

**COMPANION TO THE
AISC
*STEEL CONSTRUCTION MANUAL***

Volume 2: Design Tables

Version 15.1



**AMERICAN INSTITUTE
OF
STEEL CONSTRUCTION**

AISC © 2019

by

American Institute of Steel Construction

All rights reserved. This publication or any part thereof must not be reproduced in any form without the written permission of the publisher. The AISC logo is a registered trademark of AISC.

The information presented in this publication has been prepared following recognized principles of design and construction. While it is believed to be accurate, this information should not be used or relied upon for any specific application without competent professional examination and verification of its accuracy, suitability and applicability by a licensed engineer or architect. The publication of this information is not a representation or warranty on the part of the American Institute of Steel Construction, its officers, agents, employees or committee members, or of any other person named herein, that this information is suitable for any general or particular use, or of freedom from infringement of any patent or patents. All representations or warranties, express or implied, other than as stated above, are specifically disclaimed. Anyone making use of the information presented in this publication assumes all liability arising from such use.

Caution must be exercised when relying upon standards and guidelines developed by other bodies and incorporated by reference herein since such material may be modified or amended from time to time subsequent to the printing of this edition. The American Institute of Steel Construction bears no responsibility for such material other than to refer to it and incorporate it by reference at the time of the initial publication of this edition.

Printed in the United States of America

PREFACE

The objective of this Companion is to provide additional design tables beyond what are incorporated into the 15th Edition AISC *Steel Construction Manual*.

Tables in this Companion that present available strengths are developed using the geometric conditions indicated and applicable limits states from the 2016 AISC *Specification for Structural Steel Buildings* (ANSI/AISC 360-16). Given the nature of the tables, and the possible governing limit state for each table value, linear interpolation between tabulated values may or may not provide correct strengths.

Tables are arranged with LRFD and ASD designs presented side-by-side, for consistency with the AISC *Manual*. Design with ASD and LRFD are based on the same nominal strength for each element so that the only differences between the approaches are the set of load combinations from ASCE/SEI 7-16 used for design, and whether the resistance factor for LRFD or the safety factor for ASD is used.

By the AISC Committee on Manuals,

Mark V. Holland, Chairman	Ronald L. Meng
Gary C. Violette, Vice Chairman	Larry S. Muir
Allen Adams	Thomas M. Murray
Scott Adan	James Neary
Abbas Aminmansour	Davis G. Parsons II, Emeritus
Craig Archacki	John Rolfes
Charles J. Carter	Rafael Sabelli
Harry A. Cole, Emeritus	Thomas J. Schlafly
Brad Davis	Clifford W. Schwinger
Bo Dowswell	William T. Segui, Emeritus
Matt Eatherton	Victor Shneur
Marshall T. Ferrell, Emeritus	William A. Thornton
Patrick J. Fortney	Michael A. West
Timothy P. Fraser	Ronald G. Yeager
Louis F. Geschwindner, Emeritus	Cynthia J. Duncan, Secretary
John L. Harris III	Eric Bolin, Assistant Secretary
Christopher M. Hewitt	Michael Gannon, Assistant Secretary
William P. Jacobs V	Carlo Lini, Assistant Secretary
Benjamin Kaan	Jennifer Traut-Todaro, Assistant Secretary

The committee gratefully acknowledges the contributions made to this document by the AISC Committee on Specifications and the following individuals: W. Scott Goodrich, Heath Mitchell, William N. Scott, Marc L. Sorenson and Sriramulu Vinnakota.

CONVENTIONS

The following conventions are used throughout these examples:

1. The 2016 AISC *Specification for Structural Steel Buildings* is referred to as the AISC *Specification* and the 15th Edition AISC *Steel Construction Manual*, is referred to as the AISC *Manual*.
2. The source of equations or tabulated values taken from the AISC *Specification* or AISC *Manual* is noted along the right-hand edge of the page.
3. Values are presented to three significant figures throughout this Companion.

TABLE OF CONTENTS

DESIGN TABLE DISCUSSION	1
REFERENCES	6
COMPOSITE COMPRESSION MEMBER SELECTION TABLES (supplement to AISC <i>Manual</i> Part 4)	7
Table 4-A. Available Strength in Axial Compression—Filled Rectangular HSS ($f'_c = 4$ ksi)	7
Table 4-B. Available Strength in Axial Compression—Filled Rectangular HSS ($f'_c = 5$ ksi)	30
Table 4-C. Available Strength in Axial Compression—Filled Square HSS ($f'_c = 4$ ksi)	53
Table 4-D. Available Strength in Axial Compression—Filled Square HSS ($f'_c = 5$ ksi)	68
Table 4-E. Available Strength in Axial Compression—Filled Round HSS ($f'_c = 4$ ksi)	83
Table 4-F. Available Strength in Axial Compression—Filled Round HSS ($f'_c = 5$ ksi)	100
Table 4-G. Available Strength in Axial Compression—Filled Pipe ($f'_c = 4$ ksi)	117
Table 4-H. Available Strength in Axial Compression—Filled Pipe ($f'_c = 5$ ksi)	121
STEEL BEAM-COLUMN SELECTION TABLES (supplement to AISC <i>Manual</i> Part 6)	125
Table 6-A. Available Strength for Members Subject to Axial, Shear, Flexure and Combined Forces— W-Shapes ($F_y = 65$ ksi)	125
Table 6-B. Available Strength for Members Subject to Axial, Shear, Flexure and Combined Forces— W-Shapes ($F_y = 70$ ksi)	220
Table 6-C. Available Strength for Members Subject to Axial, Shear, Flexure and Combined Forces— Rectangular HSS (ASTM A1085 Gr. A)	315
Table 6-D. Available Strength for Members Subject to Axial, Shear, Flexure and Combined Forces— Rectangular HSS (ASTM A500 Gr. C)	365
Table 6-E. Available Strength for Members Subject to Axial, Shear, Flexure and Combined Forces— Square HSS (ASTM A1085 Gr. A)	422
Table 6-F. Available Strength for Members Subject to Axial, Shear, Flexure and Combined Forces— Square HSS (ASTM A500 Gr. C)	441
Table 6-G. Available Strength for Members Subject to Axial, Shear, Flexure and Combined Forces— Round HSS (ASTM A1085 Gr. A)	460
Table 6-H. Available Strength for Members Subject to Axial, Shear, Flexure and Combined Forces— Round HSS (ASTM A500 Gr. C)	483
Table 6-I. Available Strength for Members Subject to Axial, Shear, Flexure and Combined Forces— Pipe	509
Table 6-J. Combined Flexure and Axial Force—W-Shapes	520
DESIGN TABLES (supplement to AISC <i>Manual</i> Part 9)	614
Table 9-A. Plastic Section Modulus for Coped W-Shapes	614

DESIGN TABLE DISCUSSION

Table 4-A. Available Strength in Axial Compression—Composite Filled Rectangular HSS

Available strengths in axial compression are given for filled rectangular HSS with $F_y = 50$ ksi and $F_u = 62$ ksi (ASTM A500 Grade C) and 4-ksi normal weight concrete. The tabulated values are given for the effective length with respect to the y -axis (L_{cy}). However, the effective length with respect to the x -axis (L_{cx}) must also be investigated. To determine the available strength in axial compression, the table should be entered at the larger of L_{cy} and $L_{cy \text{ eq}}$, where

$$L_{cy \text{ eq}} = \frac{L_{cx}}{\left(\frac{r_{mx}}{r_{my}} \right)} \quad (1)$$

Values of the ratio r_{mx}/r_{my} and other properties useful in the design of composite HSS compression members are listed at the bottom of Table 4-A. The values r_{mx} and r_{my} are the radii of gyration for the composite cross section. The ratio r_{mx}/r_{my} is determined as

$$\frac{r_{mx}}{r_{my}} = \sqrt{\frac{P_{ex}(L_{cx})^2}{P_{ey}(L_{cy})^2}} \quad (2)$$

For compact composite sections, the values of ϕM_n and M_n/Ω are calculated using the nominal flexural strength equations for Point B of the interaction diagram in AISC *Manual* Table 6-4. For noncompact composite sections, the values of ϕM_n and M_n/Ω are calculated using the closed formed equations presented in the AISC *Specification* Commentary Figure C-I3.7.

The available strengths tabulated in Table 4-A are given for the indicated shape with the associated concrete fill. AISC *Specification* Section I2.2b stipulates that the available compressive strength of a filled composite member need not be less than that specified for the bare steel member, as required by AISC *Specification* Chapter E. In this table, available strengths controlled by the bare steel acting alone are identified. Additionally, there is no longitudinal reinforcement provided because there is no requirement for minimum reinforcement in the AISC *Specification*. The use of filled shapes without longitudinal reinforcement is a common industry practice.

Table 4-B. Available Strength in Axial Compression—Composite Filled Rectangular HSS

Table 4-B is the same as Table 4-A, except it provides the available strength for filled rectangular HSS with $F_y = 50$ ksi and $F_u = 62$ ksi (ASTM A500 Grade C) and 5-ksi normal weight concrete.

Table 4-C. Available Strength in Axial Compression—Composite Filled Square HSS

Table 4-C is the same as Table 4-A, except it provides the available strength for filled square HSS with $F_y = 50$ ksi and $F_u = 62$ ksi (ASTM A500 Grade C) and 4-ksi normal weight concrete.

Table 4-D. Available Strength in Axial Compression—Composite Filled Square HSS

Table 4-D is the same as Table 4-A, except it provides the available strength for filled square HSS with $F_y = 50$ ksi and $F_u = 62$ ksi (ASTM A500 Grade C) and 5-ksi normal weight concrete.

Table 4-E. Available Strength in Axial Compression—Composite Filled Round HSS

Available strengths in axial compression are given for filled round HSS with $F_y = 46$ ksi and $F_u = 62$ ksi (ASTM A500 Grade C) 4-ksi normal weight concrete. To determine the available strength in axial compression, the table should be entered at the largest effective length, L_c . Other properties useful in the design of compression members are listed at the bottom of Table 4-E.

The values of ϕM_n and M_n/Ω were calculated using the nominal flexural strength equations for Point B of the interaction diagram in AISC *Manual* Table 6-5.

Table 4-F. Available Strength in Axial Compression—Composite Filled Round HSS

Table 4-F is the same as Table 4-E, except it provides the available strength for filled round HSS with $F_y = 46$ ksi and $F_u = 62$ ksi (ASTM A500 Grade C) and 5-ksi normal weight concrete.

Table 4-G. Available Strength in Axial Compression—Composite Filled Pipe

Table 4-G is the same as Table 4-E, except it provides the available strength for filled pipe with $F_y = 35$ ksi and $F_u = 60$ ksi (ASTM A53) and 4-ksi normal weight concrete.

Table 4-H. Available Strength in Axial Compression—Composite Filled Pipe

Table 4-H is the same as Table 4-E, except it provides the available strength for filled pipe with $F_y = 35$ ksi and $F_u = 60$ ksi (ASTM A53) and 5-ksi normal weight concrete.

Table 6-A. Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces—W-Shapes

Table 6-A is the same as AISC *Manual* Table 6-2, except it provides the available strength for $F_y = 65$ ksi and $F_u = 80$ ksi (ASTM A913 Grade 65). Discussion on the use of this table can be found in Part 6 of the AISC *Manual*.

Table 6-B. Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces—W-Shapes

Table 6-B is the same as Table 6-A, except it provides the available strength for $F_y = 70$ ksi and $F_u = 90$ ksi (ASTM A913 Grade 70).

Table 6-C. Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces—Rectangular HSS

The available strengths of rectangular HSS are given in Table 6-C for $F_y = 50$ ksi and $F_u = 65$ ksi (ASTM A1085 Grade A). These tables may be used to design members with only compression, tension, flexure and shear forces or may be used to design members subject to combined effects. All the information presented here in the following is presented in Parts 3, 4 and 5 of the AISC *Manual*, but has been grouped here for ease of use.

HSS Subject to Flexure

The available flexural strengths of rectangular HSS bent about their major (X-X) and minor (Y-Y) principal axis are given in the lower portion of Table 6-C.

The available strength for bending about the major and minor axes is a single value based on the limit states of yielding or flange local buckling. The limit state of lateral-torsional buckling is not included and must be checked for bending in the major axis. Lateral-torsional buckling does not apply to bending of rectangular HSS about their minor axis.

HSS Subject to Shear

The available shear strengths of rectangular HSS for both the major (X-X) and minor (Y-Y) principal axis are given in the lower portion of Table 6-C.

HSS Subject to Compression

The available strengths in axial compression are tabulated for the effective length with respect to the minor axis, L_{cy} . However, the effective length with respect to the major axis, L_{cx} , must also be investigated. To determine the available strength in axial compression the table should be entered at the larger of L_{cy} and $L_{cy\ eq}$, where

$$L_{cy\ eq} = \frac{L_{cy}}{\frac{r_x}{r_y}} \quad (\text{Manual Eq. 4-1})$$

Values for the ratio r_x / r_y and other properties useful in the design of rectangular HSS compression members are listed at the bottom of Table 6-C.

HSS Subject to Tension

The available tensile strengths of rectangular HSS are given in the lower portion of Table 6-C for the limit states of tensile yielding and tensile rupture.

Strengths given for the limit state of tensile rupture are based on the assumption that $A_e = 0.75A_g$.

HSS Subject to Combined Forces

AISC *Specification* Equation H1-1a or Equation H1-1b governs the design of HSS subject to combined axial force and flexure. The values of the available strength in tension, compression or flexure obtained from Table 6-C may be used to check interaction through these equations or the equations given in AISC *Specification* Section H1.3.

Table 6-D. Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces—Rectangular HSS

Table 6-D is the same as Table 6-C, except it provides the available strength for rectangular HSS with $F_y = 50$ ksi and $F_u = 62$ ksi (ASTM A500 Grade C).

Table 6-E. Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces—Square HSS

Table 6-E is the same as Table 6-C, except it provides the available strength for square HSS with $F_y = 50$ ksi and $F_u = 65$ ksi (ASTM A1085 Grade A).

The limit state of lateral-torsional buckling does not apply for a square HSS bending in either the major or minor axis.

Table 6-F. Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces—Square HSS

Table 6-F is the same as Table 6-E, except it provides the available strength for square HSS with $F_y = 50$ ksi and $F_u = 62$ ksi (ASTM A500 Grade C).

Table 6-G. Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces—Round HSS

The available strengths of round HSS are given in Table 6-G for $F_y = 50$ ksi and $F_u = 65$ ksi (ASTM A1085 Grade A). This table is similar to Table 6-C, except the available flexural strength is determined from AISC *Specification*

Section F8 and the available strength in axial compression is determined by entering the top of the table with the effective length, L_c .

Table 6-H. Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces—Round HSS

Table 6-H is the same as Table 6-G, except it provides the available strength for square HSS with $F_y = 46$ ksi and $F_u = 62$ ksi (ASTM A500 Grade C).

Table 6-I. Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces—Pipe

Table 6-I is similar to Table 6-G, except it provides the available strengths for pipes with $F_y = 35$ ksi and $F_u = 60$ ksi (ASTM A53 Grade B).

Table 6-J. Combined Flexure and Axial Force—W-Shapes

W-shapes with $F_y = 50$ ksi and $F_u = 65$ ksi (ASTM A992) and subject to combined axial force (tension or compression) and flexure may be checked for compliance with the provisions of AISC *Specification* Sections H1.1 and H1.2 using values listed in Table 1 and the appropriate interaction equations provided in the following sections.

Values p , b_x , b_y , t_y and t_r presented in Table 6-J are defined in Table 1. Values of p , b_x and b_y already account for section compactness and can be used directly. Given that the limit state of lateral-torsional buckling does not apply to W-shapes bent about their minor axis, values of b_y are independent of unbraced length and C_b . Values of b_x equally apply to combined flexure and compression, as well as combined flexure and tension. Smaller values of variable p for a given L_c and smaller values of b_x for a given L_b indicate higher strength for the type of load in question. For example, a section with a smaller p at a certain L_c is more effective in carrying axial compression than another section with a larger value of p at the same L_c . Similarly, a section with a smaller b_x is more effective for flexure at a given L_b than another section with a larger b_x for the same L_b . This information may be used to select more efficient shapes when relatively large amounts of axial load or bending are present.

Table 1		
Variables in Table 6-J		
	LRFD	ASD
Axial Compression	$p = \frac{1}{\phi_c P_n}, (\text{kips})^{-1}$ (3a)	$p = \frac{\Omega_c}{P_n}, (\text{kips})^{-1}$ (3b)
Major-Axis Bending	$b_x = \frac{8}{9\phi_b M_{nx}}, (\text{kip-ft})^{-1}$ (4a)	$b_x = \frac{8\Omega_b}{9M_{nx}}, (\text{kip-ft})^{-1}$ (4b)
Minor-Axis Bending	$b_y = \frac{8}{9\phi_b M_{ny}}, (\text{kip-ft})^{-1}$ (5a)	$b_y = \frac{8\Omega_b}{9M_{ny}}, (\text{kip-ft})^{-1}$ (5b)
Tension Yielding	$t_y = \frac{1}{\phi_t F_y A_g}, (\text{kips})^{-1}$ (6a)	$t_y = \frac{\Omega_t}{F_y A_g}, (\text{kips})^{-1}$ (6b)
Tension Rupture	$t_r = \frac{1}{\phi_t F_u (0.75 A_g)}, (\text{kips})^{-1}$ (7a)	$t_r = \frac{\Omega_t}{F_u (0.75 A_g)}, (\text{kips})^{-1}$ (7b)

The tabulated values of b_x assume that $C_b = 1.0$. These values may be modified in accordance with AISC *Specification* Sections F1 and H1.2. The following procedure may be used to account for $C_b > 1.0$.

$$b_{x(C_b > 1.0)} = \frac{b_{x(C_b = 1.0)}}{C_b} \geq b_{x \min} \quad (8)$$

Combined Flexure and Compression

Equations H1-1a and H1-1b of the AISC *Specification* may be written as follows using the coefficients listed in Table 6-J and defined in Table 1.

When $pP_r \geq 0.2$:

$$pP_r + b_x M_{rx} + b_y M_{ry} \leq 1.0 \quad (9)$$

When $pP_r < 0.2$:

$$\frac{pP_r}{2} + \frac{9}{8}(b_x M_{rx} + b_y M_{ry}) \leq 1.0 \quad (10)$$

The designer may check acceptability of a given shape using the appropriate interaction Equation 9 or 10. See Aminmansour (2000) for more information on this method, including an alternative approach for selection of a trial shape.

Combined Flexure and Tension

Equations H1-1a and H1-1b of the AISC *Specification* may be written as follows using the coefficients listed in Table 6-J and defined in Table 1.

When $pP_r \geq 0.2$:

$$(t_y \text{ or } t_r)P_r + b_x M_{rx} + b_y M_{ry} \leq 1.0 \quad (11)$$

When $pP_r < 0.2$:

$$\frac{(t_y \text{ or } t_r)P_r}{2} + \frac{9}{8}(b_x M_{rx} + b_y M_{ry}) \leq 1.0 \quad (12)$$

The larger value of t_y and t_r should be used in the above equations.

The designer may check acceptability of a given shape using the approximate interaction Equation 11 or 12 along with variables t_r , t_y , b_x and b_y . See Aminmansour (2006) for more information on this method.

It is noted that the values for t_r listed in Table 6-J are based on the assumption that $A_e = 0.75A_g$. See Part 5 of the AISC *Manual* for more information on this assumption. When $A_e > 0.75A_g$, the tabulated values for t_r are conservative. When $A_e < 0.75A_g$, t_r must be calculated based upon the actual value of A_e .

Values of $b_{x \min}$ are listed in Table 6-J at $L_b = 0$. See Aminmansour (2009) for more information on this method. Values for p , b_x , b_y , t_y and t_r presented in Table 6-J have been multiplied by 10^3 . Thus, when used in the appropriate interaction equation they must be multiplied by 10^{-3} (0.001).

Table 9-A. Plastic Section Modulus for Coped W-Shapes

Values are given for the major axis gross and net plastic section modulus (Z_x and Z_{net} , respectively) for coped W-shapes, as illustrated in the table header.

REFERENCES

- Aminmansour, A. (2000), "A New Approach for Design of Steel Beam-Columns," *Engineering Journal*, AISC, Vol. 37, No. 2, pp. 41–72.
- Aminmansour, A. (2006), "New Method of Design for Combined Tension and Bending," *Engineering Journal*, AISC, Vol. 43, No. 4, pp. 247–256.
- Aminmansour, A. (2009), "Optimum Flexural Design of Steel Members Utilizing Moment Gradient and C_b ," *Engineering Journal*, AISC, Vol. 46, No. 1, pp. 47–55.

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24px; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">4</div> COMPOSITE HSS20-HSS16		Table 4-A Available Strength in Axial Compression, kips Filled Rectangular HSS								A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi					
		HSS20x12x				HSS16x12x									
Shape		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{5}{8}$		$\frac{1}{2}$			
t_{des} , in.		0.581		0.465		0.349		0.291		0.581		0.465			
Steel, lb/ft		127		103		78.5		65.9		110		89.7			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	1220	1830	1070	1600	908	1360	803	1200	1030	1550	898	1350		
	1	1220	1830	1070	1600	908	1360	803	1200	1030	1540	898	1350		
	2	1220	1830	1060	1600	906	1360	802	1200	1030	1540	896	1340		
	3	1220	1820	1060	1590	904	1360	799	1200	1030	1540	894	1340		
	4	1210	1820	1060	1590	901	1350	797	1190	1020	1530	891	1340		
	5	1210	1810	1050	1580	897	1340	793	1190	1020	1530	887	1330		
	6	1200	1800	1050	1570	892	1340	788	1180	1010	1520	882	1320		
	7	1190	1790	1040	1560	886	1330	783	1170	1010	1510	876	1310		
	8	1180	1780	1030	1550	879	1320	777	1170	998	1500	870	1300		
	9	1170	1760	1020	1540	871	1310	771	1160	990	1480	862	1290		
	10	1160	1750	1010	1520	863	1290	763	1140	980	1470	854	1280		
	11	1150	1730	1000	1510	854	1280	755	1130	970	1460	845	1270		
	12	1140	1710	993	1490	844	1270	746	1120	959	1440	836	1250		
	13	1130	1690	981	1470	833	1250	737	1100	947	1420	825	1240		
	14	1110	1670	968	1450	822	1230	726	1090	934	1400	814	1220		
	15	1100	1640	954	1430	809	1210	716	1070	921	1380	802	1200		
	16	1080	1620	940	1410	797	1200	704	1060	907	1360	790	1180		
	17	1060	1590	925	1390	783	1180	693	1040	892	1340	777	1170		
	18	1040	1570	909	1360	769	1150	680	1020	877	1310	763	1140		
	19	1030	1540	893	1340	755	1130	668	1000	861	1290	749	1120		
	20	1010	1510	876	1310	740	1110	654	981	844	1270	735	1100		
	21	987	1480	858	1290	725	1090	641	961	827	1240	720	1080		
	22	967	1450	840	1260	709	1060	627	940	809	1210	704	1060		
	23	946	1420	822	1230	693	1040	612	919	791	1190	688	1030		
	24	925	1390	803	1200	676	1010	598	897	773	1160	672	1010		
	25	903	1350	784	1180	660	990	583	875	754	1130	656	984		
	26	881	1320	765	1150	643	964	568	852	735	1100	639	959		
	27	859	1290	745	1120	626	938	553	829	716	1070	622	934		
	28	836	1250	725	1090	608	912	537	806	697	1050	605	908		
	29	813	1220	705	1060	591	886	522	783	677	1020	588	883		
	30	791	1190	685	1030	573	860	506	760	658	986	571	857		
	32	745	1120	644	967	538	807	475	713	618	927	537	805		
	34	699	1050	604	906	503	754	444	666	579	868	502	753		
	36	653	979	564	846	468	702	413	620	540	810	468	702		
	38	608	912	524	786	434	651	383	575	501	752	434	652		
	40	564	845	486	728	401	601	354	531	464	696	402	602		
	Properties														
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	636	956	530	796	417	627	359	540	450	677	375	563
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	434	653	359	539	281	423	232	348	363	545	302	454
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			72200		62100		51100		45100		40300		34900	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			30500		26100		21400		18900		24900		21500		
r_{mx}/r_{my}			1.54		1.54		1.55		1.54		1.27		1.27		
r_{my} , in.			4.93		4.99		5.04		5.07		4.80		4.86		
ASD	LRFD														
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

4 COMPOSITE HSS16		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi			
		HSS16x12x				HSS16x8x									
Shape		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$			
t_{des} , in.		0.349		0.291		0.581		0.465		0.349		0.291			
Steel, lb/ft		68.3		57.4		93.3		76.1		58.1		48.9			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	761	1140	692	1040	814	1220	703	1050	590	885	529	794		
	1	761	1140	691	1040	814	1220	703	1050	589	884	529	793		
	2	760	1140	690	1040	811	1220	700	1050	587	881	527	790		
	3	758	1140	688	1030	807	1210	697	1040	584	876	524	786		
	4	755	1130	686	1030	800	1200	691	1040	580	870	520	780		
	5	751	1130	682	1020	793	1190	685	1030	574	861	515	772		
	6	747	1120	678	1020	783	1170	677	1020	567	851	509	763		
	7	742	1110	674	1010	772	1160	668	1000	559	839	502	752		
	8	736	1100	668	1000	760	1140	657	985	550	826	493	740		
	9	730	1090	662	993	746	1120	645	968	540	811	484	726		
	10	723	1080	656	983	731	1100	632	948	529	794	474	711		
	11	715	1070	648	972	714	1070	618	927	518	776	464	695		
	12	706	1060	640	960	697	1050	603	905	505	757	452	678		
	13	697	1050	632	948	678	1020	587	881	491	737	440	660		
	14	688	1030	623	934	659	988	571	856	477	716	427	640		
	15	677	1020	613	920	638	957	553	830	463	694	414	620		
	16	666	1000	603	905	617	926	535	803	447	671	400	600		
	17	655	983	592	889	595	893	517	775	432	648	385	578		
	18	643	965	581	872	573	860	498	747	416	624	371	556		
	19	631	946	570	855	551	826	479	718	400	599	356	534		
	20	618	927	558	837	528	792	459	689	383	575	341	512		
	21	605	908	546	819	505	758	440	659	367	550	326	489		
	22	592	888	534	801	482	723	420	630	350	525	311	467		
	23	578	867	521	782	459	689	400	600	333	500	296	444		
	24	564	846	508	762	436	656	381	571	317	475	281	422		
	25	550	825	495	742	416	625	361	542	301	451	267	400		
	26	536	803	482	722	395	594	342	513	284	427	252	378		
	27	521	782	468	702	375	564	323	485	269	403	238	357		
	28	506	760	455	682	356	534	305	457	253	380	224	336		
	29	492	737	441	661	336	505	287	430	238	357	210	316		
	30	477	715	427	641	317	477	269	404	223	334	197	295		
	32	447	670	400	600	280	421	236	355	196	294	173	259		
	34	417	626	372	559	248	373	209	314	174	260	153	230		
	36	388	582	346	518	221	333	187	280	155	232	137	205		
	38	359	539	319	479	199	299	168	252	139	208	123	184		
	40	331	497	294	440	179	269	151	227	125	188	111	166		
	Properties														
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	296	444	253	381	348	524	292	438	232	348	199	299
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	237	356	203	304	208	312	174	261	137	205	117	175
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			28700		25400		29100		25700		21400		18900	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			17600		15600		9060		7950		6590		5820		
r_{mx}/r_{my}			1.28		1.28		1.79		1.80		1.80		1.80		
r_{my} , in.			4.91		4.94		3.27		3.32		3.37		3.40		
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24pt; font-weight: bold;">4</div> COMPOSITE HSS16-HSS14		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS												A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi			
		HSS16x8x		HSS14x10x													
Shape		$\frac{1}{4}$		$\frac{5}{16}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$					
t_{des} , in.		0.233		0.581		0.465		0.349		0.291		0.233					
Steel, lb/ft		39.4		93.3		76.1		58.1		48.9		39.4					
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	455	682	835	1250	724	1090	610	915	550	825	488	733				
	1	454	682	834	1250	723	1080	610	915	549	824	488	732				
	2	453	679	832	1250	722	1080	608	913	548	822	487	730				
	3	450	676	829	1240	719	1080	606	909	546	819	485	728				
	4	447	670	825	1240	716	1070	603	905	543	815	482	724				
	5	442	664	820	1230	711	1070	599	899	540	809	479	719				
	6	437	656	813	1220	705	1060	594	892	535	803	475	713				
	7	431	646	806	1210	699	1050	589	883	530	795	470	705				
	8	424	636	797	1200	692	1040	582	873	524	786	465	697				
	9	416	624	787	1180	683	1020	575	863	517	776	459	688				
	10	407	611	777	1170	674	1010	567	851	510	765	452	678				
	11	398	597	765	1150	664	996	559	838	502	753	445	667				
	12	388	582	752	1130	653	980	549	824	494	740	437	655				
	13	378	566	739	1110	642	963	539	809	484	727	429	643				
	14	366	550	725	1090	630	944	529	793	475	712	420	630				
	15	355	532	710	1060	617	925	518	777	465	697	410	616				
	16	343	515	694	1040	603	905	506	759	454	681	401	601				
	17	331	496	678	1020	589	884	494	741	443	664	391	586				
	18	318	477	661	991	575	862	482	722	432	647	380	570				
	19	306	458	643	965	560	840	469	703	420	630	370	554				
	20	293	439	625	938	545	817	456	684	408	612	359	538				
	21	280	420	607	911	529	793	442	663	395	593	347	521				
	22	267	400	588	883	513	769	429	643	383	574	336	504				
	23	254	381	570	854	497	745	415	622	370	555	325	487				
	24	241	362	551	826	481	721	401	601	357	536	313	469				
	25	228	343	531	797	464	696	387	580	345	517	301	452				
	26	216	324	512	768	448	671	373	559	332	498	290	434				
	27	204	306	493	739	431	646	358	538	319	478	278	417				
	28	192	288	474	711	414	622	344	516	306	459	266	400				
	29	180	270	455	682	398	597	330	495	293	440	255	382				
	30	168	253	436	653	382	572	316	475	281	421	244	365				
	32	148	222	398	597	349	524	289	433	256	384	221	332				
	34	131	197	362	543	318	477	262	394	232	348	200	300				
	36	117	175	327	491	288	432	237	355	208	313	179	268				
	38	105	157	294	442	259	388	213	319	187	281	161	241				
	40	94.7	142	266	399	234	350	192	288	169	253	145	217				
	Properties																
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	166	249	324	487	271	408	214	322	184	277	153	229		
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	93.6	141	253	380	211	318	166	250	142	214	116	175		
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			16200		24500		21600		17800		15700		13500			
$P_{ey}(L_c)^2/10^4$, kip-in. ²			4980		13900		12300		10100		8870		7620				
r_{mx}/r_{my}			1.80		1.33		1.33		1.33		1.33		1.33				
r_{my} , in.			3.42		3.98		4.04		4.09		4.12		4.14				
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.															
$\Omega_b = 1.67$	$\phi_b = 0.90$																
$\Omega_c = 2.00$	$\phi_c = 0.75$																

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24px; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">4</div> COMPOSITE HSS12		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi			
		HSS12x10x					HSS12x8x								
Shape		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{5}{8}$		$\frac{1}{2}$			
t_{des} , in.		0.465		0.349		0.291		0.233		0.581		0.465			
Steel, lb/ft		69.3		53.0		44.6		36.0		76.3		62.5			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	645	968	544	815	488	732	434	652	650	976	563	844		
	1	645	967	543	815	487	731	434	651	650	975	562	843		
	2	643	965	542	813	486	729	433	650	648	971	560	840		
	3	641	962	540	810	484	727	431	647	644	966	557	836		
	4	638	957	537	806	482	723	429	643	639	958	553	829		
	5	634	951	534	800	479	718	426	639	632	948	547	821		
	6	629	943	529	794	475	712	422	633	624	937	541	811		
	7	623	934	524	786	470	705	418	627	615	923	533	799		
	8	616	924	518	777	465	697	413	620	605	907	524	786		
	9	608	912	512	768	459	688	408	612	593	890	514	771		
	10	600	900	505	757	452	678	402	603	581	871	504	755		
	11	591	886	497	745	445	668	395	593	567	850	492	738		
	12	581	871	488	733	437	656	388	582	552	828	479	719		
	13	570	856	479	719	429	644	381	571	537	805	466	699		
	14	559	839	470	705	421	631	373	559	521	781	453	679		
	15	548	821	460	690	412	617	364	546	504	755	438	657		
	16	535	803	449	674	402	603	356	533	486	729	423	635		
	17	523	784	439	658	392	588	346	520	468	702	408	612		
	18	509	764	427	641	382	573	337	506	450	675	392	589		
	19	496	744	416	624	371	557	328	491	432	647	377	565		
	20	482	723	404	606	361	541	318	477	413	620	361	541		
	21	468	702	392	588	350	524	308	461	395	594	345	517		
	22	453	680	379	569	338	508	297	446	377	567	328	493		
	23	439	658	367	550	327	491	287	431	360	541	312	469		
	24	424	636	354	532	316	474	277	415	343	515	297	445		
	25	409	613	342	513	304	456	266	400	325	489	281	421		
	26	394	591	329	494	293	439	256	384	308	463	265	398		
	27	379	568	316	474	281	422	246	368	292	438	250	375		
	28	364	546	304	456	270	405	235	353	275	413	235	353		
	29	349	524	291	437	259	388	225	338	259	389	221	331		
	30	334	502	279	418	247	371	215	322	243	366	206	310		
	32	306	458	254	381	225	338	195	293	214	321	181	272		
	34	277	416	230	346	204	306	176	264	189	285	161	241		
	36	250	375	207	311	183	275	157	236	169	254	143	215		
	38	225	337	186	279	164	246	141	212	152	228	129	193		
	40	203	304	168	252	148	222	127	191	137	206	116	174		
	Properties														
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	214	322	170	255	146	219	121	182	219	329	185	277
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	187	282	148	223	127	191	105	158	163	244	137	206
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			14500		12000		10600		9110		13600		12000	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			10700		8820		7790		6690		6900		6100		
r_{mx}/r_{my}			1.16		1.17		1.17		1.17		1.40		1.40		
r_{my} , in.			3.96		4.01		4.04		4.07		3.16		3.21		
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 2px; display: inline-block; width: 30px; height: 30px; text-align: center; line-height: 30px;">4</div> COMPOSITE HSS12		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi			
		HSS12x8x				HSS12x6x									
Shape		$\frac{3}{8}$		$\frac{1}{4}$		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$			
t_{des} , in.		0.349		0.233		0.581		0.465		0.349		0.291			
Steel, lb/ft		47.9		32.6		67.8		55.7		42.8		36.1			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	470	705	372	557	560	841	478	716	397	595	353	530		
	1	470	704	371	557	559	840	477	715	396	594	352	529		
	2	468	702	370	555	556	835	474	711	394	591	350	526		
	3	465	698	368	552	551	828	469	704	390	585	347	521		
	4	462	693	365	547	544	817	463	695	385	577	343	514		
	5	457	686	361	542	535	804	455	683	378	567	337	505		
	6	452	678	356	535	524	787	445	668	370	556	330	495		
	7	445	668	351	527	512	769	434	652	361	542	322	483		
	8	438	657	345	518	498	748	422	633	351	527	313	469		
	9	430	644	338	507	482	725	408	613	340	510	303	454		
	10	421	631	331	496	466	700	394	590	328	492	292	438		
	11	411	616	323	484	448	673	378	567	315	473	281	421		
	12	401	601	314	472	429	645	362	542	302	453	269	403		
	13	390	584	305	458	410	616	344	517	288	432	256	385		
	14	378	567	296	444	390	586	327	490	273	410	244	365		
	15	366	549	286	429	370	556	309	464	259	388	231	346		
	16	354	530	276	414	349	525	291	438	244	366	217	326		
	17	341	511	266	399	329	494	275	413	229	344	204	306		
	18	328	492	255	383	308	463	258	388	214	322	191	287		
	19	315	472	244	367	288	433	242	364	200	300	178	267		
	20	301	452	234	350	268	403	226	339	186	279	166	248		
	21	288	432	223	334	248	373	210	316	172	258	153	230		
	22	274	412	212	318	229	345	195	293	158	237	141	212		
	23	261	392	201	302	211	317	180	270	145	218	129	194		
	24	248	372	190	286	194	291	165	248	133	200	119	178		
	25	235	352	180	270	178	268	152	229	123	184	109	164		
	26	222	332	170	254	165	248	141	211	114	170	101	152		
	27	209	313	160	239	153	230	130	196	105	158	93.9	141		
	28	197	295	150	224	142	214	121	182	97.9	147	87.3	131		
	29	184	277	140	210	133	199	113	170	91.2	137	81.4	122		
	30	172	259	131	196	124	186	106	159	85.3	128	76.0	114		
	32	152	227	115	172	109	164	92.9	140	74.9	112	66.8	100		
	34	134	201	102	153	96.4	145	82.2	124	66.4	99.6	59.2	88.8		
	36	120	180	90.7	136	86.0	129	73.4	110	59.2	88.8	52.8	79.2		
	38	107	161	81.4	122	77.2	116	65.8	99.0	53.1	79.7	47.4	71.1		
	40	97.0	145	73.5	110			59.4	89.3	48.0	71.9	42.8	64.2		
	Properties														
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	147	221	105	158	182	274	154	232	123	185	106	160
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	108	163	76.9	116	109	164	92.1	138	73.5	110	63.2	94.9
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			10100		7690		10800		9520		8120		7260	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			5100		3860		3380		2980		2520		2250		
r_{mx}/r_{my}			1.41		1.41		1.79		1.79		1.80		1.80		
r_{my} , in.			3.27		3.32		2.39		2.44		2.49		2.52		
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24px; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">4</div> COMPOSITE HSS12-HSS10		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi			
		HSS12x6x				HSS10x8x									
Shape		$\frac{1}{4}$		$\frac{3}{16}$		$\frac{5}{16}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$			
t_{des} , in.		0.233		0.174		0.581		0.465		0.349		0.291			
Steel, lb/ft		29.2		22.2		67.8		55.7		42.8		36.1			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	309	464	255	382	570	855	491	737	410	615	367	550		
	1	309	463	254	382	569	854	491	736	410	615	366	549		
	2	307	460	253	379	567	851	489	733	408	613	365	547		
	3	304	456	250	376	564	846	486	729	406	609	363	544		
	4	300	450	247	371	559	839	482	723	403	604	360	540		
	5	295	442	243	364	553	830	477	716	399	598	356	534		
	6	288	433	238	356	546	819	471	707	394	591	352	528		
	7	281	422	232	347	538	807	464	696	388	582	347	520		
	8	273	410	225	337	528	792	456	684	382	572	341	511		
	9	264	396	218	326	518	777	447	671	374	561	334	501		
	10	255	382	210	314	506	759	438	657	366	549	327	490		
	11	245	367	201	302	494	741	427	641	358	537	319	479		
	12	234	351	192	288	481	721	416	624	348	523	311	466		
	13	223	334	183	275	467	700	404	607	339	508	302	453		
	14	212	317	174	261	452	678	392	588	329	493	293	439		
	15	200	300	164	246	437	657	379	569	318	477	283	425		
	16	188	283	154	232	422	635	366	549	307	460	273	410		
	17	177	265	145	217	407	612	352	528	296	443	263	395		
	18	165	248	135	203	392	589	338	507	284	426	253	379		
	19	154	231	126	189	376	565	324	486	272	409	242	364		
	20	143	214	116	175	360	541	310	465	261	391	232	348		
	21	132	198	107	161	344	517	296	443	249	373	221	332		
	22	121	182	98.7	148	328	493	281	422	237	355	210	316		
	23	111	166	90.3	135	312	470	267	401	225	338	200	300		
	24	102	153	83.0	124	297	446	253	380	214	320	189	284		
	25	93.8	141	76.4	115	281	422	239	359	202	303	179	269		
	26	86.7	130	70.7	106	266	399	226	338	191	286	169	253		
	27	80.4	121	65.5	98.3	251	377	212	318	179	269	159	238		
	28	74.8	112	60.9	91.4	236	354	199	299	169	253	149	224		
	29	69.7	105	56.8	85.2	221	333	187	280	158	237	140	209		
	30	65.1	97.7	53.1	79.6	207	311	175	263	148	221	130	196		
	32	57.3	85.9	46.7	70.0	182	274	154	231	130	195	115	172		
	34	50.7	76.1	41.3	62.0	161	242	136	205	115	172	102	152		
	36	45.2	67.9	36.9	55.3	144	216	121	183	102	154	90.6	136		
	38	40.6	60.9	33.1	49.6	129	194	109	164	92.0	138	81.3	122		
	40	36.6	55.0	29.9	44.8	116	175	98.4	148	83.0	125	73.4	110		
	Properties														
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	88.7	133	69.6	105	165	247	139	209	111	167	95.6	144
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	52.2	78.5	39.3	59.1	140	210	118	178	94.1	141	80.9	122
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			6230		5120		8440		7480		6340		5610	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			1930		1570		5820		5140		4360		3850		
r_{mx}/r_{my}			1.80		1.81		1.20		1.21		1.21		1.21		
r_{my} , in.			2.54		2.57		3.09		3.14		3.19		3.22		
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24px; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">4</div> COMPOSITE HSS10		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi			
		HSS10x8x				HSS10x6x									
Shape		$\frac{1}{4}$		$\frac{3}{16}$		$\frac{5}{16}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$			
t_{des} , in.		0.233		0.174		0.581		0.465		0.349		0.291			
Steel, lb/ft		29.2		22.2		59.3		48.9		37.7		31.8			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	323	484	277	416	491	738	415	623	344	515	306	458		
	1	322	484	277	415	490	737	415	622	343	514	305	458		
	2	321	482	276	413	487	732	412	618	341	511	303	455		
	3	319	479	274	411	483	725	408	612	338	507	300	451		
	4	317	475	272	407	476	716	402	603	333	500	296	444		
	5	313	470	269	403	468	703	395	593	327	491	291	437		
	6	309	464	265	397	458	689	386	580	320	481	285	428		
	7	305	457	261	391	447	672	377	565	312	469	278	417		
	8	299	449	256	384	434	653	365	548	303	455	270	405		
	9	293	440	251	376	420	632	353	530	293	440	261	392		
	10	287	430	245	367	405	609	340	510	283	424	252	378		
	11	280	420	239	358	389	585	326	489	271	407	242	363		
	12	272	409	232	348	372	560	311	467	260	389	231	347		
	13	265	397	225	337	355	533	296	445	247	371	220	331		
	14	256	384	217	326	337	506	282	423	235	352	209	314		
	15	248	371	210	315	319	479	267	401	222	332	198	297		
	16	239	358	202	303	300	451	252	379	209	313	186	280		
	17	230	344	194	291	282	423	237	357	196	293	175	262		
	18	220	331	186	278	263	396	222	334	183	274	163	245		
	19	211	316	177	266	245	369	208	312	170	255	152	228		
	20	201	302	169	254	228	342	193	291	158	236	141	212		
	21	192	288	161	241	210	316	179	269	145	218	130	196		
	22	183	274	152	229	194	291	166	249	134	201	120	180		
	23	173	260	144	216	177	266	152	229	122	184	110	165		
	24	164	246	136	204	163	245	140	210	112	169	101	151		
	25	155	232	128	192	150	225	129	194	104	155	92.9	139		
	26	146	218	120	180	139	208	119	179	95.7	144	85.9	129		
	27	137	205	113	169	129	193	110	166	88.8	133	79.7	119		
	28	128	192	105	158	120	180	103	154	82.5	124	74.1	111		
	29	120	179	97.9	147	111	168	95.7	144	76.9	116	69.0	104		
	30	112	168	91.5	137	104	157	89.4	134	71.9	108	64.5	96.8		
	32	98.2	147	80.4	121	91.5	138	78.6	118	63.2	94.9	56.7	85.1		
	34	87.0	131	71.2	107	81.1	122	69.6	105	56.0	84.0	50.2	75.3		
	36	77.6	116	63.5	95.3	72.3	109	62.1	93.3	49.9	75.0	44.8	67.2		
	38	69.7	104	57.0	85.5	64.9	97.6	55.7	83.8	44.8	67.3	40.2	60.3		
	40	62.9	94.3	51.5	77.2					40.4	60.7	36.3	54.4		
	Properties														
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	79.5	119	62.0	93.3	135	203	115	172	92.1	138	79.6	120
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	67.2	101	52.1	78.3	92.8	140	78.8	118	63.0	94.6	54.2	81.4
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			4810		3950		6600		5860		5020		4530	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			3300		2700		2810		2500		2130		1910		
r_{mx}/r_{my}			1.21		1.21		1.53		1.53		1.54		1.54		
r_{my} , in.			3.25		3.28		2.34		2.39		2.44		2.47		
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 2px; display: inline-block; width: 20px; height: 20px; text-align: center; line-height: 20px;">4</div> COMPOSITE HSS10		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi			
		HSS10x6x				HSS10x5x									
Shape		$\frac{1}{4}$		$\frac{3}{16}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$			
t_{des} , in.		0.233		0.174		0.349		0.291		0.233		0.174			
Steel, lb/ft		25.8		19.6		35.1		29.7		24.1		18.4			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	267	401	227	340	310	464	275	412	239	359	202	303		
	1	267	400	226	340	309	463	274	411	239	358	201	302		
	2	265	398	225	338	306	459	272	408	237	355	200	299		
	3	262	394	223	334	302	453	268	402	233	350	197	295		
	4	259	388	220	329	296	444	263	395	229	343	193	289		
	5	254	381	216	323	289	433	257	385	223	335	188	282		
	6	249	373	211	316	280	420	249	374	217	325	182	273		
	7	243	364	205	308	270	406	241	361	209	314	176	263		
	8	235	353	199	299	259	389	231	346	201	301	168	253		
	9	228	342	192	288	248	371	220	331	192	287	160	241		
	10	219	329	185	277	235	352	209	314	182	273	152	228		
	11	210	316	177	266	222	333	198	297	172	258	143	215		
	12	201	302	169	253	208	312	186	279	161	242	134	201		
	13	192	287	161	241	194	291	173	260	151	226	125	188		
	14	182	272	152	228	180	270	161	242	140	210	116	174		
	15	172	257	143	215	166	250	149	223	129	194	107	160		
	16	161	242	134	201	153	229	137	205	119	178	97.8	147		
	17	151	227	126	188	140	211	125	188	109	163	89.0	134		
	18	141	212	117	175	129	193	114	171	98.6	148	80.6	121		
	19	131	197	108	162	117	176	103	154	89.0	133	72.5	109		
	20	122	182	100	150	106	159	92.6	139	80.3	120	65.4	98.1		
	21	112	168	92.0	138	96.2	145	84.0	126	72.8	109	59.3	89.0		
	22	103	154	84.0	126	87.6	132	76.5	115	66.4	99.5	54.1	81.1		
	23	94.1	141	76.9	115	80.2	121	70.0	105	60.7	91.1	49.5	74.2		
	24	86.5	130	70.6	106	73.6	111	64.3	96.5	55.8	83.6	45.4	68.1		
	25	79.7	120	65.1	97.6	67.9	102	59.3	88.9	51.4	77.1	41.9	62.8		
	26	73.7	111	60.2	90.2	62.7	94.3	54.8	82.2	47.5	71.3	38.7	58.1		
	27	68.3	102	55.8	83.7	58.2	87.5	50.8	76.2	44.1	66.1	35.9	53.8		
	28	63.5	95.3	51.9	77.8	54.1	81.3	47.2	70.9	41.0	61.4	33.4	50.1		
	29	59.2	88.8	48.4	72.5	50.4	75.8	44.0	66.1	38.2	57.3	31.1	46.7		
	30	55.3	83.0	45.2	67.8	47.1	70.8	41.2	61.7	35.7	53.5	29.1	43.6		
	32	48.6	72.9	39.7	59.6	41.4	62.3	36.2	54.3	31.4	47.0	25.6	38.3		
	34	43.1	64.6	35.2	52.8	36.7	55.2	32.0	48.1	27.8	41.7	22.6	33.9		
	36	38.4	57.6	31.4	47.1										
	38	34.5	51.7	28.2	42.2										
	40	31.1	46.7	25.4	38.1										
	Properties														
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	66.5	99.9	52.1	78.3	82.4	124	71.5	107	59.7	89.8	47.0	70.6
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	45.1	67.7	35.0	52.7	49.2	73.9	42.4	63.8	35.4	53.2	27.5	41.3
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			3880		3180		4320		3930		3410		2800	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			1640		1340		1350		1220		1050		859		
r_{mx}/r_{my}			1.54		1.54		1.79		1.79		1.80		1.81		
r_{my} , in.			2.49		2.52		2.05		2.07		2.10		2.13		
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24pt; font-weight: bold;">4</div> COMPOSITE HSS9		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS												A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi	
		HSS9x7x													
Shape		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$			
t_{des} , in.		0.581		0.465		0.349		0.291		0.233		0.174			
Steel, lb/ft		59.3		48.9		37.7		31.8		25.8		19.6			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	491	738	420	631	349	523	311	466	272	408	232	348		
	1	490	737	420	630	348	522	310	465	272	408	232	348		
	2	488	734	418	627	347	520	309	463	271	406	231	346		
	3	485	728	415	622	344	516	307	460	269	403	229	343		
	4	480	721	410	615	341	511	303	455	266	399	226	339		
	5	473	711	405	607	336	504	299	449	262	393	223	335		
	6	466	700	398	597	331	496	295	442	258	387	219	329		
	7	457	687	390	585	324	486	289	434	253	379	215	322		
	8	447	672	381	572	317	476	283	424	247	371	210	315		
	9	436	655	372	557	309	464	276	413	241	361	204	306		
	10	424	637	361	541	301	451	268	402	234	351	198	297		
	11	411	618	350	524	291	437	260	390	227	340	192	288		
	12	398	598	338	506	282	423	251	377	219	329	185	278		
	13	383	576	325	487	271	407	242	363	211	316	178	267		
	14	368	554	312	468	261	391	233	349	203	304	170	256		
	15	353	531	298	448	250	375	223	334	194	291	163	244		
	16	337	507	285	427	239	358	213	319	185	278	155	233		
	17	321	483	271	406	227	341	203	304	176	264	147	221		
	18	305	459	257	385	216	324	192	289	167	250	139	209		
	19	289	435	243	365	204	306	182	273	158	237	132	197		
	20	273	411	230	345	193	289	172	258	149	223	124	186		
	21	257	387	217	326	181	272	162	243	140	210	116	174		
	22	242	363	204	307	170	255	152	228	131	197	108	163		
	23	226	340	191	288	159	239	142	213	123	184	101	151		
	24	211	317	179	269	148	223	133	199	114	171	93.8	141		
	25	196	295	167	251	138	207	123	185	106	159	86.6	130		
	26	182	273	155	234	128	192	114	171	98.0	147	80.1	120		
	27	169	253	144	217	118	178	106	159	90.9	136	74.3	111		
	28	157	236	134	201	110	165	98.4	148	84.5	127	69.1	104		
	29	146	220	125	188	103	154	91.8	138	78.8	118	64.4	96.6		
	30	137	205	117	175	95.9	144	85.7	129	73.6	110	60.2	90.2		
	32	120	180	103	154	84.3	126	75.4	113	64.7	97.0	52.9	79.3		
	34	106	160	90.8	137	74.7	112	66.7	100	57.3	86.0	46.8	70.3		
	36	94.9	143	81.0	122	66.6	99.9	59.5	89.3	51.1	76.7	41.8	62.7		
	38	85.1	128	72.7	109	59.8	89.7	53.4	80.2	45.9	68.8	37.5	56.2		
	40	76.8	115	65.6	98.7	54.0	80.9	48.2	72.3	41.4	62.1	33.8	50.8		
	Properties														
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	127	191	108	162	86.4	130	74.6	112	62.2	93.5	48.6	73.0
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	106	159	89.7	135	71.6	108	61.8	92.9	51.4	77.3	40.1	60.2
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			5690		5080		4330		3870		3330		2720	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			3740		3320		2840		2530		2180		1780		
r_{mx}/r_{my}			1.23		1.24		1.23		1.24		1.24		1.24		
r_{my} , in.			2.68		2.73		2.78		2.81		2.84		2.87		
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 2px; display: inline-block; width: 30px; height: 30px; text-align: center; line-height: 30px;">4</div> COMPOSITE HSS9		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi		
		HSS9x5x												
Shape		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$		
t_{des} , in.		0.581		0.465		0.349		0.291		0.233		0.174		
Steel, lb/ft		50.8		42.1		32.6		27.6		22.4		17.1		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	419	630	347	522	285	427	253	379	220	330	185	278	
	1	418	628	346	521	284	426	252	378	219	329	185	277	
	2	414	623	344	516	282	422	250	375	218	326	183	275	
	3	409	614	339	509	278	417	247	370	215	322	180	271	
	4	400	602	333	500	272	408	242	363	210	316	177	265	
	5	390	587	325	488	265	398	236	354	205	308	172	259	
	6	378	568	315	473	257	386	229	343	199	299	167	251	
	7	364	548	304	457	248	372	221	331	192	288	161	241	
	8	349	525	292	439	238	357	212	318	184	276	154	231	
	9	333	500	279	419	227	340	202	303	176	264	147	220	
	10	315	473	265	398	215	323	192	288	167	250	139	209	
	11	297	446	250	376	203	304	181	271	157	236	131	197	
	12	278	418	235	353	190	285	170	255	148	221	123	184	
	13	259	389	220	330	177	266	158	238	138	207	114	172	
	14	239	360	204	307	164	246	147	221	128	192	106	159	
	15	220	331	189	284	151	227	136	204	118	177	97.5	146	
	16	202	303	173	261	140	210	125	187	108	162	89.2	134	
	17	184	276	159	238	128	193	114	171	98.8	148	81.2	122	
	18	166	250	144	217	117	176	103	155	89.7	135	73.5	110	
	19	149	224	130	196	107	160	93.0	139	80.8	121	66.0	99.0	
	20	135	202	117	177	96.5	145	83.9	126	72.9	109	59.6	89.4	
	21	122	184	107	160	87.5	131	76.1	114	66.1	99.2	54.1	81.1	
	22	111	167	97.1	146	79.7	120	69.4	104	60.3	90.4	49.2	73.9	
	23	102	153	88.8	134	72.9	110	63.5	95.2	55.1	82.7	45.1	67.6	
	24	93.5	141	81.6	123	67.0	101	58.3	87.4	50.6	76.0	41.4	62.1	
	25	86.2	130	75.2	113	61.7	92.8	53.7	80.6	46.7	70.0	38.1	57.2	
	26	79.7	120	69.5	104	57.1	85.8	49.7	74.5	43.1	64.7	35.3	52.9	
	27	73.9	111	64.5	96.9	52.9	79.5	46.1	69.1	40.0	60.0	32.7	49.0	
	28	68.7	103	59.9	90.1	49.2	74.0	42.8	64.2	37.2	55.8	30.4	45.6	
	29	64.1	96.3	55.9	84.0	45.9	69.0	39.9	59.9	34.7	52.0	28.3	42.5	
	30	59.9	90.0	52.2	78.5	42.9	64.4	37.3	56.0	32.4	48.6	26.5	39.7	
	32	52.6	79.1	45.9	69.0	37.7	56.6	32.8	49.2	28.5	42.7	23.3	34.9	
	34							29.0	43.6	25.2	37.8	20.6	30.9	
	Properties													
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	101	151	86.0	129	69.3	104	60.2	90.4	50.4	75.8	39.5	59.4
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	65.1	97.9	55.8	83.9	45.0	67.6	38.8	58.3	32.2	48.5	25.2	37.9
$P_{ex}(L_c)^2/10^4$, kip-in. ²			4270		3840		3280		2960		2590		2120	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			1600		1430		1220		1100		958		783	
r_{mx}/r_{my}			1.63		1.64		1.64		1.64		1.64		1.65	
r_{my} , in.			1.92		1.97		2.03		2.05		2.08		2.10	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24pt; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">4</div> COMPOSITE HSS8		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi			
		HSS8x6x													
Shape		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$			
t_{des} , in.		0.581		0.465		0.349		0.291		0.233		0.174			
Steel, lb/ft		50.8		42.1		32.6		27.6		22.4		17.1			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	419	630	351	526	290	435	258	387	225	338	190	285		
	1	418	629	350	525	289	434	257	386	225	337	190	285		
	2	416	625	348	522	288	431	256	384	223	335	189	283		
	3	412	619	344	516	285	427	253	380	221	332	187	280		
	4	406	610	339	509	281	421	250	375	218	327	184	276		
	5	398	599	333	499	276	413	245	368	214	321	181	271		
	6	389	585	325	488	270	404	240	360	209	314	176	265		
	7	379	570	317	475	263	394	234	351	204	306	172	258		
	8	368	553	307	461	255	382	227	341	198	297	166	250		
	9	355	534	296	446	246	369	219	329	191	287	161	241		
	10	342	514	286	429	237	355	211	317	184	276	154	232		
	11	327	492	274	412	227	340	203	304	176	265	148	222		
	12	312	469	262	394	217	325	193	290	168	253	141	211		
	13	297	446	250	375	206	309	184	276	160	240	134	201		
	14	281	422	237	356	195	293	174	262	152	228	126	190		
	15	265	398	224	336	184	276	165	247	143	215	119	179		
	16	248	373	210	316	173	259	155	232	134	202	112	167		
	17	232	349	197	297	162	242	145	217	126	189	104	156		
	18	216	325	184	277	151	226	135	203	117	176	96.9	145		
	19	200	301	171	258	140	209	125	188	109	163	89.7	135		
	20	185	278	159	239	129	194	116	174	101	151	82.7	124		
	21	170	256	147	220	119	178	107	160	92.6	139	75.9	114		
	22	156	234	135	202	109	164	98.0	147	84.8	127	69.3	104		
	23	142	214	123	185	100	151	89.6	134	77.6	116	63.4	95.1		
	24	131	196	113	170	92.1	138	82.3	123	71.3	107	58.2	87.3		
	25	120	181	104	157	84.9	128	75.9	114	65.7	98.5	53.7	80.5		
	26	111	167	96.4	145	78.5	118	70.1	105	60.7	91.1	49.6	74.4		
	27	103	155	89.4	134	72.8	109	65.0	97.6	56.3	84.5	46.0	69.0		
	28	96.0	144	83.1	125	67.6	102	60.5	90.7	52.4	78.5	42.8	64.2		
	29	89.5	135	77.5	116	63.1	94.8	56.4	84.6	48.8	73.2	39.9	59.8		
	30	83.7	126	72.4	109	58.9	88.6	52.7	79.0	45.6	68.4	37.3	55.9		
	32	73.5	111	63.6	95.7	51.8	77.8	46.3	69.5	40.1	60.1	32.7	49.1		
	34	65.1	97.9	56.4	84.7	45.9	69.0	41.0	61.5	35.5	53.3	29.0	43.5		
	36	58.1	87.3	50.3	75.6	40.9	61.5	36.6	54.9	31.7	47.5	25.9	38.8		
	38			45.1	67.8	36.7	55.2	32.8	49.3	28.4	42.6	23.2	34.8		
	40							29.6	44.5	25.7	38.5	21.0	31.4		
	Properties														
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	94.3	142	80.6	121	64.9	97.5	56.2	84.5	46.9	70.5	37.0	55.6
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	76.4	115	65.2	98.0	52.6	79.1	45.4	68.2	37.8	56.9	29.7	44.6
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			3650		3270		2790		2520		2190		1790	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			2260		2020		1730		1560		1350		1100		
r_{mx}/r_{my}			1.27		1.27		1.27		1.27		1.27		1.28		
r_{my} , in.			2.27		2.32		2.38		2.40		2.43		2.46		
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24px; font-weight: bold; text-align: center;">4</div> COMPOSITE HSS8		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi		
		HSS8x4x												
Shape		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$		
t_{des} , in.		0.581		0.465		0.349		0.291		0.233		0.174		
Steel, lb/ft		42.3		35.2		27.5		23.3		19.0		14.5		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	350	526	292	438	230	345	204	306	176	264	147	220	
	1	349	524	290	436	229	344	203	304	175	263	146	219	
	2	344	517	287	431	226	339	200	300	173	260	144	217	
	3	336	505	280	422	221	332	196	294	170	254	141	212	
	4	325	489	272	409	215	322	190	285	165	247	137	206	
	5	312	469	262	393	206	309	183	274	158	238	132	198	
	6	297	446	250	375	196	295	174	262	151	227	126	189	
	7	279	420	236	355	186	280	165	247	143	214	119	179	
	8	261	392	221	332	175	263	155	232	134	201	112	167	
	9	241	362	205	309	163	245	144	215	125	187	104	156	
	10	221	332	189	284	151	227	132	198	115	172	95.5	143	
	11	200	301	173	260	139	209	121	181	105	158	87.3	131	
	12	180	271	156	235	126	190	109	164	95.3	143	79.1	119	
	13	161	241	140	211	114	172	98.5	148	85.7	128	71.0	106	
	14	142	213	125	188	102	154	88.5	133	76.3	115	63.2	94.8	
	15	124	186	110	165	91.0	137	78.9	119	67.4	101	55.7	83.5	
	16	109	163	96.6	145	80.1	120	69.7	105	59.2	88.8	48.9	73.4	
	17	96.4	145	85.6	129	71.0	107	61.7	92.7	52.4	78.7	43.4	65.0	
	18	85.9	129	76.4	115	63.3	95.1	55.0	82.7	46.8	70.2	38.7	58.0	
	19	77.1	116	68.5	103	56.8	85.4	49.4	74.2	42.0	63.0	34.7	52.1	
	20	69.6	105	61.9	93.0	51.3	77.1	44.6	67.0	37.9	56.8	31.3	47.0	
	21	63.1	94.9	56.1	84.3	46.5	69.9	40.4	60.8	34.4	51.5	28.4	42.6	
	22	57.5	86.5	51.1	76.8	42.4	63.7	36.8	55.4	31.3	47.0	25.9	38.8	
	23	52.6	79.1	46.8	70.3	38.8	58.3	33.7	50.7	28.6	43.0	23.7	35.5	
	24	48.3	72.7	43.0	64.6	35.6	53.5	31.0	46.5	26.3	39.5	21.8	32.6	
	25	44.6	67.0	39.6	59.5	32.8	49.3	28.5	42.9	24.2	36.4	20.0	30.1	
	26			36.6	55.0	30.3	45.6	26.4	39.6	22.4	33.6	18.5	27.8	
	27							24.5	36.8	20.8	31.2	17.2	25.8	
28											16.0	24.0		
Properties														
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	71.0	107	61.6	92.5	50.1	75.3	43.5	65.4	36.6	55.0	28.8	43.3
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	42.4	63.7	36.8	55.3	29.9	45.0	26.0	39.1	21.7	32.7	17.0	25.6
$P_{ex}(L_c)^2/10^4$, kip-in. ²			2570		2330		2010		1820		1610		1330	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			800		727		628		568		498		411	
r_{mx}/r_{my}			1.79		1.79		1.79		1.79		1.80		1.80	
r_{my} , in.			1.51		1.56		1.61		1.63		1.66		1.69	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 2px; display: inline-block; width: 30px; height: 30px; text-align: center; line-height: 30px;">4</div> COMPOSITE HSS8-HSS7		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi		
		HSS8x4x		HSS7x5x										
Shape		$\frac{1}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$		
t_{des} , in.		0.116		0.465		0.349		0.291		0.233		0.174		
Steel, lb/ft		9.86		35.2		27.5		23.3		19.0		14.5		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	114	170	292	438	235	353	209	313	181	272	152	228	
	1	113	170	291	437	235	352	208	312	181	271	152	227	
	2	112	167	288	433	233	349	206	310	179	269	150	225	
	3	109	164	284	427	229	344	203	305	177	265	148	222	
	4	106	159	278	419	225	337	199	299	173	260	145	218	
	5	102	153	271	408	219	328	194	291	169	253	141	212	
	6	96.9	145	263	395	212	318	188	282	164	245	137	205	
	7	91.5	137	253	380	204	306	181	272	158	236	132	198	
	8	85.6	128	242	364	195	293	174	260	151	227	126	189	
	9	79.4	119	231	347	186	278	165	248	144	216	120	180	
	10	73.0	110	219	328	176	263	156	235	136	204	114	170	
	11	66.6	99.8	206	309	165	248	147	221	128	193	107	160	
	12	60.1	90.2	192	289	154	231	138	207	120	180	99.8	150	
	13	53.8	80.8	179	269	143	216	128	192	112	168	92.8	139	
	14	47.8	71.7	166	249	133	200	119	178	104	155	85.7	129	
	15	42.0	62.9	152	229	123	185	109	164	95.4	143	78.8	118	
	16	36.9	55.3	139	209	113	170	99.7	150	87.4	131	72.0	108	
	17	32.7	49.0	127	190	104	156	90.7	136	79.5	119	65.3	98.0	
	18	29.1	43.7	114	172	94.2	142	81.9	123	72.0	108	58.9	88.4	
	19	26.1	39.2	103	154	85.1	128	73.6	111	64.6	97.0	52.9	79.3	
	20	23.6	35.4	92.7	139	76.8	115	66.4	99.9	58.3	87.5	47.7	71.6	
	21	21.4	32.1	84.1	126	69.6	105	60.3	90.6	52.9	79.4	43.3	65.0	
	22	19.5	29.3	76.6	115	63.4	95.4	54.9	82.5	48.2	72.3	39.5	59.2	
	23	17.8	26.8	70.1	105	58.0	87.2	50.2	75.5	44.1	66.2	36.1	54.1	
	24	16.4	24.6	64.4	96.8	53.3	80.1	46.1	69.4	40.5	60.8	33.2	49.7	
	25	15.1	22.7	59.3	89.2	49.1	73.8	42.5	63.9	37.3	56.0	30.6	45.8	
	26	14.0	20.9	54.9	82.5	45.4	68.3	39.3	59.1	34.5	51.8	28.2	42.4	
	27	12.9	19.4	50.9	76.5	42.1	63.3	36.5	54.8	32.0	48.0	26.2	39.3	
	28	12.0	18.1	47.3	71.1	39.2	58.9	33.9	51.0	29.8	44.6	24.4	36.5	
	29			44.1	66.3	36.5	54.9	31.6	47.5	27.7	41.6	22.7	34.1	
	30			41.2	61.9	34.1	51.3	29.5	44.4	25.9	38.9	21.2	31.8	
	32					30.0	45.1	26.0	39.0	22.8	34.2	18.6	28.0	
	34											16.5	24.8	
	Properties													
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	20.6	31.0	57.4	86.3	46.7	70.1	40.5	60.9	34.0	51.1	26.8	40.2
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	11.7	17.5	44.9	67.5	36.3	54.6	31.6	47.5	26.5	39.8	20.7	31.2
$P_{ex}(L_c)^2/10^4$, kip-in. ²			1010		1960		1690		1530		1350		1110	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			310		1120		967		872		766		627	
r_{mx}/r_{my}			1.81		1.32		1.32		1.32		1.33		1.33	
r_{my} , in.			1.71		1.91		1.97		1.99		2.02		2.05	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24px; font-weight: bold; text-align: center;">4</div> COMPOSITE HSS7		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi		
		HSS7x5x		HSS7x4x										
Shape		$\frac{1}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$		
t_{des} , in.		0.116		0.465		0.349		0.291		0.233		0.174		
Steel, lb/ft		9.86		31.8		24.9		21.2		17.3		13.3		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	122	183	264	396	207	311	183	275	158	238	132	198	
	1	122	183	263	395	206	309	183	274	158	237	131	197	
	2	121	181	259	389	203	305	180	270	156	234	130	195	
	3	119	178	253	381	199	298	176	264	152	229	127	190	
	4	116	174	245	369	193	289	171	256	148	222	123	185	
	5	113	169	236	354	185	279	164	246	142	213	118	178	
	6	109	164	224	337	177	266	156	235	136	203	113	169	
	7	105	157	212	318	168	252	148	222	128	192	107	160	
	8	100	150	198	297	157	236	138	207	120	180	99.8	150	
	9	95.0	143	183	275	146	220	128	192	112	167	92.7	139	
	10	89.6	134	168	253	135	203	118	177	103	154	85.3	128	
	11	84.0	126	153	230	124	186	107	161	93.8	141	77.8	117	
	12	78.2	117	138	207	112	169	97.6	147	84.9	127	70.4	106	
	13	72.4	109	123	185	101	152	88.2	133	76.1	114	63.1	94.6	
	14	66.6	99.8	109	164	90.1	135	79.0	119	67.7	102	56.1	84.1	
	15	60.8	91.3	95.7	144	79.7	120	70.2	106	59.6	89.4	49.3	73.9	
	16	55.3	82.9	84.1	126	70.0	105	61.8	92.9	52.4	78.6	43.3	65.0	
	17	49.9	74.9	74.5	112	62.0	93.2	54.8	82.3	46.4	69.6	38.4	57.6	
	18	44.7	67.0	66.4	99.9	55.3	83.2	48.9	73.4	41.4	62.1	34.2	51.3	
	19	40.1	60.2	59.6	89.6	49.7	74.6	43.8	65.9	37.2	55.8	30.7	46.1	
	20	36.2	54.3	53.8	80.9	44.8	67.4	39.6	59.5	33.5	50.3	27.7	41.6	
	21	32.8	49.3	48.8	73.4	40.7	61.1	35.9	53.9	30.4	45.6	25.1	37.7	
	22	29.9	44.9	44.5	66.8	37.0	55.7	32.7	49.2	27.7	41.6	22.9	34.4	
	23	27.4	41.1	40.7	61.2	33.9	50.9	29.9	45.0	25.4	38.0	21.0	31.4	
	24	25.1	37.7	37.4	56.2	31.1	46.8	27.5	41.3	23.3	34.9	19.3	28.9	
	25	23.2	34.8	34.4	51.8	28.7	43.1	25.3	38.1	21.5	32.2	17.7	26.6	
	26	21.4	32.1			26.5	39.9	23.4	35.2	19.8	29.8	16.4	24.6	
	27	19.9	29.8							18.4	27.6	15.2	22.8	
	28	18.5	27.7											
	29	17.2	25.8											
	30	16.1	24.1											
	32	14.1	21.2											
	34	12.5	18.8											
	Properties													
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	19.0	28.6	49.1	73.7	40.1	60.2	35.2	52.9	29.5	44.3	23.3	35.0
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	14.5	21.8	32.4	48.7	26.6	39.9	23.2	34.9	19.5	29.3	15.3	23.0
$P_{ex}(L_c)^2/10^4$, kip-in. ²			842		1620		1410		1280		1130		940	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			475		637		553		501		440		364	
r_{mx}/r_{my}			1.33		1.59		1.60		1.60		1.60		1.61	
r_{my} , in.			2.07		1.53		1.58		1.61		1.64		1.66	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">4</div> COMPOSITE HSS7-HSS6		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi	
		HSS7x4x		HSS6x5x									
Shape		$\frac{1}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$			
t_{des} , in,		0.116		0.465		0.349		0.291		0.233			
Steel, lb/ft		9.01		31.8		24.9		21.2		17.3			
Design		P_n/Ω_c		P_n/Ω_c		P_n/Ω_c		P_n/Ω_c		P_n/Ω_c			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	105	157	264	396	211	316	187	280	162	243		
	1	104	156	263	395	210	315	186	279	161	242		
	2	103	154	261	392	208	312	185	277	160	240		
	3	100	151	257	386	205	307	182	273	158	236		
	4	97.2	146	251	378	201	301	178	267	154	232		
	5	93.3	140	245	368	195	293	173	260	150	226		
	6	88.7	133	237	356	189	283	168	252	146	219		
	7	83.6	125	228	342	182	272	162	242	140	210		
	8	78.0	117	218	327	173	260	154	232	134	201		
	9	72.2	108	207	311	165	247	147	220	128	192		
	10	66.2	99.3	195	293	156	233	139	208	121	181		
	11	60.1	90.2	183	275	146	219	130	196	114	170		
	12	54.1	81.2	171	257	137	205	122	183	106	159		
	13	48.2	72.4	159	238	127	191	113	170	98.8	148		
	14	42.6	64.0	146	220	118	177	104	157	91.3	137		
	15	37.3	55.9	134	201	108	163	95.7	144	83.9	126		
	16	32.8	49.1	122	183	99.2	149	87.3	131	76.6	115		
	17	29.0	43.5	110	166	90.2	136	79.2	119	69.6	104		
	18	25.9	38.8	99.3	149	81.6	123	71.4	107	62.8	94.2		
	19	23.2	34.8	89.1	134	73.3	110	64.3	96.7	56.3	84.5		
	20	21.0	31.4	80.4	121	66.2	99.5	58.0	87.2	50.8	76.3		
	21	19.0	28.5	72.9	110	60.0	90.2	52.7	79.1	46.1	69.2		
	22	17.3	26.0	66.4	99.9	54.7	82.2	48.0	72.1	42.0	63.0		
	23	15.9	23.8	60.8	91.4	50.0	75.2	43.9	66.0	38.4	57.7		
	24	14.6	21.8	55.8	83.9	46.0	69.1	40.3	60.6	35.3	53.0		
	25	13.4	20.1	51.5	77.3	42.4	63.7	37.2	55.8	32.5	48.8		
	26	12.4	18.6	47.6	71.5	39.2	58.9	34.3	51.6	30.1	45.1		
	27	11.5	17.3	44.1	66.3	36.3	54.6	31.9	47.9	27.9	41.8		
	28	10.7	16.0	41.0	61.6	33.8	50.8	29.6	44.5	25.9	38.9		
	29			38.2	57.5	31.5	47.3	27.6	41.5	24.2	36.3		
	30			35.7	53.7	29.4	44.2	25.8	38.8	22.6	33.9		
	32					25.9	38.9	22.7	34.1	19.9	29.8		
Properties													
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	16.7	25.0	44.8	67.4	36.6	54.9	31.9	47.9	26.8	40.3	
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	10.7	16.1	39.4	59.3	32.1	48.2	27.9	41.9	23.5	35.3	
$P_{ex}(L_c)^2/10^4$, kip-in. ²			714		1310		1130		1030		905		
$P_{ey}(L_c)^2/10^4$, kip-in. ²			275		968		838		758		668		
r_{mx}/r_{my}			1.61		1.16		1.16		1.17		1.16		
r_{my} , in.			1.69		1.87		1.92		1.95		1.98		
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.											
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.											
$\Omega_c = 2.00$	$\phi_c = 0.75$												

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24pt; font-weight: bold;">4</div> COMPOSITE HSS6		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi		
		HSS6x4x				HSS6x3x								
Shape		$\frac{3}{16}$		$\frac{1}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		
t_{des} , in.		0.174		0.116		0.465		0.349		0.291		0.233		
Steel, lb/ft		12.0		8.16		25.0		19.8		17.0		13.9		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	117	176	92.7	139	208	313	164	247	140	211	120	180	
	1	117	175	92.2	138	206	310	163	245	139	209	119	178	
	2	115	172	91.0	136	201	302	159	239	136	204	116	174	
	3	112	169	88.9	133	193	290	153	230	131	197	112	168	
	4	109	164	86.0	129	182	273	145	218	124	187	106	159	
	5	105	157	82.5	124	169	254	135	203	116	175	98.7	148	
	6	99.8	150	78.4	118	154	231	124	187	107	161	90.6	136	
	7	94.2	141	73.8	111	138	207	113	169	97.3	146	81.9	123	
	8	88.2	132	68.8	103	122	183	100	151	87.1	131	73.1	110	
	9	81.8	123	63.6	95.4	105	158	88.0	132	76.7	115	64.8	97.4	
	10	75.2	113	58.2	87.4	89.9	135	76.0	114	66.6	100	56.7	85.2	
	11	68.5	103	52.8	79.3	75.2	113	64.7	97.2	57.0	85.7	48.8	73.4	
	12	61.9	92.8	47.5	71.2	63.2	95.0	54.4	81.7	48.0	72.2	41.4	62.3	
	13	55.4	83.1	42.3	63.4	53.8	80.9	46.3	69.6	40.9	61.5	35.3	53.1	
	14	49.1	73.7	37.3	55.9	46.4	69.8	39.9	60.0	35.3	53.0	30.4	45.7	
	15	43.1	64.7	32.6	48.8	40.4	60.8	34.8	52.3	30.7	46.2	26.5	39.9	
	16	37.9	56.9	28.6	42.9	35.5	53.4	30.6	46.0	27.0	40.6	23.3	35.0	
	17	33.6	50.4	25.3	38.0	31.5	47.3	27.1	40.7	23.9	36.0	20.6	31.0	
	18	29.9	44.9	22.6	33.9	28.1	42.2	24.2	36.3	21.4	32.1	18.4	27.7	
	19	26.9	40.3	20.3	30.4			21.7	32.6	19.2	28.8	16.5	24.8	
	20	24.3	36.4	18.3	27.5							14.9	22.4	
	21	22.0	33.0	16.6	24.9									
	22	20.0	30.1	15.1	22.7									
	23	18.3	27.5	13.8	20.8									
	24	16.8	25.3	12.7	19.1									
	25	15.5	23.3	11.7	17.6									
	26	14.4	21.5	10.8	16.3									
27	13.3	20.0	10.0	15.1										
Properties														
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	18.3	27.5	13.1	19.7	31.2	47.0	25.9	39.0	22.8	34.3	19.3	29.1
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	13.5	20.3	9.57	14.4	18.6	27.9	15.5	23.3	13.7	20.5	11.5	17.3
$P_{ex}(L_c)^2/10^4$, kip-in. ²			632		478		833		736		673		597	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			319		241		260		230		210		186	
r_{mx}/r_{my}			1.41		1.41		1.79		1.79		1.79		1.79	
r_{my} , in.			1.63		1.66		1.12		1.17		1.19		1.22	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24pt; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">4</div> COMPOSITE HSS6-HSS5		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi		
		HSS6x3x				HSS5x4x								
Shape		$\frac{3}{16}$		$\frac{1}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		
t_{des} , in.		0.174		0.116		0.465		0.349		0.291		0.233		
Steel, lb/ft		10.7		7.31		25.0		19.8		17.0		13.9		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	98.7	148	77.1	116	208	313	164	247	143	214	123	185	
	1	97.9	147	76.5	115	207	311	163	245	142	213	123	184	
	2	95.7	144	74.8	112	204	307	161	242	140	210	121	181	
	3	92.2	138	71.9	108	199	299	157	237	137	205	118	177	
	4	87.4	131	68.1	102	192	289	153	229	132	198	114	172	
	5	81.7	123	63.5	95.3	184	276	146	220	127	190	110	165	
	6	75.2	113	58.3	87.5	174	262	139	209	120	180	104	156	
	7	68.1	102	52.8	79.1	163	246	131	197	113	170	98.3	147	
	8	60.8	91.2	47.0	70.4	152	228	123	184	105	159	91.7	138	
	9	53.5	80.2	41.2	61.7	139	210	113	170	97.8	147	84.8	127	
	10	46.3	69.5	35.5	53.3	127	191	104	156	89.9	135	77.7	117	
	11	39.5	59.3	30.2	45.3	114	172	94.5	142	81.9	123	70.5	106	
	12	33.3	49.9	25.4	38.0	102	154	85.1	128	73.9	111	63.4	95.1	
	13	28.4	42.5	21.6	32.4	90.3	136	76.0	114	66.2	99.5	56.5	84.8	
	14	24.4	36.7	18.6	28.0	78.9	119	67.2	101	58.7	88.2	49.9	74.8	
	15	21.3	31.9	16.2	24.3	68.7	103	58.7	88.3	51.5	77.4	43.9	66.0	
	16	18.7	28.1	14.3	21.4	60.4	90.8	51.6	77.6	45.3	68.0	38.6	58.0	
	17	16.6	24.9	12.6	19.0	53.5	80.4	45.7	68.7	40.1	60.3	34.2	51.4	
	18	14.8	22.2	11.3	16.9	47.7	71.7	40.8	61.3	35.8	53.7	30.5	45.8	
	19	13.3	19.9	10.1	15.2	42.8	64.4	36.6	55.0	32.1	48.2	27.4	41.1	
	20	12.0	18.0	9.13	13.7	38.7	58.1	33.0	49.7	29.0	43.5	24.7	37.1	
	21			8.28	12.4	35.1	52.7	30.0	45.0	26.3	39.5	22.4	33.7	
	22					31.9	48.0	27.3	41.0	23.9	36.0	20.4	30.7	
	23					29.2	43.9	25.0	37.5	21.9	32.9	18.7	28.1	
	24					26.8	40.4	22.9	34.5	20.1	30.2	17.2	25.8	
	25							21.1	31.8	18.5	27.9	15.8	23.8	
26											14.6	22.0		
Properties														
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	15.4	23.1	11.0	16.6	28.2	42.3	23.5	35.3	20.6	31.0	17.4	26.2
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	9.15	13.8	6.50	9.76	24.0	36.1	20.0	30.0	17.5	26.3	14.8	22.2
$P_{ex}(L_c)^2/10^4$, kip-in. ²			507		389		658		579		527		468	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			157		120		456		400		363		322	
r_{mx}/r_{my}			1.80		1.80		1.20		1.20		1.20		1.21	
r_{my} , in.			1.25		1.27		1.46		1.52		1.54		1.57	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">4</div> COMPOSITE HSS5		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi		
		HSS5x4x				HSS5x3x								
Shape		$\frac{3}{16}$		$\frac{1}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		
t_{des} , in.		0.174		0.116		0.465		0.349		0.291		0.233		
Steel, lb/ft		10.7		7.31		21.6		17.3		14.8		12.2		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	102	153	80.5	121	180	271	143	215	123	184	104	156	
	1	102	152	80.1	120	179	269	142	213	122	183	103	154	
	2	100	150	79.0	119	174	261	139	208	119	179	100	151	
	3	98.0	147	77.2	116	166	250	133	200	115	172	96.5	145	
	4	95.0	142	74.7	112	156	235	126	189	109	163	91.3	137	
	5	91.2	137	71.6	107	144	217	117	176	101	152	84.9	127	
	6	86.7	130	67.9	102	131	197	107	161	93.1	140	77.8	117	
	7	81.8	123	63.9	95.9	117	175	96.2	145	84.2	127	70.1	105	
	8	76.4	115	59.5	89.3	102	154	85.2	128	75.0	113	62.7	94.2	
	9	70.8	106	54.9	82.4	87.9	132	74.2	112	65.8	99.0	55.2	83.0	
	10	64.9	97.4	50.2	75.4	74.3	112	63.7	95.7	56.9	85.5	48.0	72.1	
	11	59.0	88.6	45.5	68.2	61.7	92.7	53.6	80.5	48.4	72.7	41.0	61.7	
	12	53.2	79.8	40.8	61.2	51.8	77.9	45.0	67.7	40.7	61.1	34.6	52.0	
	13	47.5	71.3	36.3	54.4	44.2	66.4	38.4	57.7	34.7	52.1	29.5	44.3	
	14	42.0	63.1	31.9	47.9	38.1	57.2	33.1	49.7	29.9	44.9	25.4	38.2	
	15	36.8	55.2	27.8	41.8	33.2	49.9	28.8	43.3	26.0	39.1	22.1	33.3	
	16	32.3	48.5	24.5	36.7	29.2	43.8	25.3	38.1	22.9	34.4	19.5	29.2	
	17	28.6	43.0	21.7	32.5	25.8	38.8	22.4	33.7	20.3	30.5	17.2	25.9	
	18	25.6	38.3	19.3	29.0	23.0	34.6	20.0	30.1	18.1	27.2	15.4	23.1	
	19	22.9	34.4	17.4	26.0			18.0	27.0	16.2	24.4	13.8	20.7	
	20	20.7	31.0	15.7	23.5									
	21	18.8	28.2	14.2	21.3									
	22	17.1	25.7	12.9	19.4									
	23	15.7	23.5	11.8	17.8									
	24	14.4	21.6	10.9	16.3									
	25	13.2	19.9	10.0	15.0									
	26	12.2	18.4	9.27	13.9									
27			8.59	12.9										
Properties														
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	13.8	20.8	9.90	14.9	22.7	34.1	19.1	28.7	16.9	25.4	14.4	21.6
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	11.7	17.6	8.36	12.6	15.5	23.4	13.1	19.7	11.6	17.5	9.87	14.8
$P_{ex}(L_c)^2/10^4$, kip-in. ²			397		300		503		450		413		367	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			272		206		214		192		176		157	
r_{mx}/r_{my}			1.21		1.21		1.53		1.53		1.53		1.53	
r_{my} , in.			1.60		1.62		1.09		1.14		1.17		1.19	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24px; font-weight: bold; text-align: center;">4</div> COMPOSITE HSS5-HSS4		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi		
		HSS5x3x				HSS5x2½x				HSS4x3x				
Shape		¾		½		¼		¾		½		¾		
t_{des} , in.		0.174		0.116		0.233		0.174		0.116		0.349		
Steel, lb/ft		9.42		6.46		11.4		8.78		6.03		14.7		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	85.4	128	66.7	100	94.1	141	77.2	116	59.6	89.4	122	184	
	1	84.8	127	66.1	99.2	93.0	140	76.4	115	59.0	88.4	121	182	
	2	82.8	124	64.6	96.9	90.1	135	73.9	111	57.1	85.6	118	178	
	3	79.7	119	62.1	93.2	85.5	129	69.9	105	54.0	81.0	113	170	
	4	75.4	113	58.8	88.2	79.4	119	64.7	97.1	50.0	75.0	107	161	
	5	70.3	106	54.8	82.1	72.2	109	58.6	87.9	45.3	68.0	98.9	149	
	6	64.6	96.9	50.2	75.3	64.3	96.6	51.9	77.8	40.2	60.3	90.0	135	
	7	58.4	87.6	45.3	68.0	56.1	84.3	45.0	67.4	34.8	52.3	80.6	121	
	8	51.9	77.9	40.3	60.4	47.9	71.9	38.1	57.1	29.6	44.4	70.9	107	
	9	45.5	68.3	35.2	52.8	40.0	60.1	31.8	47.8	24.5	36.8	61.3	92.1	
	10	39.3	58.9	30.3	45.5	32.7	49.2	26.2	39.3	20.0	30.0	52.1	78.3	
	11	33.4	50.0	25.7	38.5	27.0	40.6	21.6	32.5	16.5	24.8	43.5	65.3	
	12	28.0	42.0	21.6	32.4	22.7	34.1	18.2	27.3	13.9	20.8	36.5	54.9	
	13	23.9	35.8	18.4	27.6	19.4	29.1	15.5	23.3	11.8	17.7	31.1	46.8	
	14	20.6	30.9	15.9	23.8	16.7	25.1	13.4	20.1	10.2	15.3	26.8	40.3	
	15	17.9	26.9	13.8	20.7	14.5	21.9	11.6	17.5	8.88	13.3	23.4	35.1	
	16	15.8	23.6	12.1	18.2	12.8	19.2	10.2	15.4	7.80	11.7	20.5	30.9	
	17	14.0	20.9	10.8	16.1			9.06	13.6	6.91	10.4	18.2	27.4	
	18	12.5	18.7	9.59	14.4							16.2	24.4	
	19	11.2	16.8	8.61	12.9									
20	10.1	15.1	7.77	11.7										
Properties														
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	11.5	17.2	8.26	12.4	12.8	19.3	10.3	15.4	7.43	11.2	13.3	19.9
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	7.86	11.8	5.62	8.45	7.66	11.5	6.13	9.21	4.40	6.61	10.7	16.2
$P_{ex}(L_c)^2/10^4$, kip-in. ²			313		242		317		271		212		248	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			132		102		99.3		84.3		65.6		153	
r_{mx}/r_{my}			1.54		1.54		1.79		1.79		1.80		1.27	
r_{my} , in.			1.22		1.25		0.999		1.02		1.05		1.11	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24pt; font-weight: bold;">4</div> COMPOSITE HSS4		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi		
		HSS4x3x				HSS4x2½x								
Shape		5/16		¼		3/16		½		3/8		5/16		
t_{des} , in.		0.291		0.233		0.174		0.116		0.349		0.291		
Steel, lb/ft		12.7		10.5		8.15		5.61		13.4		11.6		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	105	158	87.9	132	72.4	109	56.2	84.3	112	168	96.7	145	
	1	105	157	87.2	131	71.8	108	55.8	83.6	111	166	95.6	144	
	2	102	153	85.0	128	70.1	105	54.4	81.6	107	160	92.3	139	
	3	97.9	147	81.5	122	67.3	101	52.3	78.4	100	151	87.0	131	
	4	92.4	139	76.9	116	63.6	95.4	49.4	74.1	91.8	138	80.1	120	
	5	85.8	129	71.6	108	59.2	88.7	46.0	68.9	82.2	123	72.1	108	
	6	78.3	118	65.7	98.8	54.1	81.2	42.1	63.1	71.7	108	63.4	95.2	
	7	70.4	106	59.4	89.2	48.7	73.1	37.9	56.8	61.0	91.7	54.4	81.8	
	8	62.2	93.4	52.8	79.4	43.2	64.7	33.6	50.3	50.7	76.2	45.6	68.6	
	9	54.0	81.2	46.2	69.5	37.6	56.4	29.3	43.9	41.0	61.6	37.3	56.1	
	10	46.2	69.4	39.8	59.9	32.3	48.4	25.1	37.7	33.2	49.9	30.2	45.4	
	11	38.8	58.3	33.8	50.8	27.3	41.0	21.2	31.7	27.4	41.2	25.0	37.6	
	12	32.6	49.0	28.4	42.7	23.0	34.6	17.8	26.7	23.0	34.6	21.0	31.6	
	13	27.8	41.7	24.2	36.3	19.6	29.4	15.2	22.7	19.6	29.5	17.9	26.9	
	14	23.9	36.0	20.9	31.3	16.9	25.4	13.1	19.6	16.9	25.4	15.4	23.2	
	15	20.9	31.3	18.2	27.3	14.7	22.1	11.4	17.1	14.7	22.2	13.4	20.2	
	16	18.3	27.5	16.0	24.0	12.9	19.4	10.0	15.0					
	17	16.2	24.4	14.1	21.3	11.5	17.2	8.86	13.3					
	18	14.5	21.8	12.6	19.0	10.2	15.4	7.90	11.9					
	19			11.3	17.0	9.17	13.8	7.09	10.6					
20							6.40	9.60						
Properties														
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	11.8	17.7	10.1	15.1	8.08	12.1	5.86	8.80	11.6	17.4	10.3	15.5
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	9.56	14.4	8.17	12.3	6.54	9.83	4.71	7.08	8.18	12.3	7.33	11.0
$P_{ex}(L_c)^2/10^4$, kip-in. ²			229		205		174		136		210		195	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			142		127		108		84.1		95.5		88.8	
r_{mx}/r_{my}			1.27		1.27		1.27		1.27		1.48		1.48	
r_{my} , in.			1.13		1.16		1.19		1.21		0.922		0.947	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">4</div> COMPOSITE HSS4		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi		
		HSS4x2½x				HSS4x2x								
Shape		¼		⅜		½		¾		⅝		¼		
t_{des} , in.		0.233		0.174		0.116		0.349		0.291		0.233		
Steel, lb/ft		9.66		7.51		5.18		12.2		10.6		8.81		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	79.9	120	64.8	97.2	50.0	75.0	101	153	88	132	73.1	110	
	1	79.1	119	64.1	96.1	49.4	74.2	99.5	150	86.4	130	71.8	108	
	2	76.5	115	61.9	92.9	47.8	71.7	93.8	141	81.7	123	68.2	102	
	3	72.3	109	58.5	87.7	45.2	67.8	84.9	128	74.5	112	62.5	93.9	
	4	66.9	101	54.0	81.0	41.8	62.7	73.9	111	65.5	98.4	55.3	83.2	
	5	60.5	91.0	48.7	73.0	37.8	56.7	61.9	93.0	55.4	83.3	47.3	71.2	
	6	53.6	80.5	42.9	64.4	33.4	50.1	49.7	74.8	45.2	67.9	39.1	58.8	
	7	46.4	69.7	37.0	55.5	28.8	43.3	38.4	57.7	35.5	53.4	31.2	46.9	
	8	39.2	59.0	31.4	47.2	24.4	36.6	29.4	44.2	27.3	41.0	24.1	36.3	
	9	32.5	48.8	26.2	39.4	20.1	30.2	23.2	34.9	21.5	32.4	19.1	28.7	
	10	26.4	39.7	21.5	32.3	16.3	24.5	18.8	28.3	17.4	26.2	15.5	23.2	
	11	21.8	32.8	17.7	26.7	13.5	20.3	15.5	23.4	14.4	21.7	12.8	19.2	
	12	18.3	27.5	14.9	22.4	11.4	17.0	13.1	19.6	12.1	18.2	10.7	16.1	
	13	15.6	23.5	12.7	19.1	9.67	14.5					9.15	13.7	
	14	13.5	20.2	10.9	16.5	8.34	12.5							
	15	11.7	17.6	9.54	14.3	7.27	10.9							
	16	10.3	15.5	8.38	12.6	6.39	9.58							
17					5.66	8.49								
Properties														
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	8.90	13.4	7.17	10.8	5.20	7.82	9.86	14.8	8.88	13.4	7.70	11.6
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	6.31	9.48	5.08	7.64	3.66	5.50	5.87	8.82	5.31	7.98	4.61	6.92
$P_{ex}(L_c)^2/10^4$, kip-in. ²			175		150		119		172		161		146	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			80.0		68.3		53.7		53.3		50.2		45.6	
r_{mx}/r_{my}			1.48		1.48		1.49		1.80		1.79		1.79	
r_{my} , in.			0.973		0.999		1.03		0.729		0.754		0.779	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 2px; display: inline-block; width: 30px; height: 30px; text-align: center; line-height: 30px;">4</div> COMPOSITE HSS4		Table 4-A (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS				A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi	
		Shape		HSS4x2x			
		$\frac{3}{16}$		$\frac{1}{8}$			
t_{des} , in.		0.174		0.116			
Steel, lb/ft		6.87		4.75			
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	57.5	86.2	43.8	65.7		
	1	56.5	84.7	43.1	64.6		
	2	53.5	80.3	40.9	61.4		
	3	49.0	73.5	37.6	56.4		
	4	43.6	65.5	33.4	50.1		
	5	37.7	56.6	28.6	43.0		
	6	31.5	47.3	23.8	35.6		
	7	25.5	38.3	19.0	28.6		
	8	19.9	29.9	14.8	22.2		
	9	15.7	23.7	11.7	17.5		
	10	12.8	19.2	9.46	14.2		
	11	10.5	15.8	7.82	11.7		
	12	8.86	13.3	6.57	9.85		
	13	7.55	11.3	5.60	8.39		
Properties							
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	6.24	9.38	4.56	6.86	
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	3.72	5.60	2.71	4.07	
$P_{ex}(L_c)^2/10^4$, kip-in. ²			125		100		
$P_{ey}(L_c)^2/10^4$, kip-in. ²			39.1		31.1		
r_{mx}/r_{my}			1.79		1.79		
r_{my} , in.			0.804		0.830		
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.					
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.					
$\Omega_c = 2.00$	$\phi_c = 0.75$						


<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24pt; font-weight: bold;">5</div> COMPOSITE HSS20-HSS16		Table 4-B Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi				
		HSS20x12x					HSS16x12x									
Shape		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{5}{8}$		$\frac{1}{2}$				
t_{des} , in.		0.581		0.465		0.349		0.291		0.581		0.465				
Steel, lb/ft		127		103		78.5		65.9		110		89.7				
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$				
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD			
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	1310	1960	1160	1730	1000	1500	891	1340	1100	1650	969	1450			
	1	1310	1960	1160	1730	1000	1500	890	1340	1100	1650	969	1450			
	2	1310	1960	1150	1730	999	1500	889	1330	1100	1640	967	1450			
	3	1300	1950	1150	1730	996	1490	886	1330	1090	1640	965	1450			
	4	1300	1950	1150	1720	992	1490	883	1320	1090	1630	961	1440			
	5	1290	1940	1140	1710	987	1480	879	1320	1080	1630	956	1430			
	6	1280	1930	1130	1700	981	1470	873	1310	1080	1620	951	1430			
	7	1280	1910	1130	1690	974	1460	867	1300	1070	1610	944	1420			
	8	1270	1900	1120	1680	966	1450	860	1290	1060	1590	937	1410			
	9	1260	1880	1110	1660	958	1440	852	1280	1050	1580	928	1390			
	10	1240	1870	1100	1650	948	1420	843	1260	1040	1560	919	1380			
	11	1230	1850	1090	1630	937	1410	834	1250	1030	1550	909	1360			
	12	1220	1820	1070	1610	925	1390	823	1230	1020	1530	898	1350			
	13	1200	1800	1060	1590	913	1370	812	1220	1010	1510	886	1330			
	14	1180	1780	1040	1570	899	1350	800	1200	992	1490	874	1310			
	15	1170	1750	1030	1540	885	1330	787	1180	977	1470	860	1290			
	16	1150	1720	1010	1520	870	1310	774	1160	962	1440	846	1270			
	17	1130	1700	995	1490	855	1280	760	1140	945	1420	832	1250			
	18	1110	1670	977	1470	838	1260	746	1120	928	1390	817	1220			
	19	1090	1630	958	1440	822	1230	731	1100	911	1370	801	1200			
	20	1070	1600	939	1410	804	1210	715	1070	892	1340	784	1180			
	21	1050	1570	919	1380	787	1180	699	1050	873	1310	768	1150			
	22	1020	1540	899	1350	768	1150	683	1020	854	1280	750	1130			
	23	1000	1500	878	1320	750	1120	666	999	834	1250	733	1100			
	24	978	1470	857	1290	731	1100	649	974	814	1220	715	1070			
	25	954	1430	836	1250	711	1070	632	948	794	1190	696	1040			
	26	929	1390	814	1220	692	1040	615	922	773	1160	678	1020			
	27	905	1360	792	1190	672	1010	597	895	752	1130	659	989			
	28	880	1320	769	1150	652	978	579	869	731	1100	640	960			
	29	855	1280	747	1120	632	948	561	842	709	1060	621	932			
	30	830	1240	724	1090	612	918	543	815	688	1030	602	903			
	32	779	1170	679	1020	572	858	508	761	645	968	564	846			
	34	729	1090	634	952	532	798	472	708	602	903	526	789			
	36	679	1020	590	885	493	740	437	656	560	840	488	733			
	38	630	945	546	819	455	682	403	605	518	778	452	678			
	40	582	874	504	756	418	626	370	555	478	717	416	624			
	Properties															
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft		647	972	540	812	425	639	367	551	457	687	381	573
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft		439	660	362	545	285	428	235	353	367	551	306	460
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			74400		64200		53100		47100		41400		36000		
$P_{ey}(L_c)^2/10^4$, kip-in. ²			31200		26800		22100		19600		25500		22100			
r_{mx}/r_{my}			1.54		1.55		1.55		1.55		1.27		1.28			
r_{my} , in.			4.93		4.99		5.04		5.07		4.80		4.86			
ASD	LRFD															
$\Omega_b = 1.67$	$\phi_b = 0.90$															
$\Omega_c = 2.00$	$\phi_c = 0.75$															

<div style="border: 1px solid black; padding: 2px; display: inline-block; width: 30px; height: 30px; text-align: center; line-height: 30px;">5</div> COMPOSITE HSS16		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi			
		HSS16x12x					HSS16x8x								
Shape		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$			
f_{des} , in.		0.349		0.291		0.581		0.465		0.349		0.291			
Steel, lb/ft		68.3		57.4		93.3		76.1		58.1		48.9			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	835	1250	766	1150	857	1290	749	1120	637	956	578	867		
	1	834	1250	766	1150	857	1280	748	1120	636	955	577	866		
	2	833	1250	765	1150	854	1280	745	1120	634	951	575	863		
	3	831	1250	762	1140	849	1270	741	1110	631	946	572	858		
	4	827	1240	759	1140	842	1260	735	1100	626	939	567	851		
	5	823	1230	756	1130	834	1250	728	1090	619	929	561	842		
	6	818	1230	751	1130	824	1240	719	1080	612	917	554	831		
	7	812	1220	745	1120	812	1220	709	1060	603	904	546	819		
	8	806	1210	739	1110	798	1200	697	1050	592	889	536	805		
	9	798	1200	732	1100	783	1170	684	1030	581	872	526	789		
	10	790	1180	724	1090	766	1150	670	1000	569	853	514	771		
	11	781	1170	715	1070	749	1120	654	981	555	833	502	753		
	12	771	1160	706	1060	729	1090	638	957	541	811	489	733		
	13	760	1140	696	1040	709	1060	620	930	526	789	475	712		
	14	749	1120	685	1030	688	1030	602	903	510	765	460	690		
	15	737	1110	674	1010	666	999	583	874	493	740	445	667		
	16	725	1090	662	993	643	965	563	845	476	714	429	643		
	17	711	1070	649	974	620	930	543	814	459	688	413	619		
	18	698	1050	636	955	596	894	522	783	441	661	396	594		
	19	684	1030	623	935	572	857	501	752	423	634	379	569		
	20	669	1000	609	914	547	821	480	720	404	607	363	544		
	21	654	981	595	893	523	784	458	688	386	579	346	519		
	22	639	958	581	871	498	747	437	655	368	551	329	493		
	23	623	935	566	849	473	710	416	623	349	524	312	468		
	24	607	911	551	826	449	674	395	592	331	497	295	443		
	25	591	886	536	803	425	637	374	560	313	470	279	419		
	26	574	862	520	780	401	602	353	529	295	443	263	394		
	27	558	837	505	757	378	567	333	499	278	417	247	371		
	28	541	812	489	733	356	534	313	470	261	392	232	348		
	29	524	786	473	710	336	505	294	441	245	367	216	325		
	30	508	761	457	686	317	477	275	412	229	343	202	303		
	32	474	711	426	639	280	421	241	362	201	301	178	267		
	34	441	661	395	593	248	373	214	321	178	267	158	236		
	36	408	612	365	547	221	333	191	286	159	238	140	211		
	38	376	563	335	502	199	299	171	257	142	214	126	189		
	40	345	517	306	459	179	269	154	232	129	193	114	171		
	Properties														
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	301	453	258	388	354	532	297	446	236	355	203	306
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	240	361	205	308	210	315	175	263	138	207	118	177
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			29700		26400		29700		26400		22100		19600	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			18200		16100		9200		8110		6760		5980		
r_{mx}/r_{my}			1.28		1.28		1.80		1.80		1.81		1.81		
r_{my} , in.			4.91		4.94		3.27		3.32		3.37		3.40		
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">5</div> COMPOSITE HSS16-HSS14		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi	
		HSS16x8x		HSS14x10x									
Shape		$\frac{1}{4}$		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$	
f_{des} , in.		0.233		0.581		0.465		0.349		0.291		0.233	
Steel, lb/ft		39.4		93.3		76.1		58.1		48.9		39.4	
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	501	752	883	1320	774	1160	663	994	603	905	543	815
	1	500	751	882	1320	773	1160	662	993	603	904	543	814
	2	499	748	880	1320	772	1160	661	991	601	902	541	812
	3	496	744	877	1320	769	1150	658	987	599	899	539	808
	4	492	738	872	1310	765	1150	655	982	596	894	536	804
	5	487	730	867	1300	760	1140	650	975	592	887	532	798
	6	480	720	859	1290	754	1130	645	967	586	880	527	791
	7	473	709	851	1280	746	1120	638	957	580	870	521	782
	8	465	697	842	1260	738	1110	631	946	573	860	515	772
	9	456	683	831	1250	729	1090	623	934	566	849	508	762
	10	445	668	819	1230	719	1080	614	920	557	836	500	750
	11	435	652	806	1210	708	1060	604	906	548	822	491	737
	12	423	634	793	1190	696	1040	593	890	538	807	482	723
	13	411	616	778	1170	683	1020	582	873	528	791	472	708
	14	398	597	762	1140	669	1000	570	855	516	774	462	692
	15	385	577	746	1120	655	982	557	836	505	757	451	676
	16	371	556	729	1090	640	960	544	816	492	738	439	659
	17	357	535	711	1070	625	937	530	796	480	719	427	641
	18	342	513	693	1040	609	913	516	774	466	700	415	623
	19	328	492	674	1010	592	888	502	753	453	679	402	604
20	313	469	654	981	575	863	487	730	439	659	390	584	
21	298	447	634	951	558	837	472	708	425	637	377	565	
22	284	425	614	921	540	811	456	685	411	616	363	545	
23	269	403	594	891	523	784	441	661	396	594	350	525	
24	254	382	573	860	505	757	425	638	382	573	337	505	
25	240	360	553	829	487	730	409	614	367	551	323	485	
26	226	339	532	798	469	703	394	590	353	529	310	465	
27	213	319	511	767	450	676	378	567	338	507	297	445	
28	199	299	490	736	432	649	362	543	324	485	283	425	
29	186	279	470	705	415	622	347	520	309	464	270	405	
30	174	261	450	674	397	595	331	497	295	443	257	386	
32	153	229	410	614	362	543	301	451	267	401	232	348	
34	135	203	371	557	328	492	272	408	241	361	208	312	
36	121	181	333	500	295	443	244	365	215	322	185	278	
38	108	162	299	449	265	397	219	328	193	289	166	250	
40	97.7	147	270	405	239	359	197	296	174	261	150	225	

Properties															
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft		169	254	329	494	276	414	218	328	188	282	156	234
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft		94.8	142	255	384	214	321	168	253	144	217	118	177
$P_{ex}(L_c)^2/10^4$, kip-in. ²			16900	25000	22200	18400	16300	14000							
$P_{ey}(L_c)^2/10^4$, kip-in. ²			5130	14200	12600	10400	9150	7890							
r_{mx}/r_{my}			1.82	1.33	1.33	1.33	1.33	1.33							
r_{my} , in.			3.42	3.98	4.04	4.09	4.12	4.14							
ASD	LRFD														
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24px; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">5</div> COMPOSITE HSS12		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi			
		HSS12x10x					HSS12x8x								
Shape		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{5}{8}$		$\frac{1}{2}$			
f_{des} , in.		0.465		0.349		0.291		0.233		0.581		0.465			
Steel, lb/ft		69.3		53.0		44.6		36.0		76.3		62.5			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	688	1030	588	882	533	800	481	722	682	1020	596	894		
	1	687	1030	588	882	533	799	481	721	681	1020	595	893		
	2	686	1030	586	880	532	797	479	719	679	1020	593	890		
	3	683	1020	584	876	530	794	477	716	675	1010	590	885		
	4	680	1020	581	871	527	790	475	712	669	1000	585	878		
	5	675	1010	577	865	523	784	471	707	662	993	579	868		
	6	669	1000	572	858	518	777	467	700	654	980	572	857		
	7	663	994	566	849	513	769	462	693	644	966	563	845		
	8	655	983	559	839	507	760	456	684	633	949	553	830		
	9	647	970	552	828	500	750	450	674	620	930	543	814		
	10	638	956	544	816	492	739	442	664	606	910	531	796		
	11	627	941	535	803	484	726	435	652	592	887	518	777		
	12	617	925	526	788	475	713	426	640	576	864	505	757		
	13	605	907	515	773	466	699	418	626	559	839	490	735		
	14	593	889	505	757	456	684	408	612	542	813	475	713		
	15	580	870	493	740	445	668	399	598	524	785	460	689		
	16	566	849	482	722	435	652	388	582	505	757	443	665		
	17	552	828	469	704	423	635	378	567	486	729	427	640		
	18	538	807	457	685	412	617	367	550	466	699	410	615		
	19	523	784	444	665	400	599	356	533	446	669	393	589		
	20	508	761	430	645	387	581	344	516	426	640	375	563		
	21	492	738	417	625	375	562	333	499	406	609	358	537		
	22	476	714	403	604	362	543	321	481	386	579	341	511		
	23	460	690	389	584	349	524	309	464	366	550	323	485		
	24	444	666	375	563	336	505	297	446	347	520	306	459		
	25	428	642	361	541	323	485	285	428	327	491	289	434		
	26	411	617	347	520	311	466	273	410	308	463	273	409		
	27	395	593	333	499	298	446	261	392	292	438	257	385		
	28	379	568	319	478	285	427	250	374	275	413	241	361		
	29	363	544	305	457	272	408	238	357	259	389	225	338		
	30	347	520	291	437	260	389	227	340	243	366	210	316		
	32	316	474	264	396	235	353	204	306	214	321	185	277		
	34	286	428	238	358	211	317	183	274	189	285	164	246		
	36	256	384	213	320	189	283	163	244	169	254	146	219		
	38	230	345	191	287	169	254	146	219	152	228	131	197		
	40	208	311	173	259	153	229	132	198	137	206	118	178		
	Properties														
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	217	327	173	259	148	223	123	185	222	334	187	282
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	190	285	150	226	129	193	106	160	164	247	138	208
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			14800		12400		11000		9460		13900		12300	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			10900		9070		8030		6930		7000		6220		
r_{mx}/r_{my}			1.17		1.17		1.17		1.17		1.41		1.41		
r_{my} , in.			3.96		4.01		4.04		4.07		3.16		3.21		
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

 COMPOSITE HSS12		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi			
		HSS12x8x					HSS12x6x								
Shape		$\frac{3}{8}$		$\frac{1}{4}$		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$			
f_{des} , in.		0.349		0.233		0.581		0.465		0.349		0.291			
Steel, lb/ft		47.9		32.6		67.8		55.7		42.8		36.1			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	505	758	409	613	578	867	501	752	422	633	379	569		
	1	505	757	408	612	577	866	500	751	421	632	379	568		
	2	503	754	407	610	574	860	497	746	419	628	376	564		
	3	500	750	404	606	568	852	492	739	415	622	373	559		
	4	496	744	401	601	560	840	486	728	409	613	367	551		
	5	491	736	396	594	550	824	477	715	402	603	361	541		
	6	484	727	391	586	537	806	467	700	393	590	353	530		
	7	477	716	385	577	523	785	455	682	383	575	344	516		
	8	469	703	377	566	507	761	441	662	372	558	334	501		
	9	460	689	370	554	490	735	426	640	360	539	323	484		
	10	450	674	361	542	471	707	410	616	346	519	311	466		
	11	439	658	352	528	452	677	394	590	332	498	298	447		
	12	427	641	342	513	431	646	376	564	317	476	285	427		
	13	415	622	332	497	410	616	358	536	302	453	271	407		
	14	402	603	321	481	390	586	339	508	286	430	257	385		
	15	389	583	309	464	370	556	320	479	270	406	243	364		
	16	375	562	298	447	349	525	300	451	254	381	228	342		
	17	361	541	286	429	329	494	281	422	238	357	214	320		
	18	346	519	274	411	308	463	262	393	222	333	199	299		
	19	332	497	261	392	288	433	243	365	207	310	185	278		
	20	317	475	249	374	268	403	226	339	191	287	171	257		
	21	302	453	237	355	248	373	210	316	176	265	158	237		
	22	287	431	225	337	229	345	195	293	162	243	145	217		
	23	273	409	212	319	211	317	180	270	148	222	132	199		
	24	258	387	200	301	194	291	165	248	136	204	122	182		
	25	244	366	189	283	178	268	152	229	125	188	112	168		
	26	230	345	177	266	165	248	141	211	116	174	104	155		
	27	216	324	166	249	153	230	130	196	107	161	96.1	144		
	28	203	304	155	232	142	214	121	182	99.9	150	89.3	134		
	29	189	284	144	216	133	199	113	170	93.1	140	83.3	125		
	30	177	265	135	202	124	186	106	159	87.0	130	77.8	117		
	32	155	233	118	178	109	164	92.9	140	76.5	115	68.4	103		
	34	138	206	105	157	96.4	145	82.2	124	67.7	102	60.6	90.9		
	36	123	184	93.6	140	86.0	129	73.4	110	60.4	90.6	54.0	81.1		
	38	110	165	84.0	126	77.2	116	65.8	99.0	54.2	81.3	48.5	72.8		
	40	99.4	149	75.8	114			59.4	89.3	48.9	73.4	43.8	65.7		
	Properties														
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	149	225	107	161	184	277	157	235	125	188	108	163
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	110	165	77.8	117	110	165	92.8	140	74.1	111	63.7	95.8
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			10400		7970		10900		9730		8350		7500	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			5220		3980		3410		3020		2570		2300		
r_{mx}/r_{my}			1.41		1.42		1.79		1.79		1.80		1.81		
r_{my} , in.			3.27		3.32		2.39		2.44		2.49		2.52		
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 2px; display: inline-block; width: 30px; height: 30px; text-align: center; line-height: 30px; font-size: 24px; font-weight: bold;">5</div> COMPOSITE HSS12-HSS10		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi			
		HSS12x6x					HSS10x8x								
Shape		$\frac{1}{4}$		$\frac{3}{16}$		$\frac{5}{16}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$			
t_{des} , in.		0.233		0.174		0.581		0.465		0.349		0.291			
Steel, lb/ft		29.2		22.2		67.8		55.7		42.8		36.1			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	336	504	281	421	595	893	518	778	439	659	396	594		
	1	336	503	280	420	595	892	518	777	439	658	396	594		
	2	334	500	278	418	592	889	516	774	437	656	394	592		
	3	330	495	276	413	589	883	513	769	434	652	392	588		
	4	325	488	272	407	584	876	509	763	431	646	389	583		
	5	319	479	267	400	577	866	503	755	426	639	385	577		
	6	312	469	260	391	570	855	497	745	421	631	379	569		
	7	304	456	253	380	561	841	489	733	414	622	374	560		
	8	295	442	246	368	551	826	480	720	407	611	367	550		
	9	285	427	237	356	539	809	471	706	399	598	359	539		
	10	274	411	228	342	527	791	460	690	390	585	351	527		
	11	262	394	218	327	514	771	449	673	381	571	342	514		
	12	250	375	208	312	500	750	437	655	370	555	333	500		
	13	238	357	197	296	485	727	424	636	359	539	323	485		
	14	225	338	186	280	469	704	410	616	348	522	313	469		
	15	212	318	175	263	453	679	396	595	336	505	302	453		
	16	199	298	164	247	436	654	382	573	324	486	291	437		
	17	186	279	153	230	419	628	367	551	312	468	280	420		
	18	173	260	143	214	401	602	352	528	299	449	268	402		
	19	160	241	132	198	384	576	337	506	286	430	256	385		
	20	148	222	122	183	366	549	322	483	273	410	245	367		
	21	136	204	112	168	348	522	306	460	260	391	233	349		
	22	124	187	102	153	330	496	291	437	248	371	221	332		
	23	114	171	93.2	140	313	470	276	414	235	352	209	314		
	24	105	157	85.6	128	297	446	261	391	222	333	198	297		
	25	96.3	145	78.9	118	281	422	246	369	210	314	187	280		
	26	89.1	134	72.9	109	266	399	232	347	197	296	175	263		
	27	82.6	124	67.6	101	251	377	217	326	185	278	165	247		
	28	76.8	115	62.9	94.3	236	354	204	305	174	260	154	231		
	29	71.6	107	58.6	87.9	221	333	190	285	162	243	143	215		
	30	66.9	100	54.8	82.2	207	311	177	266	151	227	134	201		
	32	58.8	88.2	48.2	72.2	182	274	156	234	133	199	118	177		
	34	52.1	78.1	42.7	64.0	161	242	138	207	118	177	104	157		
	36	46.5	69.7	38.0	57.1	144	216	123	185	105	158	93.1	140		
	38	41.7	62.6	34.1	51.2	129	194	111	166	94.3	141	83.5	125		
	40	37.6	56.5	30.8	46.2	116	175	99.7	150	85.1	128	75.4	113		
	Properties														
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	90.6	136	71.2	107	167	250	141	212	113	169	97.2	146
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	52.7	79.2	39.8	59.8	141	212	120	180	95.2	143	82.0	123
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			6460		5340		8590		7640		6520		5780	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			1980		1620		5900		5240		4470		3960		
r_{mx}/r_{my}			1.81		1.82		1.21		1.21		1.21		1.21		
r_{my} , in.			2.54		2.57		3.09		3.14		3.19		3.22		
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24pt; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">5</div> COMPOSITE HSS10		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi				
		HSS10x8x					HSS10x6x									
Shape		$\frac{1}{4}$		$\frac{3}{16}$		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$				
f_{des} , in.		0.233		0.174		0.581		0.465		0.349		0.291				
Steel, lb/ft		29.2		22.2		59.3		48.9		37.7		31.8				
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$				
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD			
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	353	530	308	463	500	750	435	652	365	547	327	491			
	1	353	529	308	462	499	749	434	651	364	546	327	490			
	2	352	527	307	460	496	744	431	647	362	542	325	487			
	3	349	524	305	457	491	736	427	640	358	537	321	482			
	4	346	519	302	453	484	725	421	631	353	529	317	475			
	5	342	514	298	448	474	712	413	619	347	520	311	467			
	6	338	507	294	441	463	695	404	605	339	508	304	456			
	7	332	498	289	433	451	676	393	589	330	495	296	445			
	8	326	489	283	425	437	655	381	571	320	480	288	431			
	9	319	479	277	415	421	632	368	552	309	464	278	417			
	10	312	468	270	405	405	609	354	530	298	446	267	401			
	11	304	456	263	394	389	585	339	508	285	428	256	384			
	12	295	443	255	382	372	560	323	484	272	408	245	367			
	13	286	429	246	370	355	533	307	460	259	388	233	349			
	14	277	415	238	357	337	506	290	435	245	368	220	330			
	15	267	400	229	343	319	479	273	410	231	347	208	312			
	16	257	385	220	329	300	451	256	384	217	325	195	293			
	17	246	369	210	315	282	423	239	359	203	304	182	274			
	18	236	353	201	301	263	396	223	334	189	283	170	255			
	19	225	337	191	287	245	369	208	312	175	263	158	237			
	20	214	321	181	272	228	342	193	291	162	243	146	219			
	21	204	305	172	258	210	316	179	269	149	224	134	201			
	22	193	289	162	243	194	291	166	249	136	205	123	184			
	23	182	274	153	229	177	266	152	229	125	187	112	169			
	24	172	258	144	216	163	245	140	210	115	172	103	155			
	25	162	243	135	202	150	225	129	194	106	158	95.1	143			
	26	152	228	126	189	139	208	119	179	97.6	146	87.9	132			
	27	142	213	117	176	129	193	110	166	90.5	136	81.5	122			
	28	132	198	109	163	120	180	103	154	84.2	126	75.8	114			
	29	123	185	102	152	111	168	95.7	144	78.5	118	70.7	106			
	30	115	173	94.8	142	104	157	89.4	134	73.3	110	66.0	99.1			
	32	101	152	83.4	125	91.5	138	78.6	118	64.4	96.7	58.0	87.1			
	34	89.7	135	73.8	111	81.1	122	69.6	105	57.1	85.6	51.4	77.1			
	36	80.0	120	65.9	98.8	72.3	109	62.1	93.3	50.9	76.4	45.9	68.8			
	38	71.8	108	59.1	88.7	64.9	97.6	55.7	83.8	45.7	68.6	41.2	61.7			
	40	64.8	97.3	53.4	80.0					41.2	61.9	37.1	55.7			
	Properties															
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft		80.9	122	63.2	94.9	137	205	116	175	93.5	141	81.0	122
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft		68.1	102	52.8	79.3	93.5	140	79.5	119	63.6	95.5	54.7	82.3
	$P_{ex}(L_c)^2/10^4$, kip-in. ²		4980		4110		6700		5970		5150		4670			
$P_{ey}(L_c)^2/10^4$, kip-in. ²		3410		2800		2840		2540		2170		1950				
r_{mx}/r_{my}		1.21		1.21		1.54		1.53		1.54		1.55				
r_{my} , in.		3.25		3.28		2.34		2.39		2.44		2.47				
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.														
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.														
$\Omega_c = 2.00$	$\phi_c = 0.75$															


<div style="border: 1px solid black; padding: 2px; display: inline-block; width: 30px; height: 30px; text-align: center; line-height: 30px;">5</div> COMPOSITE HSS10		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi				
		HSS10x6x					HSS10x5x									
Shape		$\frac{1}{4}$		$\frac{3}{16}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$				
t_{des} , in.		0.233		0.174		0.349		0.291		0.233		0.174				
Steel, lb/ft		25.8		19.6		35.1		29.7		24.1		18.4				
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$				
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD			
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	290	434	250	375	327	490	293	439	258	386	221	331			
	1	289	433	250	374	326	488	292	438	257	385	220	330			
	2	287	431	248	372	323	484	289	434	255	382	218	327			
	3	284	426	245	368	318	477	285	428	251	376	215	322			
	4	280	420	242	362	312	468	280	419	246	369	210	316			
	5	275	412	237	355	304	456	272	409	240	359	205	307			
	6	269	403	231	347	295	442	264	396	232	348	198	297			
	7	261	392	225	337	284	426	254	382	224	336	191	286			
	8	253	380	217	326	272	408	244	366	214	321	182	273			
	9	245	367	209	314	259	388	232	349	204	306	173	260			
	10	235	353	201	301	245	368	220	330	193	290	163	245			
	11	225	338	192	288	231	346	207	311	182	273	153	230			
	12	215	322	183	274	216	324	194	291	170	255	143	215			
	13	204	306	173	259	201	302	181	271	158	238	133	199			
	14	193	289	163	244	186	279	168	251	147	220	122	184			
	15	181	272	153	229	171	257	154	232	135	202	112	168			
	16	170	255	143	214	157	235	141	212	123	185	102	153			
	17	159	238	133	199	143	214	129	193	112	168	92.5	139			
	18	148	221	123	185	129	194	117	175	101	152	83.1	125			
	19	137	205	114	170	117	176	105	157	91.1	137	74.6	112			
	20	126	189	104	156	106	159	94.5	142	82.2	123	67.3	101			
	21	116	174	95.1	143	96.2	145	85.7	129	74.6	112	61.0	91.6			
	22	106	158	86.7	130	87.6	132	78.1	117	68.0	102	55.6	83.4			
	23	96.7	145	79.3	119	80.2	121	71.4	107	62.2	93.3	50.9	76.3			
	24	88.8	133	72.8	109	73.6	111	65.6	98.4	57.1	85.7	46.7	70.1			
	25	81.8	123	67.1	101	67.9	102	60.5	90.7	52.6	78.9	43.1	64.6			
	26	75.7	113	62.1	93.1	62.7	94.3	55.9	83.9	48.7	73.0	39.8	59.7			
	27	70.2	105	57.6	86.3	58.2	87.5	51.8	77.8	45.1	67.7	36.9	55.4			
	28	65.2	97.8	53.5	80.3	54.1	81.3	48.2	72.3	42.0	62.9	34.3	51.5			
	29	60.8	91.2	49.9	74.8	50.4	75.8	44.9	67.4	39.1	58.7	32.0	48.0			
	30	56.8	85.2	46.6	69.9	47.1	70.8	42.0	63.0	36.5	54.8	29.9	44.9			
	32	49.9	74.9	41.0	61.5	41.4	62.3	36.9	55.4	32.1	48.2	26.3	39.4			
	34	44.2	66.4	36.3	54.4	36.7	55.2	32.7	49.0	28.5	42.7	23.3	34.9			
	36	39.5	59.2	32.4	48.6											
	38	35.4	53.1	29.1	43.6											
	40	32.0	47.9	26.2	39.3											
	Properties															
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft		67.8	102	53.2	79.9	83.7	126	72.7	109	60.9	91.5	48.0	72.1
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft		45.6	68.5	35.4	53.3	49.6	74.5	42.8	64.3	35.7	53.7	27.7	41.7
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			4010		3310		4430		4040		3520		2900		
$P_{ey}(L_c)^2/10^4$, kip-in. ²			1680		1380		1370		1240		1080		884			
r_{mx}/r_{my}			1.54		1.55		1.80		1.81		1.81		1.81			
r_{my} , in.			2.49		2.52		2.05		2.07		2.10		2.13			
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.														
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.														
$\Omega_c = 2.00$	$\phi_c = 0.75$															


<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24px; font-weight: bold; text-align: center;">5</div> COMPOSITE HSS9		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi				
		HSS9x7x														
Shape		5/8		1/2		3/8		5/16		1/4		3/16				
t_{des} , in,		0.581		0.465		0.349		0.291		0.233		0.174				
Steel, lb/ft		59.3		48.9		37.7		31.8		25.8		19.6				
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$				
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD			
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	507	760	441	662	371	556	334	500	296	444	256	385			
	1	506	759	441	661	370	556	333	500	295	443	256	384			
	2	503	755	438	658	369	553	332	497	294	441	255	382			
	3	499	749	435	652	366	549	329	494	292	438	253	379			
	4	494	741	430	645	362	543	325	488	288	433	250	375			
	5	487	730	424	636	357	535	321	481	284	427	246	369			
	6	478	717	417	625	351	526	316	473	279	419	241	362			
	7	468	702	408	613	344	516	309	464	274	411	236	354			
	8	457	685	399	598	336	504	302	453	267	401	230	345			
	9	445	667	388	583	327	491	294	442	260	390	224	336			
	10	431	647	377	565	318	477	286	429	252	378	217	325			
	11	417	625	365	547	308	462	277	415	244	366	209	314			
	12	402	603	352	528	297	446	267	401	235	353	201	302			
	13	386	579	338	507	286	429	257	385	226	339	193	290			
	14	369	554	324	486	274	411	246	370	217	325	184	277			
	15	353	531	310	464	262	393	236	353	207	310	176	264			
	16	337	507	295	442	250	375	225	337	197	295	167	250			
	17	321	483	280	420	238	356	213	320	187	280	158	237			
	18	305	459	265	397	225	338	202	303	177	265	149	223			
	19	289	435	250	375	213	319	191	286	166	250	140	210			
	20	273	411	235	353	200	300	180	270	156	235	131	196			
	21	257	387	220	331	188	282	169	253	147	220	122	183			
	22	242	363	206	309	176	264	158	237	137	205	114	171			
	23	226	340	192	288	164	246	147	221	127	191	105	158			
	24	211	317	179	269	153	229	137	205	118	177	97.2	146			
	25	196	295	167	251	141	212	127	190	109	164	89.6	134			
	26	182	273	155	234	131	196	117	176	101	151	82.8	124			
	27	169	253	144	217	121	182	109	163	93.5	140	76.8	115			
	28	157	236	134	201	113	169	101	151	87.0	130	71.4	107			
	29	146	220	125	188	105	157	94.1	141	81.1	122	66.6	99.9			
	30	137	205	117	175	98.1	147	87.9	132	75.8	114	62.2	93.3			
	32	120	180	103	154	86.2	129	77.3	116	66.6	99.9	54.7	82.0			
	34	106	160	90.8	137	76.3	115	68.5	103	59.0	88.5	48.4	72.7			
	36	94.9	143	81.0	122	68.1	102	61.1	91.6	52.6	78.9	43.2	64.8			
	38	85.1	128	72.7	109	61.1	91.7	54.8	82.2	47.2	70.8	38.8	58.2			
	40	76.8	115	65.6	98.7	55.2	82.7	49.5	74.2	42.6	63.9	35.0	52.5			
	Properties															
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft		128	193	109	164	87.7	132	75.8	114	63.3	95.1	49.5	74.3
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft		107	160	90.6	136	72.4	109	62.6	94.1	52.1	78.3	40.6	61.0
	$P_{ex}(L_c)^2/10^4$, kip-in. ²			5780		5180		4440		3980		3430		2830		
$P_{ey}(L_c)^2/10^4$, kip-in. ²			3790		3380		2900		2600		2240		1840			
r_{mx}/r_{my}			1.23		1.24		1.24		1.24		1.24		1.24			
r_{my} , in.			2.68		2.73		2.78		2.81		2.84		2.87			
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.														
$\Omega_b = 1.67$	$\phi_b = 0.90$															
$\Omega_c = 2.00$	$\phi_c = 0.75$															


<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24pt; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">5</div> COMPOSITE HSS9		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS												A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi	
		HSS9x5x													
Shape		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$			
t_{des} , in.		0.581		0.465		0.349		0.291		0.233		0.174			
Steel, lb/ft		50.8		42.1		32.6		27.6		22.4		17.1			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	419	630	359	539	300	450	269	403	236	355	202	303		
	1	418	628	358	537	299	449	268	402	236	354	202	302		
	2	414	623	355	533	296	445	266	398	234	350	200	300		
	3	409	614	350	525	292	438	262	393	230	345	197	295		
	4	400	602	343	514	286	429	257	385	226	338	193	289		
	5	390	587	334	500	279	418	250	375	220	330	187	281		
	6	378	568	323	484	270	405	242	363	213	319	181	272		
	7	364	548	310	466	260	390	233	350	205	308	174	262		
	8	349	525	297	445	249	373	223	335	196	294	167	250		
	9	333	500	282	423	237	355	213	319	187	280	158	237		
	10	315	473	266	400	224	336	201	302	177	265	149	224		
	11	297	446	250	376	211	316	190	284	166	249	140	210		
	12	278	418	235	353	197	296	177	266	156	233	131	196		
	13	259	389	220	330	183	275	165	248	145	217	121	182		
	14	239	360	204	307	170	254	153	229	134	201	112	168		
	15	220	331	189	284	156	234	141	211	123	184	102	153		
	16	202	303	173	261	142	214	129	193	112	169	93.2	140		
	17	184	276	159	238	129	194	117	175	102	153	84.3	126		
	18	166	250	144	217	117	176	106	159	92.2	138	75.7	114		
	19	149	224	130	196	107	160	94.9	142	82.8	124	67.9	102		
	20	135	202	117	177	96.5	145	85.6	128	74.7	112	61.3	92.0		
	21	122	184	107	160	87.5	131	77.6	116	67.7	102	55.6	83.4		
	22	111	167	97.1	146	79.7	120	70.8	106	61.7	92.6	50.7	76.0		
	23	102	153	88.8	134	72.9	110	64.7	97.1	56.5	84.7	46.4	69.5		
	24	93.5	141	81.6	123	67.0	101	59.5	89.2	51.9	77.8	42.6	63.9		
	25	86.2	130	75.2	113	61.7	92.8	54.8	82.2	47.8	71.7	39.2	58.8		
	26	79.7	120	69.5	104	57.1	85.8	50.7	76.0	44.2	66.3	36.3	54.4		
	27	73.9	111	64.5	96.9	52.9	79.5	47.0	70.5	41.0	61.5	33.6	50.5		
	28	68.7	103	59.9	90.1	49.2	74.0	43.7	65.5	38.1	57.2	31.3	46.9		
	29	64.1	96.3	55.9	84.0	45.9	69.0	40.7	61.1	35.5	53.3	29.2	43.7		
	30	59.9	90.0	52.2	78.5	42.9	64.4	38.0	57.1	33.2	49.8	27.2	40.9		
	32	52.6	79.1	45.9	69.0	37.7	56.6	33.4	50.2	29.2	43.8	23.9	35.9		
	34							29.6	44.4	25.8	38.8	21.2	31.8		
	Properties														
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	102	153	87.0	131	70.4	106	61.2	91.9	51.4	77.2	40.3	60.6	
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	65.5	98.5	56.2	84.5	45.4	68.2	39.1	58.8	32.6	48.9	25.5	38.3	
$P_{ex}(L_c)^2/10^4$, kip-in. ²			4330		3900		3350		3040		2670		2200		
$P_{ey}(L_c)^2/10^4$, kip-in. ²			1610		1450		1240		1120		981		805		
r_{mx}/r_{my}			1.64		1.64		1.64		1.65		1.65		1.65		
r_{my} , in.			1.92		1.97		2.03		2.05		2.08		2.10		
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24px; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">5</div> COMPOSITE HSS8		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi				
		HSS8x6x														
Shape		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$				
t_{des} , in.		0.581		0.465		0.349		0.291		0.233		0.174				
Steel, lb/ft		50.8		42.1		32.6		27.6		22.4		17.1				
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$				
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD			
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	420	630	366	549	306	459	275	413	243	364	209	313			
	1	419	629	365	547	306	458	274	412	242	363	208	312			
	2	416	625	363	544	304	456	273	409	241	361	207	310			
	3	412	619	359	538	301	451	270	405	238	357	204	307			
	4	406	610	353	530	296	444	266	399	235	352	201	302			
	5	398	599	347	520	291	436	261	392	230	345	197	296			
	6	389	585	339	508	284	426	255	383	225	337	193	289			
	7	379	570	329	494	276	415	248	373	219	328	187	281			
	8	368	553	319	478	268	402	241	361	212	318	181	272			
	9	355	534	307	461	258	388	232	349	205	307	174	262			
	10	342	514	295	443	248	373	223	335	196	295	167	251			
	11	327	492	282	423	238	356	214	321	188	282	160	239			
	12	312	469	268	403	226	340	204	306	179	269	152	227			
	13	297	446	254	382	215	322	193	290	170	255	143	215			
	14	281	422	240	360	203	305	183	274	160	241	135	203			
	15	265	398	226	338	191	287	172	258	151	226	127	190			
	16	248	373	211	316	179	269	161	242	141	212	118	178			
	17	232	349	197	297	167	251	151	226	132	198	110	165			
	18	216	325	184	277	155	233	140	210	122	184	102	153			
	19	200	301	171	258	144	215	130	195	113	170	93.8	141			
	20	185	278	159	239	132	199	120	179	104	156	86.1	129			
	21	170	256	147	220	121	182	110	165	95.5	143	78.4	118			
	22	156	234	135	202	111	166	100	150	87.1	131	71.5	107			
	23	142	214	123	185	101	152	91.7	138	79.7	119	65.4	98.1			
	24	131	196	113	170	93.1	140	84.2	126	73.2	110	60.1	90.1			
	25	120	181	104	157	85.8	129	77.6	116	67.4	101	55.3	83.0			
	26	111	167	96.4	145	79.3	119	71.8	108	62.3	93.5	51.2	76.8			
	27	103	155	89.4	134	73.5	110	66.5	99.8	57.8	86.7	47.5	71.2			
	28	96.0	144	83.1	125	68.4	103	61.9	92.8	53.8	80.6	44.1	66.2			
	29	89.5	135	77.5	116	63.7	95.6	57.7	86.5	50.1	75.2	41.1	61.7			
	30	83.7	126	72.4	109	59.6	89.3	53.9	80.8	46.8	70.2	38.4	57.7			
	32	73.5	111	63.6	95.7	52.3	78.5	47.4	71.1	41.2	61.7	33.8	50.7			
	34	65.1	97.9	56.4	84.7	46.4	69.6	42.0	62.9	36.5	54.7	29.9	44.9			
	36	58.1	87.3	50.3	75.6	41.4	62.0	37.4	56.1	32.5	48.8	26.7	40.0			
	38			45.1	67.8	37.1	55.7	33.6	50.4	29.2	43.8	24.0	35.9			
	40							30.3	45.5	26.3	39.5	21.6	32.4			
	Properties															
	M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft		95.2	143	81.6	123	65.8	98.9	57.1	85.8	47.7	71.7	37.6	56.6
	M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft		77.0	116	65.8	98.9	53.2	79.9	45.9	69.0	38.3	57.6	30.0	45.2
	$P_{ex}(L_c)^2/10^4$, kip-in. ²				3700		3320		2860		2590		2250		1850	
$P_{ey}(L_c)^2/10^4$, kip-in. ²				2290		2050		1760		1590		1380		1140		
r_{mx}/r_{my}				1.27		1.27		1.27		1.28		1.28		1.27		
r_{my} , in.				2.27		2.32		2.38		2.40		2.43		2.46		
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.														
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.														
$\Omega_c = 2.00$	$\phi_c = 0.75$															

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24px; font-weight: bold; text-align: center;">5</div> COMPOSITE HSS8		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi		
		HSS8x4x												
Shape		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$		
t_{des} , in.		0.581		0.465		0.349		0.291		0.233		0.174		
Steel, lb/ft		42.3		35.2		27.5		23.3		19.0		14.5		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	350	526	292	438	241	361	214	322	187	281	159	238	
	1	349	524	290	436	239	359	214	320	187	280	158	237	
	2	344	517	287	431	236	354	211	316	184	276	156	234	
	3	336	505	280	422	231	346	206	309	180	270	152	229	
	4	325	489	272	409	224	335	200	299	175	262	148	222	
	5	312	469	262	393	215	322	192	288	168	252	142	213	
	6	297	446	250	375	204	306	183	274	160	240	135	202	
	7	279	420	236	355	192	289	172	258	151	226	127	191	
	8	261	392	221	332	180	269	161	242	141	212	119	178	
	9	241	362	205	309	166	249	149	224	131	196	110	165	
	10	221	332	189	284	152	229	137	206	120	180	101	151	
	11	200	301	173	260	139	209	125	187	109	164	91.7	138	
	12	180	271	156	235	126	190	113	169	98.8	148	82.6	124	
	13	161	241	140	211	114	172	101	151	88.4	133	73.8	111	
	14	142	213	125	188	102	154	89.1	134	78.4	118	65.2	97.9	
	15	124	186	110	165	91.0	137	78.9	119	68.7	103	57.1	85.6	
	16	109	163	96.6	145	80.1	120	69.7	105	60.4	90.6	50.2	75.3	
	17	96.4	145	85.6	129	71.0	107	61.7	92.7	53.5	80.3	44.4	66.7	
	18	85.9	129	76.4	115	63.3	95.1	55.0	82.7	47.7	71.6	39.6	59.5	
	19	77.1	116	68.5	103	56.8	85.4	49.4	74.2	42.8	64.2	35.6	53.4	
	20	69.6	105	61.9	93.0	51.3	77.1	44.6	67.0	38.7	58.0	32.1	48.2	
	21	63.1	94.9	56.1	84.3	46.5	69.9	40.4	60.8	35.1	52.6	29.1	43.7	
	22	57.5	86.5	51.1	76.8	42.4	63.7	36.8	55.4	31.9	47.9	26.5	39.8	
	23	52.6	79.1	46.8	70.3	38.8	58.3	33.7	50.7	29.2	43.8	24.3	36.4	
	24	48.3	72.7	43.0	64.6	35.6	53.5	31.0	46.5	26.8	40.3	22.3	33.5	
	25	44.6	67.0	39.6	59.5	32.8	49.3	28.5	42.9	24.7	37.1	20.6	30.8	
	26			36.6	55.0	30.3	45.6	26.4	39.6	22.9	34.3	19.0	28.5	
	27							24.5	36.8	21.2	31.8	17.6	26.4	
28											16.4	24.6		
Properties														
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	71.6	108	62.2	93.5	50.8	76.3	44.2	66.4	37.2	55.9	29.4	44.1
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	42.6	64.0	37.0	55.6	30.2	45.3	26.2	39.4	21.9	33.0	17.2	25.8
$P_{ex}(L_c)^2/10^4$, kip-in. ²			2600		2360		2050		1860		1650		1380	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			805		733		636		577		508		422	
r_{mx}/r_{my}			1.80		1.79		1.80		1.80		1.80		1.81	
r_{my} , in.			1.51		1.56		1.61		1.63		1.66		1.69	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

 COMPOSITE HSS8-HSS7		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi		
		HSS8x4x		HSS7x5x										
Shape		$\frac{1}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$		
t_{des} , in.		0.116		0.465		0.349		0.291		0.233		0.174		
Steel, lb/ft		9.9		35.2		27.5		23.3		19.0		14.5		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	125	188	296	443	247	370	221	331	194	291	165	248	
	1	125	187	295	442	246	369	220	330	193	290	165	247	
	2	123	184	292	438	244	366	218	327	192	287	163	245	
	3	120	180	287	431	240	360	215	322	189	283	161	241	
	4	116	174	281	422	235	353	211	316	185	277	157	236	
	5	111	167	273	410	229	343	205	307	180	270	153	229	
	6	106	158	264	396	221	332	198	297	174	261	148	222	
	7	99.3	149	253	380	213	319	191	286	168	251	142	213	
	8	92.5	139	242	364	203	305	182	273	160	240	136	203	
	9	85.4	128	231	347	193	290	173	260	152	228	129	193	
	10	78.1	117	219	328	182	274	164	246	144	216	121	182	
	11	70.7	106	206	309	171	257	154	231	135	203	114	171	
	12	63.5	95.2	192	289	160	239	143	215	126	189	106	159	
	13	56.4	84.6	179	269	148	222	133	200	117	176	98.0	147	
	14	49.7	74.5	166	249	136	204	123	184	108	162	90.2	135	
	15	43.3	64.9	152	229	125	187	113	169	99.2	149	82.5	124	
	16	38.0	57.1	139	209	114	170	103	154	90.5	136	75.0	112	
	17	33.7	50.6	127	190	104	156	92.9	139	82.0	123	67.7	102	
	18	30.1	45.1	114	172	94.2	142	83.5	125	73.8	111	60.6	90.9	
	19	27.0	40.5	103	154	85.1	128	75.0	112	66.2	99.3	54.4	81.6	
	20	24.4	36.5	92.7	139	76.8	115	67.7	101	59.7	89.6	49.1	73.7	
	21	22.1	33.1	84.1	126	69.6	105	61.4	92.0	54.2	81.3	44.5	66.8	
	22	20.1	30.2	76.6	115	63.4	95.4	55.9	83.9	49.4	74.1	40.6	60.9	
	23	18.4	27.6	70.1	105	58.0	87.2	51.2	76.7	45.2	67.8	37.1	55.7	
	24	16.9	25.4	64.4	96.8	53.3	80.1	47.0	70.5	41.5	62.2	34.1	51.2	
	25	15.6	23.4	59.3	89.2	49.1	73.8	43.3	64.9	38.2	57.4	31.4	47.1	
	26	14.4	21.6	54.9	82.5	45.4	68.3	40.0	60.0	35.4	53.0	29.1	43.6	
	27	13.4	20.0	50.9	76.5	42.1	63.3	37.1	55.7	32.8	49.2	26.9	40.4	
	28	12.4	18.6	47.3	71.1	39.2	58.9	34.5	51.8	30.5	45.7	25.1	37.6	
	29			44.1	66.3	36.5	54.9	32.2	48.3	28.4	42.6	23.4	35.0	
	30			41.2	61.9	34.1	51.3	30.1	45.1	26.6	39.8	21.8	32.7	
	32					30.0	45.1	26.4	39.6	23.3	35.0	19.2	28.8	
	34											17.0	25.5	
	Properties													
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	21.1	31.7	58.0	87.2	47.3	71.0	41.1	61.7	34.6	52.0	27.2	40.9
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	11.8	17.7	45.3	68.0	36.7	55.1	32.0	48.0	26.8	40.2	21.0	31.6
$P_{ex}(L_c)^2/10^4$, kip-in. ²			1050		1990		1720		1570		1390		1150	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			320		1130		982		889		785		645	
r_{mx}/r_{my}			1.81		1.33		1.32		1.33		1.33		1.34	
r_{my} , in.			1.71		1.91		1.97		1.99		2.02		2.05	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

 COMPOSITE HSS7		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi			
		HSS7x5x		HSS7x4x											
Shape		$\frac{1}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$			
t_{des} , in.		0.116		0.465		0.349		0.291		0.233		0.174			
Steel, lb/ft		9.86		31.8		24.9		21.2		17.3		13.3			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	136	204	264	396	216	324	193	289	168	252	142	213		
	1	135	203	263	395	215	322	192	288	167	251	142	212		
	2	134	201	259	389	212	318	189	284	165	248	140	210		
	3	132	198	253	381	207	311	185	277	162	242	137	205		
	4	129	193	245	369	201	301	179	269	156	235	132	198		
	5	125	187	236	354	192	288	172	258	150	225	127	190		
	6	120	181	224	337	183	274	163	245	143	214	121	181		
	7	115	173	212	318	172	258	154	231	135	202	114	170		
	8	110	165	198	297	160	241	144	216	126	189	106	159		
	9	104	156	183	275	148	222	133	200	117	175	98.1	147		
	10	97.4	146	168	253	136	203	122	183	107	161	89.9	135		
	11	90.8	136	153	230	124	186	111	166	97.4	146	81.6	122		
	12	84.1	126	138	207	112	169	99.8	150	87.8	132	73.4	110		
	13	77.4	116	123	185	101	152	89.0	134	78.4	118	65.5	98.2		
	14	70.8	106	109	164	90.1	135	79.0	119	69.4	104	57.8	86.7		
	15	64.3	96.4	95.7	144	79.7	120	70.2	106	60.8	91.2	50.5	75.8		
	16	58.0	87.0	84.1	126	70.0	105	61.8	92.9	53.4	80.2	44.4	66.6		
	17	51.9	77.8	74.5	112	62.0	93.2	54.8	82.3	47.3	71.0	39.3	59.0		
	18	46.3	69.4	66.4	99.9	55.3	83.2	48.9	73.4	42.2	63.3	35.1	52.6		
	19	41.5	62.3	59.6	89.6	49.7	74.6	43.8	65.9	37.9	56.8	31.5	47.2		
	20	37.5	56.2	53.8	80.9	44.8	67.4	39.6	59.5	34.2	51.3	28.4	42.6		
	21	34.0	51.0	48.8	73.4	40.7	61.1	35.9	53.9	31.0	46.5	25.8	38.7		
	22	31.0	46.5	44.5	66.8	37.0	55.7	32.7	49.2	28.3	42.4	23.5	35.2		
	23	28.3	42.5	40.7	61.2	33.9	50.9	29.9	45.0	25.9	38.8	21.5	32.2		
	24	26.0	39.1	37.4	56.2	31.1	46.8	27.5	41.3	23.7	35.6	19.7	29.6		
	25	24.0	36.0	34.4	51.8	28.7	43.1	25.3	38.1	21.9	32.8	18.2	27.3		
	26	22.2	33.3			26.5	39.9	23.4	35.2	20.2	30.4	16.8	25.2		
	27	20.6	30.9							18.8	28.1	15.6	23.4		
	28	19.1	28.7												
	29	17.8	26.7												
	30	16.7	25.0												
	32	14.6	22.0												
	34	13.0	19.5												
	Properties														
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft		19.4	29.1	49.5	74.5	40.6	61.0	35.7	53.6	30.0	45.1	23.7	35.7
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft		14.7	22.0	32.6	49.0	26.8	40.2	23.4	35.2	19.6	29.5	15.4	23.2
$P_{ex}(L_c)^2/10^4$, kip-in. ²				876		1640		1430		1300		1160		970	
$P_{ey}(L_c)^2/10^4$, kip-in. ²				492		642		560		508		449		373	
r_{mx}/r_{my}				1.33		1.60		1.60		1.60		1.61		1.61	
r_{my} , in.				2.07		1.53		1.58		1.61		1.64		1.66	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														

 COMPOSITE HSS7-HSS6		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi	
		HSS7x4x		HSS6x5x									
Shape		$\frac{1}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$			
f_{des} , in.		0.116		0.465		0.349		0.291		0.233			
Steel, lb/ft		9.01		31.8		24.9		21.2		17.3			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	115	173	264	396	220	330	197	295	172	259		
	1	115	172	263	395	220	329	196	295	172	258		
	2	113	170	261	392	218	326	195	292	170	256		
	3	110	166	257	386	214	321	192	287	168	252		
	4	107	160	251	378	210	314	188	281	164	246		
	5	102	153	245	368	204	306	182	274	160	240		
	6	96.8	145	237	356	197	295	176	264	155	232		
	7	90.8	136	228	342	189	284	169	254	149	223		
	8	84.4	127	218	327	180	271	162	243	142	213		
	9	77.6	116	207	311	171	257	154	230	135	202		
	10	70.7	106	195	293	161	242	145	217	127	191		
	11	63.8	95.7	183	275	151	226	136	204	119	179		
	12	57.0	85.5	171	257	140	211	126	190	111	167		
	13	50.5	75.7	159	238	130	195	117	176	103	155		
	14	44.1	66.2	146	220	119	179	108	162	95.0	143		
	15	38.5	57.7	134	201	109	164	98.6	148	87.0	130		
	16	33.8	50.7	122	183	99.2	149	89.6	134	79.2	119		
	17	29.9	44.9	110	166	90.2	136	81.0	121	71.6	107		
	18	26.7	40.1	99.3	149	81.6	123	72.6	109	64.2	96.4		
	19	24.0	35.9	89.1	134	73.3	110	65.1	97.7	57.7	86.5		
	20	21.6	32.4	80.4	121	66.2	99.5	58.8	88.2	52.0	78.1		
	21	19.6	29.4	72.9	110	60.0	90.2	53.3	80.0	47.2	70.8		
	22	17.9	26.8	66.4	99.9	54.7	82.2	48.6	72.9	43.0	64.5		
	23	16.4	24.5	60.8	91.4	50.0	75.2	44.4	66.7	39.3	59.0		
	24	15.0	22.5	55.8	83.9	46.0	69.1	40.8	61.2	36.1	54.2		
	25	13.8	20.8	51.5	77.3	42.4	63.7	37.6	56.4	33.3	50.0		
	26	12.8	19.2	47.6	71.5	39.2	58.9	34.8	52.2	30.8	46.2		
	27	11.9	17.8	44.1	66.3	36.3	54.6	32.3	48.4	28.6	42.8		
	28	11.0	16.6	41.0	61.6	33.8	50.8	30.0	45.0	26.5	39.8		
	29			38.2	57.5	31.5	47.3	28.0	41.9	24.7	37.1		
	30			35.7	53.7	29.4	44.2	26.1	39.2	23.1	34.7		
	32					25.9	38.9	23.0	34.4	20.3	30.5		
Properties													
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	17.0	25.6	45.3	68.0	37.0	55.6	32.3	48.5	27.2	40.9	
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	10.8	16.3	39.7	59.7	32.4	48.7	28.2	42.4	23.8	35.7	
$P_{ex}(L_c)^2/10^4$, kip-in. ²			743		1330		1150		1050		928		
$P_{ey}(L_c)^2/10^4$, kip-in. ²			284		978		850		772		684		
r_{mx}/r_{my}			1.62		1.17		1.16		1.17		1.16		
r_{my} , in.			1.69		1.87		1.92		1.95		1.98		
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.											
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.											
$\Omega_c = 2.00$	$\phi_c = 0.75$												

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24px; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">5</div> COMPOSITE HSS6		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi		
		HSS6x5x					HSS6x4x							
Shape		$\frac{3}{16}$		$\frac{1}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		
t_{des} , in.		0.174		0.116		0.465		0.349		0.291		0.233		
Steel, lb/ft		13.3		9.01		28.4		22.4		19.1		15.6		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	147	220	120	180	236	355	191	287	171	256	149	223	
	1	146	219	120	179	235	353	191	286	170	255	148	222	
	2	145	217	118	177	232	348	188	282	168	251	146	219	
	3	143	214	116	175	226	340	183	275	164	245	143	214	
	4	139	209	114	170	219	329	177	266	158	238	138	207	
	5	136	203	110	165	210	315	170	255	152	228	133	199	
	6	131	196	106	159	199	300	161	242	144	216	126	189	
	7	126	189	102	153	188	282	151	227	136	204	119	178	
	8	120	180	96.8	145	175	263	141	211	127	190	111	166	
	9	114	171	91.4	137	161	243	130	195	117	175	102	154	
	10	107	161	85.8	129	148	222	119	179	107	160	93.8	141	
	11	100	151	80.0	120	134	201	109	164	96.9	145	85.1	128	
	12	93.5	140	74.0	111	120	181	98.4	148	87.0	131	76.5	115	
	13	86.5	130	68.1	102	107	161	88.2	133	77.4	116	68.1	102	
	14	79.5	119	62.2	93.3	94.3	142	78.4	118	68.9	104	60.1	90.2	
	15	72.6	109	56.4	84.7	82.3	124	68.9	104	60.9	91.6	52.5	78.7	
	16	65.9	98.9	50.9	76.3	72.3	109	60.5	91.0	53.5	80.5	46.1	69.2	
	17	59.5	89.2	45.5	68.2	64.0	96.2	53.6	80.6	47.4	71.3	40.9	61.3	
	18	53.2	79.8	40.6	60.8	57.1	85.9	47.8	71.9	42.3	63.6	36.4	54.7	
	19	47.8	71.6	36.4	54.6	51.3	77.1	42.9	64.5	38.0	57.1	32.7	49.1	
	20	43.1	64.7	32.9	49.3	46.3	69.5	38.7	58.2	34.3	51.5	29.5	44.3	
	21	39.1	58.6	29.8	44.7	42.0	63.1	35.1	52.8	31.1	46.7	26.8	40.2	
	22	35.6	53.4	27.2	40.7	38.2	57.5	32.0	48.1	28.3	42.6	24.4	36.6	
	23	32.6	48.9	24.8	37.3	35.0	52.6	29.3	44.0	25.9	38.9	22.3	33.5	
	24	29.9	44.9	22.8	34.2	32.1	48.3	26.9	40.4	23.8	35.8	20.5	30.8	
	25	27.6	41.4	21.0	31.5	29.6	44.5	24.8	37.3	21.9	33.0	18.9	28.3	
	26	25.5	38.3	19.4	29.2					20.3	30.5	17.5	26.2	
	27	23.7	35.5	18.0	27.0									
	28	22.0	33.0	16.8	25.1									
	29	20.5	30.8	15.6	23.4									
	30	19.2	28.7	14.6	21.9									
	32	16.8	25.3	12.8	19.3									
Properties														
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	21.5	32.4	15.3	23.0	38.3	57.5	31.7	47.7	27.8	41.8	23.5	35.3
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	18.7	28.1	13.2	19.9	28.5	42.8	23.5	35.3	20.5	30.9	17.3	26.0
$P_{ex}(L_c)^2/10^4$, kip-in. ²			771		588		1080		950		865		770	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			566		432		551		481		440		388	
r_{mx}/r_{my}			1.17		1.17		1.40		1.41		1.40		1.41	
r_{my} , in.			2.01		2.03		1.50		1.55		1.58		1.61	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200. Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_b = 1.67$	$\phi_b = 0.90$													
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">5</div> COMPOSITE HSS6		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi		
		HSS6x4x					HSS6x3x							
Shape		$\frac{3}{16}$		$\frac{1}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		
t_{des} , in.		0.174		0.116		0.465		0.349		0.291		0.233		
Steel, lb/ft		12.0		8.16		25.0		19.8		17.0		13.9		
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	126	189	102	153	208	313	164	247	145	217	126	189	
	1	125	188	101	152	206	310	163	245	144	215	125	187	
	2	123	185	99.9	150	201	302	159	239	140	210	122	183	
	3	121	181	97.5	146	193	290	153	230	134	202	117	175	
	4	117	175	94.2	141	182	273	145	218	127	190	111	166	
	5	112	168	90.0	135	169	254	135	203	118	177	103	154	
	6	106	160	85.3	128	154	231	124	187	108	162	94.2	141	
	7	100	150	80.0	120	138	207	113	169	97.3	146	84.9	127	
	8	93.5	140	74.2	111	122	183	100	151	87.1	131	75.2	113	
	9	86.4	130	68.2	102	105	158	88.0	132	76.7	115	65.6	98.5	
	10	79.1	119	62.1	93.2	89.9	135	76.0	114	66.6	100	56.7	85.2	
	11	71.7	108	56.0	84.0	75.2	113	64.7	97.2	57.0	85.7	48.8	73.4	
	12	64.5	96.7	50.0	74.9	63.2	95.0	54.4	81.7	48.0	72.2	41.4	62.3	
	13	57.4	86.1	44.1	66.2	53.8	80.9	46.3	69.6	40.9	61.5	35.3	53.1	
	14	50.6	76.0	38.6	57.8	46.4	69.8	39.9	60.0	35.3	53.0	30.4	45.7	
	15	44.2	66.3	33.6	50.4	40.4	60.8	34.8	52.3	30.7	46.2	26.5	39.9	
	16	38.9	58.3	29.5	44.3	35.5	53.4	30.6	46.0	27.0	40.6	23.3	35.0	
	17	34.4	51.6	26.1	39.2	31.5	47.3	27.1	40.7	23.9	36.0	20.6	31.0	
	18	30.7	46.0	23.3	35.0	28.1	42.2	24.2	36.3	21.4	32.1	18.4	27.7	
	19	27.6	41.3	20.9	31.4			21.7	32.6	19.2	28.8	16.5	24.8	
	20	24.9	37.3	18.9	28.3							14.9	22.4	
	21	22.6	33.8	17.1	25.7									
	22	20.6	30.8	15.6	23.4									
	23	18.8	28.2	14.3	21.4									
	24	17.3	25.9	13.1	19.7									
	25	15.9	23.9	12.1	18.1									
	26	14.7	22.1	11.2	16.8									
27	13.6	20.5	10.4	15.6										
Properties														
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	18.6	28.0	13.3	20.1	31.5	47.3	26.2	39.4	23.1	34.7	19.6	29.5
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	13.7	20.5	9.69	14.6	18.6	28.0	15.6	23.5	13.8	20.7	11.6	17.5
$P_{ex}(L_c)^2/10^4$, kip-in. ²			651		495		841		746		685		609	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			327		248		261		232		213		189	
r_{mx}/r_{my}			1.41		1.41		1.80		1.79		1.79		1.80	
r_{my} , in.			1.63		1.66		1.12		1.17		1.19		1.22	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24px; width: 30px; height: 30px; text-align: center; line-height: 30px;">5</div> COMPOSITE HSS6-HSS5		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi		
		HSS6x3x					HSS5x4x							
Shape		$\frac{3}{16}$		$\frac{1}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		
t_{des} , in.		0.174		0.116		0.465		0.349		0.291		0.233		
Steel, lb/ft		10.7		7.31		25.0		19.8		17.0		13.9		
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	105	158	83.9	126	208	313	167	250	149	223	130	195	
	1	104	156	83.2	125	207	311	166	249	148	222	129	194	
	2	102	153	81.2	122	204	307	164	246	146	219	127	191	
	3	97.8	147	77.9	117	199	299	160	239	143	214	124	187	
	4	92.6	139	73.6	110	192	289	154	231	138	207	120	181	
	5	86.2	129	68.3	103	184	276	147	221	132	198	115	173	
	6	79.1	119	62.4	93.6	174	262	140	209	125	187	109	164	
	7	71.4	107	56.1	84.2	163	246	131	197	117	176	103	154	
	8	63.4	95.1	49.6	74.4	152	228	123	184	109	163	95.7	144	
	9	55.5	83.2	43.1	64.7	139	210	113	170	100	150	88.3	132	
	10	47.7	71.6	36.9	55.4	127	191	104	156	91.4	137	80.6	121	
	11	40.4	60.6	31.0	46.5	114	172	94.5	142	82.5	124	72.9	109	
	12	34.0	50.9	26.1	39.1	102	154	85.1	128	73.9	111	65.3	98.0	
	13	28.9	43.4	22.2	33.3	90.3	136	76.0	114	66.2	99.5	58.0	87.0	
	14	24.9	37.4	19.1	28.7	78.9	119	67.2	101	58.7	88.2	51.0	76.5	
	15	21.7	32.6	16.7	25.0	68.7	103	58.7	88.3	51.5	77.4	44.4	66.6	
	16	19.1	28.6	14.7	22.0	60.4	90.8	51.6	77.6	45.3	68.0	39.0	58.5	
	17	16.9	25.4	13.0	19.5	53.5	80.4	45.7	68.7	40.1	60.3	34.6	51.9	
	18	15.1	22.6	11.6	17.4	47.7	71.7	40.8	61.3	35.8	53.7	30.8	46.3	
	19	13.5	20.3	10.4	15.6	42.8	64.4	36.6	55.0	32.1	48.2	27.7	41.5	
	20	12.2	18.3	9.38	14.1	38.7	58.1	33.0	49.7	29.0	43.5	25.0	37.5	
	21			8.51	12.8	35.1	52.7	30.0	45.0	26.3	39.5	22.7	34.0	
	22					31.9	48.0	27.3	41.0	23.9	36.0	20.6	31.0	
	23					29.2	43.9	25.0	37.5	21.9	32.9	18.9	28.3	
	24					26.8	40.4	22.9	34.5	20.1	30.2	17.3	26.0	
	25							21.1	31.8	18.5	27.9	16.0	24.0	
26											14.8	22.2		
Properties														
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	15.6	23.5	11.3	16.9	28.4	42.7	23.7	35.6	20.9	31.3	17.7	26.5
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	9.23	13.9	6.56	9.86	24.2	36.4	20.1	30.2	17.7	26.6	15.0	22.5
$P_{ex}(L_c)^2/10^4$, kip-in. ²			521		403		664		587		536		478	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			161		123		459		404		368		328	
r_{mx}/r_{my}			1.80		1.81		1.20		1.21		1.21		1.21	
r_{my} , in.			1.25		1.27		1.46		1.52		1.54		1.57	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24px; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">5</div> COMPOSITE HSS5		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi				
		HSS5x4x					HSS5x3x									
Shape		$\frac{3}{16}$		$\frac{1}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$				
f_{des} , in.		0.174		0.116		0.465		0.349		0.291		0.233				
Steel, lb/ft		10.7		7.31		21.6		17.3		14.8		12.2				
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$				
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD			
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	109	164	88.2	132	180	271	143	215	125	188	109	163			
	1	109	163	87.7	132	179	269	142	213	124	186	108	162			
	2	107	161	86.4	130	174	261	139	208	121	181	105	158			
	3	105	157	84.3	126	166	250	133	200	116	174	101	151			
	4	101	152	81.4	122	156	235	126	189	109	164	95.2	143			
	5	97.1	146	77.8	117	144	217	117	176	101	152	88.3	133			
	6	92.2	138	73.6	110	131	197	107	161	93.1	140	80.7	121			
	7	86.7	130	69.0	103	117	175	96.2	145	84.2	127	72.5	109			
	8	80.8	121	64.0	96.0	102	154	85.2	128	75.0	113	64.1	96.1			
	9	74.5	112	58.8	88.1	87.9	132	74.2	112	65.8	99.0	55.7	83.5			
	10	68.1	102	53.4	80.1	74.3	112	63.7	95.7	56.9	85.5	48.0	72.1			
	11	61.7	92.5	48.1	72.1	61.7	92.7	53.6	80.5	48.4	72.7	41.0	61.7			
	12	55.3	83.0	42.9	64.3	51.8	77.9	45.0	67.7	40.7	61.1	34.6	52.0			
	13	49.2	73.7	37.8	56.7	44.2	66.4	38.4	57.7	34.7	52.1	29.5	44.3			
	14	43.3	64.9	33.0	49.5	38.1	57.2	33.1	49.7	29.9	44.9	25.4	38.2			
	15	37.7	56.6	28.7	43.1	33.2	49.9	28.8	43.3	26.0	39.1	22.1	33.3			
	16	33.2	49.7	25.2	37.9	29.2	43.8	25.3	38.1	22.9	34.4	19.5	29.2			
	17	29.4	44.0	22.4	33.5	25.8	38.8	22.4	33.7	20.3	30.5	17.2	25.9			
	18	26.2	39.3	19.9	29.9	23.0	34.6	20.0	30.1	18.1	27.2	15.4	23.1			
	19	23.5	35.3	17.9	26.9			18.0	27.0	16.2	24.4	13.8	20.7			
	20	21.2	31.8	16.2	24.2											
	21	19.2	28.9	14.7	22.0											
	22	17.5	26.3	13.4	20.0											
	23	16.0	24.1	12.2	18.3											
	24	14.7	22.1	11.2	16.8											
	25	13.6	20.4	10.3	15.5											
	26	12.6	18.8	9.56	14.3											
27			8.86	13.3												
Properties																
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft		14.1	21.1	10.1	15.1	22.9	34.4	19.3	29.0	17.1	25.7	14.5	21.9	
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft		11.9	17.9	8.47	12.7	15.6	23.5	13.2	19.8	11.7	17.6	9.95	15.0	
$P_{ex}(L_c)^2/10^4$, kip-in. ²			408	311			507			455			420			374
$P_{ey}(L_c)^2/10^4$, kip-in. ²			279	212			215			194			178			159
r_{mx}/r_{my}			1.21	1.21			1.54			1.53			1.54			1.53
r_{my} , in.			1.60	1.62			1.09			1.14			1.17			1.19
ASD	LRFD		Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$		Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$															

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24pt; font-weight: bold;">5</div> COMPOSITE HSS5-HSS4		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi		
		HSS5x3x				HSS5x2½x				HSS4x3x				
Shape		¾		½		¼		¾		½		¾		
t_{des} , in.		0.174		0.116		0.233		0.174		0.116		0.349		
Steel, lb/ft		9.42		6.46		11.4		8.8		6.03		14.7		
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	90.7	136	72.3	108	98.0	147	81.5	122	64.2	96.3	122	184	
	1	89.9	135	71.7	108	96.9	145	80.5	121	63.5	95.2	121	182	
	2	87.8	132	69.9	105	93.5	140	77.8	117	61.3	92.0	118	178	
	3	84.3	126	67.1	101	88.2	132	73.5	110	57.9	86.8	113	170	
	4	79.7	119	63.3	94.9	81.2	122	67.8	102	53.4	80.1	107	161	
	5	74.1	111	58.7	88.1	73.0	110	61.2	91.8	48.1	72.2	98.9	149	
	6	67.8	102	53.6	80.4	64.3	96.6	53.9	80.9	42.4	63.6	90.0	135	
	7	61.0	91.5	48.1	72.1	56.1	84.3	46.5	69.7	36.5	54.8	80.6	121	
	8	54.0	81.0	42.4	63.7	47.9	71.9	39.1	58.7	30.7	46.1	70.9	107	
	9	47.1	70.6	36.9	55.3	40.0	60.1	32.2	48.3	25.3	37.9	61.3	92.1	
	10	40.4	60.6	31.5	47.2	32.7	49.2	26.2	39.3	20.5	30.7	52.1	78.3	
	11	34.0	51.0	26.4	39.6	27.0	40.6	21.6	32.5	16.9	25.4	43.5	65.3	
	12	28.6	42.9	22.2	33.2	22.7	34.1	18.2	27.3	14.2	21.3	36.5	54.9	
	13	24.3	36.5	18.9	28.3	19.4	29.1	15.5	23.3	12.1	18.2	31.1	46.8	
	14	21.0	31.5	16.3	24.4	16.7	25.1	13.4	20.1	10.4	15.7	26.8	40.3	
	15	18.3	27.4	14.2	21.3	14.5	21.9	11.6	17.5	9.09	13.6	23.4	35.1	
	16	16.1	24.1	12.5	18.7	12.8	19.2	10.2	15.4	7.99	12.0	20.5	30.9	
	17	14.2	21.4	11.0	16.6			9.06	13.6	7.08	10.6	18.2	27.4	
	18	12.7	19.0	9.85	14.8							16.2	24.4	
	19	11.4	17.1	8.84	13.3									
20	10.3	15.4	7.98	12.0										
Properties														
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	11.7	17.5	8.42	12.7	13.0	19.5	10.4	15.7	7.58	11.4	13.4	20.1
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	7.94	11.9	5.68	8.54	7.71	11.6	6.18	9.29	4.44	6.67	10.8	16.3
$P_{ex}(L_c)^2/10^4$, kip-in. ²			321		250		323		277		220		250	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			135		105		100		85.7		67.2		155	
r_{mx}/r_{my}			1.54		1.54		1.80		1.80		1.81		1.27	
r_{my} , in.			1.22		1.25		0.999		1.02		1.05		1.11	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24pt; font-weight: bold;">5</div> COMPOSITE HSS4		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi		
		HSS4x3x					HSS4x2½x							
Shape		5/16		¼		3/16		⅛		3/8		5/16		
t_{des} , in.		0.291		0.233		0.174		0.116		0.349		0.291		
Steel, lb/ft		12.7		10.5		8.15		5.61		13.4		11.6		
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	105	158	91.7	138	76.5	115	60.6	91.0	112	168	96.7	145	
	1	105	157	90.9	136	75.9	114	60.1	90.2	111	166	95.6	144	
	2	102	153	88.6	133	74.0	111	58.6	87.9	107	160	92.3	139	
	3	97.9	147	84.8	127	71.0	106	56.2	84.3	100	151	87.0	131	
	4	92.4	139	79.9	120	66.9	100	53.0	79.4	91.8	138	80.1	120	
	5	85.8	129	73.9	111	62.0	93.1	49.1	73.6	82.2	123	72.1	108	
	6	78.3	118	67.2	101	56.6	84.9	44.7	67.1	71.7	108	63.4	95.2	
	7	70.4	106	60.1	90.2	50.7	76.1	40.1	60.1	61.0	91.7	54.4	81.8	
	8	62.2	93.4	52.8	79.4	44.7	67.1	35.3	52.9	50.7	76.2	45.6	68.6	
	9	54.0	81.2	46.2	69.5	38.8	58.2	30.6	45.8	41.0	61.6	37.3	56.1	
	10	46.2	69.4	39.8	59.9	33.1	49.6	26.0	39.0	33.2	49.9	30.2	45.4	
	11	38.8	58.3	33.8	50.8	27.7	41.5	21.7	32.6	27.4	41.2	25.0	37.6	
	12	32.6	49.0	28.4	42.7	23.3	34.9	18.3	27.4	23.0	34.6	21.0	31.6	
	13	27.8	41.7	24.2	36.3	19.8	29.7	15.6	23.3	19.6	29.5	17.9	26.9	
	14	23.9	36.0	20.9	31.3	17.1	25.6	13.4	20.1	16.9	25.4	15.4	23.2	
	15	20.9	31.3	18.2	27.3	14.9	22.3	11.7	17.5	14.7	22.2	13.4	20.2	
	16	18.3	27.5	16.0	24.0	13.1	19.6	10.3	15.4					
	17	16.2	24.4	14.1	21.3	11.6	17.4	9.1	13.7					
	18	14.5	21.8	12.6	19.0	10.3	15.5	8.12	12.2					
	19			11.3	17.0	9.28	13.9	7.29	10.9					
20							6.57	9.86						
Properties														
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	11.9	17.9	10.2	15.3	8.19	12.3	5.96	8.95	11.6	17.5	10.4	15.7
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	9.63	14.5	8.24	12.4	6.61	9.93	4.77	7.17	8.22	12.4	7.38	11.1
$P_{ex}(L_c)^2/10^4$, kip-in. ²			232		208		178		140		212		197	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			143		128		110		86.4		96.1		89.5	
r_{mx}/r_{my}			1.27		1.27		1.27		1.27		1.49		1.48	
r_{my} , in.			1.13		1.16		1.19		1.21		0.922		0.947	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24px; font-weight: bold; text-align: center;">5</div> COMPOSITE HSS4		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi		
		HSS4x2½x					HSS4x2x							
Shape		¼		⅜		½		¾		⅝		¼		
t_{des} , in.		0.233		0.174		0.116		0.349		0.291		0.233		
Steel, lb/ft		9.66		7.51		5.18		12.2		10.6		8.81		
Design	Effective length, L_c (ft), with respect to the least radius of gyration, r_y	P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
0		81.9	123	68.1	102	53.6	80.5	101	153	88.0	132	73.1	110	
1		80.9	121	67.3	101	53.0	79.5	99.5	150	86.4	130	71.8	108	
2		78.0	117	65.0	97.5	51.2	76.8	93.8	141	81.7	123	68.2	102	
3		73.4	110	61.3	91.9	48.2	72.4	84.9	128	74.5	112	62.5	93.9	
4		67.4	101	56.4	84.6	44.4	66.7	73.9	111	65.5	98.4	55.3	83.2	
5		60.5	91.0	50.7	76.0	40.0	60.0	61.9	93.0	55.4	83.3	47.3	71.2	
6		53.6	80.5	44.5	66.7	35.1	52.7	49.7	74.8	45.2	67.9	39.1	58.8	
7		46.4	69.7	38.1	57.2	30.1	45.2	38.4	57.7	35.5	53.4	31.2	46.9	
8		39.2	59.0	31.9	47.9	25.3	37.9	29.4	44.2	27.3	41.0	24.1	36.3	
9		32.5	48.8	26.2	39.4	20.7	31.0	23.2	34.9	21.5	32.4	19.1	28.7	
10		26.4	39.7	21.5	32.3	16.7	25.1	18.8	28.3	17.4	26.2	15.5	23.2	
11		21.8	32.8	17.7	26.7	13.8	20.8	15.5	23.4	14.4	21.7	12.8	19.2	
12		18.3	27.5	14.9	22.4	11.6	17.4	13.1	19.6	12.1	18.2	10.7	16.1	
13		15.6	23.5	12.7	19.1	9.91	14.9					9.15	13.7	
14		13.5	20.2	10.9	16.5	8.54	12.8							
15		11.7	17.6	9.54	14.3	7.44	11.2							
16		10.3	15.5	8.38	12.6	6.54	9.81							
17						5.79	8.69							
Properties														
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	9.00	13.5	7.27	10.9	5.29	7.96	9.93	14.9	8.96	13.5	7.78	11.7
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	6.36	9.55	5.13	7.70	3.70	5.56	5.89	8.85	5.34	8.02	4.63	6.96
$P_{ex}(L_c)^2/10^4$, kip-in. ²			178		153		123		173		163		148	
$P_{ey}(L_c)^2/10^4$, kip-in. ²			80.9		69.4		55.0		53.5		50.5		46.0	
r_{mx}/r_{my}			1.48		1.48		1.50		1.80		1.80		1.79	
r_{my} , in.			0.973		0.999		1.03		0.729		0.754		0.779	
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 2px; display: inline-block; font-size: 24pt; font-weight: bold; margin-right: 5px;">5</div> COMPOSITE HSS4		Table 4-B (continued) Available Strength in Axial Compression, kips Filled Rectangular HSS				A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi	
		HSS4x2x					
Shape		$\frac{3}{16}$		$\frac{1}{8}$			
t_{des} , in.		0.174		0.116			
Steel, lb/ft		6.87		4.75			
Design		P_n/Ω_c		P_n/Ω_c			
		ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	60.0	90.0	46.6	69.9		
	1	58.9	88.4	45.8	68.7		
	2	55.8	83.7	43.4	65.2		
	3	50.9	76.4	39.8	59.6		
	4	44.8	67.2	35.1	52.7		
	5	38.0	57.0	29.9	44.9		
	6	31.5	47.3	24.6	36.9		
	7	25.5	38.3	19.6	29.3		
	8	19.9	29.9	15.1	22.6		
	9	15.7	23.7	11.9	17.9		
	10	12.8	19.2	9.65	14.5		
	11	10.5	15.8	7.98	12.0		
	12	8.86	13.3	6.70	10.1		
	13	7.55	11.3	5.71	8.57		
Properties							
M_{nx}/Ω_b	$\phi_b M_{nx}$	kip-ft	6.33	9.51	4.64	6.98	
M_{ny}/Ω_b	$\phi_b M_{ny}$	kip-ft	3.75	5.64	2.73	4.10	
$P_{ex}(L_c)^2/10^4$, kip-in. ²			128		103		
$P_{ey}(L_c)^2/10^4$, kip-in. ²			39.6		31.7		
r_{mx}/r_{my}			1.80		1.80		
r_{my} , in.			0.804		0.830		
ASD	LRFD	Notes: Heavy line indicates L_c/r_{my} equal to or greater than 200.					
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.					
$\Omega_c = 2.00$	$\phi_c = 0.75$						

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">4</div> COMPOSITE HSS16-HSS14		Table 4-C Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi			
		HSS16x16x					HSS14x14x								
Shape		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$			
t_{des} , in.		0.465		0.349		0.291		0.581		0.465		0.349			
Steel, lb/ft		103		78.5		65.9		110		89.7		68.3			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	1090	1640	935	1400	856	1280	1040	1560	905	1360	768	1150		
	1	1090	1640	935	1400	856	1280	1040	1560	905	1360	768	1150		
	2	1090	1640	934	1400	855	1280	1040	1550	904	1360	767	1150		
	3	1090	1640	933	1400	854	1280	1030	1550	902	1350	765	1150		
	4	1090	1630	931	1400	852	1280	1030	1550	899	1350	763	1140		
	5	1090	1630	928	1390	850	1270	1030	1540	896	1340	760	1140		
	6	1080	1620	925	1390	847	1270	1020	1530	893	1340	757	1140		
	7	1080	1620	921	1380	843	1260	1020	1530	888	1330	753	1130		
	8	1070	1610	917	1380	839	1260	1010	1520	883	1320	749	1120		
	9	1070	1600	912	1370	834	1250	1010	1510	877	1320	744	1120		
	10	1060	1590	907	1360	829	1240	998	1500	871	1310	738	1110		
	11	1050	1580	901	1350	824	1240	990	1490	864	1300	732	1100		
	12	1050	1570	894	1340	817	1230	982	1470	856	1280	725	1090		
	13	1040	1560	887	1330	811	1220	972	1460	848	1270	718	1080		
	14	1030	1550	880	1320	804	1210	962	1440	839	1260	710	1070		
	15	1020	1530	872	1310	796	1190	952	1430	830	1240	702	1050		
	16	1010	1520	863	1300	788	1180	940	1410	820	1230	693	1040		
	17	1000	1500	855	1280	780	1170	929	1390	809	1210	684	1030		
	18	992	1490	845	1270	771	1160	916	1370	798	1200	675	1010		
	19	981	1470	835	1250	762	1140	903	1350	787	1180	665	997		
	20	970	1450	825	1240	752	1130	890	1330	775	1160	654	982		
	21	958	1440	815	1220	743	1110	876	1310	763	1140	644	966		
	22	945	1420	804	1210	732	1100	862	1290	750	1130	633	949		
	23	933	1400	793	1190	722	1080	847	1270	737	1110	622	932		
	24	920	1380	781	1170	711	1070	832	1250	724	1090	610	915		
	25	906	1360	769	1150	700	1050	816	1220	711	1070	598	897		
	26	893	1340	757	1140	688	1030	801	1200	697	1050	586	879		
	27	878	1320	745	1120	676	1010	785	1180	683	1020	574	861		
	28	864	1300	732	1100	664	997	768	1150	668	1000	561	842		
	29	849	1270	719	1080	652	979	752	1130	654	980	549	823		
	30	834	1250	706	1060	640	960	735	1100	639	958	536	804		
	32	804	1210	679	1020	615	922	701	1050	609	913	510	765		
	34	773	1160	651	977	589	884	666	999	579	868	484	725		
	36	741	1110	624	935	563	845	632	947	548	822	457	686		
	38	709	1060	595	893	537	805	597	895	518	776	431	646		
	40	676	1010	567	850	510	765	562	843	487	731	405	607		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	456	685	358	538	305	459	409	615	341	513	268	403
	$P_e(L_c)^2/10^4$, kip-in. ²			43900		36000		31900		32700		28200		23100	
	r_m , in.			6.31		6.37		6.39		5.44		5.49		5.55	
ASD	LRFD														
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">4</div> COMPOSITE HSS14-HSS12		Table 4-C (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi			
		HSS14x14x		HSS12x12x											
Shape		$\frac{5}{16}$		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$			
t_{des} , in.		0.291		0.581		0.465		0.349		0.291		0.233			
Steel, lb/ft		57.4		93.3		76.1		58.1		48.9		39.4			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	698	1050	842	1260	731	1100	617	925	557	835	496	744		
	1	698	1050	841	1260	730	1100	617	925	556	834	496	744		
	2	697	1050	840	1260	729	1090	616	923	555	833	495	742		
	3	696	1040	838	1260	727	1090	614	921	554	831	494	740		
	4	694	1040	835	1250	724	1090	612	918	552	827	492	737		
	5	691	1040	831	1250	721	1080	609	913	549	823	489	734		
	6	688	1030	826	1240	717	1080	605	908	546	818	486	729		
	7	684	1030	820	1230	712	1070	601	901	542	813	482	724		
	8	680	1020	814	1220	707	1060	596	894	537	806	478	718		
	9	676	1010	806	1210	700	1050	591	886	532	799	474	711		
	10	670	1010	798	1200	693	1040	585	877	527	790	469	703		
	11	665	997	790	1180	686	1030	578	867	521	781	463	695		
	12	658	987	780	1170	678	1020	571	857	514	771	457	686		
	13	651	977	770	1150	669	1000	564	845	507	761	451	676		
	14	644	966	759	1140	660	989	555	833	500	750	444	666		
	15	637	955	747	1120	650	974	547	820	492	738	437	655		
	16	629	943	735	1100	639	959	538	807	484	726	429	643		
	17	620	930	723	1080	628	943	528	793	475	713	421	631		
	18	611	917	709	1060	617	925	519	778	466	699	413	619		
	19	602	903	696	1040	605	908	508	763	457	685	404	606		
	20	592	889	682	1020	593	890	498	747	447	671	395	593		
	21	582	874	667	1000	580	871	487	731	437	656	386	579		
	22	572	858	652	978	568	851	476	714	427	641	377	565		
	23	562	843	637	955	554	832	465	697	417	625	367	551		
	24	551	826	621	932	541	812	453	680	406	609	358	536		
	25	540	810	605	908	527	791	441	662	395	593	348	522		
	26	529	793	589	884	514	770	430	644	384	577	338	507		
	27	517	776	573	859	500	749	418	626	373	560	328	492		
	28	506	759	557	835	485	728	405	608	362	544	318	477		
	29	494	741	540	810	471	707	393	590	351	527	308	462		
	30	482	723	523	785	457	685	381	571	340	510	298	446		
	32	458	687	490	735	428	643	356	535	318	477	277	416		
	34	434	651	457	686	400	600	332	498	296	443	257	386		
	36	410	614	425	637	372	558	308	462	274	411	238	356		
	38	385	578	393	589	344	516	285	427	253	379	218	328		
	40	361	542	362	543	317	476	262	393	232	348	200	300		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	230	345	292	440	244	367	192	289	165	248	136	205
	$P_e(L_c)^2/10^4$, kip-in. ²			20400		19200		16900		13900		12300		10500	
	r_m , in.			5.58		4.62		4.68		4.73		4.76		4.79	
ASD	LRFD														
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24px; font-weight: bold; text-align: center;">4</div> COMPOSITE HSS12-HSS10		Table 4-C (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi			
		HSS12x12x		HSS10x10x											
Shape		$\frac{3}{16}$		$\frac{5}{16}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$			
t_{des} , in.		0.174		0.581		0.465		0.349		0.291		0.233			
Steel, lb/ft		29.8		76.3		62.5		47.9		40.4		32.6			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	417	626	657	986	570	854	477	715	428	642	378	568		
	1	417	625	657	985	569	854	477	715	428	642	378	567		
	2	416	624	655	983	568	852	475	713	427	640	377	566		
	3	415	622	653	979	566	848	474	711	425	638	376	564		
	4	413	620	649	974	563	844	471	707	423	634	374	560		
	5	411	617	645	967	559	838	468	702	420	630	371	557		
	6	408	613	639	959	554	831	464	696	416	625	368	552		
	7	405	608	633	949	549	823	460	689	412	618	364	546		
	8	402	603	626	938	543	814	454	682	408	611	360	540		
	9	398	597	617	926	536	803	449	673	402	603	355	532		
	10	394	590	608	913	528	792	442	663	396	595	350	524		
	11	389	583	599	898	520	779	435	653	390	585	344	516		
	12	384	576	588	882	511	766	428	642	383	575	338	506		
	13	378	567	577	865	501	752	420	630	376	564	331	496		
	14	372	559	565	847	491	736	411	617	368	552	324	486		
	15	366	549	552	829	480	720	402	603	360	540	316	475		
	16	360	539	539	809	469	704	393	589	351	527	309	463		
	17	353	529	526	789	458	686	383	575	343	514	301	451		
	18	346	519	512	768	446	668	373	560	333	500	293	439		
	19	338	508	497	746	433	650	363	544	324	486	284	426		
	20	331	496	483	724	421	631	352	529	314	472	275	413		
	21	323	485	468	701	408	612	342	512	305	457	267	400		
	22	315	473	452	679	395	592	331	496	295	442	258	386		
	23	307	461	437	655	382	572	320	479	285	427	249	373		
	24	299	448	421	632	368	552	308	463	275	412	239	359		
	25	291	436	406	609	355	532	297	446	264	397	230	345		
	26	282	423	390	585	341	512	286	429	254	381	221	332		
	27	274	410	374	562	328	492	275	412	244	366	212	318		
	28	265	397	359	538	315	472	264	395	234	351	203	304		
	29	256	385	343	515	301	452	252	379	224	336	194	291		
	30	248	372	328	492	288	432	241	362	214	321	185	278		
	32	231	346	298	448	262	393	220	330	194	291	168	252		
	34	214	321	271	407	237	356	199	298	176	263	151	227		
	36	197	296	244	367	213	320	179	268	157	236	135	202		
	38	181	271	219	329	191	287	160	240	141	212	121	182		
	40	165	248	198	297	173	259	145	217	127	191	109	164		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	100	151	194	292	163	246	130	195	111	168	92.4	139
	$P_e(L_c)^2/10^4$, kip-in. ²		8690		10300		9070		7600		6690		5740		
	r_m , in.		4.82		3.80		3.86		3.92		3.94		3.97		
ASD		LRFD		Note: Dashed line indicates the L_c beyond which the bare steel strength controls.											
$\Omega_b = 1.67$		$\phi_b = 0.90$													
$\Omega_c = 2.00$		$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 2em; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">4</div> COMPOSITE HSS10-HSS9		Table 4-C (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi			
		HSS10×10×		HSS9×9×											
Shape		$\frac{3}{16}$		$\frac{5}{16}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$			
t_{des} , in.		0.174		0.581		0.465		0.349		0.291		0.233			
Steel, lb/ft		24.7		67.8		55.7		42.8		36.1		29.2			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	327	491	571	857	493	739	412	618	368	553	324	487		
	1	327	491	571	856	492	739	412	617	368	552	324	486		
	2	326	489	569	854	491	737	410	616	367	550	323	485		
	3	325	487	567	850	489	733	409	613	365	548	322	483		
	4	323	484	563	844	486	728	406	609	363	544	320	479		
	5	321	481	558	837	481	722	403	604	360	540	317	475		
	6	318	476	552	828	477	715	398	598	356	534	313	470		
	7	314	471	545	818	471	706	394	591	352	528	310	464		
	8	310	465	537	806	464	696	388	582	347	520	305	458		
	9	306	459	529	793	457	685	382	573	341	512	300	450		
	10	301	452	519	778	449	673	376	563	335	503	295	442		
	11	296	444	509	763	440	660	368	552	329	493	289	433		
	12	290	435	497	746	431	646	361	541	322	483	282	424		
	13	284	426	486	728	421	631	352	528	314	471	276	414		
	14	278	417	473	710	410	615	344	515	306	460	269	403		
	15	271	407	460	690	399	598	334	502	298	447	261	392		
	16	264	396	446	670	388	581	325	487	290	434	254	380		
	17	257	386	432	649	376	564	315	473	281	421	246	368		
	18	250	374	418	627	364	545	305	458	272	408	237	356		
	19	242	363	403	606	351	527	295	442	262	394	229	344		
	20	234	351	389	585	339	508	284	427	253	379	221	331		
	21	226	340	375	563	326	489	274	411	243	365	212	318		
	22	218	328	360	542	313	469	263	395	234	351	203	305		
	23	210	315	346	520	300	450	252	378	224	336	195	292		
	24	202	303	331	498	287	430	242	362	214	322	186	279		
	25	194	291	317	476	274	411	231	346	205	307	178	266		
	26	186	279	302	455	261	392	220	330	195	293	169	254		
	27	178	267	288	433	249	373	210	314	186	279	161	241		
	28	170	255	274	412	236	354	199	299	176	265	152	229		
	29	162	243	260	391	224	336	189	283	167	251	144	216		
	30	154	231	247	371	212	317	179	268	158	237	136	204		
	32	139	209	220	331	188	282	159	239	141	211	121	181		
	34	124	186	195	293	167	250	141	212	125	187	107	160		
	36	111	166	174	262	149	223	126	189	111	167	95.3	143		
	38	99.5	149	156	235	133	200	113	169	99.7	150	85.6	128		
	40	89.8	135	141	212	120	181	102	153	90.0	135	77.2	116		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	71.7	108	153	230	129	194	103	155	88.6	133	73.5	110
	$P_e(L_c)^2/10^4$, kip-in. ²			4720		7140		6330		5360		4730		4060	
	r_m , in.			4.00		3.40		3.45		3.51		3.54		3.56	
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">4</div> COMPOSITE HSS9-HSS8		Table 4-C (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi			
		HSS9x9x				HSS8x8x									
Shape		$\frac{3}{16}$		$\frac{1}{8}^c$		$\frac{5}{16}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$			
t_{des} , in.		0.174		0.116		0.581		0.465		0.349		0.291			
Steel, lb/ft		22.2		15.0		59.3		48.9		37.7		31.8			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	279	418	204	305	491	738	422	633	350	526	312	469		
	1	278	418	203	305	490	737	422	632	350	525	312	468		
	2	278	416	203	304	489	735	420	630	349	523	311	466		
	3	276	414	202	303	486	730	418	626	347	520	309	464		
	4	274	411	200	301	482	724	414	621	344	516	307	460		
	5	272	408	199	298	477	717	410	614	340	510	303	455		
	6	269	403	197	295	471	707	404	606	336	504	299	449		
	7	265	398	194	291	463	697	398	597	331	496	295	442		
	8	261	392	191	287	455	684	391	586	325	488	290	435		
	9	257	385	188	282	446	671	383	574	319	478	284	426		
	10	252	378	185	277	436	656	374	561	312	467	278	417		
	11	247	370	181	272	426	640	365	547	304	456	271	406		
	12	241	361	177	266	414	623	355	532	296	444	264	396		
	13	235	352	173	260	402	605	344	516	287	431	256	384		
	14	229	343	169	253	390	586	333	500	278	417	248	372		
	15	222	333	164	246	377	566	322	483	269	403	240	360		
	16	215	323	159	239	363	546	310	465	259	389	231	347		
	17	208	312	154	231	349	525	298	447	249	374	222	333		
	18	201	301	149	224	335	504	286	428	239	359	213	320		
	19	193	290	144	216	321	482	273	410	229	344	204	306		
	20	186	279	139	208	307	461	261	391	219	328	195	293		
	21	178	268	133	200	292	439	248	372	209	313	186	279		
	22	171	256	128	192	278	417	235	353	198	298	177	265		
	23	163	245	122	184	263	396	223	334	188	282	168	251		
	24	156	234	117	175	249	374	211	316	178	267	159	238		
	25	148	222	112	167	235	353	199	298	168	252	150	224		
	26	141	211	106	159	221	333	187	281	158	237	141	211		
	27	133	200	101	151	208	313	176	265	149	223	132	199		
	28	126	189	95.8	144	195	293	165	249	139	209	124	186		
	29	119	179	90.7	136	182	274	155	233	130	195	116	174		
	30	112	168	85.7	129	170	256	145	217	122	182	108	162		
	32	98.8	148	75.9	114	149	225	127	191	107	160	95.1	143		
	34	87.5	131	67.2	101	132	199	113	169	94.6	142	84.2	126		
	36	78.1	117	60.0	89.9	118	177	100	151	84.4	127	75.1	113		
	38	70.1	105	53.8	80.7	106	159	90.2	136	75.8	114	67.4	101		
	40	63.2	94.9	48.6	72.9	95.6	144	81.4	122	68.4	103	60.8	91.3		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	57.3	86.2	33.8	50.7	117	176	99.5	150	79.5	119	68.7	103
	$P_e(L_c)^2/10^4$, kip-in. ²			3320		2550		4730		4220		3590		3200	
	r_m , in.			3.59		3.62		2.99		3.04		3.10		3.13	
ASD	LRFD	^c Shape is slender for $F_y = 50$ ksi; tabulated values have been adjusted accordingly. Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24px; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">4</div> COMPOSITE HSS8-HSS7		Table 4-C (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi			
		HSS8x8x					HSS7x7x								
Shape		$\frac{1}{4}$		$\frac{3}{16}$		$\frac{1}{2}$		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$			
t_{des} , in.		0.233		0.174		0.116		0.581		0.465		0.349			
Steel, lb/ft		25.8		19.6		13.3		50.8		42.1		32.6			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	274	411	234	351	186	278	419	630	352	528	292	437		
	1	274	410	233	350	185	278	418	629	352	528	291	437		
	2	273	409	233	349	185	277	417	626	350	525	290	435		
	3	271	406	231	347	183	275	413	621	347	521	288	431		
	4	269	403	229	344	182	273	409	614	343	515	284	427		
	5	266	399	227	340	180	269	403	606	338	508	280	421		
	6	262	393	223	335	177	266	396	595	333	499	276	414		
	7	258	387	220	330	174	261	388	583	326	489	270	405		
	8	254	380	216	324	171	256	379	569	318	477	264	396		
	9	249	373	211	317	167	250	369	554	309	464	257	386		
	10	243	364	206	309	163	244	358	538	300	450	250	375		
	11	237	355	201	301	159	238	346	520	290	435	242	363		
	12	230	346	195	293	154	231	334	502	280	420	233	350		
	13	224	335	189	284	149	223	321	482	269	404	224	336		
	14	216	325	183	274	144	216	307	462	258	387	215	323		
	15	209	314	176	264	138	208	294	441	247	371	206	308		
	16	201	302	170	254	133	199	280	420	235	354	196	294		
	17	194	290	163	244	127	191	265	399	224	336	186	279		
	18	186	278	156	234	122	183	251	377	212	319	176	265		
	19	177	266	149	223	116	174	237	356	200	301	167	250		
	20	169	254	142	212	110	165	223	335	189	284	157	235		
	21	161	242	134	202	105	157	209	314	177	267	147	221		
	22	153	230	127	191	98.8	148	195	293	166	250	138	206		
	23	145	218	120	181	93.2	140	182	273	155	233	128	192		
	24	137	206	114	170	87.7	132	169	253	145	217	119	179		
	25	129	194	107	160	82.3	123	156	234	134	201	110	166		
	26	122	182	100	150	77.0	115	144	216	124	186	102	153		
	27	114	171	93.7	141	71.8	108	133	201	115	173	94.6	142		
	28	107	160	87.3	131	66.7	100	124	186	107	161	88.0	132		
	29	99.5	149	81.4	122	62.2	93.3	116	174	99.6	150	82.0	123		
	30	92.9	139	76.0	114	58.1	87.2	108	162	93.1	140	76.6	115		
	32	81.7	123	66.8	100	51.1	76.6	95.0	143	81.8	123	67.4	101		
	34	72.4	109	59.2	88.8	45.3	67.9	84.1	126	72.4	109	59.7	89.5		
	36	64.5	96.8	52.8	79.2	40.4	60.6	75.1	113	64.6	97.1	53.2	79.8		
	38	57.9	86.9	47.4	71.1	36.2	54.4	67.4	101	58.0	87.2	47.8	71.6		
	40	52.3	78.4	42.8	64.2	32.7	49.1	60.8	91.4	52.3	78.7	43.1	64.7		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	57.0	85.7	44.6	67.1	29.8	44.8	86.2	130	73.5	110	59.2	89.0
	$P_e(L_c)^2/10^4$, kip-in. ²			2750		2250		1720		2970		2650		2270	
	r_m , in.			3.15		3.18		3.21		2.58		2.63		2.69	
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">4</div> COMPOSITE HSS7-HSS6		Table 4-C (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi			
		HSS7x7x								HSS6x6x					
Shape		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$		$\frac{1}{2}$		$\frac{5}{8}$		$\frac{1}{2}$			
t_{des} , in.		0.291		0.233		0.174		0.116		0.581		0.465			
Steel, lb/ft		27.6		22.4		17.1		11.6		42.3		35.2			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	260	389	227	340	192	288	156	235	350	526	292	438		
	1	259	389	226	340	192	287	156	234	350	525	291	437		
	2	258	387	225	338	191	286	155	233	347	522	289	435		
	3	256	384	224	335	189	284	154	231	343	516	286	430		
	4	253	380	221	332	187	281	152	228	338	508	282	424		
	5	250	375	218	327	184	277	150	225	331	498	277	416		
	6	246	369	214	322	181	272	147	221	323	486	270	406		
	7	241	361	210	315	177	266	144	216	314	472	263	395		
	8	235	353	205	308	173	260	140	210	304	456	255	383		
	9	229	344	200	300	169	253	136	204	292	439	246	369		
	10	223	334	194	291	164	245	132	198	280	421	236	355		
	11	216	324	188	282	158	237	127	191	267	402	226	339		
	12	208	312	181	272	152	229	122	183	254	382	215	323		
	13	200	301	174	262	146	220	117	176	240	361	204	306		
	14	192	288	167	251	140	210	112	168	226	340	193	289		
	15	184	276	160	240	134	201	106	159	212	318	181	272		
	16	175	263	152	229	127	191	101	151	198	297	170	255		
	17	167	250	145	217	121	181	95.2	143	184	276	158	238		
	18	158	237	137	206	114	171	89.7	134	170	255	147	221		
	19	149	224	130	194	108	161	84.1	126	156	235	136	204		
	20	141	211	122	183	101	152	78.7	118	143	215	125	188		
	21	132	198	114	172	94.7	142	73.3	110	130	196	115	172		
	22	124	185	107	161	88.4	133	68.1	102	119	179	104	157		
	23	115	173	99.9	150	82.2	123	63.0	94.6	109	163	95.6	144		
	24	107	161	92.9	139	76.3	114	58.0	87.0	99.8	150	87.8	132		
	25	99.5	149	85.9	129	70.3	106	53.5	80.2	92.0	138	80.9	122		
	26	92.0	138	79.4	119	65.0	97.6	49.4	74.2	85.1	128	74.8	112		
	27	85.3	128	73.7	111	60.3	90.5	45.8	68.8	78.9	119	69.4	104		
	28	79.3	119	68.5	103	56.1	84.1	42.6	63.9	73.4	110	64.5	96.9		
	29	73.9	111	63.9	95.8	52.3	78.4	39.7	59.6	68.4	103	60.1	90.4		
	30	69.1	104	59.7	89.5	48.9	73.3	37.1	55.7	63.9	96.0	56.2	84.4		
	32	60.7	91.1	52.4	78.7	42.9	64.4	32.6	49.0	56.2	84.4	49.4	74.2		
	34	53.8	80.7	46.5	69.7	38.0	57.1	28.9	43.4	49.7	74.8	43.7	65.7		
	36	48.0	72.0	41.4	62.2	33.9	50.9	25.8	38.7	44.4	66.7	39.0	58.6		
	38	43.1	64.6	37.2	55.8	30.4	45.7	23.1	34.7						
	40	38.9	58.3	33.6	50.3	27.5	41.2	20.9	31.3						
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	51.2	77.0	42.7	64.2	33.5	50.3	23.3	35.0	60.0	90.2	51.7	77.8
	$P_e(L_c)^2/10^4$, kip-in. ²	2040		1760		1440		1100		1720		1550			
	r_m , in.	2.72		2.75		2.77		2.80		2.17		2.23			
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														

4		Table 4-C (continued)										A500 Gr. C			
		Available Strength in Axial Compression, kips										$F_y = 50$ ksi			
COMPOSITE HSS6-HSS5½		Filled Square HSS										$f'_c = 4$ ksi			
Shape		HSS6×6×										HSS5½×5½×			
		¾		⅝		¼		⅜		½		¾			
t_{des} , in.		0.349		0.291		0.233		0.174		0.116		0.349			
Steel, lb/ft		27.5		23.3		19.0		14.5		9.86		24.9			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	237	356	211	316	183	274	154	231	124	186	211	317		
	1	237	355	210	315	183	274	153	230	124	186	210	316		
	2	235	353	209	313	181	272	152	229	123	184	209	313		
	3	233	349	207	310	180	269	151	226	122	182	206	309		
	4	229	344	204	305	177	265	149	223	120	179	202	304		
	5	225	337	200	300	174	261	146	219	117	176	198	297		
	6	219	329	195	293	170	255	142	214	114	171	192	288		
	7	213	320	190	285	165	248	138	208	111	166	186	279		
	8	207	310	184	276	160	240	134	201	107	161	179	268		
	9	199	299	177	266	155	232	129	194	103	155	171	257		
	10	191	287	170	256	149	223	124	186	98.8	148	163	245		
	11	183	274	163	245	142	213	119	178	94.2	141	154	232		
	12	174	261	155	233	135	203	113	170	89.4	134	146	218		
	13	165	248	147	221	129	193	107	161	84.5	127	137	205		
	14	156	234	139	209	122	182	101	152	79.5	119	128	192		
	15	146	220	131	196	114	172	95.1	143	74.4	112	119	179		
	16	137	205	123	184	107	161	89.0	133	69.3	104	110	166		
	17	128	191	114	172	100	150	82.9	124	64.3	96.5	102	153		
	18	118	178	106	159	93.1	140	76.9	115	59.4	89.1	93.6	141		
	19	109	164	98.3	147	86.1	129	71.1	107	54.6	81.9	85.6	129		
	20	101	152	90.5	136	79.4	119	65.4	98.1	50.0	75.0	77.7	117		
	21	92.9	140	83.0	125	72.9	109	59.9	89.8	45.4	68.2	70.5	106		
	22	85.0	128	75.7	114	66.5	99.8	54.6	81.8	41.4	62.1	64.2	96.5		
	23	77.8	117	69.2	104	60.8	91.3	49.9	74.9	37.9	56.8	58.7	88.3		
	24	71.4	107	63.6	95.4	55.9	83.8	45.8	68.8	34.8	52.2	53.9	81.1		
	25	65.8	98.9	58.6	87.9	51.5	77.2	42.2	63.4	32.1	48.1	49.7	74.7		
	26	60.8	91.4	54.2	81.3	47.6	71.4	39.1	58.6	29.6	44.5	46.0	69.1		
	27	56.4	84.8	50.2	75.4	44.2	66.2	36.2	54.3	27.5	41.2	42.6	64.1		
	28	52.5	78.8	46.7	70.1	41.1	61.6	33.7	50.5	25.6	38.3	39.6	59.6		
	29	48.9	73.5	43.6	65.3	38.3	57.4	31.4	47.1	23.8	35.7	36.9	55.5		
	30	45.7	68.7	40.7	61.0	35.8	53.6	29.3	44.0	22.3	33.4	34.5	51.9		
	32	40.2	60.4	35.8	53.7	31.4	47.1	25.8	38.7	19.6	29.4	30.3	45.6		
	34	35.6	53.5	31.7	47.5	27.8	41.8	22.8	34.3	17.3	26.0	26.9	40.4		
	36	31.7	47.7	28.3	42.4	24.8	37.3	20.4	30.6	15.5	23.2				
	38	28.5	42.8	25.4	38.1	22.3	33.4	18.3	27.4	13.9	20.8				
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	41.9	63.0	36.5	54.9	30.5	45.9	24.0	36.1	17.0	25.5	34.6	52.0
	$P_e(L_c)^2/10^4$, kip-in. ²	1330		1200		1060		867		658		986			
r_m , in.	2.28		2.31		2.34		2.37		2.39		2.08				
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">4</div> COMPOSITE HSS5½-HSS5		Table 4-C (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi		
		HSS5½x5½x					HSS5x5x							
Shape		5/16		¼		3/16		½		½		3/8		
t_{des} , in.		0.291		0.233		0.174		0.116		0.465		0.349		
Steel, lb/ft		21.2		17.3		13.3		9.01		28.4		22.4		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	187	281	162	243	136	204	109	163	236	355	186	279	
	1	187	280	162	243	135	203	108	163	235	353	185	278	
	2	185	278	161	241	134	202	108	161	233	350	183	275	
	3	183	275	159	238	133	199	106	159	229	345	181	271	
	4	180	270	156	234	130	196	104	156	224	337	177	265	
	5	176	264	152	229	128	191	102	152	218	328	172	258	
	6	171	256	148	223	124	186	98.7	148	210	316	166	250	
	7	165	248	144	215	120	180	95.3	143	202	303	160	240	
	8	159	239	138	208	116	173	91.6	137	192	289	153	229	
	9	153	229	133	199	111	166	87.5	131	182	274	145	218	
	10	145	218	127	190	106	158	83.2	125	172	258	137	206	
	11	138	207	120	180	100	150	78.7	118	161	241	129	193	
	12	130	195	113	170	94.5	142	74.0	111	149	224	120	180	
	13	122	183	107	160	88.8	133	69.2	104	138	207	111	167	
	14	114	171	99.6	149	82.9	124	64.4	96.6	127	190	103	154	
	15	106	159	92.7	139	77.1	116	59.6	89.4	115	173	94.0	141	
	16	97.9	147	85.8	129	71.3	107	54.9	82.3	105	157	85.6	129	
	17	90.1	135	79.1	119	65.6	98.4	50.3	75.4	94.2	142	77.5	116	
	18	82.4	124	72.5	109	60.1	90.1	45.8	68.7	84.1	126	69.6	105	
	19	75.1	113	66.1	99.1	54.7	82.1	41.4	62.1	75.5	113	62.5	93.9	
	20	68.0	102	59.9	89.8	49.5	74.3	37.4	56.1	68.1	102	56.4	84.8	
	21	61.6	92.7	54.3	81.4	44.9	67.4	33.9	50.9	61.8	92.9	51.2	76.9	
	22	56.2	84.4	49.5	74.2	40.9	61.4	30.9	46.4	56.3	84.6	46.6	70.0	
	23	51.4	77.2	45.3	67.9	37.4	56.1	28.3	42.4	51.5	77.4	42.6	64.1	
	24	47.2	70.9	41.6	62.3	34.4	51.6	26.0	38.9	47.3	71.1	39.2	58.9	
	25	43.5	65.4	38.3	57.5	31.7	47.5	23.9	35.9	43.6	65.5	36.1	54.2	
	26	40.2	60.4	35.4	53.1	29.3	43.9	22.1	33.2	40.3	60.6	33.4	50.2	
	27	37.3	56.0	32.8	49.3	27.2	40.7	20.5	30.8	37.4	56.2	30.9	46.5	
	28	34.7	52.1	30.5	45.8	25.3	37.9	19.1	28.6	34.8	52.2	28.8	43.2	
	29	32.3	48.6	28.5	42.7	23.5	35.3	17.8	26.7	32.4	48.7	26.8	40.3	
	30	30.2	45.4	26.6	39.9	22.0	33.0	16.6	24.9	30.3	45.5	25.1	37.7	
	32	26.5	39.9	23.4	35.1	19.3	29.0	14.6	21.9					
	34	23.5	35.3	20.7	31.1	17.1	25.7	12.9	19.4					
	36					15.3	22.9	11.5	17.3					
	Properties													
	M_n/Ω_b	$\phi_b M_n$	kip-ft	30.2	45.3	25.2	37.9	19.9	29.9	14.1	21.2	33.9	51.0	27.8
$P_e(L_c)^2/10^4$, kip-in. ²			891		786		650		491		813		708	
r_m , in.			2.11		2.13		2.16		2.19		1.82		1.87	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24px; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">4</div> COMPOSITE HSS5-HSS4½		Table 4-C (continued) Available Strength in Axial Compression, kips Filled Square HSS								A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi			
		HSS5x5x				HSS4½x4½x							
Shape		5/16		¼		3/16		1/8		½		3/8	
t_{des} , in.		0.291		0.233		0.174		0.116		0.465		0.349	
Steel, lb/ft		19.1		15.6		12.0		8.16		25.0		19.8	
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	165	247	142	214	119	178	94.4	142	208	313	164	247
	1	164	246	142	213	118	178	94.1	141	207	311	163	246
	2	163	244	141	211	117	176	93.2	140	205	308	162	243
	3	160	240	139	208	116	173	91.7	138	201	302	159	238
	4	157	235	136	203	113	170	89.7	135	195	293	154	232
	5	152	228	132	198	110	165	87.2	131	188	283	149	224
	6	147	221	128	191	107	160	84.2	126	180	270	143	215
	7	141	212	123	184	102	154	80.8	121	171	256	136	205
	8	135	203	117	176	97.9	147	77.0	116	160	241	129	194
	9	128	192	111	167	93.0	139	73.0	109	150	225	121	182
	10	121	181	105	158	87.8	132	68.7	103	139	208	112	169
	11	113	170	98.7	148	82.4	124	64.3	96.4	127	191	104	156
	12	105	158	92.0	138	76.9	115	59.7	89.6	116	174	95.3	143
	13	97.6	146	85.3	128	71.3	107	55.2	82.8	105	157	86.7	130
	14	89.7	135	78.6	118	65.7	98.5	50.7	76.0	93.9	141	78.3	118
	15	82.0	123	72.0	108	60.2	90.3	46.2	69.3	83.4	125	70.2	105
	16	74.6	112	65.6	98.3	54.8	82.2	41.9	62.8	73.5	110	62.3	93.7
	17	67.8	102	59.3	89.0	49.6	74.4	37.7	56.6	65.1	97.8	55.2	83.0
	18	61.2	91.9	53.2	79.9	44.5	66.8	33.7	50.5	58.0	87.2	49.2	74.0
	19	54.9	82.5	47.8	71.7	40.0	60.0	30.2	45.3	52.1	78.3	44.2	66.4
	20	49.6	74.5	43.1	64.7	36.1	54.1	27.3	40.9	47.0	70.7	39.9	59.9
	21	44.9	67.6	39.1	58.7	32.7	49.1	24.7	37.1	42.6	64.1	36.2	54.4
	22	41.0	61.5	35.6	53.5	29.8	44.7	22.5	33.8	38.9	58.4	33.0	49.5
	23	37.5	56.3	32.6	48.9	27.3	40.9	20.6	30.9	35.5	53.4	30.2	45.3
	24	34.4	51.7	29.9	44.9	25.1	37.6	18.9	28.4	32.6	49.1	27.7	41.6
	25	31.7	47.7	27.6	41.4	23.1	34.6	17.5	26.2	30.1	45.2	25.5	38.4
	26	29.3	44.1	25.5	38.3	21.3	32.0	16.1	24.2	27.8	41.8	23.6	35.5
	27	27.2	40.9	23.7	35.5	19.8	29.7	15.0	22.5			21.9	32.9
	28	25.3	38.0	22.0	33.0	18.4	27.6	13.9	20.9				
	29	23.6	35.4	20.5	30.8	17.2	25.7	13.0	19.5				
	30	22.0	33.1	19.2	28.8	16.0	24.1	12.1	18.2				
	32			16.8	25.3	14.1	21.1	10.7	16.0				

Properties														
M_n/Ω_b	$\phi_b M_n$	kip-ft	24.3	36.5	20.5	30.8	16.2	24.3	11.5	17.3	26.3	39.5	21.8	32.8
$P_e(L_c)^2/10^4$, kip-in. ²			641		566		474		358		558		491	
r_m , in.			1.90		1.93		1.96		1.99		1.61		1.67	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24px; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">4</div> COMPOSITE HSS4½-HSS4		Table 4-C (continued) Available Strength in Axial Compression, kips Filled Square HSS								A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi				
		HSS4½x4½x				HSS4x4x								
Shape		5/16		¼		3/16		½		½		3/8		
t_{des} , in.		0.291		0.233		0.174		0.116		0.465		0.349		
Steel, lb/ft		17.0		13.9		10.7		7.31		21.6		17.3		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	143	214	124	185	103	154	80.9	121	180	271	143	215	
	1	142	214	123	185	102	153	80.6	121	179	269	142	214	
	2	141	211	122	183	101	152	79.7	120	176	265	140	211	
	3	138	207	119	179	99.2	149	78.2	117	172	258	137	206	
	4	134	202	116	175	96.6	145	76.1	114	166	249	132	199	
	5	130	195	112	169	93.4	140	73.5	110	158	237	127	190	
	6	124	187	108	162	89.7	135	70.4	106	149	224	120	180	
	7	118	178	103	154	85.5	128	67.0	100	139	209	113	169	
	8	112	168	97.0	146	80.9	121	63.2	94.8	128	193	105	157	
	9	105	157	91.0	136	75.9	114	59.2	88.8	117	176	96.4	145	
	10	97.3	146	84.7	127	70.8	106	55.0	82.5	106	160	87.9	132	
	11	90.2	136	78.2	117	65.5	98.2	50.7	76.1	95.0	143	79.4	119	
	12	82.9	125	71.7	108	60.1	90.2	46.4	69.6	84.1	126	71.0	107	
	13	75.7	114	65.3	97.9	54.8	82.2	42.2	63.2	73.6	111	62.8	94.4	
	14	68.6	103	58.9	88.4	49.6	74.4	38.0	57.0	63.7	95.8	55.0	82.7	
	15	61.7	92.8	52.8	79.2	44.5	66.8	34.0	50.9	55.5	83.5	47.9	72.0	
	16	55.1	82.9	46.9	70.3	39.7	59.5	30.1	45.1	48.8	73.3	42.1	63.3	
	17	48.8	73.4	41.5	62.4	35.1	52.7	26.6	40.0	43.2	65.0	37.3	56.1	
	18	43.6	65.5	37.0	55.6	31.3	47.0	23.8	35.6	38.6	58.0	33.3	50.0	
	19	39.1	58.8	33.3	49.9	28.1	42.2	21.3	32.0	34.6	52.0	29.9	44.9	
	20	35.3	53.0	30.0	45.1	25.4	38.1	19.2	28.9	31.2	46.9	27.0	40.5	
	21	32.0	48.1	27.2	40.9	23.0	34.5	17.5	26.2	28.3	42.6	24.4	36.7	
	22	29.2	43.8	24.8	37.3	21.0	31.5	15.9	23.9	25.8	38.8	22.3	33.5	
	23	26.7	40.1	22.7	34.1	19.2	28.8	14.6	21.8	23.6	35.5	20.4	30.6	
	24	24.5	36.8	20.8	31.3	17.6	26.4	13.4	20.0			18.7	28.1	
	25	22.6	34.0	19.2	28.8	16.2	24.4	12.3	18.5					
	26	20.9	31.4	17.8	26.7	15.0	22.5	11.4	17.1					
	27	19.4	29.1	16.5	24.7	13.9	20.9	10.6	15.8					
	28	18.0	27.1	15.3	23.0	13.0	19.4	9.82	14.7					
29					12.1	18.1	9.15	13.7						
Properties														
M_n/Ω_b	$\phi_b M_n$	kip-ft	19.2	28.8	16.2	24.3	12.8	19.3	9.17	13.8	19.8	29.7	16.6	25.0
$P_e(L_c)^2/10^4$, kip-in. ²			446		394		333		253		362		325	
r_m , in.			1.70		1.73		1.75		1.78		1.41		1.47	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">4</div> COMPOSITE HSS4-HSS3½		Table 4-C (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi		
		HSS4x4x								HSS3½x3½x				
Shape		5/16		¼		3/16		1/8		3/8		5/16		
t_{des} , in.		0.291		0.233		0.174		0.116		0.349		0.291		
Steel, lb/ft		14.8		12.2		9.42		6.46		14.7		12.7		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	123	184	105	158	87.1	131	68.4	103	122	184	105	158	
	1	122	184	105	157	86.7	130	68	102	122	183	105	157	
	2	120	181	103	155	85.5	128	67.1	101	119	179	103	154	
	3	118	177	101	151	83.5	125	65.5	98.2	115	173	99.6	150	
	4	114	171	97.6	146	80.8	121	63.3	94.9	110	166	95.2	143	
	5	109	164	93.4	140	77.5	116	60.6	90.9	104	156	90.0	135	
	6	103	156	88.6	133	73.6	110	57.5	86.2	96.4	145	83.9	126	
	7	97.3	146	83.2	125	69.2	104	54.0	81.0	88.5	133	77.3	116	
	8	90.6	136	77.4	116	64.5	96.7	50.2	75.4	80.1	120	70.3	106	
	9	83.6	126	71.3	107	59.5	89.3	46.3	69.4	71.6	108	63.1	94.9	
	10	76.4	115	65.0	97.6	54.5	81.7	42.2	63.4	63.1	94.8	56.0	84.1	
	11	69.2	104	58.8	88.1	49.3	74.0	38.2	57.3	54.9	82.5	49.0	73.7	
	12	62.0	93.2	52.6	78.9	44.3	66.4	34.2	51.3	47.1	70.7	42.4	63.7	
	13	55.1	82.8	46.7	70.2	39.4	59.1	30.3	45.4	40.1	60.3	36.2	54.4	
	14	48.5	72.8	41.3	62.1	34.7	52.0	26.6	39.9	34.6	52.0	31.2	46.9	
	15	42.2	63.5	36.1	54.3	30.2	45.4	23.2	34.7	30.1	45.3	27.2	40.8	
	16	37.1	55.8	31.7	47.7	26.6	39.9	20.4	30.5	26.5	39.8	23.9	35.9	
	17	32.9	49.4	28.1	42.3	23.5	35.3	18.0	27.1	23.5	35.2	21.2	31.8	
	18	29.3	44.1	25.1	37.7	21.0	31.5	16.1	24.1	20.9	31.4	18.9	28.4	
	19	26.3	39.6	22.5	33.8	18.8	28.3	14.4	21.7	18.8	28.2	16.9	25.5	
	20	23.8	35.7	20.3	30.5	17.0	25.5	13.0	19.5	16.9	25.5	15.3	23	
	21	21.5	32.4	18.4	27.7	15.4	23.1	11.8	17.7	15.4	23.1	13.9	20.8	
	22	19.6	29.5	16.8	25.2	14.1	21.1	10.8	16.2					
	23	18.0	27.0	15.4	23.1	12.9	19.3	9.85	14.8					
	24	16.5	24.8	14.1	21.2	11.8	17.7	9.05	13.6					
	25			13.0	19.5	10.9	16.3	8.34	12.5					
26							7.71	11.6						
Properties														
M_n/Ω_b	$\phi_b M_n$	kip-ft	14.7	22.0	12.4	18.7	9.92	14.9	7.12	10.7	12.1	18.2	10.8	16.2
$P_e(L_c)^2/10^4$, kip-in. ²			296		263		223		171		201		185	
r_m , in.			1.49		1.52		1.55		1.58		1.26		1.29	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">4</div> COMPOSITE HSS3½-HSS3		Table 4-C (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi		
		HSS3½×3½×					HSS3×3×							
Shape		¼		⅜		½		¾		⅝		¾		
t_{des} , in.		0.233		0.174		0.116		0.349		0.291		0.233		
Steel, lb/ft		10.5		8.15		5.61		12.2		10.6		8.81		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	88.3	132	72.8	109	56.6	85.0	101	153	88	132	73.1	110	
	1	87.8	132	72.4	109	56.3	84.4	101	151	87.2	131	72.4	109	
	2	86.1	129	71.1	107	55.2	82.9	97.8	147	84.9	128	70.6	106	
	3	83.4	125	68.9	103	53.6	80.3	93.3	140	81.2	122	67.6	102	
	4	79.7	120	65.9	98.9	51.3	76.9	87.4	131	76.2	115	63.7	95.8	
	5	75.2	113	62.4	93.5	48.5	72.8	80.3	121	70.2	106	59.0	88.7	
	6	70.1	105	58.2	87.4	45.3	68.0	72.4	109	63.6	95.6	53.7	80.7	
	7	64.8	97.4	53.7	80.6	41.8	62.7	64.1	96.4	56.6	85.0	48.1	72.2	
	8	59.2	89.0	48.9	73.4	38.1	57.1	55.7	83.7	49.4	74.2	42.3	63.5	
	9	53.4	80.3	44.0	66.0	34.3	51.4	47.5	71.4	42.4	63.7	36.6	55.0	
	10	47.6	71.6	39.1	58.7	30.5	45.7	39.8	59.8	35.7	53.6	31.1	46.7	
	11	41.9	63.0	34.3	51.5	26.7	40.1	32.9	49.4	29.6	44.5	25.9	39.0	
	12	36.5	54.9	29.8	44.6	23.2	34.8	27.6	41.5	24.9	37.4	21.8	32.8	
	13	31.3	47.1	25.4	38.2	19.8	29.7	23.5	35.4	21.2	31.8	18.6	27.9	
	14	27.0	40.6	21.9	32.9	17.1	25.6	20.3	30.5	18.3	27.4	16.0	24.1	
	15	23.5	35.4	19.1	28.7	14.9	22.3	17.7	26.6	15.9	23.9	13.9	21.0	
	16	20.7	31.1	16.8	25.2	13.1	19.6	15.5	23.3	14.0	21.0	12.3	18.4	
	17	18.3	27.5	14.9	22.3	11.6	17.4	13.8	20.7	12.4	18.6	10.9	16.3	
	18	16.3	24.6	13.3	19.9	10.3	15.5			11.0	16.6	9.69	14.6	
	19	14.7	22.0	11.9	17.9	9.28	13.9							
	20	13.2	19.9	10.8	16.1	8.38	12.6							
	21	12.0	18.0	9.75	14.6	7.60	11.4							
22	10.9	16.4	8.89	13.3	6.92	10.4								
Properties														
M_n/Ω_b	$\phi_b M_n$	kip-ft	9.22	13.9	7.39	11.1	5.32	7.99	8.34	12.5	7.50	11.3	6.48	9.74
$P_e(L_c)^2/10^4$, kip-in. ²			166		141		110		115		107		96.9	
r_m , in.			1.32		1.35		1.37		1.06		1.08		1.11	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">4</div> COMPOSITE HSS3-HSS2½		Table 4-C (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi		
		HSS3x3x				HSS2½x2½x								
Shape		¾		½		⅝		¼		¾		½		
t_{des} , in.		0.174		0.116		0.291		0.233		0.174		0.116		
Steel, lb/ft		6.87		4.75		8.45		7.11		5.59		3.90		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	59.2	88.7	45.5	68.3	70.4	106	59	88.6	46.3	69.5	35.5	53.2	
	1	58.7	88	45.1	67.7	69.4	104	58.2	87.5	45.7	68.6	35.0	52.6	
	2	57.2	85.7	44.0	66.0	66.6	100	56.0	84.2	44.0	66.1	33.8	50.7	
	3	54.8	82.1	42.2	63.3	62.3	93.6	52.6	79.0	41.4	62.2	31.8	47.7	
	4	51.6	77.4	39.8	59.7	56.6	85.1	48.1	72.3	38.1	57.2	29.2	43.9	
	5	47.7	71.6	36.9	55.4	50.1	75.3	42.9	64.4	34.2	51.3	26.2	39.3	
	6	43.4	65.1	33.7	50.6	43.1	64.8	37.2	56.0	29.9	45.0	23.0	34.4	
	7	38.8	58.3	30.2	45.4	36.1	54.3	31.5	47.4	25.6	38.5	19.6	29.4	
	8	34.2	51.2	26.7	40.0	29.5	44.3	26.0	39.1	21.4	32.2	16.4	24.5	
	9	29.5	44.3	23.2	34.8	23.5	35.2	20.9	31.5	17.4	26.2	13.3	19.9	
	10	25.2	37.8	19.8	29.7	19.0	28.6	17.0	25.5	14.1	21.2	10.8	16.2	
	11	21.2	31.8	16.6	24.8	15.7	23.6	14.0	21.1	11.7	17.5	8.90	13.3	
	12	17.8	26.8	13.9	20.9	13.2	19.8	11.8	17.7	9.80	14.7	7.48	11.2	
	13	15.2	22.8	11.9	17.8	11.2	16.9	10.0	15.1	8.35	12.6	6.37	9.56	
	14	13.1	19.7	10.2	15.3	9.69	14.6	8.65	13.0	7.20	10.8	5.49	8.24	
	15	11.4	17.1	8.91	13.4			7.53	11.3	6.27	9.43	4.79	7.18	
	16	10.0	15.1	7.83	11.7							4.21	6.31	
	17	8.87	13.3	6.93	10.4									
	18	7.91	11.9	6.19	9.28									
19	7.10	10.7	5.55	8.33										
Properties														
M_n/Ω_b	$\phi_b M_n$	kip-ft	5.23	7.86	3.81	5.73	4.83	7.25	4.22	6.35	3.47	5.21	2.55	3.83
$P_e(L_c)^2/10^4$, kip-in. ²			83.1		65.8		55.4		50.9		44.1		35.4	
r_m , in.			1.14		1.17		0.880		0.908		0.937		0.965	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">4</div> COMPOSITE HSS2¼-HSS2		Table 4-C (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 4$ ksi		
		HSS2¼×2¼×						HSS2×2×						
Shape		¼		⅜		½		¼		⅜		½		
t_{des} , in.		0.233		0.174		0.116		0.233		0.174		0.116		
Steel, lb/ft		6.26		4.96		3.48		5.41		4.32		3.05		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	52.1	78.3	41.0	61.6	30.8	46.2	45.2	67.9	35.6	53.5	26.3	39.4	
	1	51.3	77.0	40.4	60.7	30.3	45.5	44.3	66.5	34.9	52.5	25.8	38.7	
	2	48.8	73.4	38.6	58.0	29.0	43.5	41.5	62.4	32.9	49.5	24.3	36.5	
	3	45.0	67.7	35.8	53.8	26.9	40.3	37.3	56.1	29.9	44.9	22.1	33.1	
	4	40.2	60.4	32.2	48.4	24.2	36.3	32.2	48.4	26.0	39.1	19.3	29.0	
	5	34.7	52.2	28.1	42.3	21.1	31.7	26.6	40.0	21.8	32.8	16.2	24.3	
	6	29.1	43.7	23.8	35.8	17.9	26.9	21.0	31.6	17.6	26.4	13.1	19.7	
	7	23.5	35.4	19.6	29.4	14.7	22.1	15.9	24.0	13.6	20.5	10.3	15.5	
	8	18.4	27.7	15.6	23.4	11.7	17.6	12.2	18.3	10.4	15.7	7.93	11.9	
	9	14.6	21.9	12.3	18.5	9.26	13.9	9.64	14.5	8.24	12.4	6.27	9.42	
	10	11.8	17.7	9.97	15.0	7.50	11.3	7.81	11.7	6.67	10.0	5.08	7.63	
	11	9.75	14.7	8.24	12.4	6.20	9.30	6.46	9.70	5.52	8.29	4.20	6.31	
	12	8.19	12.3	6.92	10.4	5.21	7.81			4.63	6.97	3.53	5.30	
	13	6.98	10.5	5.90	8.87	4.44	6.66							
	14					3.83	5.74							
Properties														
M_n/Ω_b	$\phi_b M_n$	kip-ft	3.30	4.96	2.72	4.09	2.02	3.03	2.47	3.72	2.07	3.11	1.55	2.33
$P_e(L_c)^2/10^4$, kip-in. ²			34.9		30.6		24.6		22.7		20.2		16.4	
r_m , in.			0.806		0.835		0.863		0.704		0.733		0.761	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24px; font-weight: bold;">5</div> COMPOSITE HSS16-HSS14		Table 4-D Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi				
		HSS16×16×					HSS14×14×									
Shape		½		⅜		⅝		⅝		½		⅜				
t_{des} , in.		0.465		0.349		0.291		0.581		0.465		0.349				
Steel, lb/ft		103		78.5		65.9		110		89.7		68.3				
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$				
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD			
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	1190	1780	1030	1550	957	1440	1110	1660	978	1470	843	1260			
	1	1190	1780	1030	1550	957	1440	1110	1660	977	1470	843	1260			
	2	1190	1780	1030	1550	956	1430	1110	1660	976	1460	842	1260			
	3	1190	1780	1030	1550	954	1430	1100	1650	974	1460	840	1260			
	4	1180	1780	1030	1540	952	1430	1100	1650	971	1460	838	1260			
	5	1180	1770	1030	1540	949	1420	1100	1640	968	1450	834	1250			
	6	1180	1760	1020	1530	946	1420	1090	1640	963	1450	830	1250			
	7	1170	1760	1020	1530	941	1410	1090	1630	958	1440	826	1240			
	8	1170	1750	1010	1520	936	1400	1080	1620	953	1430	821	1230			
	9	1160	1740	1010	1510	931	1400	1070	1610	946	1420	815	1220			
	10	1150	1730	1000	1500	925	1390	1060	1600	939	1410	808	1210			
	11	1140	1720	994	1490	918	1380	1050	1580	931	1400	801	1200			
	12	1140	1700	986	1480	911	1370	1050	1570	922	1380	793	1190			
	13	1130	1690	978	1470	903	1350	1030	1550	913	1370	785	1180			
	14	1120	1680	969	1450	894	1340	1020	1540	903	1350	776	1160			
	15	1110	1660	960	1440	885	1330	1010	1520	892	1340	766	1150			
	16	1100	1650	950	1430	876	1310	1000	1500	881	1320	756	1130			
	17	1090	1630	940	1410	866	1300	987	1480	869	1300	746	1120			
	18	1070	1610	929	1390	855	1280	973	1460	857	1290	735	1100			
	19	1060	1590	917	1380	844	1270	959	1440	844	1270	723	1080			
	20	1050	1570	905	1360	833	1250	944	1420	831	1250	711	1070			
	21	1030	1550	893	1340	821	1230	929	1390	817	1230	699	1050			
	22	1020	1530	880	1320	809	1210	913	1370	803	1200	686	1030			
	23	1010	1510	867	1300	796	1190	897	1340	789	1180	673	1010			
	24	991	1490	854	1280	784	1180	880	1320	774	1160	660	990			
	25	976	1460	840	1260	770	1160	863	1290	758	1140	647	970			
	26	960	1440	826	1240	757	1140	846	1270	743	1110	633	949			
	27	944	1420	811	1220	743	1110	828	1240	727	1090	619	928			
	28	928	1390	796	1190	729	1090	810	1220	711	1070	604	906			
	29	911	1370	781	1170	714	1070	792	1190	695	1040	590	885			
	30	895	1340	766	1150	700	1050	773	1160	678	1020	575	863			
	32	860	1290	735	1100	670	1010	736	1100	645	967	546	818			
	34	825	1240	703	1050	640	960	698	1050	611	917	516	774			
	36	789	1180	671	1010	610	915	660	991	577	866	486	729			
	38	753	1130	639	958	579	869	623	934	544	815	456	685			
	40	717	1080	606	910	549	823	585	878	510	765	427	641			
	Properties															
	M_n/Ω_b	$\phi_b M_n$	kip-ft		463	696	364	546	310	466	415	624	346	521	273	410
	$P_e(L_c)^2/10^4$, kip-in. ²		45300		37300		33200		33500		29000		23900			
	r_m , in.		6.31		6.37		6.39		5.44		5.49		5.55			
ASD		LRFD														
$\Omega_b = 1.67$		$\phi_b = 0.90$														
$\Omega_c = 2.00$		$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">5</div> COMPOSITE HSS14-HSS12		Table 4-D (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi			
		HSS14x14x		HSS12x12x											
Shape		$\frac{5}{16}$		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$			
t_{des} , in.		0.291		0.581		0.465		0.349		0.291		0.233			
Steel, lb/ft		57.4		93.3		76.1		58.1		48.9		39.4			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	775	1160	891	1340	783	1170	671	1010	612	918	553	829		
	1	775	1160	891	1340	782	1170	671	1010	612	917	552	828		
	2	774	1160	890	1330	781	1170	670	1000	610	916	551	827		
	3	772	1160	887	1330	779	1170	668	1000	609	913	550	824		
	4	769	1150	884	1330	776	1160	665	998	606	909	547	821		
	5	766	1150	879	1320	772	1160	662	993	603	905	544	816		
	6	763	1140	874	1310	767	1150	658	987	599	899	541	811		
	7	758	1140	868	1300	762	1140	653	979	595	892	536	805		
	8	753	1130	861	1290	756	1130	647	971	590	884	531	797		
	9	748	1120	853	1280	749	1120	641	962	584	876	526	789		
	10	742	1110	844	1270	741	1110	634	952	577	866	520	780		
	11	735	1100	834	1250	733	1100	627	940	570	855	513	770		
	12	727	1090	824	1240	724	1090	619	928	563	844	506	759		
	13	719	1080	813	1220	714	1070	610	915	555	832	499	748		
	14	711	1070	801	1200	703	1060	601	901	546	819	490	736		
	15	702	1050	788	1180	692	1040	591	887	537	805	482	723		
	16	692	1040	775	1160	681	1020	581	871	527	791	473	709		
	17	682	1020	761	1140	669	1000	570	855	517	776	463	695		
	18	672	1010	747	1120	656	984	559	838	507	760	454	680		
	19	661	992	732	1100	643	965	547	821	496	744	443	665		
	20	650	975	716	1070	630	944	535	803	485	727	433	650		
	21	638	957	700	1050	616	923	523	785	473	710	422	634		
	22	626	939	684	1030	601	902	511	766	462	693	411	617		
	23	614	921	667	1000	587	880	498	747	450	675	400	601		
	24	601	902	651	976	572	858	485	727	438	656	389	584		
	25	588	883	633	950	557	835	471	707	425	638	378	566		
	26	575	863	616	924	542	813	458	687	413	619	366	549		
	27	562	843	598	897	526	790	445	667	400	601	354	532		
	28	549	823	581	871	511	766	431	646	388	582	343	514		
	29	535	803	563	844	495	743	417	626	375	563	331	497		
	30	521	782	545	817	480	719	404	605	362	544	319	479		
	32	494	740	509	764	448	673	376	564	337	506	296	444		
	34	466	699	474	711	417	626	349	524	312	468	273	410		
	36	438	657	439	658	387	580	323	484	288	432	251	376		
	38	410	615	405	607	357	535	297	445	264	396	229	344		
	40	383	574	372	557	328	492	272	408	241	362	208	312		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	233	351	296	445	247	372	195	294	168	252	139	208
	$P_e(L_c)^2/10^4$, kip-in. ²			21200		19600		17300		14300		12700		10900	
	r_m , in.			5.58		4.62		4.68		4.73		4.76		4.79	
ASD	LRFD														
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">5</div> COMPOSITE HSS12-HSS10		Table 4-D (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi			
		HSS12x12x		HSS10x10x											
Shape		$\frac{3}{16}$		$\frac{5}{16}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$			
t_{des} , in.		0.174		0.581		0.465		0.349		0.291		0.233			
Steel, lb/ft		29.8		76.3		62.5		47.9		40.4		32.6			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	470	706	690	1040	604	907	514	770	466	699	417	626		
	1	470	705	690	1030	604	906	513	770	465	698	417	625		
	2	469	704	688	1030	603	904	512	768	464	696	416	623		
	3	468	702	685	1030	600	900	510	765	462	694	414	621		
	4	466	699	682	1020	597	895	507	761	460	690	411	617		
	5	463	695	677	1020	593	889	504	755	456	685	408	612		
	6	460	690	671	1010	588	881	499	749	452	679	405	607		
	7	456	684	664	996	582	872	494	741	448	671	400	600		
	8	452	678	656	984	575	862	488	732	442	663	395	593		
	9	447	671	647	971	567	851	482	723	436	654	389	584		
	10	442	663	638	956	559	838	475	712	429	644	383	575		
	11	436	654	627	940	550	824	467	700	422	633	376	565		
	12	430	645	616	923	540	810	458	687	414	621	369	554		
	13	423	635	603	905	529	794	449	674	406	609	361	542		
	14	416	624	591	886	518	777	440	660	397	596	353	530		
	15	409	613	577	866	506	760	430	645	388	582	345	517		
	16	401	601	563	844	494	741	419	629	378	567	336	504		
	17	393	589	548	823	482	722	408	613	368	552	327	490		
	18	384	576	533	800	469	703	397	596	358	537	317	476		
	19	375	563	518	777	455	683	386	579	347	521	307	461		
	20	366	550	502	753	441	662	374	561	336	505	297	446		
	21	357	536	486	729	427	641	362	543	325	488	287	431		
	22	348	521	469	704	413	620	350	525	314	471	277	415		
	23	338	507	453	679	399	598	338	507	303	454	267	400		
	24	328	492	436	654	384	577	325	488	291	437	256	384		
	25	318	478	420	629	370	555	313	469	280	420	246	369		
	26	308	463	403	604	355	533	301	451	269	403	235	353		
	27	298	447	386	579	341	511	288	432	257	386	225	338		
	28	288	432	370	555	326	490	276	414	246	369	215	322		
	29	278	417	353	530	312	468	264	396	235	352	205	307		
	30	268	402	337	506	298	447	252	378	224	336	195	292		
	32	248	372	305	458	270	405	228	342	202	304	175	263		
	34	228	343	275	412	244	365	205	308	182	273	157	235		
	36	209	314	245	368	218	327	184	275	162	243	140	209		
	38	191	286	220	330	195	293	165	247	145	218	125	188		
	40	173	259	199	298	176	265	149	223	131	197	113	170		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	102	154	196	295	165	249	131	198	113	170	93.9	141
	$P_e(L_c)^2/10^4$, kip-in. ²		9080		10400		9270		7810		6900		5940		
	r_m , in.		4.82		3.80		3.86		3.92		3.94		3.97		
ASD		LRFD													
$\Omega_b = 1.67$		$\phi_b = 0.90$													
$\Omega_c = 2.00$		$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">5</div> COMPOSITE HSS10-HSS9		Table 4-D (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi			
		HSS10×10×		HSS9×9×											
Shape		$\frac{3}{16}$	$\frac{5}{16}$	$\frac{1}{2}$	$\frac{3}{8}$	$\frac{5}{16}$	$\frac{1}{4}$								
t_{des} , in.		0.174	0.581	0.465	0.349	0.291	0.233								
Steel, lb/ft		24.7	67.8	55.7	42.8	36.1	29.2								
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	367	550	597	896	520	781	441	662	398	598	355	533		
	1	367	550	597	895	520	780	441	661	398	597	355	533		
	2	366	548	595	893	518	778	440	659	397	595	354	531		
	3	364	546	592	888	516	774	437	656	395	592	352	528		
	4	362	542	588	882	512	769	434	652	392	588	350	524		
	5	359	538	583	874	508	762	431	646	389	583	346	520		
	6	355	533	576	865	503	754	426	639	385	577	343	514		
	7	351	527	569	854	496	744	421	631	380	569	338	507		
	8	346	520	561	841	489	734	415	622	374	561	333	499		
	9	341	512	551	827	481	722	408	612	368	552	327	491		
	10	335	503	541	812	472	708	401	601	361	541	321	481		
	11	329	494	530	795	463	694	393	589	354	530	314	471		
	12	322	483	518	777	452	679	384	576	346	518	307	460		
	13	315	473	505	758	442	662	375	562	337	506	299	449		
	14	308	461	492	738	430	645	365	548	328	493	291	436		
	15	300	449	478	717	418	627	355	532	319	479	282	424		
	16	291	437	463	695	406	609	344	517	309	464	274	410		
	17	283	424	449	673	393	590	334	500	300	449	265	397		
	18	274	411	433	650	380	570	323	484	289	434	255	383		
	19	265	398	418	626	366	550	311	467	279	418	246	369		
	20	256	384	402	603	353	529	300	450	268	403	236	354		
	21	247	370	386	579	339	509	288	432	258	387	226	340		
	22	237	356	370	554	325	488	276	414	247	371	217	325		
	23	228	342	353	530	311	467	265	397	236	355	207	310		
	24	218	328	337	506	297	446	253	379	226	338	197	296		
	25	209	313	321	482	283	425	241	362	215	322	188	281		
	26	200	299	306	458	270	405	230	344	204	307	178	267		
	27	190	285	290	435	256	384	218	327	194	291	169	253		
	28	181	272	274	412	243	364	207	310	184	276	159	239		
	29	172	258	260	391	230	345	196	293	174	261	150	226		
	30	163	245	247	371	217	325	185	277	164	246	142	212		
	32	146	219	220	331	192	288	164	245	145	217	125	187		
	34	129	194	195	293	170	255	145	217	128	192	110	166		
	36	115	173	174	262	152	227	129	194	114	171	98.5	148		
	38	104	155	156	235	136	204	116	174	103	154	88.4	133		
	40	93.4	140	141	212	123	184	105	157	92.6	139	79.8	120		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	72.8	109	155	233	131	197	104	157	89.9	135	74.6	112
	$P_e(L_c)^2/10^4$, kip-in. ²			4910	7260	6450	5500	4870	4190						
	r_m , in.			4.00	3.40	3.45	3.51	3.54	3.56						
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

5 COMPOSITE HSS9-HSS8		Table 4-D (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi			
		HSS9x9x				HSS8x8x									
Shape		$\frac{3}{16}$		$\frac{1}{8}^c$		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$			
t_{des} , in.		0.174		0.116		0.581		0.465		0.349		0.291			
Steel, lb/ft		22.2		15.0		59.3		48.9		37.7		31.8			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	311	466	230	346	509	763	443	665	373	560	336	504		
	1	310	465	230	345	508	762	443	664	373	559	335	503		
	2	309	464	229	344	506	759	441	662	371	557	334	501		
	3	307	461	228	342	503	754	438	658	369	553	332	498		
	4	305	458	227	340	498	748	435	652	366	549	329	494		
	5	302	453	225	337	493	739	430	645	362	543	326	488		
	6	299	448	222	333	486	729	424	636	357	536	321	482		
	7	294	442	219	328	478	717	417	626	351	527	316	474		
	8	290	435	216	323	469	703	409	614	345	518	310	465		
	9	284	427	212	318	459	688	401	601	338	507	304	456		
	10	279	418	208	312	448	672	391	587	330	495	297	445		
	11	272	408	203	305	436	654	381	572	322	483	289	434		
	12	266	398	198	298	423	635	371	556	313	469	281	422		
	13	259	388	193	290	410	615	359	539	303	455	273	409		
	14	251	377	188	282	396	594	347	521	294	440	264	396		
	15	243	365	182	274	382	572	335	503	283	425	254	382		
	16	235	353	177	265	367	550	322	483	273	409	245	367		
	17	227	340	171	256	352	528	309	464	262	393	235	353		
	18	219	328	165	247	336	504	296	444	251	377	225	338		
	19	210	315	158	238	321	482	283	424	240	360	215	323		
	20	201	302	152	228	307	461	269	404	229	343	205	308		
	21	192	289	146	219	292	439	256	384	218	326	195	293		
	22	184	276	139	209	278	417	243	364	206	310	185	277		
	23	175	262	133	199	263	396	229	344	195	293	175	262		
	24	166	249	127	190	249	374	216	325	185	277	165	248		
	25	158	236	120	181	235	353	204	305	174	261	155	233		
	26	149	224	114	171	221	333	191	287	163	245	146	219		
	27	141	211	108	162	208	313	179	268	153	230	137	205		
	28	133	199	102	153	195	293	167	250	143	214	128	191		
	29	125	187	96.1	144	182	274	155	233	133	200	119	178		
	30	117	175	90.4	136	170	256	145	218	124	187	111	167		
	32	103	154	79.5	119	149	225	128	191	109	164	97.7	147		
	34	90.9	136	70.4	106	132	199	113	170	96.9	145	86.5	130		
	36	81.1	122	62.8	94.2	118	177	101	151	86.4	130	77.2	116		
	38	72.8	109	56.4	84.5	106	159	90.5	136	77.6	116	69.3	104		
	40	65.7	98.5	50.9	76.3	95.6	144	81.7	123	70.0	105	62.5	93.8		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	58.3	87.6	34.2	51.4	118	178	101	151	80.5	121	69.7	105
	$P_e(L_c)^2/10^4$, kip-in. ²			3450		2670		4800		4290		3680		3290	
	r_m , in.			3.59		3.62		2.99		3.04		3.10		3.13	
ASD	LRFD	Shape is slender for $F_y = 50$ ksi; tabulated values have been adjusted accordingly.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">5</div> COMPOSITE HSS8-HSS7		Table 4-D (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi			
		HSS8x8x					HSS7x7x								
Shape		1/4		3/16		1/8		5/16		1/2		3/8			
t_{des} , in.		0.233		0.174		0.116		0.581		0.465		0.349			
Steel, lb/ft		25.8		19.6		13.3		50.8		42.1		32.6			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	298	447	259	388	209	314	422	633	368	552	308	463		
	1	298	446	258	387	209	314	421	632	367	551	308	462		
	2	297	445	257	386	208	312	419	628	365	548	306	460		
	3	295	442	256	383	207	310	415	623	362	544	304	456		
	4	292	438	253	380	205	307	411	616	358	537	301	451		
	5	289	433	250	375	202	303	404	606	353	530	296	444		
	6	285	427	246	370	199	298	397	595	347	520	291	437		
	7	280	420	242	363	195	293	388	583	339	509	285	428		
	8	275	412	237	356	191	287	379	569	331	497	278	417		
	9	269	403	232	348	187	280	369	554	322	483	271	406		
	10	263	394	226	339	182	273	358	538	312	468	263	394		
	11	256	383	220	330	177	265	346	520	301	452	254	381		
	12	248	372	213	320	171	256	334	502	290	435	245	367		
	13	241	361	206	309	165	248	321	482	278	418	235	353		
	14	232	349	199	298	159	238	307	462	266	400	225	338		
	15	224	336	191	287	153	229	294	441	254	381	215	322		
	16	215	323	184	275	146	219	280	420	241	362	204	307		
	17	207	310	176	263	139	209	265	399	228	343	194	291		
	18	198	296	168	251	133	199	251	377	216	324	183	275		
	19	189	283	160	239	126	189	237	356	203	304	173	259		
	20	179	269	151	227	119	179	223	335	190	285	162	243		
	21	170	256	143	215	113	169	209	314	178	267	152	228		
	22	161	242	135	203	106	159	195	293	166	250	142	212		
	23	152	229	127	191	99.5	149	182	273	155	233	132	198		
	24	144	215	120	179	93.1	140	169	253	145	217	122	183		
	25	135	202	112	168	86.9	130	156	234	134	201	113	169		
	26	126	190	105	157	80.8	121	144	216	124	186	104	156		
	27	118	177	97.3	146	75.0	112	133	201	115	173	96.6	145		
	28	110	165	90.5	136	69.7	105	124	186	107	161	89.8	135		
	29	103	154	84.3	126	65.0	97.5	116	174	99.6	150	83.7	126		
	30	95.8	144	78.8	118	60.7	91.1	108	162	93.1	140	78.3	117		
	32	84.2	126	69.3	104	53.4	80.1	95.0	143	81.8	123	68.8	103		
	34	74.6	112	61.4	92.0	47.3	70.9	84.1	126	72.4	109	60.9	91.4		
	36	66.6	99.8	54.7	82.1	42.2	63.3	75.1	113	64.6	97.1	54.3	81.5		
	38	59.7	89.6	49.1	73.7	37.8	56.8	67.4	101	58.0	87.2	48.8	73.2		
	40	53.9	80.9	44.3	66.5	34.2	51.2	60.8	91.4	52.3	78.7	44.0	66.0		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	57.9	87.0	45.3	68.1	30.4	45.7	86.9	131	74.3	112	59.9	90.1
	$P_e(L_c)^2/10^4$, kip-in. ²			2830		2330		1790		3000		2690		2310	
	r_m , in.			3.15		3.18		3.21		2.58		2.63		2.69	
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

5 COMPOSITE HSS7-HSS6		Table 4-D (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi			
		HSS7x7x								HSS6x6x					
Shape		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$		$\frac{1}{2}$		$\frac{5}{8}$		$\frac{1}{2}$			
t_{des} , in.		0.291		0.233		0.174		0.116		0.581		0.465			
Steel, lb/ft		27.6		22.4		17.1		11.6		42.3		35.2			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	277	416	245	367	211	316	176	264	350	526	298	447		
	1	277	415	244	367	210	316	176	263	350	525	297	446		
	2	275	413	243	365	209	314	175	262	347	522	295	443		
	3	273	410	241	362	208	311	173	259	343	516	292	437		
	4	270	405	239	358	205	308	171	256	338	508	287	431		
	5	266	399	235	353	202	303	168	252	331	498	281	422		
	6	262	392	231	346	198	297	165	247	323	486	274	411		
	7	256	384	226	339	194	291	161	241	314	472	266	399		
	8	250	375	221	331	189	283	156	234	304	456	257	386		
	9	244	365	215	322	184	275	151	227	292	439	247	371		
	10	236	354	208	312	178	267	146	219	280	421	237	355		
	11	228	343	201	302	172	257	141	211	267	402	226	339		
	12	220	330	194	291	165	247	135	202	254	382	215	323		
	13	212	317	186	279	158	237	129	193	240	361	204	306		
	14	203	304	178	267	151	226	122	183	226	340	193	289		
	15	194	290	170	255	144	216	116	174	212	318	181	272		
	16	184	276	161	242	136	204	109	164	198	297	170	255		
	17	175	262	153	230	129	193	103	154	184	276	158	238		
	18	165	248	145	217	121	182	96.4	145	170	255	147	221		
	19	156	234	136	204	114	171	90.0	135	156	235	136	204		
	20	146	220	128	192	107	160	83.8	126	143	215	125	188		
	21	137	206	120	179	99.5	149	77.6	116	130	196	115	172		
	22	128	192	111	167	92.5	139	71.7	108	119	179	104	157		
	23	119	179	104	155	85.7	128	65.8	98.7	109	163	95.6	144		
	24	111	166	95.9	144	78.9	118	60.4	90.7	99.8	150	87.8	132		
	25	102	153	88.4	133	72.7	109	55.7	83.5	92.0	138	80.9	122		
	26	94.3	141	81.7	123	67.2	101	51.5	77.2	85.1	128	74.8	112		
	27	87.4	131	75.8	114	62.4	93.5	47.8	71.6	78.9	119	69.4	104		
	28	81.3	122	70.5	106	58.0	87.0	44.4	66.6	73.4	110	64.5	96.9		
	29	75.8	114	65.7	98.6	54.0	81.1	41.4	62.1	68.4	103	60.1	90.4		
	30	70.8	106	61.4	92.1	50.5	75.8	38.7	58.0	63.9	96.0	56.2	84.4		
	32	62.3	93.4	54.0	80.9	44.4	66.6	34.0	51.0	56.2	84.4	49.4	74.2		
	34	55.1	82.7	47.8	71.7	39.3	59.0	30.1	45.2	49.7	74.8	43.7	65.7		
	36	49.2	73.8	42.6	64.0	35.1	52.6	26.9	40.3	44.4	66.7	39.0	58.6		
	38	44.1	66.2	38.3	57.4	31.5	47.2	24.1	36.2						
	40	39.8	59.8	34.5	51.8	28.4	42.6	21.8	32.6						
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	51.9	78.1	43.3	65.1	34.0	51.1	23.7	35.6	60.4	90.8	52.2	78.5
	$P_e(L_c)^2/10^4$, kip-in. ²			2090		1810		1490		1140		1730		1570	
	r_m , in.			2.72		2.75		2.77		2.80		2.17		2.23	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">5</div> COMPOSITE HSS6-HSS5½		Table 4-D (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi	
		HSS6x6x										HSS5½x5½x	
Shape		¾		⅝		¼		⅜		½		¾	
t_{des} , in.		0.349		0.291		0.233		0.174		0.116		0.349	
Steel, lb/ft		27.5		23.3		19.0		14.5		9.86		24.9	
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	249	374	223	334	196	294	167	251	138	207	221	331
	1	248	373	222	334	196	293	167	250	138	207	220	330
	2	247	370	221	332	194	291	166	249	137	205	218	328
	3	244	366	219	328	192	288	164	246	135	203	216	323
	4	240	361	215	323	189	284	161	242	133	199	212	317
	5	236	353	211	317	186	278	158	237	130	195	207	310
	6	230	345	206	309	181	272	154	231	127	190	201	301
	7	223	335	200	300	176	264	150	225	123	184	194	291
	8	216	324	194	291	170	256	145	217	118	177	186	279
	9	208	312	187	280	164	246	139	209	113	170	178	267
	10	200	299	179	269	158	236	134	200	108	162	169	254
	11	191	286	171	257	151	226	127	191	103	154	160	240
	12	181	272	163	244	143	215	121	181	97.3	146	151	226
	13	171	257	154	231	136	203	114	171	91.5	137	141	211
	14	161	242	145	218	128	192	108	161	85.7	129	131	197
	15	151	227	136	204	120	180	101	151	79.8	120	121	182
	16	141	212	127	191	112	168	93.9	141	74.0	111	112	168
	17	131	197	119	178	104	157	87.2	131	68.3	102	102	154
	18	122	182	110	165	96.8	145	80.6	121	62.7	94.1	93.6	141
	19	112	168	101	152	89.3	134	74.1	111	57.3	86.0	85.6	129
	20	103	154	93.0	139	82.0	123	67.9	102	52.0	78.0	77.7	117
	21	93.7	141	84.9	127	74.9	112	61.7	92.6	47.2	70.8	70.5	106
	22	85.3	128	77.3	116	68.3	102	56.3	84.4	43.0	64.5	64.2	96.5
	23	78.1	117	70.7	106	62.5	93.7	51.5	77.2	39.3	59.0	58.7	88.3
	24	71.7	108	65.0	97.5	57.4	86.0	47.3	70.9	36.1	54.2	53.9	81.1
	25	66.1	99.1	59.9	89.8	52.9	79.3	43.6	65.3	33.3	49.9	49.7	74.7
	26	61.1	91.7	55.4	83.0	48.9	73.3	40.3	60.4	30.8	46.2	46.0	69.1
	27	56.7	85.0	51.3	77.0	45.3	68.0	37.3	56.0	28.5	42.8	42.6	64.1
	28	52.7	79.0	47.7	71.6	42.1	63.2	34.7	52.1	26.5	39.8	39.6	59.6
	29	49.1	73.7	44.5	66.8	39.3	58.9	32.4	48.6	24.7	37.1	36.9	55.5
	30	45.9	68.8	41.6	62.4	36.7	55.1	30.3	45.4	23.1	34.7	34.5	51.9
	32	40.3	60.5	36.5	54.8	32.3	48.4	26.6	39.9	20.3	30.5	30.3	45.6
	34	35.7	53.6	32.4	48.6	28.6	42.9	23.6	35.3	18.0	27.0	26.9	40.4
	36	31.9	47.8	28.9	43.3	25.5	38.2	21.0	31.5	16.1	24.1		
	38	28.6	42.9	25.9	38.9	22.9	34.3	18.9	28.3	14.4	21.6		

Properties														
M_n/Ω_b	$\phi_b M_n$	kip-ft	42.4	63.7	37.0	55.5	30.9	46.5	24.4	36.6	17.2	25.9	35.0	52.5
$P_e(L_c)^2/10^4$, kip-in. ²			1360		1230		1090		894		683		1000	
r_m , in.			2.28		2.31		2.34		2.37		2.39		2.08	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">5</div> COMPOSITE HSS5½-HSS5		Table 4-D (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi		
		HSS5½x5½x								HSS5x5x				
Shape		5/16		¼		3/16		½		½		3/8		
t_{des} , in.		0.291		0.233		0.174		0.116		0.465		0.349		
Steel, lb/ft		21.2		17.3		13.3		9.01		28.4		22.4		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	197	296	173	260	147	221	120	181	236	355	194	290	
	1	197	295	173	259	147	220	120	180	235	353	193	289	
	2	195	293	171	257	146	218	119	179	233	350	191	287	
	3	193	289	169	254	144	215	117	176	229	345	188	282	
	4	189	284	166	249	141	211	115	173	224	337	184	276	
	5	185	277	162	243	138	207	112	168	218	328	179	268	
	6	180	270	158	236	134	201	109	163	210	316	172	258	
	7	174	261	152	229	129	194	105	157	202	303	165	248	
	8	167	251	147	220	124	186	100	151	192	289	157	236	
	9	160	240	140	210	119	178	95.6	143	182	274	149	223	
	10	152	228	134	200	113	169	90.6	136	172	258	140	210	
	11	144	216	126	190	107	160	85.3	128	161	241	131	196	
	12	135	203	119	179	100	151	79.9	120	149	224	121	182	
	13	127	190	112	168	94.0	141	74.4	112	138	207	112	168	
	14	118	177	104	156	87.5	131	68.9	103	127	190	103	154	
	15	110	164	96.6	145	81.1	122	63.4	95.1	115	173	94.0	141	
	16	101	152	89.2	134	74.7	112	58.1	87.1	105	157	85.6	129	
	17	92.6	139	81.9	123	68.4	103	52.8	79.3	94.2	142	77.5	116	
	18	84.5	127	74.8	112	62.4	93.6	47.8	71.7	84.1	126	69.6	105	
	19	76.7	115	68.0	102	56.5	84.7	43.0	64.4	75.5	113	62.5	93.9	
	20	69.2	104	61.3	92.0	51.0	76.5	38.8	58.2	68.1	102	56.4	84.8	
	21	62.8	94.1	55.6	83.5	46.2	69.4	35.2	52.7	61.8	92.9	51.2	76.9	
	22	57.2	85.8	50.7	76.0	42.1	63.2	32.0	48.1	56.3	84.6	46.6	70.0	
	23	52.3	78.5	46.4	69.6	38.5	57.8	29.3	44.0	51.5	77.4	42.6	64.1	
	24	48.1	72.1	42.6	63.9	35.4	53.1	26.9	40.4	47.3	71.1	39.2	58.9	
	25	44.3	66.4	39.3	58.9	32.6	48.9	24.8	37.2	43.6	65.5	36.1	54.2	
	26	40.9	61.4	36.3	54.4	30.2	45.2	22.9	34.4	40.3	60.6	33.4	50.2	
	27	38.0	57.0	33.7	50.5	28.0	42.0	21.3	31.9	37.4	56.2	30.9	46.5	
	28	35.3	53.0	31.3	46.9	26.0	39.0	19.8	29.7	34.8	52.2	28.8	43.2	
	29	32.9	49.4	29.2	43.8	24.2	36.4	18.4	27.7	32.4	48.7	26.8	40.3	
	30	30.8	46.1	27.3	40.9	22.7	34.0	17.2	25.8	30.3	45.5	25.1	37.7	
	32	27.0	40.5	24.0	35.9	19.9	29.9	15.1	22.7					
	34	23.9	35.9	21.2	31.8	17.6	26.5	13.4	20.1					
	36					15.7	23.6	12.0	17.9					
	Properties													
	M_n/Ω_b	$\phi_b M_n$	kip-ft	30.5	45.9	25.6	38.4	20.2	30.3	14.3	21.5	34.2	51.4	28.1
$P_e(L_c)^2/10^4$, kip-in. ²			909		806		670		509		821		719	
r_m , in.			2.11		2.13		2.16		2.19		1.82		1.87	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">5</div> COMPOSITE HSS5-HSS4½		Table 4-D (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi		
		HSS5x5x								HSS4½x4½x				
Shape		5/16		¼		3/16		½		½		¾		
t_{des} , in.		0.291		0.233		0.174		0.116		0.465		0.349		
Steel, lb/ft		19.1		15.6		12.0		8.16		25.0		19.8		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	173	259	151	227	128	192	104	156	208	313	167	251	
	1	172	258	151	226	128	191	104	156	207	311	167	250	
	2	171	256	149	224	126	189	103	154	205	308	165	247	
	3	168	252	147	220	124	187	101	151	201	302	161	242	
	4	164	246	144	216	122	182	98.6	148	195	293	157	235	
	5	160	239	140	209	118	177	95.6	143	188	283	151	227	
	6	154	231	135	202	114	171	92.1	138	180	270	145	217	
	7	148	222	130	194	110	164	88.1	132	171	256	137	206	
	8	141	211	124	185	104	157	83.8	126	160	241	129	194	
	9	133	200	117	176	99.0	149	79.1	119	150	225	121	182	
	10	126	188	110	165	93.2	140	74.2	111	139	208	112	169	
	11	117	176	103	155	87.2	131	69.1	104	127	191	104	156	
	12	109	164	96.1	144	81.1	122	63.9	95.9	116	174	95.3	143	
	13	101	151	88.8	133	74.9	112	58.7	88.1	105	157	86.7	130	
	14	92.5	139	81.6	122	68.8	103	53.6	80.4	93.9	141	78.3	118	
	15	84.3	126	74.5	112	62.8	94.2	48.6	72.9	83.4	125	70.2	105	
	16	76.3	115	67.6	101	56.9	85.4	43.8	65.7	73.5	110	62.3	93.7	
	17	68.7	103	60.9	91.4	51.3	76.9	39.1	58.6	65.1	97.8	55.2	83.0	
	18	61.4	92.0	54.4	81.7	45.8	68.7	34.9	52.3	58.0	87.2	49.2	74.0	
	19	55.1	82.6	48.9	73.3	41.1	61.7	31.3	46.9	52.1	78.3	44.2	66.4	
	20	49.7	74.5	44.1	66.2	37.1	55.6	28.2	42.4	47.0	70.7	39.9	59.9	
	21	45.1	67.6	40.0	60.0	33.6	50.5	25.6	38.4	42.6	64.1	36.2	54.4	
	22	41.1	61.6	36.4	54.7	30.7	46.0	23.3	35.0	38.9	58.4	33.0	49.5	
	23	37.6	56.4	33.3	50.0	28.1	42.1	21.3	32.0	35.5	53.4	30.2	45.3	
	24	34.5	51.8	30.6	45.9	25.8	38.6	19.6	29.4	32.6	49.1	27.7	41.6	
	25	31.8	47.7	28.2	42.3	23.7	35.6	18.1	27.1	30.1	45.2	25.5	38.4	
	26	29.4	44.1	26.1	39.1	22.0	32.9	16.7	25.1	27.8	41.8	23.6	35.5	
	27	27.3	40.9	24.2	36.3	20.4	30.5	15.5	23.2			21.9	32.9	
	28	25.4	38.0	22.5	33.8	18.9	28.4	14.4	21.6					
	29	23.6	35.5	21.0	31.5	17.6	26.5	13.4	20.1					
	30	22.1	33.1	19.6	29.4	16.5	24.7	12.5	18.8					
	32			17.2	25.8	14.5	21.7	11.0	16.5					
Properties														
M_n/Ω_b	$\phi_b M_n$	kip-ft	24.6	37.0	20.7	31.2	16.4	24.6	11.7	17.6	26.5	39.8	22.0	33.1
$P_e(L_c)^2/10^4$, kip-in. ²			653		579		487		371		563		497	
r_m , in.			1.90		1.93		1.96		1.99		1.61		1.67	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													


<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24px; font-weight: bold; width: 30px; height: 30px; text-align: center; line-height: 30px;">5</div> COMPOSITE HSS4½-HSS4		Table 4-D (continued) Available Strength in Axial Compression, kips Filled Square HSS								A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi					
		HSS4½x4½x				HSS4x4x									
Shape		5/16		¼		3/16		½		½		3/8			
t_{des} , in.		0.291		0.233		0.174		0.116		0.465		0.349			
Steel, lb/ft		17.0		13.9		10.7		7.31		21.6		17.3			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	149	224	130	196	110	165	88.7	133	180	271	143	215		
	1	149	223	130	195	109	164	88.3	132	179	269	142	214		
	2	147	221	128	193	108	162	87.2	131	176	265	140	211		
	3	144	216	126	189	106	159	85.5	128	172	258	137	206		
	4	140	210	123	184	103	155	83.1	125	166	249	132	199		
	5	135	203	118	177	99.7	150	80.1	120	158	237	127	190		
	6	130	194	113	170	95.6	143	76.5	115	149	224	120	180		
	7	123	185	108	162	90.9	136	72.6	109	139	209	113	169		
	8	116	174	102	152	85.8	129	68.2	102	128	193	105	157		
	9	108	163	95.1	143	80.3	120	63.7	95.5	117	176	96.4	145		
	10	100	151	88.2	132	74.6	112	58.9	88.3	106	160	87.9	132		
	11	92.4	139	81.3	122	68.8	103	54.0	81.1	95.0	143	79.4	119		
	12	84.4	127	74.3	111	62.9	94.4	49.2	73.8	84.1	126	71.0	107		
	13	76.4	115	67.4	101	57.1	85.7	44.4	66.6	73.6	111	62.8	94.4		
	14	68.6	103	60.6	90.9	51.5	77.2	39.8	59.6	63.7	95.8	55.0	82.7		
	15	61.7	92.8	54.1	81.2	46.0	69.0	35.3	53.0	55.5	83.5	47.9	72.0		
	16	55.1	82.9	47.8	71.8	40.7	61.1	31.1	46.6	48.8	73.3	42.1	63.3		
	17	48.8	73.4	42.4	63.6	36.1	54.1	27.5	41.3	43.2	65.0	37.3	56.1		
	18	43.6	65.5	37.8	56.7	32.2	48.3	24.5	36.8	38.6	58.0	33.3	50.0		
	19	39.1	58.8	33.9	50.9	28.9	43.3	22.0	33.0	34.6	52.0	29.9	44.9		
	20	35.3	53.0	30.6	45.9	26.1	39.1	19.9	29.8	31.2	46.9	27.0	40.5		
	21	32.0	48.1	27.8	41.7	23.6	35.5	18.0	27.1	28.3	42.6	24.4	36.7		
	22	29.2	43.8	25.3	38.0	21.5	32.3	16.4	24.6	25.8	38.8	22.3	33.5		
	23	26.7	40.1	23.2	34.7	19.7	29.6	15.0	22.6	23.6	35.5	20.4	30.6		
	24	24.5	36.8	21.3	31.9	18.1	27.2	13.8	20.7			18.7	28.1		
	25	22.6	34.0	19.6	29.4	16.7	25.0	12.7	19.1						
	26	20.9	31.4	18.1	27.2	15.4	23.1	11.8	17.6						
	27	19.4	29.1	16.8	25.2	14.3	21.5	10.9	16.4						
	28	18.0	27.1	15.6	23.4	13.3	19.9	10.1	15.2						
29					12.4	18.6	9.46	14.2							
Properties															
M_n/Ω_b	$\phi_b M_n$	kip-ft		19.4	29.1	16.4	24.6	13.0	19.6	9.32	14.0	19.9	29.9	16.7	25.2
$P_e(L_c)^2/10^4$, kip-in. ²				454	402	342	261	365	328						
r_m , in.				1.70	1.73	1.75	1.78	1.41	1.47						
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24px; font-weight: bold;">5</div> COMPOSITE HSS4-HSS3½		Table 4-D (continued) Available Strength in Axial Compression, kips Filled Square HSS								A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi				
		HSS4x4x				HSS3½x3½x								
Shape		5/16		¼		3/16		1/8		3/8		5/16		
t_{des} , in.		0.291		0.233		0.174		0.116		0.349		0.291		
Steel, lb/ft		14.8		12.2		9.42		6.46		14.7		12.7		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	127	191	111	166	92.8	139	74.4	112	122	184	106	159	
	1	127	190	110	165	92.3	139	74.0	111	122	183	105	158	
	2	125	187	109	163	91.0	136	72.9	109	119	179	103	155	
	3	121	182	106	159	88.8	133	71.1	107	115	173	99.6	150	
	4	117	176	102	153	85.8	129	68.6	103	110	166	95.2	143	
	5	112	168	97.7	147	82.1	123	65.5	98.3	104	156	90.0	135	
	6	106	159	92.5	139	77.8	117	62.0	92.9	96.4	145	83.9	126	
	7	99.0	149	86.7	130	73.0	110	58.0	87.0	88.5	133	77.3	116	
	8	91.7	138	80.5	121	67.9	102	53.7	80.6	80.1	120	70.3	106	
	9	84.1	126	73.9	111	62.5	93.7	49.3	73.9	71.6	108	63.1	94.9	
	10	76.4	115	67.3	101	56.9	85.4	44.8	67.1	63.1	94.8	56.0	84.1	
	11	69.2	104	60.6	90.9	51.4	77.0	40.2	60.3	54.9	82.5	49.0	73.7	
	12	62.0	93.2	54.0	81.0	45.9	68.9	35.8	53.7	47.1	70.7	42.4	63.7	
	13	55.1	82.8	47.7	71.5	40.6	60.9	31.5	47.3	40.1	60.3	36.2	54.4	
	14	48.5	72.8	41.6	62.4	35.6	53.3	27.4	41.1	34.6	52.0	31.2	46.9	
	15	42.2	63.5	36.3	54.4	31.0	46.5	23.9	35.8	30.1	45.3	27.2	40.8	
	16	37.1	55.8	31.9	47.8	27.2	40.8	21.0	31.5	26.5	39.8	23.9	35.9	
	17	32.9	49.4	28.2	42.3	24.1	36.2	18.6	27.9	23.5	35.2	21.2	31.8	
	18	29.3	44.1	25.2	37.8	21.5	32.3	16.6	24.9	20.9	31.4	18.9	28.4	
	19	26.3	39.6	22.6	33.9	19.3	29.0	14.9	22.3	18.8	28.2	16.9	25.5	
	20	23.8	35.7	20.4	30.6	17.4	26.1	13.4	20.2	16.9	25.5	15.3	23.0	
	21	21.5	32.4	18.5	27.7	15.8	23.7	12.2	18.3	15.4	23.1	13.9	20.8	
	22	19.6	29.5	16.9	25.3	14.4	21.6	11.1	16.7					
	23	18.0	27.0	15.4	23.1	13.2	19.8	10.2	15.2					
	24	16.5	24.8	14.2	21.2	12.1	18.1	9.33	14.0					
	25			13.1	19.6	11.2	16.7	8.60	12.9					
26							7.95	11.9						
Properties														
M_n/Ω_b	$\phi_b M_n$	kip-ft	14.8	22.2	12.6	18.9	10.1	15.1	7.23	10.9	12.2	18.3	10.9	16.3
$P_e(L_c)^2/10^4$, kip-in. ²			300		268		229		176		203		188	
r_m , in.			1.49		1.52		1.55		1.58		1.26		1.29	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													


5 COMPOSITE HSS3½-HSS3		Table 4-D (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi			
		HSS3½×3½×						HSS3×3×							
Shape		¼		⅜		½		¾		⅝		¾			
t_{des} , in.		0.233		0.174		0.116		0.349		0.291		0.233			
Steel, lb/ft		10.5		8.15		5.61		12.2		10.6		8.81			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	92.2	138	77.1	116	61.2	91.8	101	153	88.0	132	74.5	112		
	1	91.6	137	76.6	115	60.8	91.2	101	151	87.2	131	73.9	111		
	2	89.8	135	75.1	113	59.6	89.4	97.8	147	84.9	128	71.9	108		
	3	86.9	130	72.7	109	57.7	86.5	93.3	140	81.2	122	68.6	103		
	4	83.0	124	69.5	104	55.1	82.7	87.4	131	76.2	115	64.4	96.6		
	5	78.2	117	65.6	98.4	52.0	78.0	80.3	121	70.2	106	59.3	88.9		
	6	72.7	109	61.1	91.7	48.4	72.6	72.4	109	63.6	95.6	53.7	80.7		
	7	66.7	100	56.2	84.3	44.5	66.7	64.1	96.4	56.6	85.0	48.1	72.2		
	8	60.4	90.7	51.0	76.5	40.3	60.5	55.7	83.7	49.4	74.2	42.3	63.5		
	9	54.0	81.0	45.7	68.6	36.1	54.1	47.5	71.4	42.4	63.7	36.6	55.0		
	10	47.7	71.6	40.5	60.7	31.9	47.8	39.8	59.8	35.7	53.6	31.1	46.7		
	11	41.9	63.0	35.3	53.0	27.8	41.7	32.9	49.4	29.6	44.5	25.9	39.0		
	12	36.5	54.9	30.5	45.7	24.0	35.9	27.6	41.5	24.9	37.4	21.8	32.8		
	13	31.3	47.1	26.0	39.0	20.4	30.6	23.5	35.4	21.2	31.8	18.6	27.9		
	14	27.0	40.6	22.4	33.6	17.6	26.4	20.3	30.5	18.3	27.4	16.0	24.1		
	15	23.5	35.4	19.5	29.3	15.3	23.0	17.7	26.6	15.9	23.9	13.9	21.0		
	16	20.7	31.1	17.2	25.7	13.5	20.2	15.5	23.3	14.0	21.0	12.3	18.4		
	17	18.3	27.5	15.2	22.8	11.9	17.9	13.8	20.7	12.4	18.6	10.9	16.3		
	18	16.3	24.6	13.6	20.3	10.6	16.0			11.0	16.6	9.69	14.6		
	19	14.7	22.0	12.2	18.2	9.55	14.3								
	20	13.2	19.9	11.0	16.5	8.62	12.9								
	21	12.0	18.0	9.96	14.9	7.82	11.7								
22	10.9	16.4	9.07	13.6	7.13	10.7									
Properties															
M_n/Ω_b	$\phi_b M_n$	kip-ft		9.31	14.0	7.49	11.3	5.39	8.11	8.39	12.6	7.55	11.4	6.54	9.83
$P_e(L_c)^2/10^4$, kip-in. ²				168	144	113	113	116	116	108	108	98.1	98.1	98.1	98.1
r_m , in.				1.32	1.35	1.37	1.37	1.06	1.06	1.08	1.08	1.11	1.11	1.11	1.11
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="border: 1px solid black; padding: 5px; display: inline-block; font-size: 24pt; font-weight: bold;">5</div> COMPOSITE HSS3-HSS2½		Table 4-D (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi		
		HSS3x3x				HSS2½x2½x								
Shape		¾		½		⅝		¼		¾		½		
t_{des} , in.		0.174		0.116		0.291		0.233		0.174		0.116		
Steel, lb/ft		6.87		4.75		8.45		7.11		5.59		3.90		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	62.1	93.2	48.8	73.1	70.4	106	59.0	88.6	48.3	72.4	37.7	56.5	
	1	61.6	92.4	48.3	72.5	69.4	104	58.2	87.5	47.7	71.5	37.2	55.8	
	2	60.0	90.0	47.1	70.6	66.6	100	56.0	84.2	45.8	68.8	35.8	53.7	
	3	57.4	86.1	45.1	67.6	62.3	93.6	52.6	79.0	43.0	64.4	33.6	50.5	
	4	53.9	80.9	42.4	63.6	56.6	85.1	48.1	72.3	39.2	58.8	30.8	46.2	
	5	49.8	74.7	39.2	58.8	50.1	75.3	42.9	64.4	34.9	52.3	27.5	41.3	
	6	45.2	67.8	35.6	53.5	43.1	64.8	37.2	56.0	30.2	45.3	24.0	35.9	
	7	40.3	60.4	31.8	47.8	36.1	54.3	31.5	47.4	25.6	38.5	20.4	30.5	
	8	35.2	52.9	27.9	41.9	29.5	44.3	26.0	39.1	21.4	32.2	16.9	25.3	
	9	30.3	45.5	24.1	36.2	23.5	35.2	20.9	31.5	17.4	26.2	13.6	20.4	
	10	25.6	38.4	20.4	30.6	19.0	28.6	17.0	25.5	14.1	21.2	11.0	16.5	
	11	21.3	31.9	17.0	25.5	15.7	23.6	14.0	21.1	11.7	17.5	9.10	13.7	
	12	17.9	26.8	14.3	21.4	13.2	19.8	11.8	17.7	9.80	14.7	7.65	11.5	
	13	15.2	22.9	12.2	18.3	11.2	16.9	10.0	15.1	8.35	12.6	6.52	9.77	
	14	13.1	19.7	10.5	15.7	9.69	14.6	8.65	13.0	7.20	10.8	5.62	8.43	
	15	11.4	17.2	9.14	13.7			7.53	11.3	6.27	9.43	4.89	7.34	
	16	10.1	15.1	8.04	12.1							4.30	6.45	
	17	8.91	13.4	7.12	10.7									
	18	7.95	11.9	6.35	9.53									
19	7.13	10.7	5.70	8.55										
Properties														
M_n/Ω_b	$\phi_b M_n$	kip-ft	5.29	7.95	3.87	5.81	4.86	7.30	4.26	6.40	3.50	5.27	2.58	3.88
$P_e(L_c)^2/10^4$, kip-in. ²			84.6		67.6		55.8		51.4		44.7		36.2	
r_m , in.			1.14		1.17		0.880		0.908		0.937		0.965	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													


5 COMPOSITE HSS2¼-HSS2		Table 4-D (continued) Available Strength in Axial Compression, kips Filled Square HSS										A500 Gr. C $F_y = 50$ ksi $f'_c = 5$ ksi		
		HSS2¼×2¼×						HSS2×2×						
Shape		¼		⅜		½		¼		⅜		½		
t_{des} , in.		0.233		0.174		0.116		0.233		0.174		0.116		
Steel, lb/ft		6.26		4.96		3.48		5.41		4.32		3.05		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	52.1	78.3	41.9	62.8	32.5	48.8	45.2	67.9	35.6	53.5	27.6	41.4	
	1	51.3	77.0	41.2	61.8	32.0	48.0	44.3	66.5	34.9	52.5	27.1	40.6	
	2	48.8	73.4	39.2	58.9	30.6	45.8	41.5	62.4	32.9	49.5	25.5	38.3	
	3	45.0	67.7	36.2	54.3	28.3	42.4	37.3	56.1	29.9	44.9	23.1	34.6	
	4	40.2	60.4	32.3	48.4	25.3	38.0	32.2	48.4	26.0	39.1	20.1	30.1	
	5	34.7	52.2	28.1	42.3	22.0	33.0	26.6	40.0	21.8	32.8	16.8	25.2	
	6	29.1	43.7	23.8	35.8	18.6	27.8	21.0	31.6	17.6	26.4	13.5	20.2	
	7	23.5	35.4	19.6	29.4	15.1	22.7	15.9	24.0	13.6	20.5	10.4	15.6	
	8	18.4	27.7	15.6	23.4	12.0	17.9	12.2	18.3	10.4	15.7	7.95	11.9	
	9	14.6	21.9	12.3	18.5	9.45	14.2	9.64	14.5	8.24	12.4	6.28	9.42	
	10	11.8	17.7	9.97	15.0	7.65	11.5	7.81	11.7	6.67	10.0	5.09	7.63	
	11	9.75	14.7	8.24	12.4	6.33	9.49	6.46	9.70	5.52	8.29	4.20	6.31	
	12	8.19	12.3	6.92	10.4	5.31	7.97			4.63	6.97	3.53	5.30	
	13	6.98	10.5	5.90	8.87	4.53	6.79							
	14					3.90	5.86							
Properties														
M_n/Ω_b	$\phi_b M_n$	kip-ft	3.32	5.00	2.74	4.12	2.04	3.07	2.49	3.74	2.09	3.14	1.57	2.36
$P_e(L_c)^2/10^4$, kip-in. ²			35.2		31.0		25.1		22.9		20.4		16.7	
r_m , in.			0.806		0.835		0.863		0.704		0.733		0.761	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													


 COMPOSITE HSS20.000– HSS16.000		Table 4-E Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 4$ ksi			
		HSS20.000×				HSS18.000×				HSS16.000×					
Shape		0.500		0.375		0.500		0.375		0.625		0.500			
t_{des} , in.		0.465		0.349		0.465		0.349		0.581		0.465			
Steel, lb/ft		104		78.7		93.5		70.7		103		82.9			
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	1200	1800	1050	1580	1020	1540	893	1340	975	1460	861	1290		
	1	1200	1800	1050	1580	1020	1530	893	1340	975	1460	861	1290		
	2	1200	1800	1050	1570	1020	1530	892	1340	973	1460	860	1290		
	3	1200	1790	1050	1570	1020	1530	890	1340	972	1460	858	1290		
	4	1190	1790	1050	1570	1020	1530	888	1330	969	1450	856	1280		
	5	1190	1790	1040	1560	1020	1520	885	1330	966	1450	853	1280		
	6	1190	1780	1040	1560	1010	1520	882	1320	962	1440	849	1270		
	7	1180	1770	1040	1550	1010	1510	878	1320	957	1440	845	1270		
	8	1180	1770	1030	1550	1000	1500	874	1310	952	1430	840	1260		
	9	1170	1760	1030	1540	998	1500	869	1300	946	1420	834	1250		
	10	1170	1750	1020	1530	992	1490	863	1290	939	1410	828	1240		
	11	1160	1740	1020	1520	985	1480	857	1290	931	1400	821	1230		
	12	1150	1730	1010	1510	978	1470	850	1280	923	1380	814	1220		
	13	1150	1720	1000	1500	970	1460	843	1260	915	1370	806	1210		
	14	1140	1710	994	1490	962	1440	836	1250	905	1360	797	1200		
	15	1130	1690	986	1480	953	1430	828	1240	895	1340	788	1180		
	16	1120	1680	978	1470	944	1420	819	1230	885	1330	779	1170		
	17	1110	1670	969	1450	934	1400	810	1210	874	1310	769	1150		
	18	1100	1650	959	1440	924	1390	800	1200	863	1290	758	1140		
	19	1090	1640	949	1420	913	1370	790	1190	851	1280	747	1120		
	20	1080	1620	939	1410	902	1350	780	1170	838	1260	736	1100		
	21	1070	1600	928	1390	890	1340	769	1150	825	1240	724	1090		
	22	1060	1580	917	1380	878	1320	758	1140	812	1220	712	1070		
	23	1040	1560	906	1360	866	1300	747	1120	798	1200	700	1050		
	24	1030	1550	894	1340	853	1280	735	1100	784	1180	687	1030		
	25	1020	1530	882	1320	840	1260	723	1080	770	1150	674	1010		
	26	1000	1510	869	1300	827	1240	711	1070	755	1130	661	991		
	27	990	1480	856	1280	813	1220	698	1050	740	1110	647	971		
	28	976	1460	843	1260	799	1200	685	1030	725	1090	633	950		
	29	961	1440	830	1240	784	1180	672	1010	710	1060	619	929		
	30	946	1420	816	1220	770	1150	659	988	694	1040	605	908		
	32	916	1370	788	1180	740	1110	632	948	662	993	576	865		
	34	885	1330	760	1140	710	1070	604	906	630	945	547	821		
	36	853	1280	730	1100	679	1020	576	865	598	896	518	777		
	38	821	1230	701	1050	648	972	548	822	565	848	489	733		
	40	788	1180	671	1010	617	925	520	780	533	799	460	690		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	476	716	373	560	380	571	298	447	355	533	294	443
	$P_e(L_c)^2/10^4$, kip-in. ²			55100		45200		39000		31900		31100		26500	
	r_m , in.			6.91		6.95		6.20		6.24		5.46		5.49	
ASD	LRFD														
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  COMPOSITE HSS16.000– HSS14.000 </div>		Table 4-E (continued) Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 4$ ksi			
		HSS16.000×					HSS14.000×								
Shape		0.438		0.375		0.312		0.250		0.625		0.500			
t_{des} , in.		0.407		0.349		0.291		0.233		0.581		0.465			
Steel, lb/ft		72.9		62.6		52.3		42.1		89.4		72.2			
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	802	1200	745	1120	686	1030	625	937	809	1210	710	1070		
	1	802	1200	745	1120	686	1030	624	937	809	1210	710	1060		
	2	801	1200	744	1120	685	1030	624	935	808	1210	709	1060		
	3	799	1200	742	1110	683	1020	622	933	806	1210	707	1060		
	4	797	1200	740	1110	681	1020	620	930	803	1200	705	1060		
	5	794	1190	737	1110	678	1020	618	926	800	1200	701	1050		
	6	790	1190	734	1100	675	1010	614	922	795	1190	698	1050		
	7	786	1180	730	1090	671	1010	611	916	790	1190	693	1040		
	8	782	1170	725	1090	667	1000	607	910	784	1180	688	1030		
	9	776	1160	720	1080	662	993	602	903	778	1170	682	1020		
	10	770	1160	715	1070	657	985	597	895	771	1160	676	1010		
	11	764	1150	708	1060	651	976	591	886	763	1140	668	1000		
	12	757	1140	702	1050	644	966	585	877	754	1130	661	991		
	13	749	1120	694	1040	637	956	578	867	745	1120	653	979		
	14	741	1110	687	1030	630	945	571	856	735	1100	644	966		
	15	733	1100	678	1020	622	933	563	845	725	1090	635	952		
	16	724	1090	670	1000	614	921	555	833	714	1070	625	937		
	17	714	1070	661	991	605	907	547	821	703	1050	615	922		
	18	704	1060	651	977	596	894	538	807	691	1040	604	906		
	19	694	1040	641	962	586	879	529	794	678	1020	593	889		
	20	683	1020	631	946	576	865	520	780	666	998	581	872		
	21	672	1010	620	930	566	849	510	765	652	978	569	854		
	22	660	990	609	914	556	834	500	750	639	958	557	836		
	23	648	973	598	897	545	818	490	735	625	937	545	817		
	24	636	954	586	880	534	801	479	719	611	916	532	798		
	25	624	936	575	862	523	784	469	703	596	894	519	779		
	26	611	917	563	844	511	767	458	687	581	872	506	759		
	27	598	898	550	825	500	750	447	670	567	850	493	739		
	28	585	878	538	807	488	732	436	654	551	827	480	719		
	29	572	858	525	788	476	714	425	637	536	804	466	699		
	30	559	838	513	769	464	696	413	620	521	782	453	679		
	32	531	797	487	730	440	659	390	586	490	736	425	638		
	34	504	756	461	691	415	623	367	551	460	690	398	597		
	36	476	715	435	652	391	586	345	517	429	644	371	557		
	38	449	673	409	613	366	549	322	483	399	599	345	517		
	40	422	633	383	575	342	513	300	449	370	555	319	478		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	263	396	231	347	198	297	161	242	266	399	221	332
	$P_e(L_c)^2/10^4$, kip-in. ²			24100		21600		19000		16400		19900		17100	
	r_m , in.			5.51		5.53		5.55		5.58		4.75		4.79	
ASD	LRFD														
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  COMPOSITE HSS14.000- HSS12.750 </div>		Table 4-E (continued) Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 4$ ksi			
		HSS14.000×					HSS12.750×								
Shape		0.375		0.312		0.250		0.500		0.375		0.250			
t_{des} , in.		0.349		0.291		0.233		0.465		0.349		0.233			
Steel, lb/ft		54.6		45.7		36.8		65.5		49.6		33.4			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	609	913	556	834	506	758	620	930	530	794	436	654		
	1	609	913	556	834	505	758	620	930	529	794	436	653		
	2	608	912	555	833	504	757	619	928	528	792	435	652		
	3	606	909	553	830	503	754	617	925	527	790	433	650		
	4	604	906	551	827	501	751	614	922	524	786	431	647		
	5	601	902	549	823	498	747	611	917	521	782	429	643		
	6	598	896	545	818	495	743	607	911	518	777	425	638		
	7	593	890	542	812	491	737	602	904	514	770	422	632		
	8	589	883	537	806	487	731	597	896	509	763	417	626		
	9	584	875	532	798	482	724	591	887	503	755	412	619		
	10	578	867	527	790	477	716	584	877	498	746	407	611		
	11	571	857	521	781	471	707	577	866	491	737	401	602		
	12	564	847	514	771	465	698	569	854	484	726	395	593		
	13	557	836	507	761	458	688	561	841	477	715	388	583		
	14	549	824	500	749	451	677	552	828	469	703	381	572		
	15	541	811	492	738	444	666	543	814	460	690	374	561		
	16	532	798	483	725	436	654	533	799	451	677	366	549		
	17	523	784	475	712	428	641	522	784	442	663	358	537		
	18	513	770	466	699	419	629	512	767	433	649	350	524		
	19	503	755	456	685	410	615	500	751	423	634	341	511		
	20	493	740	447	670	401	601	489	734	413	619	332	498		
	21	483	724	437	655	392	587	477	716	402	603	323	484		
	22	472	708	427	640	382	573	465	698	392	588	313	470		
	23	461	691	416	625	372	558	453	679	381	571	304	456		
	24	449	674	406	609	362	543	440	661	370	555	294	442		
	25	438	657	395	593	352	528	428	642	359	538	285	427		
	26	426	640	384	576	342	512	415	623	348	521	275	413		
	27	415	622	373	560	331	497	402	603	336	504	265	398		
	28	403	604	362	543	321	481	389	584	325	487	256	383		
	29	391	586	351	526	310	466	376	564	314	470	246	369		
	30	379	568	340	510	300	450	363	545	302	453	236	354		
	32	355	532	318	476	279	419	337	506	280	420	217	326		
	34	331	497	295	443	259	388	312	468	258	387	198	298		
	36	307	461	274	410	238	358	287	431	236	354	180	270		
	38	284	427	252	378	219	328	263	394	215	323	163	244		
	40	262	393	232	347	200	300	239	359	195	292	147	220		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	173	261	149	223	122	184	180	271	142	213	101	151
	$P_e(L_c)^2/10^4$, kip-in. ²		13900		12200		10500		12600		10200		7710		
	r_m , in.		4.83		4.85		4.87		4.35		4.39		4.43		
ASD		LRFD													
$\Omega_b = 1.67$		$\phi_b = 0.90$													
$\Omega_c = 2.00$		$\phi_c = 0.75$													


 COMPOSITE HSS10.750- HSS10.000		Table 4-E (continued) Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 4$ ksi			
		HSS10.750×					HSS10.000×								
Shape		0.500		0.375		0.250		0.625		0.500		0.375			
t_{des} , in.		0.465		0.349		0.233		0.581		0.465		0.349			
Steel, lb/ft		54.8		41.6		28.1		62.6		50.8		38.6			
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	489	733	413	619	335	502	512	768	443	664	373	559		
	1	489	733	413	619	335	502	512	767	442	663	373	559		
	2	487	731	412	617	334	501	510	765	441	661	371	557		
	3	485	728	410	615	332	498	508	762	439	658	370	554		
	4	483	724	407	611	330	495	504	756	436	654	367	551		
	5	479	718	404	606	327	491	500	750	432	648	364	546		
	6	475	712	400	601	324	486	495	742	428	641	360	540		
	7	469	704	396	594	320	480	488	733	422	633	355	533		
	8	464	696	391	587	316	474	481	722	416	624	350	525		
	9	457	686	385	578	311	466	474	710	410	614	345	517		
	10	450	675	379	569	305	458	465	698	402	603	338	507		
	11	442	663	372	559	299	449	456	684	394	591	331	497		
	12	434	651	365	548	293	440	446	669	386	578	324	486		
	13	425	638	358	536	286	430	435	653	377	565	316	474		
	14	416	623	349	524	279	419	424	636	367	550	308	462		
	15	406	609	341	511	272	408	412	618	357	535	299	449		
	16	395	593	332	498	264	397	400	600	346	520	290	436		
	17	385	577	323	484	256	385	387	581	336	504	281	422		
	18	374	561	313	470	248	372	375	562	325	487	272	408		
	19	363	544	304	455	240	360	361	542	313	470	262	393		
	20	351	526	294	440	231	347	348	522	302	453	252	378		
	21	339	509	284	425	223	334	335	502	290	435	242	364		
	22	327	491	273	410	214	321	321	481	279	418	232	349		
	23	315	473	263	395	205	308	307	461	267	400	222	334		
	24	303	455	253	379	197	295	294	441	255	383	212	319		
	25	291	437	242	363	188	282	280	420	244	365	203	304		
	26	279	419	232	348	179	269	267	400	232	348	193	289		
	27	267	401	222	333	171	256	253	380	220	331	183	274		
	28	255	383	212	317	162	243	240	360	209	314	173	260		
	29	244	365	202	302	154	231	228	343	198	297	164	246		
	30	232	348	192	287	146	219	217	326	187	281	155	232		
	32	209	314	172	259	130	195	195	293	166	249	137	205		
	34	187	281	154	231	115	173	173	260	147	221	121	182		
	36	167	251	137	206	103	154	155	232	131	197	108	162		
	38	150	225	123	185	92.1	138	139	208	118	177	97.1	146		
	40	135	203	111	167	83.1	125	125	188	106	159	87.6	131		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	124	187	98	147	69.7	105	127	191	106	160	83.8	126
	$P_e(L_c)^2/10^4$, kip-in. ²			7110		5840		4370		6400		5580		4600	
	r_m , in.			3.64		3.68		3.72		3.34		3.38		3.41	
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  <p>COMPOSITE HSS10.000- HSS9.625</p> </div>		Table 4-E (continued) Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 4$ ksi			
		HSS10.000×					HSS9.625×								
Shape		0.312		0.250		0.188		0.500		0.375		0.312			
t_{des} , in.		0.291		0.233		0.174		0.465		0.349		0.291			
Steel, lb/ft		32.3		26.1		19.7		48.8		37.1		31.1			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	337	505	300	450	263	394	421	631	353	530	318	477		
	1	336	504	300	450	262	393	421	631	353	530	318	477		
	2	335	503	299	448	261	392	419	629	352	528	317	475		
	3	334	500	297	446	260	390	417	626	350	525	315	473		
	4	331	497	295	443	258	387	414	621	348	521	313	469		
	5	328	492	292	438	255	383	410	615	344	517	310	465		
	6	325	487	289	433	252	378	406	608	340	511	306	459		
	7	320	481	285	428	248	373	400	600	336	504	302	453		
	8	316	474	281	421	244	366	394	591	331	496	297	446		
	9	310	466	276	414	240	360	387	581	325	487	292	438		
	10	305	457	270	405	235	352	380	569	318	478	286	429		
	11	298	447	264	397	229	344	371	557	312	467	279	419		
	12	291	437	258	387	223	335	363	544	304	456	273	409		
	13	284	426	251	377	217	326	353	530	296	444	265	398		
	14	277	415	244	367	211	316	344	516	288	432	258	387		
	15	269	403	237	356	204	306	334	500	280	419	250	375		
	16	261	391	229	344	197	295	323	485	271	406	242	363		
	17	252	378	222	333	190	285	312	468	261	392	233	350		
	18	243	365	214	321	182	274	301	452	252	378	225	337		
	19	235	352	206	308	175	262	290	435	243	364	216	324		
	20	226	338	197	296	167	251	278	418	233	349	207	311		
	21	217	325	189	284	160	240	267	400	223	335	198	297		
	22	207	311	181	271	152	229	255	383	213	320	189	284		
	23	198	297	172	259	145	217	244	365	204	305	180	270		
	24	189	284	164	246	137	206	232	348	194	291	171	257		
	25	180	270	156	234	130	195	221	331	184	276	163	244		
	26	171	257	148	222	123	184	209	314	175	262	154	231		
	27	162	243	140	210	116	174	198	297	165	248	145	218		
	28	154	230	132	198	109	163	187	281	156	234	137	206		
	29	145	218	124	186	102	153	176	265	147	220	129	193		
	30	137	205	117	175	95.3	143	166	249	138	207	121	181		
	32	121	181	103	154	83.8	126	146	219	121	182	106	159		
	34	107	160	90.9	136	74.2	111	129	194	108	161	94.0	141		
	36	95.3	143	81.1	122	66.2	99.3	115	173	96.0	144	83.9	126		
	38	85.5	128	72.8	109	59.4	89.1	103	155	86.1	129	75.3	113		
	40	77.2	116	65.7	98.6	53.6	80.4	93.4	140	77.7	117	67.9	102		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	72.0	108	59.7	89.7	46.5	69.8	97.8	147	77.1	116	66.3	99.6
	$P_e(L_c)^2/10^4$, kip-in. ²			4060		3450		2820		4910		4080		3570	
	r_m , in.			3.43		3.45		3.47		3.24		3.28		3.30	
ASD	LRFD														
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  COMPOSITE HSS9.625- HSS8.625 </div>		Table 4-E (continued) Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 4$ ksi			
		HSS9.625×					HSS8.625×								
Shape		0.250		0.188		0.625		0.500		0.375		0.322			
f_{des} , in.		0.233		0.174		0.581		0.465		0.349		0.300			
Steel, lb/ft		25.1		19.0		53.5		43.4		33.1		28.6			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	283	425	247	371	421	632	362	543	302	454	277	415		
	1	283	424	247	371	421	631	362	542	302	453	276	414		
	2	282	423	246	369	419	628	360	540	301	451	275	413		
	3	280	421	245	367	416	624	358	537	299	448	273	410		
	4	278	417	243	364	412	619	355	532	296	444	271	406		
	5	275	413	240	360	408	611	351	526	293	439	268	402		
	6	272	408	237	355	402	603	346	519	289	433	264	396		
	7	268	402	233	350	395	593	340	510	284	426	259	389		
	8	264	395	229	344	387	581	334	500	278	418	254	382		
	9	259	388	224	337	379	568	326	489	272	409	249	373		
	10	253	380	219	329	370	554	318	478	266	399	243	364		
	11	247	371	214	321	359	539	310	465	259	388	236	354		
	12	241	361	208	312	349	523	301	451	251	377	229	344		
	13	234	351	202	303	338	506	291	437	243	365	222	333		
	14	227	341	195	293	326	489	281	422	235	352	214	321		
	15	220	330	189	283	314	471	271	407	226	339	206	309		
	16	213	319	182	273	301	452	261	391	217	326	198	297		
	17	205	307	175	262	289	433	250	375	208	313	190	284		
	18	197	295	168	251	276	414	239	358	199	299	181	272		
	19	189	283	160	240	263	396	228	342	190	285	172	259		
	20	181	271	153	229	251	378	217	325	181	271	164	246		
	21	173	259	146	218	239	360	205	308	171	257	155	233		
	22	165	247	138	207	227	342	194	292	162	243	147	220		
	23	157	235	131	197	215	324	183	275	153	229	138	208		
	24	148	223	124	186	204	306	173	259	144	216	130	195		
	25	141	211	117	175	192	289	162	243	135	203	122	183		
	26	133	199	110	165	181	272	152	228	127	190	114	171		
	27	125	188	103	155	170	255	142	213	118	177	106	160		
	28	118	176	96.5	145	159	239	132	198	110	165	99.0	148		
	29	110	165	89.9	135	148	223	123	185	102	154	92.2	138		
	30	103	155	84.0	126	138	208	115	173	95.7	144	86.2	129		
	32	90.6	136	73.8	111	122	183	101	152	84.1	126	75.8	114		
	34	80.2	120	65.4	98.1	108	162	89.7	135	74.5	112	67.1	101		
	36	71.6	107	58.3	87.5	96.2	145	80.0	120	66.4	99.7	59.9	89.8		
	38	64.2	96.3	52.4	78.5	86.3	130	71.8	108	59.6	89.5	53.7	80.6		
	40	58.0	86.9	47.2	70.9	77.9	117	64.8	97.5	53.8	80.7	48.5	72.7		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	54.9	82.6	42.8	64.4	91.9	138	76.9	116	60.8	91.4	53.6	80.6
	$P_e(L_c)^2/10^4$, kip-in. ²			3050		2480		3880		3400		2830		2550	
	r_m , in.			3.32		3.34		2.85		2.89		2.93		2.95	
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														


 COMPOSITE HSS8.625- HSS7.500		Table 4-E (continued) Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 4$ ksi			
		HSS8.625×				HSS7.625×				HSS7.500×					
Shape		0.250		0.188		0.375		0.328		0.500		0.375			
t_{des} , in.		0.233		0.174		0.349		0.305		0.465		0.349			
Steel, lb/ft		22.4		17.0		29.1		25.6		37.4		28.6			
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	241	361	208	313	255	383	235	352	301	452	249	374		
	1	240	360	208	312	255	382	234	351	301	451	249	373		
	2	239	359	207	311	253	380	233	350	299	449	248	372		
	3	238	356	206	309	251	377	231	347	297	445	246	368		
	4	235	353	204	306	248	373	229	343	293	440	243	364		
	5	232	349	201	302	245	367	225	338	289	433	239	358		
	6	229	344	198	297	240	361	221	332	283	425	235	352		
	7	225	337	194	291	235	353	216	325	277	415	229	344		
	8	220	331	190	285	230	344	211	317	270	405	224	335		
	9	215	323	185	278	223	335	205	308	262	393	217	326		
	10	210	315	180	270	216	325	199	299	254	381	210	315		
	11	204	306	175	262	209	313	192	288	245	367	203	304		
	12	198	296	169	254	201	302	185	278	235	353	195	293		
	13	191	286	163	245	193	290	178	266	225	338	187	280		
	14	184	276	157	235	185	277	170	255	215	323	179	268		
	15	177	265	150	225	176	264	162	243	205	307	170	255		
	16	170	254	144	216	167	251	154	231	194	291	161	242		
	17	162	243	137	205	158	238	146	219	183	275	152	229		
	18	155	232	130	195	150	224	138	206	173	259	144	215		
	19	147	220	123	185	141	211	129	194	162	243	135	202		
	20	139	209	117	175	132	198	121	182	152	228	126	189		
	21	132	198	110	165	123	185	113	170	142	214	118	176		
	22	124	186	103	155	115	172	106	159	133	200	109	164		
	23	117	175	96.6	145	107	160	98.2	147	124	187	101	152		
	24	109	164	90.2	135	98.6	148	90.8	136	115	173	93.2	140		
	25	102	154	84.0	126	90.9	136	83.6	125	107	160	85.9	129		
	26	95.5	143	77.8	117	84.0	126	77.3	116	98.6	148	79.4	119		
	27	88.6	133	72.2	108	77.9	117	71.7	108	91.4	137	73.6	110		
	28	82.4	124	67.1	101	72.4	109	66.7	100	85.0	128	68.5	103		
	29	76.8	115	62.6	93.8	67.5	101	62.2	93.2	79.3	119	63.8	95.7		
	30	71.8	108	58.5	87.7	63.1	94.6	58.1	87.1	74.1	111	59.6	89.5		
	32	63.1	94.7	51.4	77.1	55.5	83.2	51.1	76.6	65.1	97.8	52.4	78.6		
	34	55.9	83.9	45.5	68.3	49.1	73.7	45.2	67.8	57.7	86.7	46.4	69.7		
	36	49.9	74.8	40.6	60.9	43.8	65.7	40.3	60.5	51.4	77.3	41.4	62.1		
	38	44.8	67.1	36.4	54.7	39.3	59.0	36.2	54.3	46.2	69.4	37.2	55.8		
	40	40.4	60.6	32.9	49.3	35.5	53.2	32.7	49.0	41.7	62.6	33.5	50.3		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	43.4	65.2	33.9	50.9	46.5	69.9	41.6	62.5	56.6	85.1	44.9	67.4
	$P_e(L_c)^2/10^4$, kip-in. ²			2120		1730		1860		1720		2110		1760	
	r_m , in.			2.97		2.99		2.58		2.59		2.49		2.53	
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  COMPOSITE HSS7.500- HSS7.000 </div>		Table 4-E (continued) Available Strength in Axial Compression, kips Filled Round HSS												A500 Gr. C $F_y = 46$ ksi $f'_c = 4$ ksi	
		HSS7.500×						HSS7.000×							
Shape		0.312		0.250		0.188		0.500		0.375		0.312			
t_{des} , in.		0.291		0.233		0.174		0.465		0.349		0.291			
Steel, lb/ft		24.0		19.4		14.7		34.7		26.6		22.3			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	223	334	196	294	168	253	275	412	227	340	202	304		
	1	223	334	196	294	168	252	274	411	226	340	202	303		
	2	221	332	195	292	167	251	272	409	225	338	201	301		
	3	220	329	193	290	166	248	270	405	223	334	199	298		
	4	217	325	191	286	163	245	266	399	220	330	196	294		
	5	214	321	188	282	161	241	261	392	216	324	193	289		
	6	210	315	184	276	157	236	256	384	211	317	189	283		
	7	205	308	180	270	154	230	249	374	206	309	184	276		
	8	200	300	175	263	149	224	242	363	200	300	179	268		
	9	194	291	170	255	145	217	234	351	194	290	173	259		
	10	188	282	165	247	140	210	225	338	187	280	167	250		
	11	181	272	159	238	134	202	216	324	179	269	160	240		
	12	174	262	152	228	129	193	207	310	171	257	153	229		
	13	167	251	146	219	123	184	197	295	163	244	146	218		
	14	160	239	139	208	117	175	186	279	155	232	138	207		
	15	152	228	132	198	111	166	176	264	146	219	130	196		
	16	144	216	125	188	104	157	166	249	137	206	123	184		
	17	136	204	118	177	98.3	147	156	235	129	193	115	173		
	18	128	192	111	166	92.1	138	147	221	120	180	107	161		
	19	120	181	104	156	85.9	129	137	206	112	168	100	150		
	20	113	169	97.0	146	79.9	120	128	192	104	155	92.6	139		
	21	105	158	90.3	135	74.0	111	119	179	95.7	143	85.5	128		
	22	97.7	146	83.7	126	68.3	103	110	165	87.9	132	78.6	118		
	23	90.4	136	77.3	116	62.7	94.1	101	152	80.4	121	71.9	108		
	24	83.3	125	71.0	107	57.6	86.4	93.1	140	73.8	111	66.0	99.0		
	25	76.8	115	65.5	98.2	53.1	79.6	85.8	129	68.0	102	60.8	91.3		
	26	71.0	106	60.5	90.8	49.1	73.6	79.4	119	62.9	94.4	56.2	84.4		
	27	65.8	98.7	56.1	84.2	45.5	68.3	73.6	111	58.3	87.5	52.2	78.2		
	28	61.2	91.8	52.2	78.3	42.3	63.5	68.4	103	54.2	81.4	48.5	72.7		
	29	57.1	85.6	48.6	73.0	39.4	59.2	63.8	95.9	50.6	75.8	45.2	67.8		
	30	53.3	80.0	45.5	68.2	36.9	55.3	59.6	89.6	47.2	70.9	42.2	63.4		
	32	46.9	70.3	40.0	59.9	32.4	48.6	52.4	78.8	41.5	62.3	37.1	55.7		
	34	41.5	62.3	35.4	53.1	28.7	43.0	46.4	69.8	36.8	55.2	32.9	49.3		
	36	37.0	55.5	31.6	47.4	25.6	38.4	41.4	62.2	32.8	49.2	29.3	44.0		
	38	33.2	49.8	28.3	42.5	23.0	34.5	37.2	55.8	29.4	44.2	26.3	39.5		
	40	30.0	45.0	25.6	38.4	20.7	31.1								
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	38.6	58.0	32.1	48.2	25.1	37.7	48.6	73.1	38.6	58.0	33.2	50.0
	$P_e(L_c)^2/10^4$, kip-in. ²			1580	1340	1090	1670	1400	1250						
	r_m , in.			2.55	2.57	2.59	2.32	2.35	2.37						
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  COMPOSITE HSS7.000- HSS6.875 </div>		Table 4-E (continued) Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 4$ ksi			
		HSS7.000×					HSS6.875×								
Shape		0.250		0.188		0.125		0.500		0.375		0.312			
t_{des} , in.		0.233		0.174		0.116		0.465		0.349		0.291			
Steel, lb/ft		18.0		13.7		9.19		34.1		26.1		21.9			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	178	266	152	228	126	189	268	402	222	332	198	296		
	1	177	266	152	227	126	189	267	401	221	332	197	296		
	2	176	264	151	226	125	187	266	399	220	330	196	294		
	3	174	262	149	223	123	185	263	395	218	326	194	291		
	4	172	258	147	220	121	182	259	389	215	322	191	287		
	5	169	253	144	216	119	178	255	382	211	316	188	282		
	6	165	248	141	211	116	174	249	373	206	309	184	275		
	7	161	241	137	205	113	169	242	364	201	301	179	268		
	8	156	234	133	199	109	163	235	353	195	292	174	260		
	9	151	227	128	192	104	157	227	340	188	282	168	251		
	10	145	218	123	184	100	150	218	327	181	271	161	242		
	11	139	209	118	176	95.2	143	209	314	173	260	155	232		
	12	133	200	112	168	90.3	135	199	299	165	248	148	221		
	13	127	190	106	159	85.2	128	189	284	157	236	140	210		
	14	120	180	100	151	80	120	179	269	149	223	133	199		
	15	113	170	94.4	142	74.8	112	169	254	140	210	125	188		
	16	106	160	88.4	133	69.7	104	159	239	132	198	118	176		
	17	99.6	149	82.5	124	64.5	96.8	150	225	123	185	110	165		
	18	92.9	139	76.6	115	59.5	89.2	140	211	115	172	102	154		
	19	86.3	129	70.8	106	54.6	81.9	131	197	106	160	95.0	143		
	20	79.8	120	65.2	97.8	49.9	74.8	122	183	98.3	147	87.8	132		
	21	73.5	110	59.8	89.7	45.3	67.9	113	169	90.5	136	80.8	121		
	22	67.4	101	54.5	81.8	41.3	61.9	104	156	82.7	124	73.9	111		
	23	61.6	92.4	49.9	74.8	37.7	56.6	95.2	143	75.7	114	67.6	101		
	24	56.6	84.9	45.8	68.7	34.7	52.0	87.4	131	69.5	104	62.1	93.2		
	25	52.2	78.2	42.2	63.3	31.9	47.9	80.6	121	64.1	96.1	57.2	85.9		
	26	48.2	72.3	39.0	58.5	29.5	44.3	74.5	112	59.2	88.9	52.9	79.4		
	27	44.7	67.1	36.2	54.3	27.4	41.1	69.1	104	54.9	82.4	49.1	73.6		
	28	41.6	62.4	33.7	50.5	25.5	38.2	64.2	96.5	51.1	76.6	45.6	68.4		
	29	38.8	58.1	31.4	47.1	23.7	35.6	59.9	90.0	47.6	71.4	42.5	63.8		
	30	36.2	54.3	29.3	44.0	22.2	33.3	55.9	84.1	44.5	66.7	39.7	59.6		
	32	31.8	47.8	25.8	38.7	19.5	29.2	49.2	73.9	39.1	58.7	34.9	52.4		
	34	28.2	42.3	22.8	34.2	17.3	25.9	43.5	65.5	34.6	52.0	30.9	46.4		
	36	25.2	37.7	20.4	30.5	15.4	23.1	38.8	58.4	30.9	46.3	27.6	41.4		
	38	22.6	33.9	18.3	27.4	13.8	20.7			27.7	41.6	24.8	37.2		
	40			16.5	24.7	12.5	18.7								
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	27.6	41.5	21.6	32.5	15.2	22.9	46.7	70.2	37.1	55.8	32.0	48.0
	$P_e(L_c)^2/10^4$, kip-in. ²			1070		866		656		1570		1320		1170	
	r_m , in.			2.39		2.41		2.43		2.27		2.31		2.33	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  <p>COMPOSITE HSS6.875- HSS6.625</p> </div>		Table 4-E (continued) Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 4$ ksi			
		HSS6.875×				HSS6.625×									
Shape		0.250		0.188		0.500		0.432		0.375		0.312			
t_{des} , in.		0.233		0.174		0.465		0.402		0.349		0.291			
Steel, lb/ft		17.7		13.4		32.7		28.6		25.1		21.1			
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	173	260	148	222	255	383	231	347	211	316	188	281		
	1	173	259	147	221	255	382	231	346	210	315	187	281		
	2	172	257	146	220	253	380	229	344	209	313	186	279		
	3	170	255	145	217	250	376	227	340	207	310	184	276		
	4	167	251	143	214	246	370	223	335	203	305	181	272		
	5	164	247	140	210	242	362	219	328	199	299	178	267		
	6	161	241	137	205	236	354	214	321	195	292	173	260		
	7	156	235	133	199	229	344	208	312	189	284	169	253		
	8	152	227	129	193	222	332	201	301	183	275	163	245		
	9	146	220	124	186	213	320	194	290	176	265	157	236		
	10	141	211	119	178	205	307	186	279	169	254	151	226		
	11	135	202	114	170	195	293	177	266	162	243	144	216		
	12	128	193	108	162	186	278	169	253	154	231	137	206		
	13	122	183	102	153	176	264	160	239	146	218	130	195		
	14	115	173	96.5	145	166	250	150	226	137	206	122	183		
	15	109	163	90.6	136	157	236	141	212	129	193	115	172		
	16	102	153	84.7	127	147	221	132	198	120	181	107	161		
	17	95.1	143	78.8	118	138	207	123	184	112	168	99.8	150		
	18	88.5	133	73.0	110	128	193	113	170	104	156	92.5	139		
	19	82.0	123	67.4	101	119	179	105	158	95.7	143	85.3	128		
	20	75.6	113	61.9	92.8	110	165	97.2	146	87.8	132	78.4	118		
	21	69.5	104	56.5	84.8	101	152	89.6	135	80.2	120	71.5	107		
	22	63.4	95.1	51.5	77.3	92.2	139	82.0	123	73.1	110	65.2	97.8		
	23	58.0	87.0	47.1	70.7	84.4	127	75.1	113	66.9	101	59.6	89.4		
	24	53.3	79.9	43.3	64.9	77.5	116	68.9	104	61.4	92.4	54.8	82.2		
	25	49.1	73.6	39.9	59.8	71.4	107	63.5	95.5	56.6	85.1	50.5	75.7		
	26	45.4	68.1	36.9	55.3	66.0	99.3	58.7	88.3	52.4	78.7	46.7	70.0		
	27	42.1	63.1	34.2	51.3	61.2	92.0	54.5	81.9	48.5	73.0	43.3	64.9		
	28	39.1	58.7	31.8	47.7	56.9	85.6	50.6	76.1	45.1	67.9	40.2	60.4		
	29	36.5	54.7	29.6	44.5	53.1	79.8	47.2	71.0	42.1	63.3	37.5	56.3		
	30	34.1	51.1	27.7	41.5	49.6	74.6	44.1	66.3	39.3	59.1	35.1	52.6		
	32	30.0	44.9	24.3	36.5	43.6	65.5	38.8	58.3	34.6	51.9	30.8	46.2		
	34	26.5	39.8	21.6	32.3	38.6	58.0	34.4	51.6	30.6	46.0	27.3	40.9		
	36	23.7	35.5	19.2	28.9	34.4	51.8	30.6	46.1	27.3	41.0	24.3	36.5		
	38	21.2	31.9	17.3	25.9										
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	26.6	39.9	20.8	31.2	43.0	64.7	38.3	57.6	34.2	51.4	29.5	44.3
	$P_e(L_c)^2/10^4$, kip-in. ²			1010		819		1390		1270		1160		1040	
r_m , in.			2.35		2.37		2.18		2.20		2.22		2.24		
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  COMPOSITE HSS6.625- HSS6.000 </div>		Table 4-E (continued) Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 4$ ksi				
		HSS6.625×					HSS6.000×									
Shape		0.280		0.250		0.188		0.125		0.500		0.375				
t_{des} , in.		0.260		0.233		0.174		0.116		0.465		0.349				
Steel, lb/ft		19.0		17.0		12.9		8.69		29.4		22.6				
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD			
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	175	263	164	246	140	210	116	173	224	337	185	277			
	1	175	262	164	246	140	209	115	173	224	336	184	276			
	2	174	261	163	244	139	208	114	171	222	333	183	274			
	3	172	258	161	241	137	206	113	169	219	328	180	270			
	4	169	254	159	238	135	202	111	166	215	322	177	265			
	5	166	249	155	233	132	198	108	163	210	314	173	259			
	6	162	243	152	227	129	193	105	158	204	306	168	251			
	7	157	236	147	221	125	187	102	153	197	296	162	243			
	8	152	229	143	214	121	181	98.1	147	190	285	155	233			
	9	147	220	137	206	116	174	94.0	141	182	273	149	223			
	10	141	211	132	197	111	166	89.5	134	173	260	141	212			
	11	135	202	126	188	106	158	84.8	127	164	247	133	200			
	12	128	192	119	179	100	150	80.0	120	155	233	125	188			
	13	121	182	113	169	94.5	142	75.1	113	146	219	117	176			
	14	114	171	106	160	88.7	133	70.1	105	136	204	109	164			
	15	107	161	99.7	150	82.9	124	65.1	97.6	126	190	101	151			
	16	100	150	93.1	140	77.2	116	60.1	90.2	117	176	92.9	139			
	17	93.2	140	86.5	130	71.5	107	55.3	82.9	108	162	85.1	128			
	18	86.4	130	80.1	120	65.9	98.8	50.6	75.8	98.4	148	77.9	117			
	19	79.6	119	73.8	111	60.5	90.7	46.0	69.0	89.7	135	71.2	107			
	20	73.1	110	67.6	101	55.2	82.8	41.6	62.4	81.1	122	64.7	97.3			
	21	66.8	100	61.6	92.5	50.1	75.1	37.7	56.6	73.6	111	58.7	88.2			
	22	60.8	91.3	56.2	84.3	45.6	68.5	34.4	51.5	67.0	101	53.5	80.4			
	23	55.7	83.5	51.4	77.1	41.8	62.6	31.4	47.2	61.3	92.2	48.9	73.5			
	24	51.1	76.7	47.2	70.8	38.4	57.5	28.9	43.3	56.3	84.6	44.9	67.5			
	25	47.1	70.7	43.5	65.2	35.3	53.0	26.6	39.9	51.9	78	41.4	62.3			
	26	43.6	65.3	40.2	60.3	32.7	49.0	24.6	36.9	48.0	72.1	38.3	57.6			
	27	40.4	60.6	37.3	55.9	30.3	45.5	22.8	34.2	44.5	66.9	35.5	53.4			
	28	37.6	56.3	34.7	52.0	28.2	42.3	21.2	31.8	41.4	62.2	33.0	49.6			
	29	35.0	52.5	32.3	48.5	26.3	39.4	19.8	29.7	38.6	58	30.8	46.3			
	30	32.7	49.1	30.2	45.3	24.5	36.8	18.5	27.7	36.0	54.2	28.8	43.2			
	32	28.8	43.1	26.5	39.8	21.6	32.4	16.2	24.4	31.7	47.6	25.3	38.0			
	34	25.5	38.2	23.5	35.3	19.1	28.7	14.4	21.6							
	36	22.7	34.1	21.0	31.5	17.0	25.6	12.8	19.2							
	38					15.3	22.9	11.5	17.3							
	Properties															
	M_n/Ω_b	$\phi_b M_n$	kip-ft		26.9	40.4	24.5	36.9	19.2	28.9	13.6	20.4	34.5	51.9	27.5	41.4
	$P_e(L_c)^2/10^4$, kip-in. ²		967		893		726		546		994		830			
r_m , in.		2.25		2.26		2.28		2.30		1.96		2.00				
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.														
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.														
$\Omega_c = 2.00$	$\phi_c = 0.75$															

<div style="text-align: center;">  COMPOSITE HSS6.000- HSS5.563 </div>		Table 4-E (continued) Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 4$ ksi		
		HSS6.000×					HSS5.563×							
Shape		0.312		0.280		0.250		0.188		0.125		0.500		
t_{des} , in.		0.291		0.260		0.233		0.174		0.116		0.465		
Steel, lb/ft		19.0		17.1		15.4		11.7		7.85		27.1		
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	164	246	153	229	143	214	121	181	98.9	148	205	308	
	1	163	245	152	228	142	214	120	181	98.6	148	205	308	
	2	162	243	151	227	141	212	119	179	97.7	147	203	305	
	3	160	240	149	224	139	209	118	177	96.2	144	200	300	
	4	157	236	146	219	137	205	116	173	94.2	141	196	294	
	5	153	230	143	214	134	200	113	169	91.6	137	191	286	
	6	149	223	139	208	130	195	109	164	88.6	133	184	277	
	7	144	216	134	201	125	188	105	158	85.2	128	178	267	
	8	138	207	129	193	120	181	101	152	81.4	122	170	255	
	9	132	198	123	185	115	173	96.4	145	77.3	116	162	243	
	10	126	188	117	175	109	164	91.4	137	73.0	109	153	229	
	11	119	178	111	166	103	155	86.2	129	68.5	103	143	216	
	12	112	167	104	156	97.3	146	80.9	121	63.8	95.8	134	201	
	13	104	157	97.3	146	91.0	137	75.4	113	59.2	88.8	125	187	
	14	97.2	146	90.5	136	84.7	127	70.0	105	54.5	81.8	115	173	
	15	89.9	135	83.8	126	78.4	118	64.5	96.8	49.9	74.9	106	159	
	16	82.8	124	77.1	116	72.2	108	59.2	88.8	45.4	68.2	96.3	145	
	17	75.8	114	70.6	106	66.1	99.2	54.0	81.0	41.1	61.7	87.3	131	
	18	69.1	104	64.3	96.5	60.2	90.4	49.0	73.4	36.9	55.3	78.6	118	
	19	62.5	93.7	58.2	87.3	54.5	81.8	44.1	66.1	33.1	49.7	70.6	106	
	20	56.4	84.6	52.5	78.8	49.2	73.8	39.8	59.6	29.9	44.8	63.7	95.7	
	21	51.2	76.7	47.6	71.4	44.6	66.9	36.1	54.1	27.1	40.6	57.8	86.8	
	22	46.6	69.9	43.4	65.1	40.7	61.0	32.9	49.3	24.7	37.0	52.6	79.1	
	23	42.6	64.0	39.7	59.6	37.2	55.8	30.1	45.1	22.6	33.9	48.2	72.4	
	24	39.2	58.7	36.5	54.7	34.2	51.2	27.6	41.4	20.7	31.1	44.2	66.5	
	25	36.1	54.1	33.6	50.4	31.5	47.2	25.4	38.2	19.1	28.7	40.8	61.3	
	26	33.4	50.1	31.1	46.6	29.1	43.7	23.5	35.3	17.7	26.5	37.7	56.6	
	27	30.9	46.4	28.8	43.2	27.0	40.5	21.8	32.7	16.4	24.6	34.9	52.5	
	28	28.8	43.2	26.8	40.2	25.1	37.6	20.3	30.4	15.2	22.9	32.5	48.8	
	29	26.8	40.2	25.0	37.5	23.4	35.1	18.9	28.4	14.2	21.3	30.3	45.5	
	30	25.1	37.6	23.3	35.0	21.9	32.8	17.7	26.5	13.3	19.9	28.3	42.5	
	32	22.0	33.0	20.5	30.8	19.2	28.8	15.5	23.3	11.7	17.5			
	34					17.0	25.5	13.8	20.6	10.3	15.5			
	Properties													
M_n/Ω_b	$\phi_b M_n$	kip-ft	23.8	35.7	21.7	32.6	19.8	29.7	15.5	23.3	11.0	16.5	29.2	43.9
$P_e(L_c)^2/10^4$, kip-in. ²			741	690	646	522	392	769						
r_m , in.			2.02	2.03	2.04	2.06	2.08	1.81						
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													


<div style="text-align: center;">  COMPOSITE HSS5.563- HSS5.500 </div>		Table 4-E (continued) Available Strength in Axial Compression, kips Filled Round HSS								A500 Gr. C $F_y = 46$ ksi $f'_c = 4$ ksi					
		HSS5.563×				HSS5.500×									
Shape		0.375		0.258		0.188		0.134		0.500		0.375			
t_{des} , in.		0.349		0.240		0.174		0.124		0.465		0.349			
Steel, lb/ft		20.8		14.6		10.8		7.78		26.7		20.6			
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	167	250	131	196	108	163	90.9	136	203	305	164	247		
	1	166	250	130	196	108	162	90.6	136	202	304	164	246		
	2	165	247	129	194	107	161	89.7	135	200	301	162	243		
	3	162	243	127	191	105	158	88.2	132	197	297	160	240		
	4	159	238	124	187	103	155	86.1	129	193	290	156	234		
	5	154	231	121	182	100	150	83.5	125	188	283	152	228		
	6	149	224	117	175	96.6	145	80.4	121	182	273	146	220		
	7	143	215	112	169	92.7	139	76.9	115	175	263	141	211		
	8	137	205	107	161	88.3	132	73.0	110	167	251	134	201		
	9	130	194	102	153	83.7	125	68.9	103	159	239	127	190		
	10	122	183	95.9	144	78.7	118	64.6	96.9	150	225	119	179		
	11	114	171	89.8	135	73.6	110	60.1	90.2	141	211	112	167		
	12	106	160	83.7	125	68.4	103	55.6	83.3	131	197	104	156		
	13	98.4	148	77.4	116	63.1	94.7	51.0	76.5	122	183	95.7	144		
	14	90.5	136	71.2	107	57.9	86.8	46.5	69.8	112	168	88.3	133		
	15	83.3	125	65.1	97.6	52.7	79.1	42.1	63.2	103	154	81.2	122		
	16	76.3	115	59.1	88.6	47.8	71.6	37.9	56.8	93.5	141	74.2	112		
	17	69.5	105	53.3	80.0	43.0	64.5	33.8	50.7	84.6	127	67.5	101		
	18	63.0	94.7	47.8	71.6	38.4	57.5	30.1	45.2	76.0	114	61.0	91.6		
	19	56.6	85.1	42.9	64.3	34.4	51.6	27.0	40.5	68.2	102	54.7	82.2		
	20	51.1	76.8	38.7	58.0	31.1	46.6	24.4	36.6	61.5	92.5	49.4	74.2		
	21	46.3	69.6	35.1	52.6	28.2	42.3	22.1	33.2	55.8	83.9	44.8	67.3		
	22	42.2	63.5	32.0	47.9	25.7	38.5	20.2	30.2	50.9	76.4	40.8	61.3		
	23	38.6	58.1	29.2	43.9	23.5	35.2	18.4	27.7	46.5	69.9	37.3	56.1		
	24	35.5	53.3	26.9	40.3	21.6	32.4	16.9	25.4	42.7	64.2	34.3	51.5		
	25	32.7	49.1	24.8	37.1	19.9	29.8	15.6	23.4	39.4	59.2	31.6	47.5		
	26	30.2	45.4	22.9	34.3	18.4	27.6	14.4	21.7	36.4	54.7	29.2	43.9		
	27	28.0	42.1	21.2	31.8	17.0	25.6	13.4	20.1	33.8	50.7	27.1	40.7		
	28	26.1	39.2	19.7	29.6	15.9	23.8	12.4	18.7	31.4	47.2	25.2	37.9		
	29	24.3	36.5	18.4	27.6	14.8	22.2	11.6	17.4	29.3	44.0	23.5	35.3		
	30	22.7	34.1	17.2	25.8	13.8	20.7	10.8	16.3			21.9	33.0		
	32							9.53	14.3						
Properties															
M_n/Ω_b	$\phi_b M_n$	kip-ft		23.3	35.0	17.2	25.9	13.2	19.8	9.89	14.9	28.4	42.8	22.7	34.2
$P_e(L_c)^2/10^4$, kip-in. ²				643	508	408	320	739	619						
r_m , in.				1.85	1.88	1.91	1.92	1.79	1.83						
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  COMPOSITE HSS5.500- HSS5.000 </div>		Table 4-E (continued) Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 4$ ksi		
		HSS5.500×		0.500		0.375		0.312		0.258		0.250		
Shape		0.258		0.465		0.349		0.291		0.240		0.233		
t_{des} , in.		0.240		0.241		0.185		0.156		0.131		0.127		
Steel, lb/ft		14.5		24.1		18.5		15.6		13.1		12.7		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	129	193	182	274	145	217	128	192	113	170	111	166	
	1	128	193	182	273	144	217	128	191	113	169	111	166	
	2	127	191	180	270	143	214	126	189	111	167	109	164	
	3	125	188	176	265	140	210	124	186	109	164	107	161	
	4	123	184	172	258	136	204	120	181	106	159	104	157	
	5	119	179	166	250	132	197	116	174	103	154	101	151	
	6	115	172	159	240	126	189	111	167	98.5	148	96.6	145	
	7	110	165	152	228	120	180	106	159	93.7	141	91.9	138	
	8	105	158	144	216	113	170	100	150	88.5	133	86.8	130	
	9	99.6	149	135	202	106	159	93.8	141	82.9	124	81.3	122	
	10	93.8	141	125	189	98.4	148	87.2	131	77.1	116	75.6	113	
	11	87.7	132	116	174	91.3	137	80.4	121	71.1	107	69.8	105	
	12	81.6	122	106	160	84.2	126	73.6	110	65.1	97.6	63.9	95.8	
	13	75.3	113	97.0	146	77.0	116	66.9	100	59.1	88.7	58.0	87.1	
	14	69.1	104	87.7	132	69.9	105	60.3	90.4	53.3	80.0	52.3	78.5	
	15	63.0	94.6	78.7	118	63.1	94.8	54.2	81.5	47.7	71.6	46.8	70.2	
	16	57.1	85.7	70.0	105	56.5	84.9	48.7	73.2	42.3	63.4	41.5	62.2	
	17	51.4	77.2	62.0	93.2	50.1	75.4	43.3	65.1	37.5	56.2	36.8	55.1	
	18	45.9	68.9	55.3	83.1	44.7	67.2	38.6	58.1	33.4	50.1	32.8	49.2	
	19	41.2	61.8	49.6	74.6	40.1	60.3	34.7	52.1	30.0	45.0	29.4	44.1	
	20	37.2	55.8	44.8	67.3	36.2	54.5	31.3	47.0	27.1	40.6	26.6	39.8	
	21	33.8	50.6	40.6	61.0	32.9	49.4	28.4	42.7	24.5	36.8	24.1	36.1	
	22	30.8	46.1	37.0	55.6	29.9	45.0	25.9	38.9	22.4	33.5	21.9	32.9	
	23	28.1	42.2	33.9	50.9	27.4	41.2	23.7	35.6	20.5	30.7	20.1	30.1	
	24	25.8	38.8	31.1	46.7	25.2	37.8	21.7	32.7	18.8	28.2	18.4	27.7	
	25	23.8	35.7	28.7	43.1	23.2	34.9	20.0	30.1	17.3	26.0	17.0	25.5	
	26	22.0	33.0	26.5	39.8	21.4	32.2	18.5	27.8	16.0	24.0	15.7	23.6	
	27	20.4	30.6			19.9	29.9	17.2	25.8	14.8	22.3	14.6	21.9	
	28	19.0	28.5							13.8	20.7	13.5	20.3	
	29	17.7	26.5											
30	16.5	24.8												
Properties														
M_n/Ω_b	$\phi_b M_n$	kip-ft	16.8	25.2	23.0	34.5	18.4	27.7	15.9	24.0	13.6	20.5	13.3	20.0
$P_e(L_c)^2/10^4$, kip-in. ²			489		534		450		401		355		349	
r_m , in.			1.86		1.61		1.65		1.67		1.69		1.69	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													


<div style="text-align: center;">  COMPOSITE HSS5.000- HSS4.500 </div>		Table 4-E (continued) Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 4$ ksi		
		HSS5.000x				HSS4.500x								
Shape		0.188		0.125		0.375		0.337		0.237		0.188		
t_{des} , in.		0.174		0.116		0.349		0.313		0.220		0.174		
Steel, lb/ft		9.67		6.51		16.5		15.0		10.8		8.67		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	93.0	140	74.9	112	126	189	117	176	92.7	139	80.0	120	
	1	92.6	139	74.6	112	126	188	117	175	92.2	138	79.6	119	
	2	91.6	137	73.6	110	124	186	115	172	90.9	136	78.5	118	
	3	89.8	135	72.1	108	121	181	112	168	88.8	133	76.7	115	
	4	87.4	131	70.0	105	117	175	108	163	85.9	129	74.2	111	
	5	84.4	127	67.4	101	112	168	104	156	82.3	123	71.1	107	
	6	80.8	121	64.4	96.6	107	160	98.5	148	78.1	117	67.5	101	
	7	76.8	115	61.0	91.4	101	151	92.6	139	73.5	110	63.4	95.2	
	8	72.5	109	57.2	85.9	94.1	141	86.1	129	68.4	103	59.1	88.6	
	9	67.8	102	53.3	79.9	87.2	131	79.4	119	63.1	94.7	54.5	81.8	
	10	63.0	94.5	49.2	73.8	80.1	120	72.9	110	57.7	86.5	49.8	74.7	
	11	58.0	87.1	45.1	67.6	72.9	110	66.5	99.9	52.2	78.3	45.1	67.7	
	12	53.1	79.6	40.9	61.4	65.7	98.8	60.0	90.2	46.8	70.3	40.4	60.7	
	13	48.1	72.2	36.8	55.3	58.8	88.3	53.7	80.8	41.6	62.4	35.9	53.9	
	14	43.3	65.0	32.9	49.3	52.1	78.2	47.7	71.7	36.6	54.9	31.6	47.4	
	15	38.7	58.1	29.1	43.7	45.6	68.6	41.9	62.9	31.9	47.9	27.6	41.3	
	16	34.2	51.3	25.6	38.4	40.1	60.3	36.8	55.3	28.0	42.1	24.2	36.3	
	17	30.3	45.5	22.7	34.0	35.5	53.4	32.6	49.0	24.8	37.3	21.5	32.2	
	18	27.0	40.6	20.2	30.3	31.7	47.6	29.1	43.7	22.2	33.2	19.1	28.7	
	19	24.3	36.4	18.1	27.2	28.4	42.7	26.1	39.2	19.9	29.8	17.2	25.8	
	20	21.9	32.9	16.4	24.6	25.7	38.6	23.5	35.4	17.9	26.9	15.5	23.2	
	21	19.9	29.8	14.9	22.3	23.3	35.0	21.4	32.1	16.3	24.4	14.1	21.1	
	22	18.1	27.2	13.5	20.3	21.2	31.9	19.5	29.3	14.8	22.2	12.8	19.2	
	23	16.6	24.8	12.4	18.6	19.4	29.2	17.8	26.8	13.6	20.4	11.7	17.6	
	24	15.2	22.8	11.4	17.1	17.8	26.8	16.4	24.6	12.5	18.7	10.8	16.1	
	25	14.0	21.0	10.5	15.7	15.7	24.6	15.7	24.6	11.5	17.2	9.92	14.9	
	26	13.0	19.4	9.69	14.5	14.5	22.8	14.5	22.8	10.8	16.1	9.2	13.8	
	27	12.0	18.0	8.99	13.5	13.5	21.4	13.5	21.4	10.1	15.2	8.6	13.1	
28	11.2	16.8	8.36	12.5	12.5	20.1	12.5	20.1	9.5	14.1	8.0	12.4		
Properties														
M_n/Ω_b	$\phi_b M_n$	kip-ft	10.5	15.7	7.43	11.2	14.6	21.9	13.4	20.1	10.1	15.2	8.32	12.5
$P_e(L_c)^2/10^4$, kip-in. ²		288	215		314		294		236		204			
r_m , in.		1.71	1.73		1.47		1.48		1.52		1.53			
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													


<div style="text-align: center;">  COMPOSITE HSS4.500- HSS4.000 </div>		Table 4-E (continued) Available Strength in Axial Compression, kips Filled Round HSS												A500 Gr. C $F_y = 46$ ksi $f'_c = 4$ ksi	
		HSS4.500×		0.313		0.250		0.237		0.226		0.220			
Shape		0.125		0.291		0.233		0.220		0.210		0.205			
f_{des} , in.		5.85		12.3		10.0		9.53		9.12		8.89			
Steel, lb/ft		5.85		12.3		10.0		9.53		9.12		8.89			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	64.0	96.0	95.4	143	82.1	123	78.9	118	76.6	115	75.4	113		
	1	63.7	95.5	94.8	142	81.6	122	78.5	118	76.2	114	74.9	112		
	2	62.7	94.0	93.1	140	80.2	120	77.1	116	74.8	112	73.6	110		
	3	61.1	91.7	90.3	135	77.8	117	74.8	112	72.6	109	71.4	107		
	4	59.0	88.5	86.5	130	74.6	112	71.7	108	69.6	104	68.5	103		
	5	56.4	84.5	81.9	123	70.6	106	67.9	102	65.9	98.9	64.9	97.3		
	6	53.3	80.0	76.6	115	66.1	99.2	63.6	95.4	61.7	92.6	60.7	91.1		
	7	49.9	74.9	71.1	107	61.1	91.7	58.8	88.2	57.1	85.6	56.2	84.3		
	8	46.3	69.4	65.4	98.3	55.8	83.8	53.7	80.6	52.2	78.3	51.3	77.0		
	9	42.4	63.6	59.5	89.5	50.4	75.6	48.5	72.8	47.1	70.7	46.4	69.6		
	10	38.5	57.8	53.6	80.5	45.0	67.4	43.3	64.9	42.0	63.0	41.4	62.1		
	11	34.6	52.0	47.7	71.6	39.6	59.4	38.2	57.2	37.1	55.6	36.5	54.7		
	12	30.8	46.2	41.9	63.0	34.6	51.9	33.2	49.9	32.3	48.4	31.8	47.7		
	13	27.2	40.7	36.5	54.8	30.1	45.3	28.9	43.4	27.7	41.6	27.3	41.0		
	14	23.6	35.4	31.5	47.3	26.0	39.1	25.0	37.5	23.9	35.9	23.5	35.3		
	15	20.6	30.9	27.4	41.2	22.6	34.0	21.7	32.7	20.8	31.3	20.5	30.8		
	16	18.1	27.1	24.1	36.2	19.9	29.9	19.1	28.7	18.3	27.5	18.0	27.0		
	17	16.0	24.0	21.3	32.1	17.6	26.5	16.9	25.4	16.2	24.4	16.0	23.9		
	18	14.3	21.4	19.0	28.6	15.7	23.6	15.1	22.7	14.5	21.7	14.2	21.4		
	19	12.8	19.2	17.1	25.7	14.1	21.2	13.6	20.4	13.0	19.5	12.8	19.2		
	20	11.6	17.4	15.4	23.2	12.7	19.1	12.2	18.4	11.7	17.6	11.5	17.3		
	21	10.5	15.8	14.0	21.0	11.6	17.4	11.1	16.7	10.6	16.0	10.5	15.7		
	22	9.57	14.4	12.7	19.1	10.5	15.8	10.1	15.2	9.68	14.6	9.53	14.3		
	23	8.76	13.1												
	24	8.04	12.1												
25	7.41	11.1													
Properties															
M_n/Ω_b	$\phi_b M_n$	kip-ft	5.92	8.90	9.74	14.6	8.17	12.3	7.80	11.7	7.51	11.3	7.36	11.1	
$P_e(L_c)^2/10^4$, kip-in. ²			152	189	164	158	154	152							
r_m , in.			1.55	1.32	1.33	1.34	1.34								
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200. Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														


Shape		HSS4.000×				
		0.188		0.125		
f_{des} , in.		0.174		0.116		
Steel, lb/ft		7.66		5.18		
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	68.0	102	53.8	80.8	
	1	67.6	101	53.5	80.3	
	2	66.4	99.5	52.5	78.8	
	3	64.4	96.6	50.9	76.3	
	4	61.8	92.6	48.7	73.0	
	5	58.5	87.8	46.0	69.0	
	6	54.8	82.2	42.9	64.4	
	7	50.7	76.0	39.6	59.4	
	8	46.3	69.5	36.0	54.0	
	9	41.8	62.7	32.4	48.6	
	10	37.3	56.0	28.7	43.1	
	11	32.9	49.4	25.2	37.8	
	12	28.7	43.0	21.8	32.7	
	13	24.6	36.9	18.6	27.9	
	14	21.2	31.9	16.1	24.1	
	15	18.5	27.8	14.0	21.0	
	16	16.3	24.4	12.3	18.4	
	17	14.4	21.6	10.9	16.3	
	18	12.8	19.3	9.71	14.6	
	19	11.5	17.3	8.72	13.1	
	20	10.4	15.6	7.87	11.8	
	21	9.44	14.2	7.13	10.7	
22	8.60	12.9	6.50	9.75		
Properties						
M_n/Ω_b	$\phi_b M_n$	kip-ft	6.44	9.68	4.59	6.90
$P_e(L_c)^2/10^4$, kip-in. ²			137		103	
r_m , in.			1.35		1.37	
ASD	LRFD	Note: Heavy line indicates L_c/r_m equal to or greater than 200.				
$\Omega_b = 1.67$	$\phi_b = 0.90$					
$\Omega_c = 2.00$	$\phi_c = 0.75$					


<div style="text-align: center;">  </div> COMPOSITE HSS20.000– HSS16.000		Table 4-F Available Strength in Axial Compression, kips Filled Round HSS								A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi						
		HSS20.000×		HSS18.000×		HSS18.000×		HSS16.000×		HSS16.000×		HSS16.000×				
Shape		0.500		0.375		0.500		0.375		0.625		0.500				
t_{des} , in.		0.465		0.349		0.465		0.349		0.581		0.465				
Steel, lb/ft		104		78.7		93.5		70.7		103		82.9				
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD			
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	1330	2000	1190	1780	1130	1700	1000	1510	1060	1590	946	1420			
	1	1330	2000	1190	1780	1130	1700	1000	1510	1060	1580	945	1420			
	2	1330	2000	1190	1780	1130	1700	1000	1500	1060	1580	944	1420			
	3	1330	2000	1190	1780	1130	1690	1000	1500	1050	1580	942	1410			
	4	1330	1990	1180	1780	1130	1690	999	1500	1050	1580	939	1410			
	5	1320	1990	1180	1770	1120	1680	995	1490	1050	1570	936	1400			
	6	1320	1980	1180	1760	1120	1680	991	1490	1040	1560	932	1400			
	7	1320	1970	1170	1760	1110	1670	987	1480	1040	1550	927	1390			
	8	1310	1970	1170	1750	1110	1660	981	1470	1030	1550	921	1380			
	9	1300	1960	1160	1740	1100	1650	975	1460	1020	1540	914	1370			
	10	1300	1950	1150	1730	1090	1640	968	1450	1020	1520	907	1360			
	11	1290	1930	1150	1720	1090	1630	961	1440	1010	1510	899	1350			
	12	1280	1920	1140	1710	1080	1620	953	1430	998	1500	891	1340			
	13	1270	1910	1130	1690	1070	1600	944	1420	988	1480	881	1320			
	14	1260	1890	1120	1680	1060	1590	935	1400	978	1470	871	1310			
	15	1250	1880	1110	1670	1050	1570	925	1390	966	1450	861	1290			
	16	1240	1860	1100	1650	1040	1560	915	1370	955	1430	850	1270			
	17	1230	1840	1090	1630	1030	1540	904	1360	942	1410	838	1260			
	18	1220	1830	1080	1620	1010	1520	892	1340	929	1390	826	1240			
	19	1200	1810	1070	1600	1000	1500	880	1320	915	1370	813	1220			
	20	1190	1790	1050	1580	989	1480	868	1300	901	1350	800	1200			
	21	1180	1770	1040	1560	975	1460	855	1280	887	1330	787	1180			
	22	1160	1750	1030	1540	961	1440	841	1260	872	1310	773	1160			
	23	1150	1720	1010	1520	946	1420	828	1240	856	1280	758	1140			
	24	1130	1700	998	1500	932	1400	814	1220	840	1260	744	1120			
	25	1120	1680	983	1470	916	1370	799	1200	824	1240	728	1090			
	26	1100	1650	968	1450	900	1350	784	1180	807	1210	713	1070			
	27	1090	1630	952	1430	884	1330	769	1150	790	1190	698	1050			
	28	1070	1600	936	1400	868	1300	754	1130	773	1160	682	1020			
	29	1050	1580	920	1380	851	1280	738	1110	756	1130	666	998			
	30	1030	1550	904	1360	835	1250	723	1080	738	1110	649	974			
	32	999	1500	870	1310	800	1200	691	1040	703	1050	617	925			
	34	963	1440	836	1250	765	1150	658	987	667	1000	584	875			
	36	925	1390	801	1200	730	1090	625	938	630	946	550	826			
	38	888	1330	765	1150	694	1040	592	888	594	892	517	776			
	40	849	1270	730	1090	658	987	559	839	559	838	485	727			
	Properties															
	M_n/Ω_b	$\phi_b M_n$	kip-ft		487	731	381	572	388	583	304	457	361	543	300	452
	$P_e(L_c)^2/10^4$, kip-in. ²			57000		47000		40300		33100		32000		27300		
	r_m , in.			6.91		6.95		6.20		6.24		5.46		5.49		
ASD	LRFD															
$\Omega_b = 1.67$	$\phi_b = 0.90$															
$\Omega_c = 2.00$	$\phi_c = 0.75$															


<div style="text-align: center;">  COMPOSITE HSS16.000– HSS14.000 </div>		Table 4-F (continued) Available Strength in Axial Compression, kips Filled Round HSS								A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi					
		HSS16.000×				HSS14.000×									
Shape		0.438		0.375		0.312		0.250		0.625		0.500			
t_{des} , in.		0.407		0.349		0.291		0.233		0.581		0.465			
Steel, lb/ft		72.9		62.6		52.3		42.1		89.4		72.2			
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	888	1330	832	1250	775	1160	715	1070	871	1310	774	1160		
	1	888	1330	832	1250	774	1160	714	1070	870	1310	774	1160		
	2	886	1330	831	1250	773	1160	713	1070	869	1300	772	1160		
	3	885	1330	829	1240	771	1160	711	1070	867	1300	770	1160		
	4	882	1320	826	1240	769	1150	709	1060	864	1300	767	1150		
	5	878	1320	823	1230	765	1150	706	1060	860	1290	764	1150		
	6	874	1310	819	1230	761	1140	702	1050	855	1280	759	1140		
	7	869	1300	814	1220	757	1140	697	1050	849	1270	754	1130		
	8	864	1300	809	1210	751	1130	692	1040	843	1260	748	1120		
	9	858	1290	803	1200	745	1120	686	1030	835	1250	741	1110		
	10	851	1280	796	1190	739	1110	680	1020	827	1240	734	1100		
	11	843	1260	788	1180	732	1100	672	1010	818	1230	726	1090		
	12	835	1250	780	1170	724	1090	665	997	809	1210	717	1080		
	13	826	1240	772	1160	715	1070	656	985	798	1200	708	1060		
	14	816	1220	762	1140	706	1060	648	971	787	1180	698	1050		
	15	806	1210	752	1130	697	1040	638	957	776	1160	687	1030		
	16	795	1190	742	1110	686	1030	628	942	764	1150	676	1010		
	17	784	1180	731	1100	676	1010	618	927	751	1130	664	996		
	18	772	1160	720	1080	665	997	607	911	737	1110	652	978		
	19	760	1140	708	1060	653	980	596	894	723	1090	639	959		
	20	747	1120	696	1040	641	962	584	877	709	1060	626	939		
	21	734	1100	683	1020	629	944	572	859	694	1040	612	919		
	22	721	1080	670	1000	616	925	560	840	679	1020	599	898		
	23	707	1060	657	985	603	905	548	822	664	995	585	877		
	24	693	1040	643	964	590	885	535	802	648	972	570	855		
	25	678	1020	629	943	577	865	522	783	632	947	555	833		
	26	664	996	615	922	563	844	509	763	615	923	541	811		
	27	649	973	600	900	549	824	495	743	599	898	526	788		
	28	634	950	586	879	535	803	482	723	582	873	511	766		
	29	618	927	571	856	521	781	468	702	565	848	495	743		
	30	603	904	556	834	507	760	454	682	548	823	480	720		
	32	571	857	526	789	478	717	427	640	514	772	449	674		
	34	540	810	496	744	449	673	399	599	481	721	419	629		
	36	508	762	466	698	420	630	372	558	447	671	389	584		
	38	477	715	436	654	392	588	346	518	415	622	360	540		
	40	446	669	406	609	364	546	320	479	383	574	331	497		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	269	404	236	355	202	304	165	247	270	406	225	338
	$P_e(L_c)^2/10^4$, kip-in. ²			24900		22400		19800		17100		20400		17600	
	r_m , in.			5.51		5.53		5.55		5.58		4.75		4.79	
ASD	LRFD														
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  <p>COMPOSITE HSS14.000– HSS12.750</p> </div>		<p>Table 4-F (continued) Available Strength in Axial Compression, kips Filled Round HSS</p>										<p>A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi</p>				
		HSS14.000×					HSS12.750×									
Shape		0.375		0.312		0.250		0.500		0.375		0.250				
f_{des} , in.		0.349		0.291		0.233		0.465		0.349		0.233				
Steel, lb/ft		54.6		45.7		36.8		65.5		49.6		33.4				
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$				
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD			
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	675	1010	623	935	574	861	672	1010	584	876	492	738			
	1	675	1010	623	935	574	860	672	1010	583	875	492	738			
	2	673	1010	622	933	572	859	671	1010	582	873	491	736			
	3	672	1010	620	930	571	856	669	1000	580	870	489	733			
	4	669	1000	618	926	568	852	666	999	578	866	486	730			
	5	666	998	614	921	565	847	662	993	574	861	483	725			
	6	661	992	610	915	561	842	657	986	570	855	479	719			
	7	657	985	606	908	556	835	652	978	565	847	475	712			
	8	651	976	600	900	551	827	646	969	559	839	469	704			
	9	645	967	594	891	545	818	639	959	553	830	464	695			
	10	638	957	588	881	539	808	632	947	546	819	457	686			
	11	630	945	580	870	532	797	623	935	539	808	450	675			
	12	622	933	572	859	524	786	614	921	530	796	442	664			
	13	613	920	564	846	516	774	605	907	522	782	434	651			
	14	604	906	555	833	507	761	595	892	512	768	426	639			
	15	594	891	546	819	498	747	584	876	503	754	417	625			
	16	584	876	536	804	488	732	573	859	492	738	407	611			
	17	573	860	525	788	478	717	561	841	482	722	397	596			
	18	562	843	515	772	468	701	549	823	470	706	387	581			
	19	550	825	503	755	457	685	536	804	459	689	377	565			
	20	538	807	492	738	446	669	523	785	447	671	366	549			
	21	526	789	480	720	434	651	510	765	435	653	355	533			
	22	513	770	468	702	423	634	496	744	423	634	344	516			
	23	500	751	456	684	411	616	482	724	410	616	333	499			
	24	487	731	443	665	399	598	468	703	398	597	321	482			
	25	474	711	431	646	387	580	454	681	385	578	310	465			
	26	461	691	418	627	374	562	440	660	372	558	298	448			
	27	447	670	405	607	362	543	426	638	359	539	287	430			
	28	433	650	392	588	350	524	411	617	346	520	276	413			
	29	419	629	379	568	337	506	397	595	333	500	264	396			
	30	406	609	366	549	325	487	382	573	321	481	253	379			
	32	378	567	340	510	300	451	354	530	295	443	231	346			
	34	351	527	314	472	276	415	326	488	270	406	209	314			
	36	324	486	289	434	253	379	298	447	246	370	188	283			
	38	298	447	265	398	230	346	272	408	223	334	169	254			
	40	273	410	242	362	208	312	246	369	201	302	153	229			
	Properties															
	M_n/Ω_b	$\phi_b M_n$	kip-ft		177	266	152	228	125	188	184	276	145	217	103	154
	$P_e(L_c)^2/10^4$, kip-in. ²				14400	12700	10900	12900	10600	8020						
	r_m , in.				4.83	4.85	4.87	4.35	4.39	4.43						
ASD	LRFD															
$\Omega_b = 1.67$	$\phi_b = 0.90$															
$\Omega_c = 2.00$	$\phi_c = 0.75$															


<div style="text-align: center;">  <p>COMPOSITE HSS10.750- HSS10.000</p> </div>		<p>Table 4-F (continued) Available Strength in Axial Compression, kips Filled Round HSS</p>										<p>A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi</p>			
		HSS10.750×					HSS10.000×								
Shape		0.500		0.375		0.250		0.625		0.500		0.375			
t_{des} , in.		0.465		0.349		0.233		0.581		0.465		0.349			
Steel, lb/ft		54.8		41.6		28.1		62.6		50.8		38.6			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	525	787	451	676	374	562	541	812	473	710	405	608		
	1	524	787	450	675	374	561	541	811	473	709	405	607		
	2	523	785	449	674	373	559	539	809	471	707	403	605		
	3	521	781	447	671	371	557	536	805	469	703	401	602		
	4	518	777	444	666	368	553	533	799	466	699	399	598		
	5	514	770	441	661	365	548	528	792	462	692	395	592		
	6	509	763	436	654	361	542	522	783	456	685	390	586		
	7	503	755	431	647	357	535	515	773	451	676	385	578		
	8	497	745	425	638	351	527	508	761	444	666	379	569		
	9	489	734	419	628	345	518	499	749	436	655	373	559		
	10	481	722	412	618	339	508	490	734	428	642	365	548		
	11	473	709	404	606	332	498	479	719	419	629	358	536		
	12	463	695	396	593	324	486	468	703	410	615	349	524		
	13	453	680	387	580	316	474	457	685	400	599	340	510		
	14	443	664	377	566	308	462	445	667	389	583	331	496		
	15	432	648	368	552	299	449	432	648	378	567	321	482		
	16	420	630	358	536	290	435	419	628	366	549	311	467		
	17	408	612	347	520	281	421	405	608	354	532	301	451		
	18	396	594	336	504	271	406	391	587	342	513	290	435		
	19	384	575	325	488	261	392	377	565	330	495	279	419		
	20	371	556	314	471	251	377	362	544	317	476	268	402		
	21	358	537	302	454	241	362	348	522	304	457	257	385		
	22	345	517	291	436	231	347	333	500	292	437	246	369		
	23	331	497	279	419	221	331	318	478	279	418	235	352		
	24	318	477	268	401	211	316	304	456	266	399	224	335		
	25	305	457	256	384	201	301	289	434	253	380	213	319		
	26	292	437	244	367	191	286	275	412	241	361	202	302		
	27	279	418	233	350	181	271	261	391	228	342	191	286		
	28	266	398	222	333	171	257	247	370	216	324	180	271		
	29	253	379	211	316	162	243	233	349	204	306	170	255		
	30	240	360	200	299	153	229	219	329	192	289	160	240		
	32	216	323	178	268	135	202	195	293	170	254	141	211		
	34	192	288	158	237	119	179	173	260	150	225	125	187		
	36	171	257	141	212	106	159	155	232	134	201	111	167		
	38	153	230	127	190	95.4	143	139	208	120	180	99.8	150		
	40	139	208	114	171	86.1	129	125	188	109	163	90.0	135		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	126	190	99.9	150	71.2	107	129	194	108	162	85.4	128
	$P_e(L_c)^2/10^4$, kip-in. ²			7280		6000		4520		6510		5700		4730	
	r_m , in.			3.64		3.68		3.72		3.34		3.38		3.41	
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  <p>COMPOSITE HSS10.000- HSS9.625</p> </div>		<p>Table 4-F (continued) Available Strength in Axial Compression, kips Filled Round HSS</p>										<p>A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi</p>						
		HSS10.000×					HSS9.625×											
Shape		0.312		0.250		0.188		0.500		0.375		0.312						
f_{des} , in.		0.291		0.233		0.174		0.465		0.349		0.291						
Steel, lb/ft		32.3		26.1		19.7		48.8		37.1		31.1						
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$						
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD					
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	370	555	334	501	297	446	449	674	383	575	349	523					
	1	369	554	334	500	297	445	449	673	383	574	348	523					
	2	368	552	332	499	296	444	447	671	381	572	347	521					
	3	366	549	331	496	294	441	445	667	379	569	345	518					
	4	363	545	328	492	292	437	441	662	376	565	342	514					
	5	360	540	325	487	288	433	437	656	373	559	339	508					
	6	356	534	321	481	284	427	432	648	368	552	335	502					
	7	351	526	316	474	280	420	426	639	363	545	330	495					
	8	345	518	311	466	275	412	419	629	357	536	324	486					
	9	339	509	305	457	269	404	412	617	350	526	318	477					
	10	332	498	298	448	263	395	403	605	343	515	311	467					
	11	325	487	291	437	256	385	394	591	335	503	304	456					
	12	317	476	284	426	249	374	384	577	327	490	296	444					
	13	309	463	276	414	242	363	374	561	318	477	287	431					
	14	300	450	268	402	234	351	363	545	309	463	279	418					
	15	291	436	259	389	226	339	352	528	299	449	270	404					
	16	281	422	250	375	217	326	341	511	289	434	260	390					
	17	272	407	241	362	209	313	329	493	279	418	251	376					
	18	262	393	232	348	200	300	316	475	268	402	241	361					
	19	252	377	222	334	191	287	304	456	257	386	231	346					
	20	241	362	213	319	182	273	291	437	247	370	221	331					
	21	231	347	203	305	173	260	279	418	236	354	211	316					
	22	221	331	194	290	164	247	266	399	225	337	201	301					
	23	210	315	184	276	156	234	254	380	214	321	190	286					
	24	200	300	174	262	147	220	241	361	203	305	180	271					
	25	190	285	165	248	138	208	229	343	193	289	171	256					
	26	180	270	156	234	130	195	216	324	182	273	161	241					
	27	170	255	147	220	122	183	204	306	172	258	152	227					
	28	160	240	138	207	114	171	192	289	162	242	142	213					
	29	151	226	129	194	106	159	181	271	152	228	133	200					
	30	141	212	121	181	99.1	149	169	254	142	213	124	187					
	32	124	186	106	159	87.1	131	149	223	125	187	109	164					
	34	110	165	94.1	141	77.2	116	132	198	110	166	96.8	145					
	36	98.2	147	83.9	126	68.8	103	118	177	98.5	148	86.4	130					
	38	88.1	132	75.3	113	61.8	92.7	106	158	88.4	133	77.5	116					
	40	79.5	119	68.0	102	55.8	83.7	95.3	143	79.8	120	70.0	105					
	Properties																	
	M_n/Ω_b		$\phi_b M_n$		kip-ft		73.4	110	60.9	91.6	47.5	71.4	99.3	149	78.6	118	67.6	102
	$P_e(L_c)^2/10^4$, kip-in. ²				4180		3570		2930		5010		4190		3680			
	r_m , in.				3.43		3.45		3.47		3.24		3.28		3.30			
ASD		LRFD																
$\Omega_b = 1.67$		$\phi_b = 0.90$																
$\Omega_c = 2.00$		$\phi_c = 0.75$																


<div style="text-align: center;">  <p>COMPOSITE HSS9.625- HSS8.625</p> </div>		<p>Table 4-F (continued) Available Strength in Axial Compression, kips Filled Round HSS</p>												<p>A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi</p>		
		HSS9.625x						HSS8.625x								
Shape		0.250		0.188		0.625		0.500		0.375		0.322				
t_{des} , in.		0.233		0.174		0.581		0.465		0.349		0.300				
Steel, lb/ft		25.1		19.0		53.5		43.4		33.1		28.6				
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD			
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	314	472	279	419	442	663	384	576	326	489	301	451			
	1	314	471	279	419	441	662	384	576	325	488	300	450			
	2	313	469	278	417	440	659	382	573	324	486	299	449			
	3	311	467	276	414	437	655	380	569	322	483	297	445			
	4	308	463	274	410	432	649	376	564	319	478	294	441			
	5	305	458	270	406	427	641	372	557	315	472	290	436			
	6	301	452	267	400	421	631	366	549	310	465	286	429			
	7	296	445	262	393	414	620	360	540	305	457	281	421			
	8	291	437	257	386	405	608	353	529	299	448	275	413			
	9	285	428	251	377	396	594	345	517	292	438	269	403			
	10	279	418	245	368	386	579	336	504	285	427	262	393			
	11	272	408	239	358	375	563	327	490	277	415	254	381			
	12	264	397	232	347	364	545	317	475	268	402	246	369			
	13	257	385	224	336	352	527	306	460	259	389	238	357			
	14	248	373	216	325	339	508	296	443	250	375	229	344			
	15	240	360	208	312	326	489	284	426	240	360	220	330			
	16	231	347	200	300	312	469	273	409	230	346	211	316			
	17	222	333	192	287	299	448	261	391	220	330	202	302			
	18	213	319	183	275	285	427	249	373	210	315	192	288			
	19	204	305	174	262	271	407	237	355	200	300	182	274			
	20	194	291	166	249	257	386	225	337	190	284	173	259			
	21	185	277	157	236	243	365	213	319	179	269	163	245			
	22	176	263	149	223	229	344	201	301	169	254	154	231			
	23	166	250	140	210	216	324	189	284	159	239	145	217			
	24	157	236	132	198	204	306	178	267	149	224	135	203			
	25	148	222	124	185	192	289	166	250	140	210	127	190			
	26	139	209	116	173	181	272	155	233	130	196	118	177			
	27	131	196	108	162	170	255	144	217	121	182	109	164			
	28	122	183	100	150	159	239	134	202	113	169	102	153			
	29	114	171	93.4	140	148	223	125	188	105	157	94.8	142			
	30	107	160	87.3	131	138	208	117	176	98.1	147	88.6	133			
	32	93.6	140	76.7	115	122	183	103	154	86.2	129	77.9	117			
	34	82.9	124	68.0	102	108	162	91.1	137	76.4	115	69.0	103			
	36	74.0	111	60.6	91.0	96.2	145	81.3	122	68.1	102	61.5	92.3			
	38	66.4	99.6	54.4	81.6	86.3	130	72.9	109	61.1	91.7	55.2	82.8			
	40	59.9	89.9	49.1	73.7	77.9	117	65.8	98.7	55.2	82.8	49.8	74.7			
	Properties															
	M_n/Ω_b	$\phi_b M_n$	kip-ft		56.1	84.3	43.8	65.8	93.1	140	78.0	117	61.9	93.0	54.6	82.1
	$P_e(L_c)^2/10^4$, kip-in. ²	3150		2580		3930		3460		2900		2620				
	r_m , in.	3.32		3.34		2.85		2.89		2.93		2.95				
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.														
$\Omega_b = 1.67$	$\phi_b = 0.90$															
$\Omega_c = 2.00$	$\phi_c = 0.75$															


<div style="text-align: center;">  <p>COMPOSITE HSS8.625- HSS7.500</p> </div>		<p>Table 4-F (continued) Available Strength in Axial Compression, kips Filled Round HSS</p>										<p>A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi</p>			
		HSS8.625×				HSS7.625×				HSS7.500×					
Shape		0.250		0.188		0.375		0.328		0.500		0.375			
f_{des} , in.		0.233		0.174		0.349		0.305		0.465		0.349			
Steel, lb/ft		22.4		17.0		29.1		25.6		37.4		28.6			
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	265	398	234	351	273	410	253	380	317	476	267	400		
	1	265	398	234	351	273	409	253	379	317	475	266	399		
	2	264	396	233	349	271	407	251	377	315	473	265	397		
	3	262	393	231	346	269	403	249	374	312	468	262	394		
	4	259	389	228	342	266	398	246	369	308	463	259	389		
	5	256	384	225	338	262	392	242	363	304	455	255	382		
	6	252	378	221	332	257	385	238	357	298	446	250	375		
	7	247	371	217	325	251	376	232	349	291	436	244	366		
	8	242	363	212	317	244	367	226	340	283	425	238	357		
	9	236	354	206	309	237	356	220	330	275	412	231	346		
	10	229	344	200	300	230	345	213	319	266	398	223	335		
	11	222	334	193	290	222	332	205	308	256	384	215	322		
	12	215	323	187	280	213	319	197	296	246	368	206	309		
	13	207	311	179	269	204	306	189	283	235	352	197	296		
	14	199	299	172	258	195	292	180	270	224	336	188	282		
	15	191	287	164	246	185	278	171	257	213	319	178	268		
	16	183	274	156	235	175	263	162	244	201	302	169	253		
	17	174	261	148	223	166	249	153	230	190	284	159	239		
	18	165	248	141	211	156	234	144	217	178	267	150	224		
	19	157	235	133	199	146	220	135	203	167	250	140	210		
	20	148	222	125	187	137	205	127	190	156	233	131	196		
	21	139	209	117	175	127	191	118	177	145	217	121	182		
	22	131	196	109	164	118	178	109	164	134	201	112	169		
	23	123	184	102	153	110	164	101	152	124	187	104	156		
	24	114	172	94.5	142	101	151	93.1	140	115	173	95.2	143		
	25	107	160	87.3	131	92.9	139	85.8	129	107	160	87.8	132		
	26	98.6	148	80.7	121	85.9	129	79.3	119	98.6	148	81.1	122		
	27	91.5	137	74.9	112	79.6	119	73.5	110	91.4	137	75.2	113		
	28	85.1	128	69.6	104	74.0	111	68.4	103	85.0	128	70.0	105		
	29	79.3	119	64.9	97.3	69.0	104	63.7	95.6	79.3	119	65.2	97.8		
	30	74.1	111	60.6	91.0	64.5	96.7	59.6	89.3	74.1	111	60.9	91.4		
	32	65.1	97.7	53.3	79.9	56.7	85.0	52.3	78.5	65.1	97.8	53.6	80.3		
	34	57.7	86.5	47.2	70.8	50.2	75.3	46.4	69.6	57.7	86.7	47.4	71.2		
	36	51.5	77.2	42.1	63.2	44.8	67.2	41.4	62.0	51.4	77.3	42.3	63.5		
	38	46.2	69.3	37.8	56.7	40.2	60.3	37.1	55.7	46.2	69.4	38.0	57.0		
	40	41.7	62.5	34.1	51.2	36.3	54.4	33.5	50.3	41.7	62.6	34.3	51.4		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	44.3	66.5	34.6	52.0	47.3	71.0	42.3	63.6	57.3	86.2	45.6	68.5
	$P_e(L_c)^2/10^4$, kip-in. ²	2190		1790		1910		1760		2150		1800			
	r_m , in.	2.97		2.99		2.58		2.59		2.49		2.53			
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  <p>COMPOSITE HSS7.500- HSS7.000</p> </div>		<p>Table 4-F (continued) Available Strength in Axial Compression, kips Filled Round HSS</p>										<p>A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi</p>				
		HSS7.500×					HSS7.000×									
Shape		0.312		0.250		0.188		0.500		0.375		0.312				
t_{des} , in.		0.291		0.233		0.174		0.465		0.349		0.291				
Steel, lb/ft		24.0		19.4		14.7		34.7		26.6		22.3				
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$				
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD			
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	241	361	215	322	187	281	288	433	242	363	218	327			
	1	240	361	214	321	187	281	288	432	241	362	217	326			
	2	239	359	213	320	186	279	286	429	240	360	216	324			
	3	237	355	211	317	184	276	283	425	237	356	214	321			
	4	234	351	208	312	182	272	279	419	234	351	211	316			
	5	230	345	205	307	178	267	274	411	230	345	207	310			
	6	226	339	201	301	174	262	268	402	225	337	202	303			
	7	221	331	196	294	170	255	261	391	219	328	197	295			
	8	215	322	190	286	165	247	253	379	212	318	191	287			
	9	208	312	184	277	159	239	244	366	205	307	184	277			
	10	201	302	178	267	153	230	235	352	197	296	177	266			
	11	194	291	171	257	147	221	225	338	189	283	170	255			
	12	186	279	164	246	140	211	215	322	180	270	162	243			
	13	178	267	156	235	134	200	204	306	171	257	154	231			
	14	169	254	149	223	127	190	193	289	162	243	146	219			
	15	161	241	141	211	119	179	182	273	153	229	137	206			
	16	152	228	133	199	112	168	171	256	143	215	129	193			
	17	143	215	125	188	105	158	160	239	134	201	120	181			
	18	135	202	117	176	97.9	147	148	223	125	187	112	168			
	19	126	189	109	164	90.9	136	138	206	116	173	104	156			
	20	117	176	102	152	84.1	126	128	192	107	160	95.8	144			
	21	109	164	94.1	141	77.4	116	119	179	98.1	147	88.1	132			
	22	101	151	86.8	130	70.9	106	110	165	89.6	134	80.5	121			
	23	93.1	140	79.6	119	64.9	97.3	101	152	82.0	123	73.6	110			
	24	85.5	128	73.1	110	59.6	89.4	93.1	140	75.3	113	67.6	101			
	25	78.8	118	67.4	101	54.9	82.4	85.8	129	69.4	104	62.3	93.5			
	26	72.8	109	62.3	93.5	50.8	76.2	79.4	119	64.2	96.3	57.6	86.4			
	27	67.5	101	57.8	86.7	47.1	70.6	73.6	111	59.5	89.3	53.4	80.1			
	28	62.8	94.2	53.7	80.6	43.8	65.7	68.4	103	55.3	83.0	49.7	74.5			
	29	58.5	87.8	50.1	75.1	40.8	61.2	63.8	95.9	51.6	77.4	46.3	69.5			
	30	54.7	82.1	46.8	70.2	38.1	57.2	59.6	89.6	48.2	72.3	43.3	64.9			
	32	48.1	72.1	41.1	61.7	33.5	50.3	52.4	78.8	42.4	63.6	38.0	57.1			
	34	42.6	63.9	36.4	54.7	29.7	44.5	46.4	69.8	37.5	56.3	33.7	50.5			
	36	38.0	57.0	32.5	48.7	26.5	39.7	41.4	62.2	33.5	50.2	30.1	45.1			
	38	34.1	51.1	29.2	43.8	23.8	35.7	37.2	55.8	30.0	45.1	27.0	40.5			
	40	30.8	46.2	26.3	39.5	21.5	32.2									
	Properties															
	M_n/Ω_b	$\phi_b M_n$	kip-ft		39.3	59.1	32.7	49.2	25.6	38.5	49.2	74.0	39.2	58.9	33.8	50.8
	$P_e(L_c)^2/10^4$, kip-in. ²			1620		1380		1130		1700		1420		1280		
	r_m , in.			2.55		2.57		2.59		2.32		2.35		2.37		
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200. Dashed line indicates the L_c beyond which the bare steel strength controls.														
$\Omega_b = 1.67$	$\phi_b = 0.90$															
$\Omega_c = 2.00$	$\phi_c = 0.75$															


<div style="text-align: center;">  COMPOSITE HSS7.000- HSS6.875 </div>		Table 4-F (continued) Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi			
		HSS7.000×					HSS6.875×								
Shape		0.250		0.188		0.125		0.500		0.375		0.312			
t_{des} , in.		0.233		0.174		0.116		0.465		0.349		0.291			
Steel, lb/ft		18.0		13.7		9.19		34.1		26.1		21.9			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	193	290	168	252	143	215	281	422	236	354	212	318		
	1	193	290	168	252	143	214	281	421	235	353	212	318		
	2	192	288	167	250	142	213	279	418	234	351	211	316		
	3	190	285	165	247	140	210	276	414	231	347	208	312		
	4	187	281	162	244	137	206	272	408	228	342	205	308		
	5	184	275	159	239	134	202	267	400	224	336	201	302		
	6	179	269	155	233	131	196	261	391	219	328	197	295		
	7	174	262	151	226	126	190	253	380	213	319	191	287		
	8	169	253	146	218	122	183	245	368	206	309	185	278		
	9	163	244	140	210	117	175	237	355	199	298	179	268		
	10	157	235	134	201	111	167	227	341	191	286	172	257		
	11	150	225	128	192	105	158	217	326	182	274	164	246		
	12	143	214	121	182	99.5	149	207	311	174	261	156	234		
	13	135	203	115	172	93.4	140	196	295	165	247	148	222		
	14	128	192	108	162	87.2	131	185	278	156	233	140	210		
	15	120	180	101	152	81.1	122	174	261	146	220	132	197		
	16	112	169	94.2	141	75.0	112	163	245	137	206	123	185		
	17	105	157	87.4	131	69.0	103	152	228	128	192	115	172		
	18	97.4	146	80.8	121	63.1	94.7	141	212	119	178	107	160		
	19	90.1	135	74.3	111	57.5	86.2	131	197	110	165	98.5	148		
	20	82.9	124	68.0	102	52.0	78.0	122	183	101	152	90.7	136		
	21	76.0	114	61.8	92.7	47.1	70.7	113	169	92.6	139	83.1	125		
	22	69.3	104	56.3	84.5	43.0	64.4	104	156	84.4	127	75.7	114		
	23	63.4	95.1	51.5	77.3	39.3	58.9	95.2	143	77.2	116	69.2	104		
	24	58.2	87.3	47.3	71.0	36.1	54.1	87.4	131	70.9	106	63.6	95.4		
	25	53.6	80.5	43.6	65.4	33.3	49.9	80.6	121	65.3	98.0	58.6	87.9		
	26	49.6	74.4	40.3	60.5	30.8	46.1	74.5	112	60.4	90.6	54.2	81.3		
	27	46.0	69.0	37.4	56.1	28.5	42.8	69.1	104	56.0	84.0	50.2	75.4		
	28	42.8	64.1	34.8	52.2	26.5	39.8	64.2	96.5	52.1	78.1	46.7	70.1		
	29	39.9	59.8	32.4	48.6	24.7	37.1	59.9	90.0	48.6	72.8	43.6	65.3		
	30	37.3	55.9	30.3	45.4	23.1	34.6	55.9	84.1	45.4	68.1	40.7	61.1		
	32	32.7	49.1	26.6	39.9	20.3	30.5	49.2	73.9	39.9	59.8	35.8	53.7		
	34	29.0	43.5	23.6	35.4	18.0	27.0	43.5	65.5	35.3	53.0	31.7	47.5		
	36	25.9	38.8	21.0	31.6	16.0	24.1	38.8	58.4	31.5	47.3	28.3	42.4		
	38	23.2	34.8	18.9	28.3	14.4	21.6			28.3	42.4	25.4	38.1		
	40			17.0	25.6	13.0	19.5								
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	28.2	42.3	22.1	33.2	15.6	23.4	47.3	71.1	37.7	56.6	32.5	48.9
	$P_e(L_c)^2/10^4$, kip-in. ²			1100	895		683		1600		1340		1200		
	r_m , in.			2.39	2.41		2.43		2.27		2.31		2.33		
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  COMPOSITE HSS6.875- HSS6.625 </div>		Table 4-F (continued) Available Strength in Axial Compression, kips Filled Round HSS												A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi	
		HSS6.875x				HSS6.625x									
Shape		0.250		0.188		0.500		0.432		0.375		0.312			
t_{des} , in.		0.233		0.174		0.465		0.402		0.349		0.291			
Steel, lb/ft		17.7		13.4		32.7		28.6		25.1		21.1			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	188	283	164	245	267	401	244	366	224	336	201	302		
	1	188	282	163	245	267	400	243	365	223	335	201	301		
	2	187	280	162	243	265	398	242	363	222	333	199	299		
	3	185	277	160	240	262	393	239	359	219	329	197	296		
	4	182	273	158	236	258	387	235	353	216	324	194	291		
	5	178	268	154	232	253	379	230	346	211	317	190	285		
	6	174	261	150	226	246	369	225	337	206	309	185	278		
	7	169	254	146	219	239	359	218	327	200	300	180	270		
	8	164	246	141	211	231	347	211	316	193	290	174	261		
	9	158	237	135	203	222	333	203	304	186	279	167	251		
	10	151	227	130	194	213	319	194	291	178	267	160	240		
	11	145	217	123	185	203	304	185	278	170	255	153	229		
	12	137	206	117	175	192	288	176	263	161	242	145	217		
	13	130	195	110	165	182	272	166	249	152	228	137	205		
	14	123	184	104	155	171	256	156	234	143	215	129	193		
	15	115	173	96.8	145	160	240	146	219	134	201	120	180		
	16	107	161	90.1	135	149	223	136	204	125	187	112	168		
	17	100	150	83.4	125	138	207	126	189	116	174	104	156		
	18	92.6	139	76.9	115	128	193	116	175	107	160	95.9	144		
	19	85.4	128	70.5	106	119	179	107	161	98.3	147	88.1	132		
	20	78.4	118	64.4	96.6	110	165	97.9	147	89.9	135	80.6	121		
	21	71.5	107	58.4	87.6	101	152	89.6	135	81.7	123	73.2	110		
	22	65.2	97.8	53.2	79.8	92.2	139	82.0	123	74.4	112	66.7	100		
	23	59.6	89.5	48.7	73.0	84.4	127	75.1	113	68.1	102	61.0	91.5		
	24	54.8	82.2	44.7	67.1	77.5	116	68.9	104	62.6	93.8	56.0	84.1		
	25	50.5	75.7	41.2	61.8	71.4	107	63.5	95.5	57.6	86.5	51.6	77.5		
	26	46.7	70.0	38.1	57.1	66.0	99.3	58.7	88.3	53.3	80.0	47.7	71.6		
	27	43.3	64.9	35.3	53.0	61.2	92.0	54.5	81.9	49.4	74.1	44.3	66.4		
	28	40.2	60.4	32.8	49.3	56.9	85.6	50.6	76.1	46.0	68.9	41.2	61.8		
	29	37.5	56.3	30.6	45.9	53.1	79.8	47.2	71.0	42.8	64.3	38.4	57.6		
	30	35.1	52.6	28.6	42.9	49.6	74.6	44.1	66.3	40.0	60.1	35.9	53.8		
	32	30.8	46.2	25.1	37.7	43.6	65.5	38.8	58.3	35.2	52.8	31.5	47.3		
	34	27.3	40.9	22.3	33.4	38.6	58.0	34.4	51.6	31.2	46.8	27.9	41.9		
	36	24.3	36.5	19.9	29.8	34.4	51.8	30.6	46.1	27.8	41.7	24.9	37.4		
	38	21.8	32.8	17.8	26.7										
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	27.1	40.7	21.2	31.9	43.5	65.5	38.9	58.4	34.7	52.2	30.0	45.1
	$P_e(L_c)^2/10^4$, kip-in. ²			1040		846		1410		1290		1180		1060	
r_m , in.			2.35		2.37		2.18		2.20		2.22		2.24		
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200. Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  COMPOSITE HSS6.625- HSS6.000 </div>		Table 4-F (continued) Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi		
		HSS6.625×					HSS6.000×							
Shape		0.280		0.250		0.188		0.125		0.500		0.375		
t_{des} , in.		0.260		0.233		0.174		0.116		0.465		0.349		
Steel, lb/ft		19.0		17.0		12.9		8.69		29.4		22.6		
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	189	284	178	268	155	232	131	196	234	351	195	293	
	1	189	283	178	267	154	231	130	196	233	350	194	292	
	2	187	281	177	265	153	230	129	194	231	347	193	289	
	3	185	278	175	262	151	227	128	191	228	342	190	285	
	4	182	273	172	258	149	223	125	188	224	336	187	280	
	5	179	268	168	252	145	218	122	183	218	327	182	273	
	6	174	261	164	246	141	212	118	177	212	317	176	265	
	7	169	253	159	239	137	205	114	171	204	306	170	255	
	8	163	245	154	230	132	198	109	164	196	293	163	245	
	9	157	236	148	221	126	190	104	157	186	280	156	233	
	10	150	225	141	212	121	181	99.1	149	177	265	148	221	
	11	143	215	134	202	114	172	93.5	140	167	250	139	209	
	12	136	204	127	191	108	162	87.7	132	156	234	131	196	
	13	128	192	120	180	102	152	81.8	123	146	219	122	183	
	14	121	181	113	169	95.0	142	75.9	114	136	204	113	170	
	15	113	169	105	158	88.3	133	70.0	105	126	190	104	156	
	16	105	158	97.9	147	81.8	123	64.3	96.4	117	176	95.6	143	
	17	97.3	146	90.6	136	75.3	113	58.6	88.0	108	162	87.2	131	
	18	89.8	135	83.5	125	69.0	104	53.2	79.8	98.4	148	79.1	119	
	19	82.5	124	76.5	115	63.0	94.5	47.9	71.9	89.7	135	71.2	107	
	20	75.4	113	69.9	105	57.0	85.5	43.2	64.9	81.1	122	64.7	97.3	
	21	68.5	103	63.3	95.0	51.7	77.6	39.2	58.8	73.6	111	58.7	88.2	
	22	62.4	93.6	57.7	86.6	47.1	70.7	35.7	53.6	67.0	101	53.5	80.4	
	23	57.1	85.7	52.8	79.2	43.1	64.7	32.7	49.0	61.3	92.2	48.9	73.5	
	24	52.4	78.7	48.5	72.7	39.6	59.4	30.0	45.0	56.3	84.6	44.9	67.5	
	25	48.3	72.5	44.7	67.0	36.5	54.7	27.7	41.5	51.9	78.0	41.4	62.3	
	26	44.7	67.0	41.3	62.0	33.7	50.6	25.6	38.4	48.0	72.1	38.3	57.6	
	27	41.4	62.2	38.3	57.5	31.3	46.9	23.7	35.6	44.5	66.9	35.5	53.4	
	28	38.5	57.8	35.6	53.4	29.1	43.6	22.1	33.1	41.4	62.2	33.0	49.6	
	29	35.9	53.9	33.2	49.8	27.1	40.7	20.6	30.8	38.6	58.0	30.8	46.3	
	30	33.6	50.4	31.0	46.6	25.3	38.0	19.2	28.8	36.0	54.2	28.8	43.2	
	32	29.5	44.3	27.3	40.9	22.3	33.4	16.9	25.3	31.7	47.6	25.3	38.0	
	34	26.1	39.2	24.2	36.2	19.7	29.6	15.0	22.4					
	36	23.3	35.0	21.6	32.3	17.6	26.4	13.3	20.0					
	38					15.8	23.7	12.0	18.0					
	Properties													
	M_n/Ω_b	$\phi_b M_n$	27.3	41.1	25.0	37.6	19.6	29.4	13.9	20.9	34.9	52.5	27.9	42.0
	$P_e(L_c)^2/10^4$, kip-in. ²		992		917		749		568		1010		844	
r_m , in.		2.25		2.26		2.28		2.30		1.96		2.00		
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_c = 2.00$	$\phi_c = 0.75$													


<div style="text-align: center;">  COMPOSITE HSS6.000- HSS5.563 </div>		Table 4-F (continued) Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi		
		HSS6.000×					HSS5.563×							
Shape		0.312		0.280		0.250		0.188		0.125		0.500		
t_{des} , in.		0.291		0.260		0.233		0.174		0.116		0.465		
Steel, lb/ft		19.0		17.1		15.4		11.7		7.85		27.1		
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	175	262	164	246	154	231	133	199	111	167	211	317	
	1	174	261	163	245	154	231	132	199	111	166	211	316	
	2	173	259	162	243	152	229	131	197	110	165	209	313	
	3	170	256	160	240	150	226	129	194	108	162	205	308	
	4	167	251	157	235	147	221	127	190	106	158	201	301	
	5	163	245	153	229	144	216	123	185	102	154	195	292	
	6	158	237	148	222	139	209	119	179	98.8	148	188	282	
	7	153	229	143	214	134	202	115	172	94.7	142	180	270	
	8	146	219	137	206	129	193	110	165	90.1	135	171	257	
	9	139	209	131	196	123	184	104	157	85.2	128	162	243	
	10	132	198	124	186	116	175	98.6	148	80.1	120	153	229	
	11	125	187	117	175	110	165	92.6	139	74.7	112	143	216	
	12	117	176	110	164	103	154	86.5	130	69.3	104	134	201	
	13	109	164	102	153	96.0	144	80.3	120	63.8	95.7	125	187	
	14	101	152	94.7	142	89.0	134	74.1	111	58.4	87.5	115	173	
	15	93.4	140	87.3	131	82.1	123	68.0	102	53.0	79.6	106	159	
	16	85.7	129	80.1	120	75.2	113	62.0	93.0	47.9	71.8	96.3	145	
	17	78.1	117	73.0	109	68.6	103	56.2	84.3	42.9	64.4	87.3	131	
	18	70.9	106	66.2	99.3	62.2	93.3	50.6	75.9	38.3	57.4	78.6	118	
	19	63.8	95.7	59.5	89.3	55.9	83.9	45.4	68.1	34.4	51.5	70.6	106	
	20	57.6	86.4	53.7	80.6	50.5	75.7	41.0	61.5	31.0	46.5	63.7	95.7	
	21	52.2	78.3	48.7	73.1	45.8	68.7	37.2	55.8	28.1	42.2	57.8	86.8	
	22	47.6	71.4	44.4	66.6	41.7	62.6	33.9	50.8	25.6	38.4	52.6	79.1	
	23	43.5	65.3	40.6	61.0	38.2	57.2	31.0	46.5	23.4	35.2	48.2	72.4	
	24	40.0	60.0	37.3	56.0	35.1	52.6	28.5	42.7	21.5	32.3	44.2	66.5	
	25	36.9	55.3	34.4	51.6	32.3	48.5	26.2	39.3	19.8	29.8	40.8	61.3	
	26	34.1	51.1	31.8	47.7	29.9	44.8	24.3	36.4	18.4	27.5	37.7	56.6	
	27	31.6	47.4	29.5	44.2	27.7	41.5	22.5	33.7	17.0	25.5	34.9	52.5	
	28	29.4	44.1	27.4	41.1	25.8	38.6	20.9	31.4	15.8	23.7	32.5	48.8	
	29	27.4	41.1	25.6	38.3	24.0	36.0	19.5	29.2	14.8	22.1	30.3	45.5	
	30	25.6	38.4	23.9	35.8	22.4	33.6	18.2	27.3	13.8	20.7	28.3	42.5	
	32	22.5	33.7	21.0	31.5	19.7	29.6	16.0	24.0	12.1	18.2			
	34					17.5	26.2	14.2	21.3	10.7	16.1			
	Properties													
M_n/Ω_b	$\phi_b M_n$	kip-ft	24.1	36.3	22.0	33.1	20.1	30.3	15.8	23.8	11.2	16.9	29.5	44.3
$P_e(L_c)^2/10^4$, kip-in. ²			756	706	663	663	538	407	777					
r_m , in.			2.02	2.03	2.04	2.04	2.06	2.08	1.81					
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200. Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_b = 1.67$	$\phi_b = 0.90$													
$\Omega_c = 2.00$	$\phi_c = 0.75$													


<div style="text-align: center;">  COMPOSITE HSS5.563- HSS5.500 </div>		Table 4-F (continued) Available Strength in Axial Compression, kips Filled Round HSS								A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi			
		HSS5.563×				HSS5.500×							
Shape		0.375		0.258		0.188		0.134		0.500		0.375	
t_{des} , in.		0.349		0.240		0.174		0.124		0.465		0.349	
Steel, lb/ft		20.8		14.6		10.8		7.78		26.7		20.6	
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	176	264	140	211	119	178	101	152	208	312	173	259
	1	175	263	140	210	118	177	101	152	208	311	172	259
	2	173	260	139	208	117	175	100	150	205	308	171	256
	3	171	256	136	205	115	172	98.1	147	202	303	168	252
	4	167	250	133	200	112	168	95.6	143	197	296	164	246
	5	162	243	129	194	109	163	92.5	139	191	287	159	239
	6	156	235	125	187	105	157	88.8	133	184	277	153	230
	7	150	225	120	180	100	151	84.7	127	177	265	147	221
	8	143	214	114	171	95.4	143	80.1	120	168	252	140	210
	9	135	203	108	162	90.0	135	75.3	113	159	239	132	198
	10	127	191	101	152	84.4	127	70.2	105	150	225	124	186
	11	119	178	94.7	142	78.6	118	65.0	97.4	141	211	116	174
	12	110	165	87.9	132	72.6	109	59.7	89.5	131	197	107	161
	13	102	152	81.0	122	66.7	100	54.4	81.6	122	183	98.7	148
	14	93.1	140	74.2	111	60.9	91.3	49.3	73.9	112	168	90.3	135
	15	84.7	127	67.5	101	55.2	82.7	44.3	66.4	103	154	82.0	123
	16	76.6	115	61.0	91.6	49.6	74.4	39.5	59.2	93.5	141	74.2	112
	17	69.5	105	54.8	82.2	44.3	66.4	35.0	52.4	84.6	127	67.5	101
	18	63.0	94.7	48.9	73.3	39.5	59.2	31.2	46.8	76.0	114	61.0	91.6
	19	56.6	85.1	43.9	65.8	35.4	53.2	28.0	42.0	68.2	102	54.7	82.2
	20	51.1	76.8	39.6	59.4	32.0	48.0	25.3	37.9	61.5	92.5	49.4	74.2
	21	46.3	69.6	35.9	53.9	29.0	43.5	22.9	34.4	55.8	83.9	44.8	67.3
	22	42.2	63.5	32.7	49.1	26.4	39.7	20.9	31.3	50.9	76.4	40.8	61.3
	23	38.6	58.1	29.9	44.9	24.2	36.3	19.1	28.7	46.5	69.9	37.3	56.1
	24	35.5	53.3	27.5	41.2	22.2	33.3	17.5	26.3	42.7	64.2	34.3	51.5
	25	32.7	49.1	25.3	38.0	20.5	30.7	16.2	24.3	39.4	59.2	31.6	47.5
	26	30.2	45.4	23.4	35.1	18.9	28.4	14.9	22.4	36.4	54.7	29.2	43.9
	27	28.0	42.1	21.7	32.6	17.6	26.3	13.9	20.8	33.8	50.7	27.1	40.7
	28	26.1	39.2	20.2	30.3	16.3	24.5	12.9	19.3	31.4	47.2	25.2	37.9
	29	24.3	36.5	18.8	28.2	15.2	22.8	12.0	18.0	29.3	44.0	23.5	35.3
	30	22.7	34.1	17.6	26.4	14.2	21.3	11.2	16.8			21.9	33.0
	32							9.87	14.8				
Properties													
M_n/Ω_b	$\phi_b M_n$	23.6	35.5	17.5	26.3	13.4	20.2	10.1	15.2	28.7	43.2	23.0	34.6
$P_e(L_c)^2/10^4$, kip-in. ²		653		520		420		332		747		629	
r_m , in.		1.85		1.88		1.91		1.92		1.79		1.83	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.											
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.											
$\Omega_c = 2.00$	$\phi_c = 0.75$												


<div style="text-align: center;">  COMPOSITE HSS5.500- HSS5.000 </div>		Table 4-F (continued) Available Strength in Axial Compression, kips Filled Round HSS										A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi			
		HSS5.500×		0.500		0.375		0.312		0.258		0.250			
Shape		0.258		0.465		0.349		0.291		0.240		0.233			
t_{des} , in.		0.240		0.465		0.349		0.291		0.240		0.233			
Steel, lb/ft		14.5		24.1		18.5		15.6		13.1		12.7			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	138	207	183	275	152	228	135	203	121	181	119	178		
	1	138	207	182	274	151	227	135	202	120	180	118	177		
	2	136	205	180	270	149	224	133	200	119	178	117	175		
	3	134	201	177	265	146	220	131	196	116	175	114	172		
	4	131	197	172	258	142	214	127	190	113	170	111	167		
	5	127	191	166	250	137	206	122	184	109	164	107	161		
	6	123	184	159	240	131	197	117	176	104	157	103	154		
	7	117	176	152	228	125	187	111	167	99.2	149	97.4	146		
	8	112	168	144	216	117	176	105	157	93.4	140	91.8	138		
	9	106	158	135	202	110	165	97.9	147	87.2	131	85.7	129		
	10	99.1	149	125	189	102	152	90.8	136	80.8	121	79.4	119		
	11	92.4	139	116	174	93.4	140	83.5	125	74.3	111	73.0	110		
	12	85.6	128	106	160	85.2	128	76.1	114	67.8	102	66.6	99.9		
	13	78.7	118	97.0	146	77.1	116	68.9	103	61.3	92.0	60.2	90.3		
	14	72.0	108	87.7	132	69.9	105	61.8	92.8	55.0	82.5	54.0	81.1		
	15	65.3	98.0	78.7	118	63.1	94.8	55.1	82.6	49.0	73.5	48.1	72.2		
	16	58.9	88.4	70.0	105	56.5	84.9	48.7	73.2	43.2	64.8	42.4	63.6		
	17	52.7	79.1	62.0	93.2	50.1	75.4	43.3	65.1	38.2	57.4	37.6	56.3		
	18	47.0	70.5	55.3	83.1	44.7	67.2	38.6	58.1	34.1	51.2	33.5	50.3		
	19	42.2	63.3	49.6	74.6	40.1	60.3	34.7	52.1	30.6	45.9	30.1	45.1		
	20	38.1	57.1	44.8	67.3	36.2	54.5	31.3	47.0	27.6	41.5	27.1	40.7		
	21	34.5	51.8	40.6	61.0	32.9	49.4	28.4	42.7	25.1	37.6	24.6	36.9		
	22	31.5	47.2	37.0	55.6	29.9	45.0	25.9	38.9	22.8	34.3	22.4	33.6		
	23	28.8	43.2	33.9	50.9	27.4	41.2	23.7	35.6	20.9	31.3	20.5	30.8		
	24	26.4	39.7	31.1	46.7	25.2	37.8	21.7	32.7	19.2	28.8	18.8	28.3		
	25	24.4	36.6	28.7	43.1	23.2	34.9	20.0	30.1	17.7	26.5	17.4	26.0		
	26	22.5	33.8	26.5	39.8	21.4	32.2	18.5	27.8	16.4	24.5	16.1	24.1		
	27	20.9	31.3			19.9	29.9	17.2	25.8	15.2	22.7	14.9	22.3		
	28	19.4	29.1							14.1	21.1	13.8	20.8		
	29	18.1	27.2												
30	16.9	25.4													
Properties															
M_n/Ω_b	$\phi_b M_n$	kip-ft		17.1	25.6	23.2	34.8	18.6	28.0	16.2	24.3	13.8	20.8	13.5	20.3
$P_e(L_c)^2/10^4$	kip-in. ²		500		539		456		408		363		356		
r_m , in.			1.86		1.61		1.65		1.67		1.69		1.69		
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  <p>COMPOSITE HSS5.000– HSS4.500</p> </div>		<p>Table 4-F (continued) Available Strength in Axial Compression, kips Filled Round HSS</p>										<p>A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi</p>		
		HSS5.000×					HSS4.500×							
Shape		0.188		0.125		0.375		0.337		0.237		0.188		
t_{des} , in.		0.174		0.116		0.349		0.313		0.220		0.174		
Steel, lb/ft		9.67		6.51		16.5		15.0		10.8		8.67		
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	101	152	83.3	125	132	197	123	184	98.8	148	86.4	130	
	1	101	151	83.0	124	131	196	122	183	98.3	148	86.0	129	
	2	99.4	149	81.9	123	129	194	120	181	96.9	145	84.7	127	
	3	97.4	146	80.0	120	126	189	117	176	94.5	142	82.7	124	
	4	94.6	142	77.5	116	122	182	113	170	91.3	137	79.8	120	
	5	91.2	137	74.5	112	116	174	108	163	87.3	131	76.3	114	
	6	87.1	131	70.8	106	110	165	103	154	82.7	124	72.2	108	
	7	82.6	124	66.8	100	103	155	96.2	144	77.5	116	67.7	102	
	8	77.7	116	62.4	93.6	95.6	143	89.3	134	72.0	108	62.8	94.2	
	9	72.4	109	57.8	86.7	87.9	132	82.1	123	66.2	99.3	57.7	86.6	
	10	66.9	100	53.1	79.6	80.1	120	74.7	112	60.2	90.3	52.5	78.7	
	11	61.4	92.1	48.3	72.4	72.9	110	67.3	101	54.3	81.4	47.3	70.9	
	12	55.8	83.8	43.5	65.3	65.7	98.8	60.0	90.2	48.4	72.7	42.1	63.2	
	13	50.4	75.6	38.9	58.3	58.8	88.3	53.7	80.8	42.8	64.2	37.2	55.8	
	14	45.1	67.6	34.4	51.6	52.1	78.2	47.7	71.7	37.4	56.1	32.5	48.7	
	15	40.0	60.0	30.1	45.2	45.6	68.6	41.9	62.9	32.6	48.8	28.3	42.4	
	16	35.2	52.8	26.5	39.7	40.1	60.3	36.8	55.3	28.6	42.9	24.8	37.3	
	17	31.2	46.7	23.5	35.2	35.5	53.4	32.6	49.0	25.4	38.0	22.0	33.0	
	18	27.8	41.7	20.9	31.4	31.7	47.6	29.1	43.7	22.6	33.9	19.6	29.4	
	19	24.9	37.4	18.8	28.2	28.4	42.7	26.1	39.2	20.3	30.4	17.6	26.4	
	20	22.5	33.8	16.9	25.4	25.7	38.6	23.5	35.4	18.3	27.5	15.9	23.9	
	21	20.4	30.6	15.4	23.1	23.3	35.0	21.4	32.1	16.6	24.9	14.4	21.6	
	22	18.6	27.9	14.0	21.0	21.2	31.9	19.5	29.3	15.1	22.7	13.1	19.7	
	23	17.0	25.5	12.8	19.2	19.4	29.2	17.8	26.8	13.8	20.8	12.0	18.0	
	24	15.6	23.4	11.8	17.6	17.8	26.8	16.4	24.6	12.7	19.1	11.0	16.6	
	25	14.4	21.6	10.8	16.3					11.7	17.6	10.2	15.3	
	26	13.3	20.0	10.0	15.0									
	27	12.4	18.5	9.30	13.9									
28	11.5	17.2	8.64	13.0										
Properties														
M_n/Ω_b	$\phi_b M_n$	kip-ft	10.6	16.0	7.59	11.4	14.7	22.2	13.6	20.4	10.2	15.4	8.47	12.7
$P_e(L_c)^2/10^4$, kip-in. ²			296		223		318		298		241		209	
r_m , in.			1.71		1.73		1.47		1.48		1.52		1.53	
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200. Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_b = 1.67$	$\phi_b = 0.90$													
$\Omega_c = 2.00$	$\phi_c = 0.75$													

<div style="text-align: center;">  COMPOSITE HSS4.500- HSS4.000 </div>		Table 4-F (continued) Available Strength in Axial Compression, kips Filled Round HSS												A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi	
		HSS4.500×		0.313		0.250		0.237		0.226		0.220			
Shape		0.125		0.291		0.233		0.220		0.210		0.205			
t_{des} , in.		0.116		0.291		0.233		0.220		0.210		0.205			
Steel, lb/ft		5.85		12.3		10.0		9.53		9.12		8.89			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	70.8	106	99.8	150	86.8	130	83.7	126	81.4	122	80.2	120		
	1	70.4	106	99.1	149	86.2	129	83.2	125	80.9	121	79.7	120		
	2	69.3	104	97.3	146	84.6	127	81.6	122	79.4	119	78.2	117		
	3	67.4	101	94.3	141	82.0	123	79.1	119	76.9	115	75.8	114		
	4	64.9	97.3	90.2	135	78.5	118	75.7	114	73.6	110	72.5	109		
	5	61.8	92.7	85.3	128	74.2	111	71.6	107	69.6	104	68.6	103		
	6	58.2	87.3	79.6	119	69.3	104	66.8	100	65.0	97.5	64.0	96.0		
	7	54.2	81.4	73.3	110	63.8	95.8	61.6	92.4	59.9	89.9	59.0	88.5		
	8	50.0	75.0	66.7	100	58.1	87.2	56.1	84.1	54.5	81.8	53.7	80.6		
	9	45.6	68.4	59.9	89.9	52.3	78.4	50.4	75.6	49.0	73.5	48.3	72.5		
	10	41.1	61.7	53.6	80.5	46.4	69.6	44.8	67.2	43.5	65.3	42.9	64.3		
	11	36.7	55.0	47.7	71.6	40.7	61.0	39.3	58.9	38.2	57.3	37.6	56.4		
	12	32.4	48.6	41.9	63.0	35.2	52.8	34.0	51.0	33.1	49.6	32.6	48.9		
	13	28.3	42.4	36.5	54.8	30.1	45.3	29.1	43.6	28.2	42.4	27.8	41.8		
	14	24.4	36.6	31.5	47.3	26.0	39.1	25.1	37.6	24.4	36.5	24.0	36.0		
	15	21.3	31.9	27.4	41.2	22.6	34.0	21.8	32.7	21.2	31.8	20.9	31.4		
	16	18.7	28.0	24.1	36.2	19.9	29.9	19.2	28.8	18.6	28.0	18.4	27.6		
	17	16.6	24.8	21.3	32.1	17.6	26.5	17.0	25.5	16.5	24.8	16.3	24.4		
	18	14.8	22.1	19.0	28.6	15.7	23.6	15.2	22.7	14.7	22.1	14.5	21.8		
	19	13.3	19.9	17.1	25.7	14.1	21.2	13.6	20.4	13.2	19.8	13.0	19.5		
	20	12.0	17.9	15.4	23.2	12.7	19.1	12.3	18.4	11.9	17.9	11.8	17.6		
	21	10.8	16.3	14.0	21.0	11.6	17.4	11.1	16.7	10.8	16.2	10.7	16.0		
	22	9.88	14.8	12.7	19.1	10.5	15.8	10.1	15.2	9.86	14.8	9.72	14.6		
	23	9.04	13.6												
	24	8.31	12.5												
25	7.65	11.5													
Properties															
M_n/Ω_b	$\phi_b M_n$	kip-ft	6.04	9.09	9.85	14.8	8.28	12.4	7.91	11.9	7.62	11.5	7.48	11.2	
$P_e(L_c)^2/10^4$, kip-in. ²			157	191	167	167	161	157	154						
r_m , in.			1.55	1.32	1.33	1.34	1.34	1.34	1.34						
ASD	LRFD	Notes: Heavy line indicates L_c/r_m equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  </div> COMPOSITE HSS4.000		Table 4-F (continued) Available Strength in Axial Compression, kips Filled Round HSS				A500 Gr. C $F_y = 46$ ksi $f'_c = 5$ ksi	
		HSS4.000x					
Shape		0.188		0.125			
f_{des} , in.		0.174		0.116			
Steel, lb/ft		7.66		5.18			
Design		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	73.0	109	59.1	88.7		
	1	72.5	109	58.7	88.1		
	2	71.1	107	57.6	86.4		
	3	68.9	103	55.7	83.5		
	4	66.0	99.0	53.1	79.7		
	5	62.3	93.5	50.0	75.0		
	6	58.2	87.3	46.5	69.7		
	7	53.6	80.4	42.6	63.9		
	8	48.8	73.2	38.5	57.8		
	9	43.8	65.8	34.4	51.6		
	10	38.9	58.4	30.3	45.4		
	11	34.1	51.1	26.3	39.5		
	12	29.5	44.3	22.5	33.8		
	13	25.2	37.8	19.2	28.8		
	14	21.7	32.6	16.5	24.8		
	15	18.9	28.4	14.4	21.6		
	16	16.6	25.0	12.7	19.0		
	17	14.7	22.1	11.2	16.8		
	18	13.1	19.7	10.0	15.0		
	19	11.8	17.7	8.98	13.5		
	20	10.7	16.0	8.11	12.2		
	21	9.66	14.5	7.35	11.0		
22	8.80	13.2	6.70	10.1			
Properties							
M_n/Ω_b		6.55		4.69			
$\phi_b M_n$		9.84		7.04			
$P_e(L_c)^2/10^4$, kip-in. ²		140		107			
r_m , in.		1.35		1.37			
ASD	LRFD	Note: Heavy line indicates L_c/r_m equal to or greater than 200.					
$\Omega_b = 1.67$	$\phi_b = 0.90$						
$\Omega_c = 2.00$	$\phi_c = 0.75$						


 COMPOSITE PIPE 12-PIPE 8		Table 4-G Available Strength in Axial Compression, kips Filled Pipe										$F_y = 35$ ksi $f'_c = 4$ ksi			
		Pipe 12				Pipe 10				Pipe 8					
Shape		XS		STD		XS		STD		XXS		XS			
t_{des} , in.		0.465		0.349		0.465		0.340		0.816		0.465			
Steel, lb/ft		65.5		49.6		54.8		40.5		72.5		43.4			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	517	776	458	687	410	614	353	530	423	635	297	445		
	1	517	776	458	687	409	614	353	530	423	634	296	445		
	2	516	775	457	686	408	613	352	529	421	632	296	443		
	3	515	773	456	684	407	611	351	527	419	629	294	441		
	4	513	770	454	681	405	608	349	524	416	624	292	438		
	5	511	767	452	678	403	604	347	521	412	618	289	434		
	6	508	763	449	674	400	599	344	516	407	611	286	429		
	7	505	758	446	669	396	594	341	511	402	602	282	423		
	8	501	752	443	664	392	588	337	506	395	593	277	416		
	9	497	746	439	658	387	581	333	500	388	583	273	409		
	10	492	739	434	651	382	573	328	493	381	573	267	401		
	11	487	731	429	644	377	565	323	485	373	561	261	392		
	12	482	723	424	636	371	556	318	477	365	549	255	383		
	13	476	714	418	628	364	547	312	468	357	536	248	373		
	14	470	704	412	619	358	537	306	459	348	523	241	362		
	15	463	694	406	609	351	526	300	449	338	508	234	351		
	16	456	684	399	599	343	515	293	439	328	494	227	340		
	17	448	673	392	589	335	503	286	429	318	478	219	328		
	18	441	661	385	578	327	491	278	418	308	463	211	316		
	19	433	649	378	566	319	479	271	406	297	447	203	304		
	20	424	637	370	555	311	466	263	395	286	430	195	292		
	21	416	624	362	542	302	453	255	383	275	414	187	280		
	22	407	611	353	530	293	440	248	371	264	397	178	267		
	23	398	597	345	517	284	426	239	359	253	380	170	255		
	24	389	583	336	505	275	413	231	347	242	364	162	243		
	25	380	569	328	491	266	399	223	335	231	347	154	231		
	26	370	555	319	478	257	385	215	322	220	331	146	218		
	27	361	541	310	465	247	371	207	310	209	314	138	207		
	28	351	526	301	451	238	357	198	298	198	298	130	195		
	29	341	512	292	438	229	343	190	285	188	283	122	184		
	30	331	497	283	424	220	330	182	273	178	267	115	172		
	32	312	467	264	397	202	303	166	250	158	237	101	152		
	34	292	438	246	370	184	276	151	226	140	210	89.7	135		
	36	272	408	229	343	167	251	136	204	124	187	80.0	120		
	38	253	379	211	317	151	226	122	183	112	168	71.8	108		
	40	234	351	194	291	136	204	110	165	101	152	64.8	97.5		
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	141	213	111	168	97.6	147	75.5	113	92.0	138	59.7	89.7
	$P_e(L_c)^2/10^4$, kip-in. ²			12600	10300	7140	5790	4770	3400						
	r_m , in.			4.35	4.39	3.64	3.68	2.78	2.89						
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														


<div style="text-align: center;">  </div> COMPOSITE PIPE 8-PIPE 5		Table 4-G (continued) Available Strength in Axial Compression, kips Filled Pipe										$F_y = 35$ ksi $f'_c = 4$ ksi			
		Pipe 8		Pipe 6				Pipe 5							
Shape		STD		XXS		XS		STD		XXS		XS			
f_{des} , in.		0.300		0.805		0.403		0.261		0.699		0.349			
Steel, lb/ft		28.6		53.2		28.6		19		38.6		20.8			
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	234	350	308	463	188	282	147	220	224	337	136	203		
	1	233	350	308	462	187	281	146	220	224	336	135	203		
	2	233	349	306	460	186	280	146	218	222	334	134	201		
	3	231	347	303	456	185	277	144	216	219	330	132	199		
	4	230	344	300	451	182	274	142	214	216	324	130	195		
	5	227	341	295	444	180	269	140	210	211	317	127	191		
	6	224	337	290	436	176	264	137	206	205	309	124	186		
	7	221	332	283	426	172	258	134	201	199	299	120	179		
	8	218	326	276	415	168	251	131	196	192	288	115	173		
	9	214	320	268	403	163	244	127	190	184	277	110	165		
	10	209	314	260	391	157	236	122	183	176	264	105	158		
	11	204	307	251	377	151	227	118	177	167	251	99.7	149		
	12	199	299	241	362	145	218	113	169	158	237	94.0	141		
	13	194	291	231	347	139	208	108	162	149	223	88.2	132		
	14	188	282	221	332	132	199	103	154	139	209	82.4	124		
	15	182	273	210	316	126	189	97.4	146	130	195	76.5	115		
	16	176	264	199	299	119	179	92.0	138	120	181	70.7	106		
	17	170	255	188	283	112	168	86.6	130	111	167	65.0	97.6		
	18	163	245	177	267	105	158	81.3	122	102	153	59.8	89.8		
	19	157	235	167	250	98.7	148	76.0	114	93.1	140	55.2	83.0		
	20	150	225	156	234	92.1	138	70.8	106	84.5	127	50.7	76.3		
	21	144	215	145	218	85.6	128	65.7	98.5	76.7	115	46.4	69.8		
	22	137	205	135	203	79.3	119	60.7	91.1	69.9	105	42.3	63.6		
	23	130	195	125	188	73.3	110	55.9	83.8	63.9	96.1	38.7	58.2		
	24	124	185	115	173	68.3	103	51.3	77.0	58.7	88.2	35.5	53.4		
	25	117	176	106	160	63.3	95.1	47.3	70.9	54.1	81.3	32.8	49.2		
	26	111	166	98.2	148	58.5	88.0	43.7	65.6	50.0	75.2	30.3	45.5		
	27	104	157	91.1	137	54.3	81.6	40.5	60.8	46.4	69.7	28.1	42.2		
	28	98.2	147	84.7	127	50.5	75.8	37.7	56.5	43.1	64.8	26.1	39.2		
	29	92.3	138	78.9	119	47.0	70.7	35.1	52.7	40.2	60.4	24.3	36.6		
	30	86.2	129	73.8	111	44.0	66.1	32.8	49.3			22.7	34.2		
	32	75.8	114	64.8	97.4	38.6	58.1	28.9	43.3						
	34	67.1	101	57.4	86.3	34.2	51.4	25.6	38.3						
	36	59.9	89.8			30.5	45.9	22.8	34.2						
	38	53.8	80.6												
	40	48.5	72.8												
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	41.8	62.8	49.8	74.8	29.8	44.7	21.0	31.5	30.1	45.2	18.0	27.1
	$P_e(L_c)^2/10^4$, kip-in. ²			2550		1910		1270		970		967		643	
	r_m , in.			2.95		2.08		2.20		2.25		1.74		1.85	
ASD	LRFD	Notes: Heavy line indicates L_c/r equal to or greater than 200. Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_b = 1.67$	$\phi_b = 0.90$														
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="text-align: center;">  <p>COMPOSITE PIPE 5-PIPE 3½</p> </div>		<p>Table 4-G (continued) Available Strength in Axial Compression, kips</p>										<p>$F_y = 35$ ksi $f'_c = 4$ ksi</p>		
		<p>Filled Pipe</p>		Pipe 5		Pipe 4				Pipe 3½				
Shape		STD		XXS		XS		STD		XS		STD		
t_{des} , in.		0.241		0.628		0.315		0.221		0.296		0.211		
Steel, lb/ft		14.6		27.6		15		10.8		12.5		9.12		
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	109	163	161	241	94.8	142	76.4	115	77.4	116	62.9	94.3	
	1	108	163	160	240	94.4	142	76.1	114	77.0	116	62.6	93.9	
	2	108	161	158	238	93.3	140	75.2	113	75.9	114	61.7	92.5	
	3	106	159	155	233	91.6	137	73.8	111	74.0	111	60.2	90.2	
	4	104	156	151	227	89.1	134	71.8	108	71.6	107	58.1	87.2	
	5	102	153	146	219	86.1	129	69.3	104	68.5	103	55.6	83.4	
	6	99.1	149	140	210	82.5	124	66.4	99.6	64.9	97.3	52.7	79.0	
	7	95.8	144	133	200	78.4	118	63.1	94.7	60.9	91.3	49.4	74.1	
	8	92.2	138	126	189	74.0	111	59.5	89.3	56.6	84.9	45.9	68.9	
	9	88.3	132	118	177	69.3	104	55.7	83.6	52.1	78.1	42.2	63.4	
	10	84.1	126	110	165	64.4	96.6	51.8	77.6	47.4	71.1	38.5	57.7	
	11	79.7	120	101	152	59.3	89.0	47.7	71.5	42.8	64.3	34.7	52.1	
	12	75.1	113	92.7	139	54.3	81.4	43.6	65.4	38.7	58.2	31.0	46.5	
	13	70.4	106	84.3	127	49.3	73.9	39.6	59.3	34.8	52.3	27.4	41.1	
	14	65.7	98.6	76.0	114	44.9	67.4	35.6	53.4	31.0	46.6	24.0	36.0	
	15	61.0	91.5	68.1	102	40.7	61.2	31.8	47.7	27.3	41.0	20.9	31.3	
	16	56.3	84.5	60.3	90.7	36.7	55.1	28.1	42.2	24.0	36.1	18.4	27.5	
	17	51.8	77.7	53.5	80.3	32.8	49.2	24.9	37.4	21.3	32.0	16.3	24.4	
	18	47.3	71.0	47.7	71.7	29.2	43.9	22.2	33.3	19.0	28.5	14.5	21.8	
	19	43.0	64.6	42.8	64.3	26.2	39.4	19.9	29.9	17.0	25.6	13.0	19.5	
	20	38.9	58.3	38.6	58.0	23.7	35.6	18.0	27.0	15.4	23.1	11.7	17.6	
	21	35.3	52.9	35.0	52.6	21.5	32.3	16.3	24.5	13.9	20.9	10.7	16.0	
	22	32.1	48.2	31.9	48.0	19.6	29.4	14.9	22.3			9.71	14.6	
	23	29.4	44.1	29.2	43.9	17.9	26.9	13.6	20.4					
	24	27.0	40.5			16.4	24.7	12.5	18.8					
	25	24.9	37.3					11.5	17.3					
	26	23.0	34.5											
	27	21.3	32.0											
	28	19.8	29.7											
	29	18.5	27.7											
30	17.3	25.9												
Properties														
M_n/Ω_b	$\phi_b M_n$	kip-ft	13.4	20.1	17.1	25.7	10.4	15.6	7.85	11.8	7.62	11.4	5.84	8.78
$P_e(L_c)^2/10^4$, kip-in. ²			511		438		295		236		191		154	
r_m , in.			1.88		1.39		1.48		1.51		1.31		1.34	
ASD	LRFD	Notes: Heavy line indicates L_c/r equal to or greater than 200. Dashed line indicates the L_c beyond which the bare steel strength controls.												
$\Omega_b = 1.67$	$\phi_b = 0.90$													
$\Omega_c = 2.00$	$\phi_c = 0.75$													

Shape		Pipe 3						
		XXS		XS		STD		
$t_{des}, in.$		0.559		0.280		0.201		
Steel, lb/ft		18.6		10.3		7.58		
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	108	163	62.4	93.6	50.6	75.9	
	1	108	162	62.0	93.0	50.3	75.4	
	2	106	159	60.8	91.3	49.3	73.9	
	3	102	154	58.9	88.4	47.8	71.6	
	4	97.6	147	56.3	84.5	45.7	68.5	
	5	92.0	138	53.2	79.8	43.1	64.7	
	6	85.6	129	49.6	74.3	40.2	60.3	
	7	78.6	118	45.6	68.4	37.0	55.5	
	8	71.2	107	41.4	62.1	33.6	50.4	
	9	63.7	95.7	37.5	56.3	30.2	45.3	
	10	56.2	84.5	33.6	50.6	26.7	40.1	
	11	49.0	73.6	29.9	44.9	23.4	35.1	
	12	42.1	63.3	26.2	39.4	20.2	30.3	
	13	35.9	53.9	22.7	34.1	17.5	26.2	
	14	30.9	46.5	19.6	29.4	15.1	22.7	
	15	26.9	40.5	17.1	25.6	13.1	19.8	
	16	23.7	35.6	15.0	22.5	11.6	17.4	
	17	21.0	31.5	13.3	20.0	10.2	15.4	
	18			11.8	17.8	9.13	13.7	
19			10.6	16.0	8.19	12.3		
Properties								
M_n/Ω_b	$\phi_b M_n$	kip-ft	8.74	13.1	5.42	8.14	4.19	6.29
$P_e(L_c)^2/10^4, kip-in.^2$			171		117		95.6	
$r_m, in.$			1.06		1.14		1.17	
ASD	LRFD	Notes: Heavy line indicates L_c/r equal to or greater than 200.						
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.						
$\Omega_c = 2.00$	$\phi_c = 0.75$							

<div style="text-align: center;">  </div> COMPOSITE PIPE 12-PIPE 8		Table 4-H Available Strength in Axial Compression, kips Filled Pipe										$F_y = 35$ ksi $f'_c = 5$ ksi				
		Pipe 12		Pipe 10		Pipe 8		Pipe 8		Pipe 8						
Shape		XS		STD		XS		STD		XXS		XS				
t_{des} , in.		0.465		0.349		0.465		0.340		0.816		0.465				
Steel, lb/ft		65.5		49.6		54.8		40.5		72.5		43.4				
Design		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$				
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD			
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	570	855	513	769	446	669	392	587	441	662	319	478			
	1	570	855	513	769	446	668	391	587	441	661	319	478			
	2	569	854	512	767	445	667	390	585	439	659	317	476			
	3	568	851	510	765	443	665	389	583	437	656	316	474			
	4	565	848	508	762	441	661	387	580	434	651	313	470			
	5	563	844	505	758	438	657	384	576	429	644	310	465			
	6	559	839	502	753	434	651	381	571	424	636	306	460			
	7	556	833	498	748	430	645	377	565	418	627	302	453			
	8	551	827	494	741	425	638	372	558	411	617	297	446			
	9	546	819	489	734	420	630	367	551	404	605	291	437			
	10	541	811	484	726	414	622	362	543	395	593	285	428			
	11	535	802	478	717	408	612	356	534	386	579	279	418			
	12	528	792	472	707	401	602	349	524	376	565	272	408			
	13	521	782	465	697	394	591	342	514	366	549	264	396			
	14	514	771	458	686	386	579	335	503	355	533	257	385			
	15	506	759	450	675	378	567	328	491	344	516	248	373			
	16	498	747	442	663	369	554	320	480	333	499	240	360			
	17	489	734	433	650	361	541	311	467	321	481	231	347			
	18	480	720	425	637	351	527	303	454	309	463	223	334			
	19	471	706	416	623	342	513	294	441	297	447	214	320			
	20	461	692	406	609	332	498	285	428	286	430	205	307			
	21	451	677	397	595	322	484	276	414	275	414	195	293			
	22	441	661	387	580	312	469	267	400	264	397	186	279			
	23	430	646	377	565	302	453	258	386	253	380	177	266			
	24	420	630	367	550	292	438	248	372	242	364	168	252			
	25	409	614	356	535	282	422	239	358	231	347	159	239			
	26	398	597	346	519	271	407	229	344	220	331	151	226			
	27	387	580	335	503	261	391	220	330	209	314	142	213			
	28	376	564	325	487	251	376	210	316	198	298	133	200			
	29	365	547	314	471	240	360	201	302	188	283	125	188			
	30	353	530	304	456	230	345	192	288	178	267	117	176			
	32	331	496	283	424	210	315	174	261	158	237	103	154			
	34	308	463	262	393	191	286	157	235	140	210	91.2	137			
	36	286	429	241	362	172	258	140	210	124	187	81.3	122			
	38	265	397	221	332	154	231	126	189	112	168	73.0	109			
	40	244	365	202	303	139	209	113	170	101	152	65.9	98.8			
	Properties															
	M_n/Ω_b	$\phi_b M_n$	kip-ft		144	217	114	171	99.4	149	77	116	92.9	140	60.7	91.2
	$P_e(L_c)^2/10^4$, kip-in. ²			12900	10600	7310	5960	4820	3460							
	r_m , in.			4.35	4.39	3.64	3.68	2.78	2.89							
ASD	LRFD	Note: Dashed line indicates the L_c beyond which the bare steel strength controls.														
$\Omega_b = 1.67$	$\phi_b = 0.90$															
$\Omega_c = 2.00$	$\phi_c = 0.75$															

<div style="text-align: center;">  </div> COMPOSITE PIPE 8-PIPE 5		Table 4-H (continued) Available Strength in Axial Compression, kips Filled Pipe										$F_y = 35$ ksi $f'_c = 5$ ksi			
		Pipe 8		Pipe 6				Pipe 5							
Shape		STD		XXS		XS		STD		XXS		XS			
f_{des} , in.		0.300		0.805		0.403		0.261		0.699		0.349			
Steel, lb/ft		28.6		53.2		28.6		19		38.6		20.8			
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	258	386	308	463	200	301	161	241	224	337	144	216		
	1	257	386	308	462	200	300	160	240	224	336	144	216		
	2	256	385	306	460	199	298	159	239	222	334	143	214		
	3	255	382	303	456	197	296	158	237	219	330	141	211		
	4	253	379	300	451	195	292	156	234	216	324	138	207		
	5	250	375	295	444	191	287	153	230	211	317	135	203		
	6	247	370	290	436	187	281	150	225	205	309	131	197		
	7	243	365	283	426	183	274	146	219	199	299	127	190		
	8	239	358	276	415	178	267	142	213	192	288	122	183		
	9	234	351	268	403	172	258	137	206	184	277	116	174		
	10	229	343	260	391	166	249	132	198	176	264	111	166		
	11	223	335	251	377	160	240	127	190	167	251	105	157		
	12	217	326	241	362	153	230	121	182	158	237	98.4	148		
	13	211	316	231	347	146	219	116	173	149	223	92.0	138		
	14	204	306	221	332	139	208	110	165	139	209	85.6	128		
	15	197	296	210	316	132	197	104	156	130	195	79.3	119		
	16	190	285	199	299	124	186	97.6	146	120	181	73.0	109		
	17	183	274	188	283	117	175	91.6	137	111	167	66.8	100		
	18	175	263	177	267	109	164	85.5	128	102	153	60.9	91.3		
	19	168	252	167	250	102	153	79.6	119	93.1	140	55.2	83.0		
	20	160	241	156	234	94.9	142	73.8	111	84.5	127	50.7	76.3		
	21	153	229	145	218	87.9	132	68.1	102	76.7	115	46.4	69.8		
	22	145	218	135	203	81.1	122	62.7	94.0	69.9	105	42.3	63.6		
	23	138	206	125	188	74.4	112	57.3	86.0	63.9	96.1	38.7	58.2		
	24	130	195	115	173	68.3	103	52.6	78.9	58.7	88.2	35.5	53.4		
	25	123	184	106	160	63.3	95.1	48.5	72.7	54.1	81.3	32.8	49.2		
	26	116	173	98.2	148	58.5	88.0	44.8	67.3	50.0	75.2	30.3	45.5		
	27	109	163	91.1	137	54.3	81.6	41.6	62.4	46.4	69.7	28.1	42.2		
	28	102	153	84.7	127	50.5	75.8	38.7	58.0	43.1	64.8	26.1	39.2		
	29	94.9	142	78.9	119	47.0	70.7	36.0	54.1	40.2	60.4	24.3	36.6		
	30	88.6	133	73.8	111	44.0	66.1	33.7	50.5			22.7	34.2		
	32	77.9	117	64.8	97.4	38.6	58.1	29.6	44.4						
	34	69.0	104	57.4	86.3	34.2	51.4	26.2	39.3						
	36	61.6	92.3			30.5	45.9	23.4	35.1						
	38	55.2	82.9												
	40	49.9	74.8												
	Properties														
	M_n/Ω_b	$\phi_b M_n$	kip-ft	42.6	64.1	50.2	75.4	30.2	45.4	21.4	32.2	30.3	45.5	18.3	27.5
	$P_e(L_c)^2/10^4$, kip-in. ²			2620		1930		1290		995		973		653	
	r_m , in.			2.95		2.08		2.20		2.25		1.74		1.85	
ASD	LRFD	Notes: Heavy line indicates L_c/r equal to or greater than 200.													
$\Omega_b = 1.67$	$\phi_b = 0.90$	Dashed line indicates the L_c beyond which the bare steel strength controls.													
$\Omega_c = 2.00$	$\phi_c = 0.75$														

<div style="text-align: center;">  <p>COMPOSITE PIPE 5-PIPE 3½</p> </div>		Table 4-H (continued) Available Strength in Axial Compression, kips Filled Pipe										$F_y = 35$ ksi $f'_c = 5$ ksi		
		Pipe 5		Pipe 4				Pipe 3½						
Shape		STD		XXS		XS		STD		XS		STD		
t_{des} , in.		0.241		0.628		0.315		0.221		0.296		0.211		
Steel, lb/ft		14.6		27.6		15		10.8		12.5		9.12		
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	118	177	161	241	100	151	82.5	124	81.7	123	67.7	101	
	1	118	177	160	240	100	150	82.2	123	81.3	122	67.3	101	
	2	117	176	158	238	98.8	148	81.2	122	80.1	120	66.3	99.4	
	3	115	173	155	233	96.8	145	79.5	119	78.1	117	64.6	96.9	
	4	113	170	151	227	94.1	141	77.3	116	75.3	113	62.3	93.4	
	5	111	166	146	219	90.7	136	74.5	112	71.9	108	59.4	89.1	
	6	107	161	140	210	86.8	130	71.2	107	68.0	102	56.1	84.2	
	7	104	155	133	200	82.3	124	67.4	101	63.6	95.5	52.5	78.7	
	8	99.4	149	126	189	77.5	116	63.4	95.1	58.9	88.4	48.5	72.8	
	9	94.8	142	118	177	72.3	109	59.1	88.7	54.0	81.1	44.5	66.7	
	10	90.1	135	110	165	67.0	100	54.7	82.0	49.1	73.6	40.3	60.4	
	11	85.0	128	101	152	61.5	92.3	50.1	75.2	44.1	66.1	36.1	54.2	
	12	79.9	120	92.7	139	56.1	84.1	45.6	68.4	39.2	58.8	32.1	48.1	
	13	74.6	112	84.3	127	50.7	76.0	41.1	61.7	34.8	52.3	28.2	42.2	
	14	69.3	104	76.0	114	45.4	68.2	36.8	55.2	31.0	46.6	24.4	36.7	
	15	64.0	96.0	68.1	102	40.7	61.2	32.6	49.0	27.3	41.0	21.3	31.9	
	16	58.8	88.2	60.3	90.7	36.7	55.1	28.7	43.1	24.0	36.1	18.7	28.1	
	17	53.8	80.6	53.5	80.3	32.8	49.2	25.4	38.1	21.3	32.0	16.6	24.9	
	18	48.9	73.3	47.7	71.7	29.2	43.9	22.7	34.0	19.0	28.5	14.8	22.2	
	19	44.1	66.1	42.8	64.3	26.2	39.4	20.4	30.5	17.0	25.6	13.3	19.9	
	20	39.8	59.7	38.6	58.0	23.7	35.6	18.4	27.6	15.4	23.1	12.0	18.0	
	21	36.1	54.1	35.0	52.6	21.5	32.3	16.7	25.0	13.9	20.9	10.9	16.3	
	22	32.9	49.3	31.9	48.0	19.6	29.4	15.2	22.8			9.89	14.8	
	23	30.1	45.1	29.2	43.9	17.9	26.9	13.9	20.8					
	24	27.6	41.4			16.4	24.7	12.8	19.1					
	25	25.5	38.2					11.8	17.6					
	26	23.5	35.3											
	27	21.8	32.7											
	28	20.3	30.4											
	29	18.9	28.4											
30	17.7	26.5												
Properties														
M_n/Ω_b	$\phi_b M_n$	kip-ft	13.6	20.5	17.2	25.8	10.5	15.8	7.99	12.0	7.72	11.6	5.94	8.93
$P_e(L_c)^2/10^4$, kip-in. ²			522		440		299		241		193		157	
r_m , in.			1.88		1.39		1.48		1.51		1.31		1.34	
ASD	LRFD	Notes: Heavy line indicates L_c/r equal to or greater than 200.												
$\Omega_b = 1.67$	$\phi_b = 0.90$													
$\Omega_c = 2.00$	$\phi_c = 0.75$													

Shape		Pipe 3						
		XXS		XS		STD		
t_{des} , in.		0.559		0.280		0.201		
Steel, lb/ft		18.6		10.3		7.58		
Design		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r	0	108	163	65.7	98.5	54.2	81.2	
	1	108	162	65.2	97.8	53.8	80.7	
	2	106	159	63.9	95.9	52.7	79.1	
	3	102	154	61.8	92.7	51.0	76.5	
	4	97.6	147	59.0	88.5	48.6	73.0	
	5	92.0	138	55.6	83.4	45.8	68.7	
	6	85.6	129	51.6	77.5	42.5	63.8	
	7	78.6	118	47.3	71.0	39.0	58.5	
	8	71.2	107	42.8	64.3	35.2	52.9	
	9	63.7	95.7	38.2	57.4	31.4	47.2	
	10	56.2	84.5	33.7	50.6	27.7	41.5	
	11	49.0	73.6	29.9	44.9	24.0	36.1	
	12	42.1	63.3	26.2	39.4	20.6	30.8	
	13	35.9	53.9	22.7	34.1	17.5	26.3	
	14	30.9	46.5	19.6	29.4	15.1	22.7	
	15	26.9	40.5	17.1	25.6	13.2	19.8	
	16	23.7	35.6	15.0	22.5	11.6	17.4	
	17	21.0	31.5	13.3	20.0	10.2	15.4	
	18			11.8	17.8	9.14	13.7	
19			10.6	16.0	8.20	12.3		
Properties								
M_n/Ω_b	$\phi_b M_n$	kip-ft	8.79	13.2	5.48	8.24	4.25	6.39
$P_e(L_c)^2/10^4$, kip-in. ²			171		119		97.3	
r_m , in.			1.06		1.14		1.17	
ASD	LRFD	Notes: Heavy line indicates L_c/r equal to or greater than 200. Dashed line indicates the L_c beyond which the bare steel strength controls.						
$\Omega_b = 1.67$	$\phi_b = 0.90$							
$\Omega_c = 2.00$	$\phi_c = 0.75$							



Table 6-A
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces


$F_y = 65$ ksi
 $F_u = 80$ ksi

W-Shapes

W44 ^x						Shape	W44 ^x					
335 ^c		290 ^c		262 ^c		lb/ft	335		290		262 ^v	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
3630	5460	3010	4530	2650	3990	0	5250	7900	4570	6870	4120	6190
3510	5270	2910	4380	2560	3850	6	5250	7900	4570	6870	4120	6190
3470	5210	2870	4320	2530	3800	7	5250	7900	4570	6870	4120	6190
3420	5130	2830	4260	2490	3750	8	5250	7900	4570	6870	4120	6190
3360	5050	2790	4190	2450	3680	9	5250	7900	4570	6870	4120	6190
3300	4960	2740	4110	2410	3620	10	5250	7900	4570	6870	4120	6190
3230	4860	2680	4030	2360	3540	11	5240	7870	4560	6850	4100	6160
3160	4750	2620	3940	2300	3460	12	5140	7730	4470	6720	4020	6040
3090	4640	2560	3840	2250	3380	13	5050	7590	4390	6590	3940	5920
3010	4520	2490	3750	2190	3290	14	4950	7450	4300	6460	3850	5790
2930	4400	2420	3640	2130	3200	15	4860	7310	4210	6330	3770	5670
2840	4270	2350	3530	2060	3100	16	4770	7160	4130	6200	3690	5550
2750	4130	2280	3420	2000	3000	17	4670	7020	4040	6080	3610	5430
2660	4000	2200	3310	1930	2900	18	4580	6880	3960	5950	3530	5310
2560	3840	2120	3190	1860	2800	19	4480	6740	3870	5820	3450	5180
2450	3680	2040	3070	1790	2690	20	4390	6600	3780	5690	3370	5060
2230	3340	1880	2830	1650	2480	22	4200	6320	3610	5430	3200	4820
2010	3020	1720	2590	1510	2270	24	4010	6030	3440	5170	3040	4570
1790	2700	1560	2340	1370	2050	26	3830	5750	3270	4910	2880	4330
1590	2390	1380	2070	1230	1850	28	3640	5470	3100	4660	2720	4080
1390	2090	1210	1810	1080	1620	30	3450	5180	2930	4400	2550	3840
1220	1840	1060	1590	948	1420	32	3260	4900	2710	4070	2310	3480
1080	1630	939	1410	839	1260	34	3000	4510	2460	3700	2090	3150
966	1450	838	1260	749	1130	36	2750	4140	2250	3380	1910	2870
867	1300	752	1130	672	1010	38	2540	3820	2070	3110	1750	2630
783	1180	679	1020	606	911	40	2360	3550	1920	2880	1620	2430
710	1070	616	925	550	827	42	2200	3310	1780	2680	1500	2260
647	972	561	843	501	753	44	2060	3100	1660	2500	1400	2100
592	890	513	771	459	689	46	1940	2910	1560	2350	1310	1970
544	817	471	708	421	633	48	1830	2750	1470	2210	1230	1850
501	753	434	653	388	583	50	1730	2600	1390	2090	1160	1740

Properties					
Available Strength in Tensile Yielding, kips					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
3830	5760	3320	5000	3000	4520
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
2960	4430	2560	3840	2320	3470
Available Strength in Shear, kips					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
1180	1770	981	1470	794	1190
Available Strength in Flexure about Y-Y Axis, kip-ft					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
765	1150	665	999	590	887
Limiting Unbraced Lengths, ft					
L_p	L_r	L_p	L_r	L_p	L_r
10.8	32.6	10.8	31.3	10.7	30.4
Area, in. ²					
98.5		85.4		77.2	
Moment of Inertia, in. ⁴					
I_x	I_y	I_x	I_y	I_x	I_y
31100	1200	27000	1040	24100	923
r_y , in.					
3.49		3.49		3.47	
r_x/r_y					
5.10		5.10		5.10	

^c Shape is slender for compression with $F_y = 65$ ksi.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Note: Confirm ASTM A913 material availability before specifying.

<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;">  W44–W40 </div> <div style="text-align: center;"> Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces </div> <div style="text-align: right;"> $F_y = 65$ ksi $F_u = 80$ ksi </div> </div>																			
W44×						W40×						Shape		W44×			W40×		
230 ^c		655 ^h		593 ^h		lb/ft		230 ^v		655 ^h		593 ^h							
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$				
Available Compressive Strength, kips								Available Flexural Strength, kip-ft											
ASD	LRFD	ASD	LRFD	ASD	LRFD			ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
2260	3400	7510	11300	6770	10200	Effective Length, L_e , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	3570	5360	9990	15000	8950	13500						
2180	3280	7270	10900	6550	9840		6	3570	5360	9990	15000	8950	13500						
2150	3240	7180	10800	6470	9720		7	3570	5360	9990	15000	8950	13500						
2120	3190	7080	10600	6370	9580		8	3570	5360	9990	15000	8950	13500						
2080	3130	6970	10500	6270	9430		9	3570	5360	9990	15000	8950	13500						
2040	3070	6850	10300	6160	9260		10	3570	5360	9990	15000	8950	13500						
2000	3010	6720	10100	6040	9080		11	3540	5320	9990	15000	8950	13500						
1960	2940	6580	9890	5910	8880		12	3470	5210	9990	15000	8930	13400						
1910	2870	6430	9670	5770	8670		13	3400	5100	9890	14900	8840	13300						
1860	2790	6270	9430	5620	8450		14	3320	5000	9790	14700	8740	13100						
1800	2710	6110	9180	5470	8220		15	3250	4890	9700	14600	8650	13000						
1750	2630	5940	8920	5310	7990		16	3180	4780	9600	14400	8550	12900						
1690	2540	5760	8660	5150	7740		17	3110	4670	9510	14300	8460	12700						
1630	2450	5580	8380	4980	7490		18	3030	4560	9410	14100	8370	12600						
1570	2360	5390	8100	4810	7230		19	2960	4450	9320	14000	8270	12400						
1510	2270	5200	7820	4640	6970		20	2890	4340	9220	13900	8180	12300						
1390	2090	4820	7240	4280	6430		22	2740	4120	9030	13600	7990	12000						
1270	1910	4430	6650	3920	5900		24	2600	3910	8840	13300	7800	11700						
1150	1730	4040	6070	3570	5360		26	2450	3690	8650	13000	7610	11400						
1030	1550	3660	5490	3220	4840		28	2310	3470	8450	12700	7420	11200						
917	1380	3290	4940	2890	4340		30	2130	3200	8260	12400	7240	10900						
813	1220	2930	4410	2560	3850		32	1910	2870	8070	12100	7050	10600						
720	1080	2600	3900	2270	3410		34	1720	2590	7880	11800	6860	10300						
642	966	2320	3480	2020	3040		36	1570	2350	7690	11600	6670	10000						
577	867	2080	3120	1820	2730		38	1430	2150	7500	11300	6480	9740						
520	782	1880	2820	1640	2460		40	1320	1980	7310	11000	6290	9460						
472	709	1700	2560	1490	2230		42	1220	1830	7110	10700	6110	9180						
430	646	1550	2330	1350	2040		44	1130	1700	6920	10400	5920	8900						
393	591	1420	2130	1240	1860		46	1060	1590	6730	10100	5730	8610						
361	543	1300	1960	1140	1710		48	991	1490	6540	9830	5540	8330						
333	501	1200	1800	1050	1580		50	932	1400	6350	9540	5350	8050						
Properties																			
Available Strength in Tensile Yielding, kips							Limiting Unbraced Lengths, ft												
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r								
2640	3970	7510	11300	6770	10200	10.6	29.5	12.0	54.9	11.8	50.4								
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²													
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	67.8		193		174									
2030	3050	5790	8690	5220	7830	Moment of Inertia, in. ⁴													
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y								
697	1050	2230	3350	2000	3000	20800	796	56500	2870	50400	2520								
Available Strength in Shear, kips						r_y , in.													
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.43		3.86		3.80									
697	1050	2230	3350	2000	3000	r_x/r_y													
Available Strength in Flexure about Y-Y Axis, kip-ft						5.10		4.43		4.47									
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$														
509	765	1760	2640	1560	2340														

^c Shape is slender for compression with $F_y = 65$ ksi.
^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Note: Confirm ASTM A913 material availability before specifying.



Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$

W-Shapes

W40 \times						Shape	W40 \times					
503 ^h		431 ^h		397 ^h		lb/ft	503 ^h		431 ^h		397 ^h	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
5760	8660	4940	7430	4550	6840	0	7520	11300	6360	9560	5840	8780
5560	8360	4760	7160	4390	6590	6	7520	11300	6360	9560	5840	8780
5490	8250	4700	7060	4330	6510	7	7520	11300	6360	9560	5840	8780
5410	8130	4630	6960	4260	6410	8	7520	11300	6360	9560	5840	8780
5320	7990	4550	6840	4190	6300	9	7520	11300	6360	9560	5840	8780
5220	7840	4460	6700	4110	6170	10	7520	11300	6360	9560	5840	8780
5110	7680	4370	6560	4020	6040	11	7520	11300	6360	9560	5840	8780
5000	7510	4260	6410	3920	5900	12	7480	11200	6300	9460	5780	8680
4870	7330	4160	6250	3820	5750	13	7390	11100	6210	9330	5690	8550
4750	7130	4040	6070	3720	5590	14	7300	11000	6120	9200	5610	8420
4610	6930	3920	5900	3610	5420	15	7200	10800	6030	9060	5520	8300
4470	6720	3800	5710	3500	5250	16	7110	10700	5940	8930	5430	8170
4330	6510	3670	5520	3380	5080	17	7020	10500	5850	8800	5350	8040
4180	6280	3540	5330	3260	4900	18	6920	10400	5760	8660	5260	7910
4030	6060	3410	5130	3140	4710	19	6830	10300	5680	8530	5180	7780
3880	5830	3280	4930	3010	4530	20	6740	10100	5590	8400	5090	7650
3570	5360	3010	4520	2760	4150	22	6550	9850	5410	8130	4920	7390
3260	4900	2740	4110	2510	3780	24	6370	9570	5230	7870	4750	7140
2950	4440	2470	3710	2270	3400	26	6180	9290	5060	7600	4580	6880
2650	3990	2210	3320	2030	3050	28	6000	9010	4880	7330	4410	6620
2370	3550	1960	2950	1800	2700	30	5810	8730	4700	7070	4240	6370
2090	3140	1720	2590	1580	2380	32	5620	8450	4520	6800	4060	6110
1850	2780	1530	2300	1400	2100	34	5440	8170	4350	6530	3890	5850
1650	2480	1360	2050	1250	1880	36	5250	7890	4170	6270	3720	5590
1480	2230	1220	1840	1120	1680	38	5070	7620	3990	6000	3550	5340
1340	2010	1100	1660	1010	1520	40	4880	7340	3810	5720	3320	4990
1210	1820	1000	1500	917	1380	42	4700	7060	3580	5370	3110	4680
1100	1660	912	1370	836	1260	44	4510	6780	3370	5070	2930	4410
1010	1520	835	1250	765	1150	46	4280	6430	3190	4800	2770	4170
928	1390	767	1150	702	1060	48	4070	6110	3030	4550	2630	3950
855	1290	706	1060	647	973	50	3880	5830	2880	4330	2500	3760

Properties											
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
5760	8660	4940	7430	4550	6840	11.5	44.2	11.3	39.8	11.3	38.1
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	148		127		117	
4440	6660	3810	5720	3510	5270	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
1690	2530	1440	2160	1300	1950	41600	2040	34800	1690	32000	1540
Available Strength in Shear, kips						r_y , in.					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.72		3.65		3.64	
1690	2530	1440	2160	1300	1950	r_x/r_y					
Available Strength in Flexure about Y-Y Axis, kip-ft						4.52		4.55		4.56	
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$						
1280	1920	1060	1600	973	1460						

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.



Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces


$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$

W-Shapes


W40 ^x						Shape	W40 ^x					
372 ^h		362 ^h		324 ^c		lb/ft	372 ^h		362 ^h		324	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
4280	6430	4130	6200	3630	5460	0	5450	8190	5320	8000	4740	7120
4120	6190	3970	5970	3510	5280	6	5450	8190	5320	8000	4740	7120
4070	6110	3920	5890	3470	5220	7	5450	8190	5320	8000	4740	7120
4000	6010	3860	5800	3420	5140	8	5450	8190	5320	8000	4740	7120
3930	5910	3790	5690	3370	5060	9	5450	8190	5320	8000	4740	7120
3850	5790	3710	5580	3310	4970	10	5450	8190	5320	8000	4740	7120
3770	5660	3630	5460	3240	4880	11	5450	8190	5320	8000	4740	7120
3680	5530	3540	5330	3180	4770	12	5380	8080	5250	7890	4660	7010
3580	5380	3450	5190	3100	4650	13	5290	7960	5170	7760	4580	6890
3480	5230	3350	5040	3010	4520	14	5210	7830	5080	7640	4510	6770
3380	5070	3250	4890	2920	4380	15	5130	7700	5000	7510	4430	6650
3270	4910	3150	4730	2820	4240	16	5040	7580	4910	7390	4350	6540
3160	4740	3040	4570	2720	4090	17	4960	7450	4830	7260	4270	6420
3040	4570	2930	4400	2620	3940	18	4870	7320	4750	7140	4190	6300
2920	4400	2820	4240	2520	3790	19	4790	7200	4660	7010	4110	6180
2810	4220	2700	4060	2420	3640	20	4700	7070	4580	6880	4030	6060
2570	3860	2470	3720	2210	3320	22	4540	6820	4410	6630	3870	5820
2330	3500	2250	3370	2010	3010	24	4370	6560	4250	6380	3720	5590
2100	3150	2020	3040	1800	2710	26	4200	6310	4080	6130	3560	5350
1870	2810	1800	2710	1610	2410	28	4030	6060	3910	5880	3400	5110
1650	2490	1590	2390	1420	2130	30	3860	5810	3740	5630	3240	4870
1450	2180	1400	2100	1250	1870	32	3690	5550	3580	5380	3080	4640
1290	1930	1240	1860	1100	1660	34	3530	5300	3410	5130	2930	4400
1150	1730	1110	1660	984	1480	36	3360	5050	3240	4870	2700	4060
1030	1550	993	1490	883	1330	38	3140	4710	3020	4530	2500	3760
930	1400	896	1350	797	1200	40	2930	4400	2810	4230	2330	3500
844	1270	813	1220	723	1090	42	2740	4120	2640	3960	2180	3270
769	1160	741	1110	659	990	44	2580	3880	2480	3730	2050	3070
703	1060	678	1020	603	906	46	2440	3660	2340	3520	1930	2900
646	971	622	935	553	832	48	2310	3470	2220	3330	1820	2740
595	895	574	862	510	766	50	2190	3300	2110	3170	1730	2600

Properties											
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
4280	6440	4130	6200	3710	5580	11.2	36.5	11.2	36.2	11.1	34.3
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	110		106		95.3	
3300	4950	3180	4770	2860	4290	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
1220	1840	1180	1770	1050	1570	29600	1420	28900	1380	25600	1220
Available Strength in Shear, kips						r_y , in.					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.60		3.60		3.58	
1220	1840	1180	1770	1050	1570	r_x/r_y					
Available Strength in Flexure about Y-Y Axis, kip-ft						4.58		4.58		4.58	
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$						
898	1350	876	1320	775	1170						


^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W40x						Shape	W40x					
297 ^c		277 ^c		249 ^c		lb/ft	297		277		249	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD
3270	4910	2970	4470	2620	3930		0	4310	6480	4050	6090	3630
3160	4740	2870	4320	2530	3800	6	4310	6480	4050	6090	3630	5460
3120	4680	2840	4270	2500	3750	7	4310	6480	4050	6090	3630	5460
3070	4620	2800	4210	2460	3700	8	4310	6480	4050	6090	3630	5460
3020	4540	2750	4140	2420	3640	9	4310	6480	4050	6090	3630	5460
2970	4460	2710	4070	2380	3570	10	4310	6480	4050	6090	3630	5460
2910	4370	2650	3990	2330	3500	11	4310	6480	4050	6090	3630	5460
2850	4280	2600	3900	2280	3430	12	4240	6370	3990	5990	3570	5360
2780	4180	2540	3810	2230	3350	13	4160	6250	3920	5890	3500	5260
2710	4070	2470	3720	2170	3260	14	4080	6140	3840	5780	3430	5160
2640	3960	2410	3620	2110	3170	15	4010	6030	3770	5670	3360	5060
2560	3850	2340	3510	2050	3080	16	3930	5910	3700	5560	3300	4950
2480	3720	2270	3410	1980	2980	17	3860	5800	3630	5450	3230	4850
2390	3580	2190	3300	1920	2880	18	3780	5690	3550	5340	3160	4750
2290	3440	2120	3180	1850	2780	19	3710	5570	3480	5230	3090	4650
2200	3300	2040	3070	1780	2680	20	3630	5460	3410	5130	3030	4550
2000	3010	1890	2840	1650	2480	22	3480	5230	3270	4910	2890	4350
1810	2720	1710	2580	1510	2270	24	3330	5000	3120	4690	2760	4150
1620	2440	1540	2320	1370	2060	26	3180	4780	2980	4470	2620	3940
1440	2170	1370	2060	1220	1840	28	3030	4550	2830	4260	2490	3740
1270	1910	1210	1820	1070	1610	30	2880	4320	2690	4040	2350	3540
1120	1680	1060	1600	944	1420	32	2730	4100	2540	3820	2190	3300
988	1480	943	1420	836	1260	34	2530	3800	2340	3520	1990	2990
881	1320	841	1260	746	1120	36	2320	3490	2150	3220	1820	2740
791	1190	755	1130	670	1010	38	2150	3220	1980	2970	1680	2520
714	1070	681	1020	604	908	40	1990	3000	1840	2760	1550	2330
647	973	618	929	548	824	42	1860	2800	1710	2570	1440	2170
590	887	563	846	499	751	44	1740	2620	1600	2410	1350	2030
540	811	515	774	457	687	46	1640	2470	1510	2260	1270	1900
496	745	473	711	420	631	48	1550	2330	1420	2140	1190	1790
457	687	436	655	387	581	50	1470	2210	1340	2020	1130	1690
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
3400	5110	3170	4770	2860	4300	11.0	32.9	11.1	32.6	11.0	31.5	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	87.3		81.5		73.5		
2620	3930	2450	3670	2210	3310	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	23200	1090	21900	1040	19600	926	
962	1440	857	1290	768	1150	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						3.54		3.58		3.55		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
697	1050	662	995	590	887	4.60		4.58		4.59		

^c Shape is slender for compression with $F_y = 65$ ksi.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes													
W40 _x						Shape	W40 _x						
215 ^c		199 ^f		392 ^h		lb/ft	215 ^v		199 ^v		392 ^h		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
2190	3290	2010	3010	4510	6790	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	3130	4700	2820	4240	5550	8340
2110	3180	1930	2910	4210	6320		6	3130	4700	2820	4240	5550	8340
2090	3140	1910	2870	4100	6160		7	3130	4700	2820	4240	5550	8340
2060	3090	1880	2830	3980	5980		8	3130	4700	2820	4240	5550	8340
2020	3040	1850	2780	3850	5790		9	3130	4700	2820	4240	5460	8210
1990	2980	1810	2720	3710	5580		10	3130	4700	2820	4240	5360	8060
1950	2920	1770	2670	3560	5350		11	3120	4700	2800	4210	5260	7910
1900	2860	1730	2610	3400	5110		12	3060	4610	2740	4120	5160	7760
1860	2790	1690	2540	3240	4870		13	3000	4510	2690	4040	5060	7610
1810	2720	1650	2470	3070	4620		14	2940	4420	2630	3950	4960	7460
1760	2640	1600	2400	2900	4360		15	2880	4330	2570	3870	4860	7310
1710	2570	1550	2330	2730	4100		16	2820	4240	2520	3780	4760	7160
1650	2490	1500	2250	2560	3850		17	2760	4150	2460	3690	4660	7010
1600	2400	1450	2180	2390	3590		18	2700	4060	2400	3610	4560	6850
1540	2320	1390	2100	2220	3340		19	2640	3970	2340	3520	4460	6700
1490	2230	1340	2020	2060	3090		20	2580	3880	2290	3440	4360	6550
1370	2060	1230	1850	1740	2620		22	2460	3700	2170	3270	4160	6250
1260	1890	1120	1690	1470	2200		24	2340	3510	2060	3090	3960	5950
1140	1710	1020	1530	1250	1880		26	2220	3330	1940	2920	3760	5650
1030	1550	914	1370	1080	1620		28	2100	3150	1830	2750	3560	5350
918	1380	812	1220	938	1410		30	1980	2970	1690	2540	3360	5040
811	1220	713	1070	824	1240		32	1790	2690	1510	2270	3120	4690
719	1080	632	950	730	1100		34	1620	2430	1370	2050	2900	4360
641	963	564	847	651	979		36	1470	2220	1240	1870	2710	4070
575	865	506	760	584	878		38	1350	2030	1140	1710	2540	3810
519	780	457	686	527	793		40	1250	1880	1050	1570	2390	3590
471	708	414	622	478	719		42	1160	1740	969	1460	2260	3390
429	645	377	567	436	655		44	1080	1620	901	1350	2140	3220
393	590	345	519				46	1010	1520	841	1260	2040	3060
361	542	317	477				48	947	1420	788	1190	1940	2920
332	499	292	439				50	892	1340	742	1110	1850	2790
Available Strength in Tensile Yielding, kips							Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		Limiting Unbraced Lengths, ft						
2470	3710	2290	3440	4510	6790	L_p	L_r	L_p	L_r	L_p	L_r		
						11.0	30.4	10.7	29.4	8.18	30.9		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	63.5		58.8		116			
1910	2860	1760	2650	3480	5220	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	16700	803	14900	695	29900	803		
592	890	587	883	1540	2300	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						3.54		3.45		2.64			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
506	761	444	668	675	1010	4.58		4.64		6.10			

^c Shape is slender for compression with $F_y = 65$ ksi.
^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.


 <p style="text-align: center;">Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces</p> <p style="text-align: right;">$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$</p> <p style="text-align: center;">W-Shapes</p>												
W40 \times						Shape	W40 \times					
331 ^h		327 ^h		294 ^c		lb/ft	331 ^h		327 ^h		294	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
3800	5720	3730	5610	3330	5010	0	4640	6970	4570	6870	4120	6190
3530	5300	3470	5210	3110	4670	6	4640	6970	4570	6870	4120	6190
3440	5160	3370	5070	3030	4550	7	4640	6970	4570	6870	4120	6190
3330	5010	3270	4920	2930	4410	8	4630	6970	4570	6870	4110	6180
3220	4830	3160	4750	2830	4250	9	4540	6820	4480	6730	4020	6040
3090	4650	3040	4570	2720	4090	10	4440	6680	4380	6590	3930	5900
2960	4450	2910	4370	2600	3910	11	4350	6530	4290	6450	3830	5760
2820	4240	2780	4170	2480	3720	12	4250	6390	4190	6300	3740	5620
2680	4030	2640	3960	2350	3530	13	4150	6240	4100	6160	3650	5490
2530	3810	2490	3750	2220	3340	14	4060	6100	4010	6020	3560	5350
2390	3590	2350	3530	2090	3140	15	3960	5950	3910	5880	3470	5210
2240	3360	2200	3310	1960	2940	16	3860	5810	3820	5740	3370	5070
2090	3140	2060	3100	1830	2740	17	3770	5660	3720	5590	3280	4930
1940	2920	1920	2880	1700	2550	18	3670	5520	3630	5450	3190	4790
1800	2700	1780	2670	1570	2360	19	3580	5370	3530	5310	3100	4660
1660	2490	1640	2460	1450	2170	20	3480	5230	3440	5170	3010	4520
1390	2090	1380	2070	1210	1820	22	3290	4940	3250	4880	2820	4240
1170	1760	1160	1740	1020	1530	24	3090	4650	3060	4600	2640	3960
996	1500	986	1480	865	1300	26	2900	4360	2870	4310	2450	3690
859	1290	850	1280	746	1120	28	2690	4050	2660	4000	2210	3320
748	1120	740	1110	650	977	30	2460	3690	2430	3650	2010	3020
658	989	651	978	571	859	32	2260	3400	2230	3360	1850	2770
583	876	576	866	506	761	34	2090	3140	2070	3110	1710	2560
520	781	514	773	451	679	36	1950	2930	1920	2890	1580	2380
466	701	461	694	405	609	38	1820	2740	1800	2710	1480	2220
421	633	416	626	366	550	40	1710	2570	1690	2540	1390	2090
382	574	378	568	332	499	42	1620	2430	1600	2400	1310	1970
						44	1530	2300	1510	2270	1240	1860
						46	1450	2180	1430	2150	1170	1760
						48	1380	2080	1360	2050	1120	1680
						50	1320	1980	1300	1960	1060	1600
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
3800	5720	3730	5610	3360	5040	7.96	27.6	7.99	27.5	7.90	26.0	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	97.7		95.9		86.2		
2930	4400	2880	4320	2590	3880	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	24700	644	24500	640	21900	562	
1290	1940	1250	1880	1110	1670	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.57		2.58		2.55		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
550	827	545	819	485	729	6.19		6.20		6.24		

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.


^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W40x						Shape	W40x					
278 ^c		264 ^c		235 ^c		lb/ft	278		264		235	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
3150	4730	2900	4370	2490	3740	0	3860	5800	3670	5510	3280	4920
2950	4430	2720	4090	2330	3510	6	3860	5800	3670	5510	3280	4920
2880	4330	2650	3990	2280	3420	7	3860	5800	3670	5510	3280	4920
2790	4190	2580	3880	2220	3330	8	3840	5780	3650	5480	3270	4910
2690	4040	2500	3760	2150	3230	9	3750	5640	3560	5350	3180	4790
2580	3880	2420	3630	2080	3120	10	3670	5510	3480	5220	3100	4670
2470	3710	2320	3490	2000	3000	11	3580	5380	3390	5090	3020	4550
2350	3530	2210	3320	1920	2880	12	3490	5240	3300	4960	2940	4420
2230	3340	2090	3150	1830	2750	13	3400	5110	3220	4840	2860	4300
2100	3160	1970	2970	1740	2620	14	3310	4980	3130	4710	2780	4180
1970	2960	1850	2790	1650	2490	15	3220	4840	3040	4580	2700	4060
1840	2770	1740	2610	1560	2350	16	3130	4710	2960	4450	2620	3940
1720	2580	1620	2430	1460	2190	17	3050	4580	2870	4320	2540	3820
1590	2390	1500	2250	1350	2030	18	2960	4440	2790	4190	2460	3700
1470	2210	1380	2080	1250	1880	19	2870	4310	2700	4060	2380	3580
1350	2030	1270	1910	1150	1730	20	2780	4180	2610	3930	2300	3460
1130	1690	1060	1590	961	1450	22	2600	3910	2440	3670	2140	3210
947	1420	891	1340	808	1210	24	2430	3650	2270	3410	1970	2960
807	1210	759	1140	688	1030	26	2220	3330	2050	3080	1740	2620
696	1050	654	984	594	892	28	2000	3000	1840	2760	1560	2350
606	911	570	857	517	777	30	1810	2730	1670	2510	1410	2120
533	801	501	753	454	683	32	1660	2500	1530	2300	1290	1940
472	709	444	667	403	605	34	1530	2300	1410	2120	1180	1780
421	633	396	595	359	540	36	1420	2140	1310	1960	1100	1650
378	568	355	534	322	484	38	1330	2000	1220	1830	1020	1530
341	512	321	482	291	437	40	1250	1870	1140	1710	953	1430
309	465	291	437	264	396	42	1170	1760	1070	1610	895	1350
						44	1110	1670	1010	1520	844	1270
						46	1050	1580	959	1440	798	1200
						48	998	1500	911	1370	757	1140
						50	951	1430	867	1300	720	1080
Available Strength in Tensile Yielding, kips						Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft						
3200	4810	3010	4530	2690	4040	L_p	L_r	L_p	L_r	L_p	L_r	
						7.81	25.2	7.81	24.7	7.87	23.9	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	82.3		77.4		69.1		
2470	3700	2320	3480	2070	3110	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	20500	521	19400	493	17400	444	
1080	1610	998	1500	857	1290	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.52		2.52		2.54		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
452	679	428	644	383	575	6.27		6.27		6.26		

^c Shape is slender for compression with $F_y = 65$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.


 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W40 ^x						Shape	W40 ^x					
211 ^c		183 ^c		167 ^c		lb/ft	211		183 ^y		167 ^y	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2170	3270	1790	2690	1640	2460	0	2940	4420	2510	3770	2250	3380
2030	3050	1670	2510	1520	2290	6	2940	4420	2510	3770	2250	3380
1980	2980	1630	2450	1480	2230	7	2940	4420	2510	3770	2250	3380
1930	2900	1590	2380	1440	2160	8	2920	4390	2490	3740	2210	3320
1870	2810	1540	2310	1390	2090	9	2850	4280	2420	3640	2150	3230
1800	2710	1480	2230	1340	2010	10	2770	4160	2350	3540	2080	3130
1730	2610	1420	2140	1280	1930	11	2690	4050	2290	3440	2020	3040
1660	2500	1360	2050	1220	1840	12	2620	3930	2220	3330	1960	2940
1590	2380	1300	1950	1160	1750	13	2540	3820	2150	3230	1890	2840
1510	2270	1230	1860	1100	1660	14	2470	3710	2080	3130	1830	2750
1430	2150	1170	1760	1040	1560	15	2390	3590	2010	3030	1760	2650
1350	2030	1100	1660	978	1470	16	2310	3480	1950	2920	1700	2550
1270	1910	1040	1560	915	1380	17	2240	3360	1880	2820	1640	2460
1190	1790	970	1460	853	1280	18	2160	3250	1810	2720	1570	2360
1100	1660	904	1360	792	1190	19	2090	3140	1740	2620	1510	2270
1010	1520	840	1260	732	1100	20	2010	3020	1670	2510	1440	2170
844	1270	713	1070	612	920	22	1860	2790	1540	2310	1280	1930
709	1070	599	900	515	773	24	1660	2500	1330	2000	1110	1660
604	908	510	767	438	659	26	1470	2200	1170	1750	967	1450
521	783	440	661	378	568	28	1310	1970	1040	1560	857	1290
454	682	383	576	329	495	30	1180	1770	929	1400	767	1150
399	599	337	506	289	435	32	1070	1610	842	1270	693	1040
353	531	298	448	256	385	34	985	1480	769	1160	631	949
315	474	266	400	229	344	36	909	1370	707	1060	579	870
283	425	239	359	205	309	38	844	1270	654	982	535	803
255	384	216	324	185	278	40	787	1180	608	914	496	746
						42	738	1110	568	854	463	695
						44	694	1040	533	801	433	651
						46	656	986	502	754	407	612
						48	621	934	474	713	384	578
						50	590	887	449	676	364	547
Available Strength in Tensile Yielding, kips						Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft						
2420	3630	2070	3120	1920	2880	L_p	L_r	L_p	L_r	L_p	L_r	
						7.78	23.0	7.71	22.1	7.44	21.3	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	62.1		53.3		49.3		
1860	2790	1600	2400	1480	2220	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	15500	390	13200	331	11600	283	
768	1150	592	890	586	881	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.51		2.49		2.40		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
341	512	286	430	247	371	6.29		6.31		6.38		

^c Shape is slender for compression with $F_y = 65$ ksi.


^y Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.

Notes: Heavy line indicates L_c/r equal to or greater than 200.


Confirm ASTM A913 material availability before specifying.

<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;">  W40–W36 </div> <div style="text-align: center;"> Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces </div> <div style="text-align: right;"> $F_y = 65$ ksi $F_u = 80$ ksi </div> </div>																				
W40×						W36×						Shape		W40×			W36×			
149 ^c		925 ^h		853 ^h		lb/ft		149 ^v		925 ^h		853 ^h								
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	Available Flexural Strength, kip-ft				
Available Compressive Strength, kips						Available Flexural Strength, kip-ft														
ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
1420	2130	10600	15900	9770	14700	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	1940	2920	13400	20100	12700	19100							
1310	1970	10300	15500	9510	14300		6	1940	2920	13400	20100	12700	19100							
1270	1910	10200	15300	9420	14200		7	1940	2920	13400	20100	12700	19100							
1230	1850	10100	15200	9310	14000		8	1890	2840	13400	20100	12700	19100							
1190	1780	9960	15000	9200	13800		9	1830	2750	13400	20100	12700	19100							
1140	1710	9820	14800	9070	13600		10	1770	2660	13400	20100	12700	19100							
1090	1630	9660	14500	8920	13400		11	1710	2570	13400	20100	12700	19100							
1030	1560	9500	14300	8770	13200		12	1650	2480	13400	20100	12700	19100							
980	1470	9320	14000	8610	12900		13	1590	2390	13400	20100	12700	19100							
925	1390	9130	13700	8440	12700		14	1530	2310	13300	20000	12700	19000							
869	1310	8930	13400	8260	12400		15	1480	2220	13200	19900	12600	18900							
812	1220	8730	13100	8070	12100		16	1420	2130	13200	19800	12500	18800							
757	1140	8510	12800	7870	11800		17	1360	2040	13100	19700	12400	18600							
702	1050	8290	12500	7670	11500		18	1300	1950	13000	19500	12300	18500							
647	973	8060	12100	7460	11200		19	1240	1860	12900	19400	12200	18400							
595	894	7830	11800	7250	10900		20	1180	1780	12800	19300	12200	18300							
495	745	7350	11000	6800	10200		22	1010	1510	12700	19000	12000	18000							
416	626	6860	10300	6350	9550		24	866	1300	12500	18800	11800	17800							
355	533	6360	9560	5900	8860		26	755	1140	12300	18600	11700	17500							
306	460	5860	8810	5440	8170		28	667	1000	12200	18300	11500	17300							
266	400	5370	8070	4990	7500		30	595	895	12000	18100	11300	17000							
234	352	4890	7350	4550	6830		32	537	806	11800	17800	11200	16800							
207	312	4430	6650	4120	6190		34	487	733	11700	17600	11000	16500							
185	278	3980	5980	3700	5570		36	446	670	11500	17300	10800	16300							
166	250	3570	5360	3320	5000		38	411	617	11400	17100	10700	16000							
		3220	4840	3000	4510		40	380	572	11200	16800	10500	15800							
		2920	4390	2720	4090		42	354	532	11000	16600	10300	15500							
		2660	4000	2480	3730		44	331	497	10900	16300	10200	15300							
		2430	3660	2270	3410		46	310	466	10700	16100	10000	15000							
		2240	3360	2080	3130		48	292	439	10500	15800	9830	14800							
		2060	3100	1920	2890		50	276	415	10400	15600	9670	14500							
Properties														Limiting Unbraced Lengths, ft						
Available Strength in Tensile Yielding, kips													L_p		L_r		L_p		L_r	
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$								7.09	20.3	13.2	82.5	13.3	77.6		
1700	2560	10600	15900	9770	14700															
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips													Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$								43.8		272		251			
1310	1970	8160	12200	7530	11300															
Available Strength in Shear, kips													Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$								I_x	I_y	I_x	I_y	I_x	I_y		
556	835	3380	5080	2820	4240								9800	229	73000	4940	70000	4600		
Available Strength in Flexure about Y-Y Axis, kip-ft													r_y , in.							
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$								2.29		4.26		4.28			
201	303	2760	4140	2610	3920															
													r_x/r_y							
													6.55		3.85		3.90			


^c Shape is slender for compression with $F_y = 65$ ksi.
^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W36 \times						Shape	W36 \times						
802 ^h		723 ^h		652 ^h		lb/ft	802 ^h		723 ^h		652 ^h		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
9190	13800	8290	12500	7470	11200	0	11900	17800	10600	15900	9440	14200	
8930	13400	8060	12100	7260	10900	6	11900	17800	10600	15900	9440	14200	
8850	13300	7980	12000	7180	10800	7	11900	17800	10600	15900	9440	14200	
8740	13100	7880	11800	7090	10700	8	11900	17800	10600	15900	9440	14200	
8630	13000	7780	11700	7000	10500	9	11900	17800	10600	15900	9440	14200	
8510	12800	7660	11500	6890	10400	10	11900	17800	10600	15900	9440	14200	
8370	12600	7540	11300	6770	10200	11	11900	17800	10600	15900	9440	14200	
8220	12400	7400	11100	6650	9990	12	11900	17800	10600	15900	9440	14200	
8070	12100	7260	10900	6510	9790	13	11900	17800	10600	15900	9410	14200	
7900	11900	7110	10700	6370	9580	14	11800	17700	10500	15800	9330	14000	
7730	11600	6940	10400	6220	9350	15	11700	17600	10400	15700	9250	13900	
7540	11300	6780	10200	6070	9120	16	11600	17500	10400	15600	9170	13800	
7360	11100	6600	9930	5910	8880	17	11500	17400	10300	15400	9090	13700	
7160	10800	6420	9660	5740	8630	18	11500	17200	10200	15300	9010	13500	
6960	10500	6240	9380	5570	8370	19	11400	17100	10100	15200	8930	13400	
6750	10200	6050	9090	5400	8110	20	11300	17000	10000	15100	8850	13300	
6330	9520	5660	8510	5040	7570	22	11100	16700	9860	14800	8690	13100	
5900	8870	5270	7920	4680	7030	24	11000	16500	9700	14600	8530	12800	
5460	8210	4870	7320	4310	6480	26	10800	16200	9540	14300	8370	12600	
5030	7560	4470	6720	3950	5930	28	10600	16000	9370	14100	8210	12300	
4600	6910	4080	6140	3590	5400	30	10500	15700	9210	13800	8050	12100	
4180	6280	3700	5570	3250	4880	32	10300	15500	9050	13600	7890	11900	
3780	5680	3340	5020	2910	4380	34	10100	15300	8880	13400	7730	11600	
3380	5090	2980	4480	2600	3910	36	9980	15000	8720	13100	7570	11400	
3040	4570	2680	4020	2330	3510	38	9820	14800	8560	12900	7410	11100	
2740	4120	2420	3630	2110	3160	40	9650	14500	8390	12600	7250	10900	
2490	3740	2190	3290	1910	2870	42	9490	14300	8230	12400	7090	10700	
2270	3410	2000	3000	1740	2620	44	9320	14000	8070	12100	6930	10400	
2070	3120	1830	2750	1590	2390	46	9160	13800	7900	11900	6770	10200	
1900	2860	1680	2520	1460	2200	48	8990	13500	7740	11600	6610	9940	
1750	2640	1550	2320	1350	2030	50	8830	13300	7580	11400	6450	9700	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
9190	13800	8290	12500	7470	11200	13.1	73.4	12.9	66.6	12.7	60.8		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	236		213		192			
7080	10600	6390	9590	5760	8640	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	64800	4210	57300	3700	50600	3230		
2640	3950	2360	3540	2110	3160	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						4.22		4.17		4.10			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
2410	3630	2130	3210	1880	2830	3.93		3.93		3.95			


^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W36 \times						Shape	W36 \times						
529 ^h		487 ^h		441 ^h		lb/ft	529 ^h		487 ^h		441 ^h		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
6070	9130	5570	8370	5060	7600	0	7560	11400	6910	10400	6200	9310	
5890	8850	5390	8110	4900	7370	6	7560	11400	6910	10400	6200	9310	
5820	8750	5330	8020	4840	7280	7	7560	11400	6910	10400	6200	9310	
5750	8640	5260	7910	4780	7180	8	7560	11400	6910	10400	6200	9310	
5670	8520	5190	7790	4710	7080	9	7560	11400	6910	10400	6200	9310	
5570	8380	5100	7670	4630	6960	10	7560	11400	6910	10400	6200	9310	
5470	8230	5010	7530	4540	6830	11	7560	11400	6910	10400	6200	9310	
5370	8070	4910	7380	4450	6690	12	7560	11400	6910	10400	6200	9310	
5250	7900	4800	7220	4350	6540	13	7510	11300	6850	10300	6130	9210	
5130	7720	4690	7050	4250	6390	14	7430	11200	6770	10200	6050	9100	
5010	7530	4570	6870	4140	6220	15	7350	11000	6700	10100	5980	8990	
4880	7330	4450	6690	4030	6050	16	7270	10900	6620	9950	5900	8870	
4740	7130	4320	6500	3910	5880	17	7190	10800	6540	9830	5830	8760	
4600	6920	4190	6300	3790	5700	18	7120	10700	6460	9720	5750	8650	
4460	6700	4060	6100	3670	5510	19	7040	10600	6390	9600	5680	8530	
4310	6480	3930	5900	3540	5330	20	6960	10500	6310	9480	5600	8420	
4010	6030	3650	5480	3290	4940	22	6800	10200	6150	9250	5450	8190	
3710	5580	3370	5060	3030	4550	24	6640	9980	6000	9020	5300	7970	
3410	5120	3090	4640	2770	4160	26	6480	9750	5840	8780	5150	7740	
3100	4670	2810	4220	2520	3780	28	6330	9510	5690	8550	5000	7510	
2810	4230	2540	3810	2270	3410	30	6170	9270	5530	8320	4850	7280	
2530	3800	2280	3420	2030	3050	32	6010	9030	5380	8080	4700	7060	
2250	3390	2020	3040	1800	2710	34	5850	8800	5220	7850	4540	6830	
2010	3020	1810	2710	1610	2420	36	5700	8560	5070	7620	4390	6600	
1800	2710	1620	2440	1440	2170	38	5540	8320	4910	7380	4240	6380	
1630	2450	1460	2200	1300	1960	40	5380	8090	4760	7150	4090	6150	
1480	2220	1330	1990	1180	1780	42	5220	7850	4600	6920	3940	5920	
1350	2020	1210	1820	1080	1620	44	5060	7610	4450	6680	3790	5700	
1230	1850	1110	1660	985	1480	46	4910	7370	4290	6450	3600	5410	
1130	1700	1020	1530	905	1360	48	4750	7140	4130	6200	3420	5140	
1040	1570	936	1410	834	1250	50	4590	6900	3930	5910	3260	4890	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
6070	9130	5570	8370	5060	7610	12.4	50.9	12.3	47.8	12.1	44.6		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	156		143		130			
4680	7020	4290	6440	3900	5850	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
1670	2500	1530	2300	1380	2060	39600	2490	36000	2250	32100	1990		
Available Strength in Flexure about Y-Y Axis, kip-ft						r_y , in.							
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	4.00		3.96		3.92			
1470	2210	1340	2010	1190	1790	r_x/r_y							
						4.00		3.99		4.01			

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

 <div style="text-align: center;"> Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes </div> <div style="text-align: right;"> $F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$ </div>													
W36 \times						Shape	W36 \times						
395 ^h		361 ^h		330		lb/ft	395 ^h		361 ^h		330		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
4510	6790	4130	6200	3770	5670	Effective Length, L_e , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	5550	8340	5030	7560	4570	6870
4370	6570	3990	6000	3650	5480		6	5550	8340	5030	7560	4570	6870
4320	6490	3940	5930	3600	5420		7	5550	8340	5030	7560	4570	6870
4260	6400	3890	5850	3550	5340		8	5550	8340	5030	7560	4570	6870
4190	6300	3830	5750	3500	5260		9	5550	8340	5030	7560	4570	6870
4120	6200	3760	5650	3440	5160		10	5550	8340	5030	7560	4570	6870
4040	6080	3690	5550	3370	5060		11	5550	8340	5030	7560	4570	6870
3960	5950	3610	5430	3300	4960		12	5550	8340	5020	7550	4560	6860
3870	5820	3530	5310	3220	4840		13	5470	8230	4950	7440	4500	6760
3780	5680	3440	5170	3140	4720		14	5400	8120	4880	7330	4430	6650
3680	5530	3350	5040	3060	4600		15	5330	8010	4810	7230	4360	6550
3580	5380	3260	4900	2970	4460		16	5250	7890	4740	7120	4290	6450
3470	5220	3160	4750	2880	4330		17	5180	7780	4670	7010	4220	6340
3360	5050	3060	4600	2790	4190		18	5100	7670	4590	6900	4150	6240
3250	4890	2960	4440	2690	4050		19	5030	7560	4520	6800	4080	6140
3140	4720	2850	4290	2600	3900		20	4960	7450	4450	6690	4020	6040
2910	4370	2640	3970	2400	3610		22	4810	7230	4310	6470	3880	5830
2670	4020	2420	3640	2200	3310		24	4660	7010	4170	6260	3740	5620
2440	3670	2210	3320	2010	3020		26	4510	6780	4020	6050	3600	5420
2210	3330	2000	3010	1810	2730		28	4370	6560	3880	5830	3470	5210
1990	2990	1800	2700	1630	2450		30	4220	6340	3740	5620	3330	5010
1780	2670	1600	2410	1450	2180		32	4070	6120	3590	5400	3190	4800
1580	2370	1420	2130	1280	1930		34	3920	5900	3450	5190	3060	4590
1410	2110	1270	1900	1140	1720		36	3780	5670	3310	4970	2920	4390
1260	1900	1140	1710	1030	1540		38	3630	5450	3160	4760	2760	4150
1140	1710	1030	1540	927	1390		40	3480	5230	3000	4510	2570	3870
1030	1550	930	1400	841	1260		42	3310	4970	2810	4230	2410	3620
942	1420	847	1270	766	1150		44	3120	4690	2650	3980	2260	3400
861	1290	775	1160	701	1050		46	2950	4430	2500	3750	2130	3200
791	1190	712	1070	644	968		48	2800	4200	2370	3560	2020	3030
729	1100	656	986	593	892		50	2660	4000	2250	3380	1910	2880
Properties													
Available Strength in Tensile Yielding, kips							Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		L_p	L_r	L_p	L_r	L_p	L_r	
4510	6790	4130	6200	3770	5670		12.0	41.3	11.9	39.4	11.9	37.5	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips							Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		116		106		96.9		
3480	5220	3180	4770	2910	4360		Moment of Inertia, in. ⁴						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		I_x	I_y	I_x	I_y	I_x	I_y	
1220	1830	1110	1660	1000	1500		28500	1750	25700	1570	23300	1420	
Available Strength in Shear, kips							r_y , in.						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		3.88		3.85		3.83		
1220	1830	1110	1660	1000	1500		r_x/r_y						
Available Strength in Flexure about Y-Y Axis, kip-ft							4.05		4.05		4.05		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$								
1050	1580	950	1430	860	1290								

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W36 \times						Shape	W36 \times						
302 c		282 c		262 c		lb/ft	302		282		262		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
3400	5120	3120	4690	2870	4310		0	4150	6240	3860	5800	3570	5360
3300	4970	3030	4550	2780	4180	6	4150	6240	3860	5800	3570	5360	
3270	4910	3000	4500	2750	4130	7	4150	6240	3860	5800	3570	5360	
3230	4850	2960	4450	2710	4080	8	4150	6240	3860	5800	3570	5360	
3180	4780	2920	4380	2680	4020	9	4150	6240	3860	5800	3570	5360	
3130	4710	2870	4320	2630	3960	10	4150	6240	3860	5800	3570	5360	
3080	4630	2820	4240	2590	3890	11	4150	6240	3860	5800	3570	5360	
3020	4540	2770	4160	2540	3810	12	4140	6220	3850	5780	3550	5330	
2960	4440	2710	4070	2480	3730	13	4080	6130	3780	5690	3490	5240	
2880	4330	2650	3980	2430	3650	14	4010	6030	3720	5590	3430	5150	
2800	4220	2590	3890	2370	3560	15	3950	5930	3660	5500	3360	5060	
2720	4100	2520	3790	2310	3470	16	3880	5830	3590	5400	3300	4970	
2640	3970	2450	3680	2240	3370	17	3820	5740	3530	5310	3240	4880	
2560	3840	2370	3570	2180	3270	18	3750	5640	3470	5210	3180	4780	
2470	3710	2290	3440	2110	3170	19	3690	5540	3410	5120	3120	4690	
2380	3580	2210	3320	2040	3070	20	3620	5440	3340	5030	3060	4600	
2200	3310	2040	3070	1880	2830	22	3490	5250	3220	4840	2940	4420	
2020	3030	1870	2810	1720	2590	24	3360	5050	3090	4650	2820	4240	
1840	2760	1700	2560	1560	2350	26	3230	4860	2970	4460	2700	4060	
1660	2500	1530	2310	1410	2110	28	3100	4660	2840	4270	2580	3870	
1490	2240	1370	2070	1260	1890	30	2970	4470	2720	4080	2460	3690	
1320	1990	1220	1830	1110	1670	32	2840	4270	2590	3890	2340	3510	
1170	1760	1080	1620	985	1480	34	2710	4080	2460	3700	2210	3330	
1050	1570	964	1450	879	1320	36	2580	3880	2310	3470	2030	3050	
939	1410	865	1300	789	1190	38	2400	3600	2130	3210	1870	2810	
847	1270	781	1170	712	1070	40	2230	3350	1980	2970	1730	2600	
768	1160	708	1060	646	971	42	2080	3130	1850	2770	1610	2420	
700	1050	645	970	588	884	44	1950	2930	1730	2600	1510	2270	
641	963	591	888	538	809	46	1840	2760	1630	2440	1420	2130	
588	884	542	815	494	743	48	1730	2610	1530	2300	1330	2000	
542	815	500	751	456	685	50	1640	2470	1450	2180	1260	1900	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
3460	5210	3230	4850	3000	4520	11.8	36.3	11.8	35.3	11.6	34.1		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	89.0		82.9		77.2			
2670	4010	2490	3730	2320	3470	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	21100	1300	19600	1200	17900	1090		
916	1370	854	1280	806	1210	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						3.82		3.80		3.76			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
782	1170	723	1090	662	995	4.03		4.05		4.07			

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
 Note: Confirm ASTM A913 material availability before specifying.




Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$


W-Shapes

W36 \times						Shape	W36 \times					
247 ^c		231 ^c		256 ^c		lb/ft	247		231		256	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2660	4000	2470	3710	2870	4320	0	3340	5020	3120	4690	3370	5070
2580	3870	2390	3600	2700	4060	6	3340	5020	3120	4690	3370	5070
2550	3830	2370	3560	2650	3980	7	3340	5020	3120	4690	3370	5070
2520	3780	2330	3510	2580	3880	8	3340	5020	3120	4690	3370	5070
2480	3730	2300	3460	2500	3760	9	3340	5020	3120	4690	3310	4980
2440	3670	2260	3400	2410	3620	10	3340	5020	3120	4690	3240	4870
2400	3600	2220	3340	2320	3480	11	3340	5020	3120	4690	3160	4760
2350	3530	2180	3270	2210	3330	12	3320	4980	3100	4650	3090	4640
2300	3460	2130	3200	2110	3170	13	3260	4900	3040	4570	3010	4530
2250	3380	2080	3130	2000	3010	14	3200	4810	2980	4480	2940	4420
2190	3290	2030	3050	1890	2840	15	3140	4720	2930	4400	2860	4310
2130	3210	1970	2970	1780	2670	16	3080	4630	2870	4320	2790	4190
2070	3120	1920	2880	1670	2510	17	3020	4550	2820	4230	2710	4080
2010	3030	1860	2800	1560	2340	18	2970	4460	2760	4150	2640	3970
1950	2930	1800	2710	1450	2180	19	2910	4370	2700	4060	2570	3860
1890	2830	1740	2620	1340	2020	20	2850	4280	2650	3980	2490	3740
1750	2640	1620	2430	1140	1710	22	2730	4110	2540	3810	2340	3520
1610	2410	1490	2250	958	1440	24	2620	3930	2420	3640	2190	3290
1460	2190	1360	2040	817	1230	26	2500	3760	2310	3480	2040	3070
1310	1970	1220	1830	704	1060	28	2380	3580	2200	3310	1840	2760
1170	1760	1080	1630	613	922	30	2270	3410	2090	3140	1670	2510
1030	1550	957	1440	539	810	32	2150	3230	1980	2970	1530	2290
916	1380	848	1270	477	718	34	2000	3010	1820	2730	1410	2120
817	1230	756	1140	426	640	36	1830	2750	1660	2490	1310	1960
733	1100	679	1020	382	575	38	1680	2530	1520	2290	1220	1830
662	994	612	920	345	518	40	1560	2340	1410	2120	1140	1710
600	902	555	835	313	470	42	1450	2180	1310	1960	1070	1610
547	822	506	761	285	429	44	1350	2030	1220	1830	1010	1520
500	752	463	696			46	1270	1910	1140	1720	960	1440
459	691	425	639			48	1200	1800	1070	1610	912	1370
423	636	392	589			50	1130	1700	1010	1520	868	1310
Properties						Limiting Unbraced Lengths, ft						
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
2820	4240	2650	3990	2930	4410	11.6	33.3	11.5	32.7	8.21	26.1	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	72.5		68.2		75.3		
2180	3260	2050	3070	2260	3390	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	16700	1010	15600	940	16800	528	
763	1150	721	1080	934	1400	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						3.74		3.71		2.65		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
616	926	571	858	444	668	4.06		4.07		5.62		

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W36x						Shape	W36x						
232 ^c		210 ^c		194 ^c		lb/ft	232		210		194		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
2520	3790	2260	3390	2030	3050	0	3040	4560	2700	4060	2490	3740	
2370	3560	2120	3180	1900	2860	6	3040	4560	2700	4060	2490	3740	
2320	3480	2070	3110	1860	2790	7	3040	4560	2700	4060	2490	3740	
2260	3400	2020	3030	1810	2720	8	3040	4560	2700	4060	2480	3730	
2190	3300	1960	2940	1760	2640	9	2970	4470	2630	3960	2420	3640	
2120	3190	1890	2850	1700	2550	10	2900	4360	2570	3860	2360	3540	
2050	3080	1830	2750	1640	2460	11	2830	4260	2500	3760	2290	3450	
1970	2960	1750	2640	1570	2360	12	2760	4150	2430	3660	2230	3350	
1890	2840	1680	2520	1500	2260	13	2690	4040	2370	3560	2170	3260	
1790	2690	1600	2410	1430	2150	14	2620	3940	2300	3460	2100	3160	
1690	2540	1520	2280	1360	2040	15	2550	3830	2230	3360	2040	3070	
1590	2390	1420	2140	1290	1940	16	2480	3720	2170	3260	1980	2970	
1490	2240	1330	2000	1210	1820	17	2410	3620	2100	3160	1910	2870	
1390	2080	1240	1860	1130	1690	18	2340	3510	2040	3060	1850	2780	
1290	1940	1150	1720	1040	1570	19	2270	3410	1970	2960	1790	2680	
1190	1790	1060	1590	962	1450	20	2200	3300	1900	2860	1720	2590	
1010	1510	889	1340	806	1210	22	2050	3090	1770	2660	1600	2400	
846	1270	747	1120	677	1020	24	1910	2870	1640	2460	1440	2170	
721	1080	636	956	577	867	26	1740	2610	1440	2170	1270	1910	
621	934	549	825	497	748	28	1560	2340	1290	1940	1130	1700	
541	814	478	718	433	651	30	1410	2120	1160	1750	1020	1530	
476	715	420	631	381	572	32	1290	1930	1060	1590	925	1390	
421	633	372	559	337	507	34	1180	1780	970	1460	847	1270	
376	565	332	499	301	452	36	1100	1650	895	1350	780	1170	
337	507	298	448	270	406	38	1020	1530	831	1250	723	1090	
305	458	269	404	244	366	40	954	1430	776	1170	674	1010	
276	415	244	366	221	332	42	896	1350	727	1090	630	948	
						44	844	1270	684	1030	593	891	
						46	799	1200	646	971	559	840	
						48	758	1140	612	920	529	795	
						50	721	1080	581	874	502	754	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
2650	3980	2410	3620	2220	3330	8.12	25.1	7.99	24.0	7.93	23.4		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	68.0		61.9		57.0			
2040	3060	1860	2790	1710	2570	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
839	1260	792	1190	726	1090	15000	468	13200	411	12100	375		
Available Strength in Flexure about Y-Y Axis, kip-ft						r_y , in.							
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	2.62		2.58		2.56			
396	595	347	522	317	476	r_x/r_y							
						5.65		5.66		5.70			

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 <p style="text-align: center;">Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces</p> <p style="text-align: right;">$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$</p> <p style="text-align: center;">W-Shapes</p>												
W36 \times						Shape	W36 \times					
182 c		170 c		160 c		lb/ft	182		170 y		160 y	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1870	2810	1710	2580	1590	2380	0	2330	3500	2170	3260	2020	3040
1760	2640	1600	2410	1480	2230	6	2330	3500	2170	3260	2020	3040
1720	2580	1570	2360	1450	2180	7	2330	3500	2170	3260	2020	3040
1670	2510	1530	2290	1410	2120	8	2320	3490	2160	3240	2010	3020
1620	2440	1480	2220	1360	2050	9	2260	3400	2100	3160	1950	2940
1570	2350	1430	2150	1320	1980	10	2200	3310	2040	3070	1900	2860
1510	2270	1380	2070	1270	1900	11	2140	3220	1980	2980	1840	2770
1450	2180	1320	1980	1210	1820	12	2080	3130	1930	2900	1790	2690
1390	2080	1260	1900	1160	1740	13	2020	3030	1870	2810	1730	2610
1320	1980	1200	1810	1100	1660	14	1960	2940	1810	2720	1680	2520
1250	1880	1140	1710	1040	1570	15	1900	2850	1750	2630	1620	2440
1190	1780	1080	1620	987	1480	16	1840	2760	1700	2550	1570	2360
1120	1680	1020	1530	928	1400	17	1780	2670	1640	2460	1510	2280
1050	1580	953	1430	870	1310	18	1720	2580	1580	2370	1460	2190
976	1470	891	1340	813	1220	19	1650	2490	1520	2290	1400	2110
899	1350	827	1240	756	1140	20	1590	2400	1460	2200	1350	2030
752	1130	690	1040	634	952	22	1470	2210	1350	2030	1240	1860
632	949	580	872	532	800	24	1310	1970	1180	1780	1070	1610
538	809	494	743	454	682	26	1150	1730	1040	1560	936	1410
464	697	426	640	391	588	28	1020	1540	920	1380	829	1250
404	608	371	558	341	512	30	921	1380	825	1240	742	1120
355	534	326	490	299	450	32	835	1250	746	1120	670	1010
315	473	289	434	265	399	34	763	1150	681	1020	610	917
281	422	258	387	237	356	36	702	1050	625	940	560	841
252	379	231	348	212	319	38	650	976	578	869	516	776
227	342	209	314	192	288	40	604	908	537	807	479	720
206	310	189	285			42	565	849	501	753	447	671
						44	530	797	470	706	418	629
						46	500	751	442	665	393	591
						48	473	710	418	628	371	557
						50	448	674	396	595	351	528
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
2090	3140	1950	2930	1830	2750	7.90	23.0	7.84	22.5	7.74	22.1	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	53.6		50.0		47.0		
1610	2410	1500	2250	1410	2120	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	11300	347	10500	320	9760	295	
684	1030	575	864	546	821	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.55		2.53		2.50		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
294	442	272	409	251	377	5.69		5.73		5.76		

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
^y Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65 \text{ ksi}$; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;"> Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces </div> <div style="text-align: right;"> $F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$ </div> </div>															
W36×						W33×		Shape		W36×				W33×	
150 ^c		135 ^c		387 ^h		lb/ft		150 ^v		135 ^v		387 ^h			
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Available Compressive Strength, kips						Available Flexural Strength, kip-ft									
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending		ASD	LRFD	ASD	LRFD	ASD	LRFD		
1470	2210	1290	1940	4440	6670			0	1880	2830	1650	2480	5060	7610	
1370	2070	1200	1810	4290	6440	6	1880	2830	1650	2480	5060	7610			
1340	2020	1170	1760	4230	6360	7	1880	2830	1650	2480	5060	7610			
1300	1960	1140	1710	4170	6270	8	1870	2800	1620	2440	5060	7610			
1260	1900	1100	1650	4100	6170	9	1810	2730	1570	2360	5060	7610			
1220	1830	1060	1590	4030	6060	10	1760	2650	1520	2290	5060	7610			
1170	1760	1010	1520	3950	5940	11	1710	2570	1480	2220	5060	7610			
1120	1680	967	1450	3860	5810	12	1660	2490	1430	2150	5040	7570			
1070	1610	920	1380	3770	5670	13	1600	2410	1380	2070	4980	7480			
1020	1530	871	1310	3670	5520	14	1550	2330	1330	2000	4910	7380			
961	1440	822	1240	3570	5370	15	1500	2250	1280	1930	4850	7290			
907	1360	773	1160	3470	5210	16	1440	2170	1230	1860	4780	7190			
852	1280	723	1090	3360	5050	17	1390	2090	1190	1780	4720	7090			
798	1200	674	1010	3250	4880	18	1340	2010	1140	1710	4650	7000			
744	1120	626	941	3130	4710	19	1290	1930	1090	1640	4590	6900			
691	1040	578	869	3020	4540	20	1230	1860	1040	1560	4530	6800			
583	876	487	733	2780	4180	22	1120	1680	909	1370	4400	6610			
490	736	410	616	2550	3830	24	960	1440	780	1170	4270	6420			
417	627	349	525	2310	3480	26	838	1260	679	1020	4140	6230			
360	541	301	452	2090	3130	28	741	1110	598	899	4010	6030			
313	471	262	394	1870	2800	30	662	994	533	801	3890	5840			
275	414	230	346	1650	2480	32	597	897	479	720	3760	5650			
244	367	204	307	1460	2200	34	542	815	435	653	3630	5450			
218	327	182	274	1300	1960	36	497	746	397	597	3500	5260			
195	294	163	246	1170	1760	38	457	688	365	548	3370	5070			
176	265			1060	1590	40	424	637	337	507	3240	4880			
				959	1440	42	395	593	313	471	3120	4680			
				874	1310	44	369	555	292	439	2960	4450			
				799	1200	46	346	521	274	412	2810	4220			
				734	1100	48	326	491	258	387	2670	4010			
				676	1020	50	309	464	243	365	2540	3820			

Properties					
Available Strength in Tensile Yielding, kips					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
1720	2590	1550	2330	4440	6670
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
1330	1990	1200	1800	3420	5130
Available Strength in Shear, kips					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
524	788	495	744	1180	1770
Available Strength in Flexure about Y-Y Axis, kip-ft					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
230	346	194	291	1010	1520
Limiting Unbraced Lengths, ft					
L_p	L_r	L_p	L_r	L_p	L_r
7.65	21.7	7.37	20.9	11.7	42.8
Area, in. ²					
44.3		39.9		114	
Moment of Inertia, in. ⁴					
I_x	I_y	I_x	I_y	I_x	I_y
9040	270	7800	225	24300	1620
r_y , in.					
2.47		2.38		3.77	
r_x/r_y					
5.79		5.88		3.87	


^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.

^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65 \text{ ksi}$; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W33x						Shape	W33x						
354 ^h		318		291		lb/ft	354 ^h		318		291		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
4050	6080	3650	5480	3330	5010		0	4610	6920	4120	6190	3760	5660
3910	5870	3520	5290	3210	4830		6	4610	6920	4120	6190	3760	5660
3860	5800	3470	5220	3170	4770		7	4610	6920	4120	6190	3760	5660
3800	5710	3420	5140	3120	4690		8	4610	6920	4120	6190	3760	5660
3740	5620	3360	5060	3070	4610		9	4610	6920	4120	6190	3760	5660
3670	5520	3300	4960	3010	4530		10	4610	6920	4120	6190	3760	5660
3600	5400	3230	4860	2950	4430		11	4610	6920	4120	6190	3760	5660
3520	5280	3160	4750	2880	4330		12	4580	6880	4090	6150	3730	5600
3430	5160	3080	4630	2810	4220		13	4520	6790	4030	6050	3670	5510
3340	5020	3000	4510	2730	4110		14	4460	6700	3970	5960	3610	5430
3250	4880	2920	4380	2650	3990		15	4390	6600	3910	5870	3550	5340
3150	4740	2830	4250	2570	3870		16	4330	6510	3850	5780	3490	5250
3050	4590	2740	4110	2490	3740		17	4270	6420	3790	5690	3430	5160
2950	4430	2640	3970	2400	3610		18	4210	6320	3730	5600	3380	5070
2840	4270	2550	3830	2310	3480		19	4140	6230	3670	5510	3320	4990
2740	4110	2450	3680	2220	3340		20	4080	6140	3610	5420	3260	4900
2520	3790	2250	3390	2040	3070		22	3960	5950	3490	5240	3140	4720
2300	3460	2060	3090	1860	2800		24	3830	5760	3370	5060	3020	4540
2090	3140	1860	2800	1680	2530		26	3710	5570	3240	4880	2910	4370
1880	2820	1670	2510	1510	2270	28	3580	5390	3120	4700	2790	4190	
1680	2520	1490	2240	1340	2020	30	3460	5200	3000	4510	2670	4020	
1480	2230	1310	1980	1180	1780	32	3340	5010	2880	4330	2550	3840	
1310	1970	1160	1750	1050	1570	34	3210	4830	2760	4150	2440	3660	
1170	1760	1040	1560	934	1400	36	3090	4640	2640	3970	2320	3490	
1050	1580	932	1400	838	1260	38	2960	4450	2520	3790	2150	3240	
949	1430	841	1260	756	1140	40	2840	4260	2350	3540	2010	3020	
861	1290	763	1150	686	1030	42	2670	4020	2210	3320	1880	2830	
784	1180	695	1050	625	939	44	2520	3790	2080	3120	1770	2660	
718	1080	636	956	572	859	46	2390	3590	1960	2950	1670	2510	
659	991	584	878	525	789	48	2270	3400	1860	2800	1580	2370	
607	913	538	809	484	727	50	2160	3240	1770	2660	1500	2260	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
4050	6080	3650	5480	3330	5010	11.6	40.3	11.5	38.0	11.4	36.1		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	104		93.7		85.6			
3120	4680	2810	4220	2570	3850	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
1070	1610	952	1430	869	1300	22000	1460	19500	1290	17700	1160		
Available Strength in Shear, kips						r_y , in.							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.74		3.71		3.68			
1070	1610	952	1430	869	1300	r_x/r_y							
Available Strength in Flexure about Y-Y Axis, kip-ft						3.88		3.91		3.91			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$								
915	1370	811	1220	733	1100								

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.



Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$

W-Shapes

W33x						Shape	W33x					
263 ^c		241 ^c		221 ^c		lb/ft	263		241		221	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2950	4440	2680	4030	2420	3640	0	3370	5070	3050	4580	2780	4180
2860	4300	2590	3900	2340	3520	6	3370	5070	3050	4580	2780	4180
2830	4250	2560	3850	2310	3470	7	3370	5070	3050	4580	2780	4180
2790	4190	2530	3800	2280	3420	8	3370	5070	3050	4580	2780	4180
2740	4130	2490	3740	2240	3370	9	3370	5070	3050	4580	2780	4180
2700	4060	2450	3680	2200	3310	10	3370	5070	3050	4580	2780	4180
2650	3980	2400	3610	2160	3250	11	3370	5070	3050	4580	2780	4180
2590	3900	2350	3530	2120	3180	12	3340	5010	3010	4520	2740	4110
2530	3810	2300	3450	2070	3110	13	3280	4930	2950	4440	2690	4040
2470	3710	2240	3370	2020	3030	14	3230	4850	2900	4360	2640	3960
2390	3600	2180	3280	1960	2950	15	3170	4770	2850	4280	2590	3890
2320	3490	2120	3180	1910	2860	16	3120	4680	2800	4200	2540	3810
2240	3370	2050	3080	1850	2780	17	3060	4600	2740	4130	2490	3740
2160	3250	1970	2970	1790	2690	18	3000	4520	2690	4050	2440	3660
2080	3130	1900	2850	1730	2600	19	2950	4430	2640	3970	2390	3580
2000	3010	1820	2740	1660	2500	20	2890	4350	2590	3890	2330	3510
1840	2760	1670	2510	1520	2280	22	2780	4180	2480	3730	2230	3360
1670	2510	1520	2280	1380	2070	24	2670	4020	2380	3570	2130	3210
1510	2270	1370	2050	1240	1860	26	2560	3850	2270	3410	2030	3060
1350	2030	1220	1830	1110	1660	28	2450	3680	2170	3260	1930	2910
1200	1810	1080	1620	976	1470	30	2340	3520	2060	3100	1830	2760
1060	1590	950	1430	858	1290	32	2230	3350	1960	2940	1730	2610
936	1410	841	1260	760	1140	34	2120	3180	1830	2740	1580	2380
835	1260	750	1130	678	1020	36	1970	2950	1680	2520	1450	2180
749	1130	674	1010	608	914	38	1820	2730	1550	2330	1330	2010
676	1020	608	914	549	825	40	1690	2540	1440	2160	1240	1860
614	922	551	829	498	748	42	1580	2380	1340	2010	1150	1730
559	840	502	755	454	682	44	1490	2230	1260	1890	1080	1620
511	769	460	691	415	624	46	1400	2100	1180	1780	1010	1520
470	706	422	634	381	573	48	1320	1990	1110	1680	953	1430
433	651	389	585	351	528	50	1260	1890	1060	1590	901	1350
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
3010	4530	2770	4160	2540	3820	11.3	34.6	11.2	33.3	11.1	32.2	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	77.4		71.1		65.3		
2320	3480	2130	3200	1960	2940	Moment of Inertia, in. ⁴						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y	
780	1170	738	1110	683	1020	15900	1040	14200	933	12900	840	
Available Strength in Shear, kips						r_y , in.						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.66		3.62		3.59		
780	1170	738	1110	683	1020	r_x/r_y						
Available Strength in Flexure about Y-Y Axis, kip-ft						3.91		3.90		3.93		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$							
655	985	590	887	532	800							

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
 Note: Confirm ASTM A913 material availability before specifying.




Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$

W-Shapes

W33x						Shape	W33x					
201 ^c		169 ^c		152 ^c		lb/ft	201		169		152	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2140	3220	1750	2620	1550	2330	0	2510	3770	2040	3070	1810	2730
2070	3110	1630	2450	1450	2180	6	2510	3770	2040	3070	1810	2730
2050	3080	1590	2390	1410	2120	7	2510	3770	2040	3070	1810	2730
2020	3030	1550	2330	1370	2060	8	2510	3770	2030	3050	1800	2700
1990	2980	1500	2250	1330	2000	9	2510	3770	1970	2970	1750	2620
1950	2930	1450	2170	1280	1920	10	2510	3770	1920	2890	1700	2550
1910	2870	1390	2090	1230	1850	11	2510	3770	1870	2800	1650	2480
1870	2810	1330	2000	1180	1770	12	2460	3700	1810	2720	1600	2400
1830	2750	1270	1910	1120	1690	13	2410	3630	1760	2640	1550	2330
1780	2680	1210	1810	1070	1600	14	2370	3560	1710	2560	1500	2250
1730	2600	1140	1720	1010	1520	15	2320	3490	1650	2480	1450	2180
1680	2530	1080	1620	950	1430	16	2270	3420	1600	2400	1400	2100
1630	2450	1010	1520	892	1340	17	2230	3350	1550	2320	1350	2030
1580	2370	948	1420	834	1250	18	2180	3270	1490	2240	1300	1950
1520	2290	874	1310	777	1170	19	2130	3200	1440	2160	1250	1880
1470	2210	802	1210	712	1070	20	2080	3130	1390	2080	1200	1800
1360	2040	667	1000	591	888	22	1990	2990	1280	1920	1100	1650
1230	1860	561	843	496	746	24	1900	2850	1130	1700	949	1430
1110	1670	478	718	423	636	26	1800	2710	997	1500	834	1250
986	1480	412	619	365	548	28	1710	2570	890	1340	741	1110
869	1310	359	539	318	478	30	1610	2420	803	1210	666	1000
763	1150	315	474	279	420	32	1490	2240	730	1100	604	908
676	1020	279	420	247	372	34	1350	2030	670	1010	552	830
603	907	249	375	221	332	36	1240	1860	618	929	508	763
541	814	224	336	198	298	38	1140	1710	574	862	470	707
489	734	202	303	179	269	40	1050	1580	535	805	438	658
443	666					42	976	1470	502	754	409	615
404	607					44	911	1370	472	710	384	577
369	555					46	854	1280	446	670	362	544
339	510					48	804	1210	422	635	342	514
313	470					50	759	1140	401	603	324	488
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
2300	3460	1930	2900	1750	2630	11.0	31.2	7.74	22.6	7.65	21.9	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	59.1		49.5		44.9		
1770	2660	1490	2230	1350	2020	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	11600	749	9290	310	8160	273	
626	940	589	883	553	830	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						3.56		2.50		2.47		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
477	717	274	411	240	360	3.93		5.48		5.47		

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.


 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W33 ^x						Shape	W33 ^x					
141 ^c		130 ^c		118 ^c		lb/ft	141 ^y		130 ^y		118 ^y	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1410	2120	1280	1920	1130	1690	0	1670	2510	1510	2280	1350	2020
1310	1970	1190	1780	1040	1570	6	1670	2510	1510	2280	1350	2020
1280	1920	1150	1740	1020	1530	7	1670	2510	1510	2280	1350	2020
1240	1860	1120	1680	983	1480	8	1650	2470	1490	2240	1310	1970
1200	1800	1080	1630	948	1430	9	1600	2400	1440	2170	1270	1910
1160	1740	1040	1570	911	1370	10	1550	2330	1400	2100	1230	1850
1110	1670	998	1500	871	1310	11	1500	2260	1360	2040	1190	1790
1060	1590	953	1430	829	1250	12	1460	2190	1310	1970	1150	1730
1010	1520	906	1360	786	1180	13	1410	2120	1270	1910	1110	1670
957	1440	858	1290	743	1120	14	1360	2050	1220	1840	1070	1610
904	1360	809	1220	698	1050	15	1320	1980	1180	1770	1030	1540
850	1280	760	1140	654	983	16	1270	1910	1140	1710	987	1480
797	1200	711	1070	610	916	17	1220	1840	1090	1640	946	1420
744	1120	663	996	566	851	18	1180	1770	1050	1570	906	1360
692	1040	615	925	523	787	19	1130	1700	1000	1510	865	1300
639	961	568	854	481	723	20	1080	1630	959	1440	824	1240
528	794	472	709	403	605	22	968	1460	837	1260	700	1050
444	667	396	596	338	509	24	836	1260	721	1080	601	903
378	569	338	508	288	433	26	732	1100	630	946	524	787
326	490	291	438	249	374	28	649	976	557	837	462	694
284	427	254	381	217	326	30	582	875	498	749	412	619
250	375	223	335	190	286	32	527	792	450	676	371	558
221	333	198	297	169	253	34	480	722	409	615	337	506
197	297	176	265	150	226	36	441	663	375	564	308	463
177	266	158	238	135	203	38	408	613	346	520	283	426
160	240					40	379	569	321	482	262	394
						42	353	531	299	449	244	366
						44	331	498	280	420	228	342
						46	312	468	263	395	213	321
						48	294	442	248	372	201	302
						50	279	419	234	352	190	285
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
1620	2430	1490	2240	1350	2030	7.53	21.4	7.40	20.8	7.19	20.2	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	41.5		38.3		34.7		
1250	1870	1150	1720	1040	1560	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	7450	246	6710	218	5900	187	
470	707	448	674	416	626	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.43		2.39		2.32		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
217	326	193	290	166	250	5.51		5.52		5.60		

^c Shape is slender for compression with $F_y = 65$ ksi.


^y Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.

Notes: Heavy line indicates L_c/r equal to or greater than 200.


Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes													
W30 ^x						Shape	W30 ^x						
391 ^h		357 ^h		326 ^h		lb/ft	391 ^h		357 ^h		326 ^h		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
4480	6730	4090	6140	3730	5610	Effective Length, L_e , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	4700	7070	4280	6440	3860	5800
4320	6490	3940	5920	3590	5400		6	4700	7070	4280	6440	3860	5800
4260	6400	3890	5840	3540	5330		7	4700	7070	4280	6440	3860	5800
4190	6300	3830	5750	3490	5240		8	4700	7070	4280	6440	3860	5800
4120	6200	3760	5650	3430	5150		9	4700	7070	4280	6440	3860	5800
4040	6080	3690	5540	3360	5050		10	4700	7070	4280	6440	3860	5800
3960	5950	3610	5420	3280	4940		11	4700	7070	4280	6440	3860	5800
3870	5810	3520	5290	3210	4820		12	4670	7020	4240	6380	3820	5740
3770	5670	3430	5160	3120	4690		13	4620	6940	4190	6300	3770	5660
3670	5510	3340	5020	3030	4560		14	4560	6860	4140	6220	3720	5580
3560	5350	3240	4870	2940	4420		15	4510	6780	4090	6140	3660	5510
3450	5190	3140	4720	2850	4280		16	4460	6700	4030	6060	3610	5430
3340	5020	3030	4560	2750	4130		17	4400	6620	3980	5980	3560	5350
3220	4840	2920	4400	2650	3980		18	4350	6540	3930	5900	3510	5280
3100	4660	2810	4230	2550	3830		19	4300	6460	3870	5820	3460	5200
2980	4480	2700	4060	2450	3680		20	4250	6380	3820	5740	3410	5130
2740	4110	2480	3730	2240	3360		22	4140	6220	3720	5590	3310	4970
2490	3750	2250	3390	2030	3050		24	4030	6060	3610	5430	3210	4820
2250	3380	2030	3060	1830	2750		26	3930	5900	3500	5270	3100	4670
2020	3030	1820	2730	1630	2450		28	3820	5740	3400	5110	3000	4510
1790	2700	1610	2420	1440	2170		30	3710	5580	3290	4950	2900	4360
1580	2370	1420	2130	1270	1900		32	3610	5420	3190	4790	2800	4210
1400	2100	1260	1890	1120	1690		34	3500	5260	3080	4630	2700	4060
1250	1880	1120	1680	1000	1500		36	3400	5100	2980	4480	2600	3900
1120	1680	1010	1510	898	1350		38	3290	4940	2870	4320	2490	3750
1010	1520	908	1360	811	1220		40	3180	4790	2770	4160	2390	3600
917	1380	823	1240	735	1110		42	3080	4630	2660	4000	2270	3400
835	1260	750	1130	670	1010		44	2970	4470	2540	3820	2140	3220
764	1150	686	1030	613	921		46	2870	4310	2410	3630	2030	3050
702	1050	630	947	563	846		48	2740	4110	2300	3450	1930	2900
647	972	581	873	519	780		50	2610	3930	2190	3290	1840	2770
Properties													
Available Strength in Tensile Yielding, kips							Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		L_p	L_r	L_p	L_r	L_p	L_r	
4480	6730	4090	6140	3730	5610		11.4	46.5	11.3	43.4	11.2	40.6	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips							Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		115		105		95.9		
3450	5180	3150	4730	2880	4320		Moment of Inertia, in. ⁴						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		I_x	I_y	I_x	I_y	I_x	I_y	
1170	1760	1060	1590	960	1440		20700	1550	18700	1390	16800	1240	
Available Strength in Shear, kips							r_y , in.						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		3.67		3.64		3.60		
1170	1760	1060	1590	960	1440		r_x/r_y						
Available Strength in Flexure about Y-Y Axis, kip-ft							3.65		3.65		3.67		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$								
1010	1510	905	1360	817	1230								


^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

 <div style="text-align: center;"> Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes </div> <div style="text-align: right;"> $F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$ </div>												
W30x						Shape	W30x					
292		261		235 ^c		lb/ft	292		261		235	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
3350	5030	3000	4500	2680	4030	0	3440	5170	3060	4600	2750	4130
3220	4840	2880	4330	2590	3890	6	3440	5170	3060	4600	2750	4130
3180	4770	2840	4270	2550	3840	7	3440	5170	3060	4600	2750	4130
3130	4700	2790	4200	2510	3780	8	3440	5170	3060	4600	2750	4130
3070	4610	2740	4120	2470	3710	9	3440	5170	3060	4600	2750	4130
3010	4520	2690	4040	2410	3630	10	3440	5170	3060	4600	2750	4130
2940	4420	2620	3940	2360	3540	11	3440	5170	3060	4590	2740	4120
2870	4310	2560	3850	2300	3450	12	3390	5100	3010	4520	2700	4050
2790	4200	2490	3740	2240	3360	13	3340	5030	2960	4450	2650	3980
2720	4080	2420	3630	2170	3260	14	3290	4950	2910	4380	2600	3910
2630	3960	2340	3520	2100	3160	15	3250	4880	2860	4300	2560	3850
2550	3830	2260	3400	2030	3050	16	3200	4800	2820	4230	2510	3780
2460	3690	2180	3280	1960	2940	17	3150	4730	2770	4160	2470	3710
2370	3560	2100	3160	1880	2830	18	3100	4660	2720	4090	2420	3640
2280	3420	2020	3030	1810	2710	19	3050	4580	2670	4020	2380	3570
2180	3280	1930	2900	1730	2600	20	3000	4510	2620	3950	2330	3500
2000	3000	1760	2650	1580	2370	22	2900	4360	2530	3800	2240	3370
1810	2720	1590	2390	1420	2140	24	2800	4210	2430	3660	2150	3230
1630	2440	1430	2140	1270	1910	26	2700	4060	2340	3510	2060	3090
1450	2180	1270	1900	1130	1700	28	2600	3910	2240	3370	1970	2960
1280	1920	1110	1670	990	1490	30	2510	3770	2150	3230	1870	2820
1120	1690	978	1470	870	1310	32	2410	3620	2050	3080	1780	2680
995	1500	866	1300	771	1160	34	2310	3470	1960	2940	1690	2540
888	1330	773	1160	688	1030	36	2210	3320	1850	2780	1560	2340
797	1200	694	1040	617	928	38	2110	3170	1720	2580	1450	2170
719	1080	626	941	557	837	40	1980	2970	1610	2410	1350	2030
652	980	568	853	505	759	42	1860	2790	1510	2270	1260	1900
594	893	517	778	460	692	44	1750	2640	1420	2130	1190	1790
544	817	473	711	421	633	46	1660	2500	1340	2020	1120	1690
499	751	435	653	387	581	48	1580	2370	1270	1910	1060	1600
460	692	401	602	356	536	50	1500	2260	1210	1820	1010	1520
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
3350	5030	3000	4500	2700	4050	11.1	38.0	10.9	35.5	10.9	33.9	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	86.0		77.0		69.3		
2580	3870	2310	3470	2080	3120	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	14900	1100	13100	959	11700	855	
849	1270	764	1150	675	1010	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						3.58		3.53		3.51		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
723	1090	636	956	568	853	3.69		3.71		3.70		


^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes														$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W30x						Shape		W30x							
211 ^c		191 ^c		173 ^c		lb/ft		211		191		173			
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Available Compressive Strength, kips						Available Flexural Strength, kip-ft									
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending		ASD	LRFD	ASD	LRFD	ASD	LRFD		
2370	3570	2090	3150	1860	2800			0	2440	3660	2190	3290	1970	2960	
2290	3440	2020	3030	1790	2700	6	2440	3660	2190	3290	1970	2960			
2260	3400	1990	2990	1770	2660	7	2440	3660	2190	3290	1970	2960			
2230	3350	1960	2950	1740	2620	8	2440	3660	2190	3290	1970	2960			
2190	3290	1930	2900	1710	2570	9	2440	3660	2190	3290	1970	2960			
2150	3230	1890	2840	1680	2520	10	2440	3660	2190	3290	1970	2960			
2100	3160	1850	2780	1640	2470	11	2430	3650	2180	3270	1950	2940			
2060	3090	1810	2720	1610	2410	12	2380	3580	2140	3210	1920	2880			
2010	3010	1760	2650	1560	2350	13	2340	3520	2100	3150	1880	2820			
1950	2920	1720	2580	1520	2290	14	2300	3450	2060	3090	1840	2760			
1880	2830	1670	2510	1480	2220	15	2260	3390	2010	3030	1800	2710			
1820	2730	1620	2430	1430	2150	16	2210	3330	1970	2970	1760	2650			
1750	2630	1560	2350	1380	2080	17	2170	3260	1930	2910	1720	2590			
1680	2530	1510	2270	1330	2000	18	2130	3200	1890	2840	1690	2540			
1620	2430	1450	2170	1280	1930	19	2080	3130	1850	2780	1650	2480			
1550	2330	1380	2080	1230	1850	20	2040	3070	1810	2720	1610	2420			
1410	2120	1260	1890	1120	1690	22	1950	2940	1730	2600	1530	2310			
1270	1910	1130	1700	1010	1520	24	1870	2810	1650	2480	1460	2190			
1130	1710	1010	1520	898	1350	26	1780	2680	1570	2350	1380	2080			
1000	1510	891	1340	792	1190	28	1700	2550	1480	2230	1310	1960			
880	1320	779	1170	690	1040	30	1610	2420	1400	2110	1230	1850			
773	1160	685	1030	607	912	32	1520	2290	1300	1950	1110	1670			
685	1030	606	911	538	808	34	1400	2100	1180	1770	1010	1510			
611	919	541	813	479	721	36	1290	1940	1080	1630	922	1390			
549	824	485	730	430	647	38	1190	1790	1000	1500	850	1280			
495	744	438	659	388	584	40	1110	1670	928	1400	787	1180			
449	675	397	597	352	529	42	1040	1560	866	1300	733	1100			
409	615	362	544	321	482	44	973	1460	812	1220	685	1030			
374	563	331	498	294	441	46	917	1380	763	1150	643	967			
344	517	304	457	270	405	48	866	1300	720	1080	606	911			
317	476	280	421	249	374	50	822	1230	682	1030	573	861			
Properties															
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	L_p	L_r		
2420	3640	2180	3280	1980	2980	10.8	32.3	10.7	31.0	10.6	30.0				
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	62.3		56.1		50.9					
1870	2800	1680	2520	1530	2290	Moment of Inertia, in. ⁴									
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y	I_x	I_y		
623	934	567	850	518	777	10300	757	9200	673	8230	598				
Available Strength in Shear, kips						r_y , in.									
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	3.49		3.46		3.42					
503	756	448	673	399	600	r_x/r_y									
						3.70		3.70		3.71					

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W30x						Shape	W30x					
148 ^c		132 ^c		124 ^c		lb/ft	148		132		124	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1570	2360	1370	2060	1270	1900	0	1620	2440	1420	2130	1320	1990
1450	2170	1260	1890	1160	1750	6	1620	2440	1420	2130	1320	1990
1400	2110	1220	1840	1130	1700	7	1620	2440	1420	2130	1320	1980
1360	2040	1180	1770	1090	1640	8	1580	2370	1370	2070	1280	1920
1310	1960	1130	1710	1050	1570	9	1530	2310	1330	2000	1240	1860
1250	1880	1090	1630	1000	1510	10	1490	2240	1290	1940	1200	1800
1190	1790	1040	1560	953	1430	11	1440	2170	1250	1880	1160	1740
1130	1700	982	1480	904	1360	12	1400	2100	1210	1810	1120	1680
1070	1610	927	1390	852	1280	13	1350	2030	1170	1750	1080	1620
1010	1510	871	1310	800	1200	14	1310	1960	1120	1690	1040	1560
938	1410	815	1220	748	1120	15	1260	1900	1080	1630	999	1500
865	1300	756	1140	696	1050	16	1220	1830	1040	1560	959	1440
793	1190	691	1040	641	964	17	1170	1760	998	1500	919	1380
723	1090	629	945	582	875	18	1130	1690	956	1440	879	1320
655	985	568	854	525	789	19	1080	1620	914	1370	839	1260
591	889	513	770	474	712	20	1040	1560	872	1310	794	1190
489	735	424	637	391	588	22	919	1380	751	1130	677	1020
411	617	356	535	329	494	24	805	1210	654	983	588	884
350	526	303	456	280	421	26	714	1070	578	868	518	779
302	454	262	393	242	363	28	641	963	516	776	462	695
263	395	228	342	211	316	30	581	874	466	701	417	626
231	347	200	301	185	278	32	531	799	425	638	379	569
205	308	177	267	164	246	34	489	736	390	586	347	522
183	274	158	238	146	220	36	454	682	360	541	320	481
164	246					38	423	635	335	503	297	446
						40	396	595	312	469	277	416
						42	372	559	293	440	259	390
						44	351	528	276	415	244	367
						46	332	500	261	392	230	346
						48	316	474	247	371	218	328
						50	300	452	235	353	207	311
Available Strength in Tensile Yielding, kips						Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft						
1700	2550	1510	2270	1420	2140	L_p	L_r	L_p	L_r	L_p	L_r	
						7.06	21.0	6.97	20.2	6.91	19.8	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	43.6		38.8		36.5		
1310	1960	1160	1750	1100	1640	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	6680	227	5770	196	5360	181	
519	778	484	727	459	689	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.28		2.25		2.23		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
221	332	189	285	175	263	5.44		5.42		5.43		

^c Shape is slender for compression with $F_y = 65$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W30 ^x						Shape	W30 ^x					
116 ^c		108 ^c		99 ^c		lb/ft	116 ^y		108 ^y		99 ^y	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1170	1760	1070	1600	954	1430	0	1230	1840	1120	1690	1010	1520
1070	1610	974	1460	869	1310	6	1230	1840	1120	1690	1010	1520
1040	1560	943	1420	840	1260	7	1220	1830	1110	1670	995	1500
1000	1510	908	1360	808	1210	8	1180	1770	1070	1610	962	1450
961	1450	871	1310	773	1160	9	1140	1720	1040	1560	928	1390
918	1380	830	1250	736	1110	10	1100	1660	1000	1510	894	1340
873	1310	788	1180	697	1050	11	1070	1600	966	1450	860	1290
826	1240	745	1120	657	988	12	1030	1540	930	1400	826	1240
778	1170	700	1050	616	926	13	990	1490	894	1340	793	1190
729	1100	655	984	575	864	14	952	1430	857	1290	759	1140
680	1020	609	916	533	802	15	914	1370	821	1230	725	1090
631	948	564	848	493	740	16	876	1320	785	1180	691	1040
582	875	520	781	452	680	17	838	1260	749	1130	658	988
528	794	472	710	412	619	18	799	1200	713	1070	624	938
474	713	424	637	370	556	19	761	1140	675	1010	575	865
428	643	382	575	334	502	20	707	1060	617	927	525	790
354	532	316	475	276	415	22	602	904	524	788	445	669
297	447	266	399	232	348	24	521	784	453	681	384	577
253	381	226	340	197	297	26	458	689	397	597	336	504
218	328	195	293	170	256	28	408	613	353	530	297	447
190	286	170	255	148	223	30	367	552	317	476	266	400
167	251	149	224	130	196	32	333	501	287	431	241	362
148	223	132	199	115	174	34	305	458	262	393	219	329
132	199					36	281	422	241	362	201	302
						38	260	391	222	334	186	279
						40	242	364	207	311	172	259
						42	226	340	193	290	161	241
						44	213	320	181	272	150	226
						46	201	301	171	257	142	213
						48	190	285	161	242	134	201
						50	180	271	153	230	126	190
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
1330	2000	1230	1850	1130	1700	6.78	19.4	6.66	18.9	6.51	18.4	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	34.2		31.7		29.0		
1030	1540	951	1430	870	1310	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	4930	164	4470	146	3990	128	
396	595	379	570	361	542	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.19		2.15		2.10		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
160	240	142	214	125	188	5.48		5.53		5.57		

^c Shape is slender for compression with $F_y = 65$ ksi.
^y Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.





Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$


W-Shapes

W30 \times		W27 \times				Shape	W30 \times		W27 \times				
90 ^c		539 ^h		368 ^h		lb/ft	90 ^{f,v}		539 ^h		368 ^h		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
838	1260	6190	9300	4240	6380	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	904	1360	6130	9210	4020	6050
762	1140	5960	8960	4070	6120		6	904	1360	6130	9210	4020	6050
736	1110	5880	8840	4010	6030		7	902	1350	6130	9210	4020	6050
708	1060	5790	8710	3950	5930		8	870	1310	6130	9210	4020	6050
677	1020	5690	8560	3870	5820		9	839	1260	6130	9210	4020	6050
644	968	5580	8390	3790	5700		10	808	1210	6130	9210	4020	6050
609	916	5470	8210	3700	5560		11	777	1170	6130	9210	4010	6030
574	863	5340	8020	3610	5420		12	745	1120	6100	9170	3970	5970
538	808	5200	7820	3500	5270		13	714	1070	6050	9100	3930	5900
501	753	5060	7600	3400	5110		14	683	1030	6010	9030	3880	5840
465	698	4910	7380	3290	4940		15	652	980	5960	8970	3840	5770
429	644	4760	7150	3180	4770		16	621	933	5920	8900	3800	5710
393	591	4600	6910	3060	4600		17	589	886	5880	8830	3760	5650
359	539	4440	6670	2940	4420		18	558	839	5830	8760	3710	5580
328	493	4270	6420	2820	4240		19	507	762	5790	8700	3670	5520
300	451	4100	6170	2700	4060		20	462	695	5740	8630	3630	5450
248	372	3760	5660	2450	3690		22	390	587	5650	8490	3540	5330
208	313	3420	5150	2210	3330		24	335	504	5560	8360	3460	5200
177	267	3090	4640	1980	2970		26	293	440	5470	8220	3370	5070
153	230	2770	4160	1750	2630		28	259	389	5380	8090	3290	4940
133	200	2450	3690	1530	2300		30	231	347	5290	7950	3200	4810
117	176	2160	3250	1350	2020		32	208	313	5200	7820	3120	4680
104	156	1910	2870	1190	1790		34	189	284	5110	7690	3030	4560
		1710	2560	1060	1600		36	173	260	5020	7550	2950	4430
		1530	2300	954	1430		38	159	240	4930	7420	2860	4300
		1380	2080	861	1290		40	148	222	4840	7280	2770	4170
		1250	1880	781	1170		42	137	206	4750	7150	2690	4040
		1140	1720	712	1070		44	128	193	4670	7010	2600	3910
		1040	1570	651	979		46	121	181	4580	6880	2520	3790
		960	1440	598	899		48	114	171	4490	6740	2430	3660
		884	1330	551	828		50	107	161	4400	6610	2330	3510
Properties							Limiting Unbraced Lengths, ft						
Available Strength in Tensile Yielding, kips							L_p						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		L_p	L_r	L_p	L_r	L_p	L_r	
1020	1540	6190	9300	4240	6380		6.91	18.1	11.3	68.6	10.8	48.6	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips							Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		26.3		159		109		
789	1180	4770	7160	3270	4910		Moment of Inertia, in. ⁴						
Available Strength in Shear, kips							I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		3610	115	25600	2110	16200	1310	
302	454	1660	2500	1090	1640		r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft							2.09		3.65		3.48		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		r_x/r_y						
110	166	1420	2130	905	1360		5.60		3.48		3.51		

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
^f Shape exceeds compact limit for flexure with $F_y = 65 \text{ ksi}$.
^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65 \text{ ksi}$; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Note: Heavy line indicates L_c/r equal to or greater than 200.

 <div style="text-align: center;"> Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes </div> <div style="text-align: right;"> $F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$ </div>													
W27 ^x						Shape	W27 ^x						
336 ^h		307 ^h		281		lb/ft	336 ^h		307 ^h		281		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
3860	5800	3510	5280	3230	4860	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	3670	5510	3340	5020	3040	4560
3700	5570	3370	5060	3100	4660		6	3670	5510	3340	5020	3040	4560
3650	5490	3310	4980	3050	4590		7	3670	5510	3340	5020	3040	4560
3590	5390	3260	4890	3000	4500		8	3670	5510	3340	5020	3040	4560
3520	5290	3190	4800	2940	4410		9	3670	5510	3340	5020	3040	4560
3440	5170	3120	4690	2870	4320		10	3670	5510	3340	5020	3040	4560
3360	5050	3040	4580	2800	4210		11	3650	5490	3320	4990	3020	4530
3270	4920	2960	4450	2720	4100		12	3610	5420	3280	4930	2970	4470
3180	4780	2880	4320	2640	3980		13	3570	5360	3240	4870	2930	4410
3080	4630	2790	4190	2560	3850		14	3520	5300	3190	4800	2890	4350
2980	4480	2690	4050	2470	3720		15	3480	5230	3150	4740	2850	4280
2880	4320	2600	3900	2380	3580		16	3440	5170	3110	4670	2810	4220
2770	4160	2500	3760	2290	3450		17	3400	5110	3070	4610	2770	4160
2660	4000	2400	3600	2200	3300		18	3350	5040	3020	4550	2730	4100
2550	3830	2300	3450	2100	3160		19	3310	4980	2980	4480	2680	4040
2440	3660	2190	3300	2010	3020		20	3270	4910	2940	4420	2640	3970
2210	3330	1990	2980	1820	2730		22	3180	4790	2850	4290	2560	3850
1990	2990	1780	2680	1630	2450		24	3100	4660	2770	4160	2480	3730
1770	2670	1580	2380	1450	2170		26	3010	4530	2680	4030	2400	3600
1570	2360	1400	2100	1270	1910		28	2930	4400	2600	3910	2310	3480
1370	2060	1220	1830	1110	1660		30	2840	4270	2510	3780	2230	3350
1200	1810	1070	1610	973	1460		32	2760	4150	2430	3650	2150	3230
1070	1600	947	1420	862	1300		34	2670	4020	2340	3520	2070	3100
951	1430	845	1270	769	1160		36	2590	3890	2260	3390	1980	2980
853	1280	758	1140	690	1040		38	2500	3760	2170	3270	1900	2860
770	1160	684	1030	623	936		40	2420	3630	2090	3140	1810	2710
699	1050	621	933	565	849		42	2330	3510	2000	3000	1700	2560
637	957	565	850	515	774		44	2250	3380	1890	2850	1610	2420
582	875	517	778	471	708		46	2150	3230	1800	2700	1530	2300
535	804	475	714	433	650		48	2050	3080	1710	2580	1460	2190
493	741	438	658	399	599	50	1960	2940	1640	2460	1390	2090	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
3860	5800	3510	5280	3230	4860	10.7	45.0	10.6	41.7	10.5	39.3		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	99.2		90.2		83.1			
2980	4460	2710	4060	2490	3740	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
983	1470	893	1340	808	1210	14600	1180	13100	1050	11900	953		
Available Strength in Shear, kips						r_y , in.							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.45		3.41		3.39			
983	1470	893	1340	808	1210	r_x/r_y							
Available Strength in Flexure about Y-Y Axis, kip-ft						3.51		3.52		3.54			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$								
817	1230	736	1110	668	1000								

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

<div style="display: flex; justify-content: space-between; align-items: center;">  <div style="text-align: center;"> Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces </div> <div style="text-align: right;"> $F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$ </div> </div>													
W-Shapes													
W27x						Shape		W27x					
258		235		217		lb/ft		258		235		217	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips								Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending		ASD	LRFD	ASD	LRFD	ASD	LRFD
2960	4450	2700	4060	2490	3740			0	2760	4150	2500	3760	2310
2840	4260	2580	3880	2380	3570	6	2760	4150	2500	3760	2310	3470	
2790	4200	2540	3820	2340	3520	7	2760	4150	2500	3760	2310	3470	
2740	4120	2500	3750	2300	3450	8	2760	4150	2500	3760	2310	3470	
2680	4040	2440	3670	2250	3380	9	2760	4150	2500	3760	2310	3470	
2620	3940	2390	3590	2200	3300	10	2760	4150	2500	3760	2310	3470	
2560	3840	2330	3500	2140	3220	11	2740	4120	2480	3720	2280	3430	
2490	3740	2260	3400	2080	3130	12	2700	4060	2440	3660	2240	3370	
2410	3630	2190	3300	2020	3030	13	2660	4000	2400	3600	2200	3310	
2340	3510	2120	3190	1950	2930	14	2620	3940	2360	3550	2160	3250	
2250	3390	2050	3080	1880	2830	15	2580	3880	2320	3490	2130	3200	
2170	3260	1970	2960	1810	2720	16	2540	3810	2280	3430	2090	3140	
2090	3140	1890	2840	1740	2610	17	2500	3750	2240	3370	2050	3080	
2000	3010	1810	2720	1660	2500	18	2460	3690	2200	3310	2010	3020	
1910	2870	1730	2600	1590	2390	19	2420	3630	2160	3250	1970	2970	
1820	2740	1650	2480	1510	2270	20	2380	3570	2120	3190	1940	2910	
1650	2480	1490	2230	1360	2050	22	2300	3450	2040	3070	1860	2790	
1470	2210	1330	1990	1220	1830	24	2220	3330	1970	2950	1780	2680	
1310	1960	1170	1760	1070	1610	26	2130	3210	1890	2840	1710	2560	
1140	1720	1020	1540	938	1410	28	2050	3090	1810	2720	1630	2450	
996	1500	893	1340	817	1230	30	1970	2970	1730	2600	1550	2340	
876	1320	784	1180	718	1080	32	1890	2840	1650	2480	1480	2220	
776	1170	695	1040	636	956	34	1810	2720	1570	2360	1390	2090	
692	1040	620	932	567	853	36	1730	2600	1470	2220	1290	1940	
621	933	556	836	509	765	38	1630	2460	1380	2070	1200	1800	
560	842	502	755	459	691	40	1530	2300	1290	1940	1120	1690	
508	764	455	684	417	626	42	1450	2170	1210	1820	1060	1590	
463	696	415	624	380	571	44	1370	2050	1150	1720	997	1500	
424	637	380	571	347	522	46	1300	1950	1090	1630	944	1420	
389	585	349	524	319	480	48	1230	1850	1030	1550	896	1350	
359	539	321	483	294	442	50	1180	1770	984	1480	853	1280	

Properties											
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
2960	4450	2700	4060	2490	3740	10.4	37.0	10.3	34.9	10.3	33.4
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	76.1		69.4		63.9	
2280	3420	2080	3120	1920	2880	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
739	1110	679	1020	613	919	10800	859	9700	769	8910	704
Available Strength in Shear, kips						r_y , in.					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	3.36		3.33		3.32	
607	912	545	819	500	751	r_x/r_y					
						3.54		3.54		3.55	

Note: Confirm ASTM A913 material availability before specifying.




Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$


W-Shapes

W27 ^x						Shape	W27 ^x						
194 ^c		178 ^c		161 ^c		lb/ft	194		178		161		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
2220	3330	2020	3040	1800	2700	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	2050	3080	1850	2780	1670	2510
2120	3190	1940	2920	1720	2590		6	2050	3080	1850	2780	1670	2510
2090	3140	1910	2870	1700	2550		7	2050	3080	1850	2780	1670	2510
2050	3080	1880	2820	1670	2510		8	2050	3080	1850	2780	1670	2510
2010	3020	1840	2770	1630	2460		9	2050	3080	1850	2780	1670	2510
1960	2940	1800	2700	1600	2400		10	2050	3080	1850	2780	1670	2510
1910	2870	1750	2630	1560	2340		11	2020	3030	1820	2730	1640	2460
1850	2780	1700	2550	1520	2280		12	1980	2980	1780	2680	1600	2410
1790	2700	1640	2470	1480	2220		13	1940	2920	1750	2630	1570	2360
1730	2610	1590	2380	1430	2150		14	1910	2870	1710	2570	1540	2310
1670	2510	1530	2290	1380	2070		15	1870	2810	1680	2520	1510	2260
1610	2420	1470	2200	1320	1990		16	1840	2760	1640	2470	1470	2210
1540	2320	1410	2110	1270	1910		17	1800	2700	1610	2420	1440	2160
1480	2220	1340	2020	1210	1820		18	1760	2650	1570	2370	1410	2110
1410	2120	1280	1920	1150	1730		19	1730	2590	1540	2310	1370	2070
1340	2010	1220	1830	1100	1650		20	1690	2540	1500	2260	1340	2020
1210	1810	1090	1640	982	1480		22	1620	2430	1440	2160	1280	1920
1070	1610	969	1460	870	1310		24	1540	2320	1370	2050	1210	1820
945	1420	851	1280	763	1150		26	1470	2210	1300	1950	1140	1720
823	1240	738	1110	661	994		28	1400	2100	1230	1840	1080	1620
717	1080	643	967	576	866		30	1330	1990	1160	1740	993	1490
630	947	565	850	506	761		32	1240	1870	1060	1590	900	1350
558	839	501	753	448	674		34	1140	1720	969	1460	823	1240
498	748	447	671	400	601		36	1060	1590	894	1340	757	1140
447	671	401	602	359	540		38	982	1480	829	1250	701	1050
403	606	362	544	324	487		40	918	1380	773	1160	652	980
366	550	328	493	294	442		42	861	1290	724	1090	610	916
333	501	299	449	268	402		44	811	1220	681	1020	572	860
305	458	274	411	245	368		46	767	1150	643	966	539	811
280	421	251	378	225	338		48	727	1090	608	914	510	766
258	388	232	348	207	312	50	692	1040	578	868	484	727	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
2220	3340	2040	3070	1850	2780	10.2	31.6	10.1	30.3	10.0	29.1		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	57.1		52.5		47.6			
1710	2570	1580	2360	1430	2140	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	7860	619	7020	555	6310	497		
548	822	524	786	474	710	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						3.29		3.25		3.23			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
441	663	396	595	354	531	3.56		3.57		3.56			

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes														$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W27x						Shape	W27x								
146 ^c		129 ^c		114 ^c		lb/ft	146		129		114				
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$			
Available Compressive Strength, kips							Available Flexural Strength, kip-ft								
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD			
1600	2400	1380	2080	1200	1800	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	1500	2260	1280	1930	1110	1670		
1530	2300	1270	1900	1100	1650		6	1500	2260	1280	1930	1110	1670		
1510	2260	1230	1840	1060	1600		7	1500	2260	1280	1920	1100	1660		
1480	2220	1180	1780	1020	1540		8	1500	2260	1240	1860	1070	1610		
1450	2180	1140	1710	983	1480		9	1500	2260	1200	1810	1040	1560		
1420	2130	1080	1630	938	1410		10	1500	2260	1170	1750	1000	1510		
1380	2080	1030	1550	890	1340		11	1470	2210	1130	1700	969	1460		
1350	2020	975	1460	841	1260		12	1440	2170	1090	1640	936	1410		
1310	1960	916	1380	791	1190		13	1410	2120	1050	1590	902	1360		
1270	1900	849	1280	740	1110		14	1380	2070	1020	1530	868	1310		
1220	1840	783	1180	684	1030		15	1350	2030	981	1470	835	1250		
1180	1770	718	1080	626	940		16	1320	1980	944	1420	801	1200		
1130	1700	655	984	569	855		17	1290	1930	908	1360	767	1150		
1090	1640	593	892	514	773		18	1260	1890	871	1310	734	1100		
1040	1560	534	802	462	694		19	1220	1840	834	1250	700	1050		
985	1480	482	724	417	626		20	1190	1790	797	1200	657	988		
880	1320	398	598	344	518		22	1130	1700	695	1050	564	848		
779	1170	335	503	289	435		24	1070	1610	611	918	493	740		
681	1020	285	428	247	371		26	1010	1510	544	817	436	655		
589	885	246	369	213	320		28	946	1420	489	736	391	587		
513	771	214	322	185	278		30	851	1280	445	669	354	532		
451	678	188	283	163	245		32	769	1160	408	613	323	485		
399	600	167	251	144	217		34	701	1050	376	566	297	446		
356	535	149	223	129	193		36	644	967	349	525	275	413		
320	481						38	594	893	326	490	256	384		
289	434						40	552	830	306	460	239	359		
262	393						42	515	774	288	433	225	338		
239	358						44	483	725	272	409	212	318		
218	328						46	454	682	258	388	200	301		
200	301						48	429	644	245	368	190	286		
185	278						50	406	610	234	351	181	272		
Available Strength in Tensile Yielding, kips							Properties								
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		Limiting Unbraced Lengths, ft								
1680	2530	1470	2210	1310	1970		L_p	L_r	L_p	L_r	L_p	L_r			
							9.91	28.2	6.85	20.4	6.75	19.6			
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips							Area, in. ²								
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		43.2		37.8		33.6				
1300	1940	1130	1700	1010	1510		Moment of Inertia, in. ⁴								
Available Strength in Shear, kips							I_x	I_y	I_x	I_y	I_x	I_y			
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		5660	443	4760	184	4080	159			
431	647	438	657	405	607		r_y , in.								
Available Strength in Flexure about Y-Y Axis, kip-ft							3.20		2.21		2.18				
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		r_x/r_y								
317	476	187	281	160	240		3.59		5.07		5.05				

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.


 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W27 ^x						Shape	W27 ^x						
102 ^c		94 ^c		84 ^c		lb/ft	102		94 ^v		84 ^v		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
1040	1560	939	1410	819	1230	0	989	1490	902	1360	791	1190	
949	1430	855	1280	742	1120	6	989	1490	902	1360	791	1190	
918	1380	826	1240	717	1080	7	979	1470	889	1340	776	1170	
883	1330	795	1190	688	1030	8	948	1420	860	1290	749	1130	
846	1270	760	1140	657	988	9	917	1380	830	1250	722	1090	
806	1210	724	1090	624	939	10	886	1330	801	1200	695	1040	
765	1150	685	1030	590	887	11	855	1280	772	1160	668	1000	
721	1080	646	971	555	834	12	823	1240	742	1120	641	964	
677	1020	605	910	519	779	13	792	1190	713	1070	614	924	
632	951	565	849	482	725	14	761	1140	684	1030	588	883	
588	883	524	787	446	670	15	730	1100	655	984	561	843	
543	817	483	727	410	617	16	699	1050	625	940	534	802	
496	746	444	667	376	564	17	668	1000	596	896	507	762	
447	671	400	601	341	512	18	637	958	567	852	477	717	
401	603	359	539	306	460	19	605	910	527	791	433	651	
362	544	324	487	276	415	20	555	834	482	725	396	595	
299	450	268	402	228	343	22	474	713	411	618	336	505	
251	378	225	338	192	288	24	413	620	356	535	290	437	
214	322	192	288	163	246	26	364	547	313	471	255	383	
185	277	165	248	141	212	28	325	488	279	419	226	340	
161	242	144	216	123	184	30	293	441	251	377	203	305	
141	212	126	190	108	162	32	267	401	228	343	184	276	
125	188	112	168	95.6	144	34	245	368	209	314	167	252	
						36	226	340	192	289	154	231	
						38	210	315	178	268	142	214	
						40	196	294	166	249	132	199	
						42	183	276	155	233	123	186	
						44	173	260	146	219	116	174	
						46	163	245	138	207	109	164	
						48	155	232	130	196	103	155	
						50	147	221	124	186	97.5	147	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
1170	1760	1070	1610	961	1440	6.66	19.0	6.57	18.5	6.41	17.9		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	30.0		27.6		24.7			
900	1350	828	1240	741	1110	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3620	139	3270	124	2850	106		
363	544	308	463	287	431	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.15		2.12		2.07			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
141	212	126	189	108	162	5.12		5.14		5.17			

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.

^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65 \text{ ksi}$; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W24x						Shape	W24x					
370 ^h		335 ^h		306 ^h		lb/ft	370 ^h		335 ^h		306 ^h	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
4240	6380	3830	5750	3490	5250	0	3670	5510	3310	4970	2990	4490
4050	6090	3650	5490	3330	5000	6	3670	5510	3310	4970	2990	4490
3980	5990	3590	5390	3270	4910	7	3670	5510	3310	4970	2990	4490
3910	5870	3520	5290	3210	4820	8	3670	5510	3310	4970	2990	4490
3820	5750	3440	5170	3130	4710	9	3670	5510	3310	4970	2990	4490
3730	5610	3360	5040	3050	4590	10	3670	5510	3310	4970	2990	4490
3630	5460	3260	4910	2970	4460	11	3640	5460	3270	4920	2950	4440
3530	5300	3170	4760	2880	4330	12	3600	5410	3240	4870	2920	4390
3420	5140	3070	4610	2790	4190	13	3570	5360	3210	4820	2890	4340
3300	4960	2960	4450	2690	4040	14	3530	5310	3170	4770	2850	4290
3180	4780	2850	4280	2580	3880	15	3500	5260	3140	4710	2820	4240
3060	4590	2730	4110	2480	3730	16	3460	5210	3100	4660	2780	4190
2930	4400	2620	3940	2370	3570	17	3430	5160	3070	4610	2750	4130
2800	4210	2500	3760	2260	3400	18	3400	5100	3030	4560	2720	4080
2670	4020	2380	3580	2150	3240	19	3360	5050	3000	4510	2680	4030
2540	3820	2260	3400	2050	3070	20	3330	5000	2970	4460	2650	3980
2280	3430	2030	3050	1830	2750	22	3260	4900	2900	4350	2580	3880
2030	3050	1800	2700	1620	2430	24	3190	4800	2830	4250	2510	3780
1790	2680	1580	2370	1410	2130	26	3120	4690	2760	4150	2450	3680
1550	2330	1370	2050	1220	1840	28	3050	4590	2690	4040	2380	3580
1350	2030	1190	1790	1070	1600	30	2990	4490	2620	3940	2310	3470
1190	1790	1050	1570	936	1410	32	2920	4390	2550	3840	2240	3370
1050	1580	926	1390	829	1250	34	2850	4280	2480	3730	2180	3270
939	1410	826	1240	740	1110	36	2780	4180	2420	3630	2110	3170
843	1270	741	1110	664	998	38	2710	4080	2350	3530	2040	3070
760	1140	669	1010	599	901	40	2640	3970	2280	3430	1970	2970
690	1040	607	912	544	817	42	2580	3870	2210	3320	1910	2860
628	944	553	831	495	744	44	2510	3770	2140	3220	1840	2760
575	864	506	760	453	681	46	2440	3670	2070	3120	1760	2650
528	794	465	698	416	625	48	2370	3560	2000	3010	1680	2530
487	731	428	644	384	576	50	2300	3460	1930	2900	1610	2420
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
4240	6380	3830	5750	3490	5250	10.1	53.8	10.0	49.2	9.91	45.4	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	109		98.3		89.7		
3270	4910	2950	4420	2690	4040	Moment of Inertia, in. ⁴						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y	
1110	1660	987	1480	888	1330	13400	1160	11900	1030	10700	919	
Available Strength in Shear, kips						r_y , in.						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.27		3.23		3.20		
1110	1660	987	1480	888	1330	r_x/r_y						
Available Strength in Flexure about Y-Y Axis, kip-ft						3.39		3.41		3.41		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$							
866	1300	772	1160	694	1040							

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.



Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces


$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$

W-Shapes

W24x						Shape	W24x					
279 ^h		250		229		lb/ft	279 ^h		250		229	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
3190	4790	2860	4300	2620	3930	0	2710	4070	2410	3630	2190	3290
3040	4560	2720	4090	2490	3740	6	2710	4070	2410	3630	2190	3290
2980	4480	2670	4020	2440	3670	7	2710	4070	2410	3630	2190	3290
2920	4390	2620	3930	2390	3590	8	2710	4070	2410	3630	2190	3290
2850	4290	2560	3840	2330	3510	9	2710	4070	2410	3630	2190	3290
2780	4180	2490	3740	2270	3410	10	2700	4060	2400	3610	2180	3270
2700	4060	2420	3630	2200	3310	11	2670	4010	2370	3560	2150	3220
2620	3940	2340	3520	2130	3210	12	2640	3960	2340	3510	2110	3180
2530	3810	2260	3400	2060	3090	13	2600	3910	2310	3470	2080	3130
2440	3670	2180	3280	1980	2980	14	2570	3860	2270	3420	2050	3080
2350	3530	2090	3150	1900	2860	15	2540	3810	2240	3370	2020	3030
2250	3380	2010	3010	1820	2740	16	2500	3760	2210	3320	1980	2980
2150	3230	1920	2880	1740	2610	17	2470	3710	2170	3270	1950	2930
2050	3080	1820	2740	1650	2490	18	2430	3660	2140	3220	1920	2880
1950	2930	1730	2600	1570	2360	19	2400	3610	2110	3170	1890	2840
1850	2780	1640	2470	1490	2230	20	2370	3560	2080	3120	1850	2790
1650	2480	1460	2200	1320	1980	22	2300	3460	2010	3020	1790	2690
1450	2190	1290	1930	1160	1740	24	2230	3360	1940	2920	1730	2590
1270	1910	1120	1680	1000	1510	26	2170	3260	1880	2820	1660	2500
1100	1650	965	1450	865	1300	28	2100	3160	1810	2720	1600	2400
955	1430	840	1260	754	1130	30	2030	3060	1750	2630	1530	2300
839	1260	739	1110	663	996	32	1970	2960	1680	2530	1470	2210
743	1120	654	983	587	882	34	1900	2860	1620	2430	1400	2110
663	996	584	877	523	787	36	1830	2760	1550	2330	1340	2010
595	894	524	787	470	706	38	1770	2650	1480	2230	1260	1890
537	807	473	711	424	637	40	1700	2550	1400	2110	1180	1780
487	732	429	645	385	578	42	1630	2450	1330	2000	1120	1680
444	667	391	587	350	527	44	1550	2330	1260	1890	1060	1590
406	610	357	537	321	482	46	1480	2220	1200	1800	1010	1510
373	560	328	493	294	443	48	1410	2120	1140	1720	958	1440
344	516	303	455	271	408	50	1350	2020	1090	1640	915	1380

Properties											
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
3190	4790	2860	4300	2620	3930	9.82	42.1	9.73	38.7	9.63	36.1
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	81.9		73.5		67.2	
2460	3690	2210	3310	2020	3020	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
805	1210	711	1070	649	973	9600	823	8490	724	7650	651
Available Strength in Shear, kips						r_y , in.					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.17		3.14		3.11	
805	1210	711	1070	649	973	r_x/r_y					
Available Strength in Flexure about Y-Y Axis, kip-ft						3.41		3.41		3.44	
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$						
626	941	555	834	500	751						

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W24x						Shape	W24x						
207		192		176		lb/ft	207		192		176		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
2360	3550	2200	3310	2010	3020	Effective Length, L_e , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	1970	2950	1810	2730	1660	2490
2240	3370	2090	3140	1910	2870		6	1970	2950	1810	2730	1660	2490
2200	3310	2050	3080	1870	2810		7	1970	2950	1810	2730	1660	2490
2150	3240	2000	3010	1830	2750		8	1970	2950	1810	2730	1660	2490
2100	3160	1960	2940	1780	2680		9	1970	2950	1810	2730	1660	2490
2050	3070	1900	2860	1740	2610		10	1950	2930	1800	2700	1640	2460
1980	2980	1840	2770	1680	2530		11	1920	2890	1770	2660	1610	2420
1920	2880	1780	2680	1630	2440		12	1890	2840	1740	2610	1580	2370
1850	2780	1720	2590	1570	2350		13	1860	2790	1710	2560	1550	2330
1780	2680	1650	2490	1510	2260		14	1820	2740	1670	2520	1520	2280
1710	2570	1590	2380	1440	2170		15	1790	2700	1640	2470	1490	2240
1630	2450	1520	2280	1380	2070		16	1760	2650	1610	2420	1460	2190
1560	2340	1450	2170	1310	1970		17	1730	2600	1580	2380	1430	2150
1480	2220	1370	2060	1250	1870		18	1700	2550	1550	2330	1400	2100
1400	2110	1300	1960	1180	1770		19	1670	2510	1520	2290	1370	2060
1330	1990	1230	1850	1110	1670		20	1640	2460	1490	2240	1340	2010
1180	1770	1090	1640	983	1480		22	1570	2360	1430	2150	1280	1920
1030	1550	953	1430	857	1290		24	1510	2270	1370	2050	1220	1830
889	1340	822	1240	738	1110		26	1450	2170	1310	1960	1160	1740
767	1150	709	1070	636	956		28	1380	2080	1240	1870	1100	1650
668	1000	618	928	554	833		30	1320	1980	1180	1780	1040	1560
587	882	543	816	487	732		32	1260	1890	1120	1680	963	1450
520	781	481	723	431	648		34	1190	1790	1040	1560	889	1340
464	697	429	645	385	578		36	1110	1660	966	1450	826	1240
416	626	385	579	345	519		38	1040	1560	903	1360	771	1160
376	565	347	522	312	468		40	975	1460	848	1270	723	1090
341	512	315	474	283	425		42	920	1380	800	1200	681	1020
310	467	287	432	258	387		44	871	1310	757	1140	643	967
284	427	263	395	236	354		46	827	1240	718	1080	610	916
261	392	241	363	216	325		48	787	1180	683	1030	580	871
240	361	222	334	199	300	50	752	1130	652	979	552	830	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
2360	3550	2200	3310	2010	3020	9.54	33.6	9.51	32.2	9.42	30.6		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	60.7		56.5		51.7			
1820	2730	1700	2540	1550	2330	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	6820	578	6260	530	5680	479		
581	872	537	806	491	737	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						3.08		3.07		3.04			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
444	668	409	614	373	561	3.44		3.42		3.45			

Note: Confirm ASTM A913 material availability before specifying.




Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$


W-Shapes

W24x						Shape	W24x					
162		146 ^c		131 ^c		lb/ft	162		146		131	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1860	2800	1650	2490	1460	2190	0	1520	2280	1360	2040	1200	1800
1760	2650	1580	2370	1390	2090	6	1520	2280	1360	2040	1200	1800
1730	2600	1550	2330	1360	2050	7	1520	2280	1360	2040	1200	1800
1690	2540	1520	2280	1340	2010	8	1520	2280	1360	2040	1200	1800
1650	2480	1480	2230	1310	1960	9	1520	2280	1360	2040	1200	1800
1610	2410	1440	2160	1270	1910	10	1500	2260	1340	2010	1180	1770
1560	2340	1390	2100	1240	1860	11	1470	2210	1310	1970	1150	1730
1510	2260	1350	2020	1200	1800	12	1440	2170	1280	1930	1130	1700
1450	2180	1300	1950	1160	1740	13	1420	2130	1260	1890	1100	1660
1390	2100	1240	1870	1110	1670	14	1390	2080	1230	1850	1080	1620
1340	2010	1190	1790	1060	1590	15	1360	2040	1200	1800	1050	1580
1280	1920	1140	1710	1010	1520	16	1330	2000	1170	1760	1020	1540
1220	1830	1080	1630	959	1440	17	1300	1950	1150	1720	999	1500
1160	1740	1030	1540	909	1370	18	1270	1910	1120	1680	973	1460
1090	1640	970	1460	858	1290	19	1240	1870	1090	1640	948	1420
1030	1550	915	1370	808	1210	20	1210	1820	1060	1600	922	1390
913	1370	806	1210	709	1070	22	1160	1740	1010	1520	870	1310
797	1200	701	1050	615	924	24	1100	1650	953	1430	819	1230
687	1030	602	904	526	790	26	1040	1560	899	1350	767	1150
592	890	519	780	453	681	28	983	1480	844	1270	697	1050
516	775	452	679	395	594	30	917	1380	763	1150	628	943
453	681	397	597	347	522	32	839	1260	696	1050	570	857
402	603	352	529	307	462	34	773	1160	639	960	523	785
358	538	314	472	274	412	36	716	1080	591	888	482	724
321	483	282	423	246	370	38	667	1000	549	826	447	672
290	436	254	382	222	334	40	625	939	513	771	417	626
263	395	231	346	201	303	42	587	883	482	724	390	586
240	360	210	316	184	276	44	554	833	454	682	367	551
219	330	192	289	168	252	46	525	789	429	645	346	520
201	303	176	265	154	232	48	498	749	407	611	328	493
186	279	163	244			50	474	713	387	581	311	468
Properties						Limiting Unbraced Lengths, ft						
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
1860	2800	1670	2520	1500	2260	9.45	29.5	9.32	28.1	9.20	26.8	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	47.8		43.0		38.6		
1430	2150	1290	1940	1160	1740	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	5170	443	4580	391	4020	340	
458	687	417	626	385	578	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						3.05		3.01		2.97		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
341	512	302	454	264	397	3.41		3.42		3.43		


^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W24 _x						Shape	W24 _x					
117 ^c		104 ^c		103 ^c		lb/ft	117		104 ^f		103	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1270	1910	1110	1660	1110	1670	0	1060	1590	925	1390	908	1370
1210	1820	1050	1580	998	1500	6	1060	1590	925	1390	908	1370
1190	1780	1030	1550	960	1440	7	1060	1590	925	1390	884	1330
1160	1750	1010	1520	918	1380	8	1060	1590	925	1390	855	1290
1130	1710	987	1480	872	1310	9	1060	1590	925	1390	827	1240
1110	1660	960	1440	824	1240	10	1040	1560	916	1380	798	1200
1070	1610	932	1400	774	1160	11	1020	1530	893	1340	769	1160
1040	1560	902	1360	717	1080	12	991	1490	871	1310	741	1110
1000	1510	871	1310	658	988	13	967	1450	849	1280	712	1070
967	1450	838	1260	599	900	14	943	1420	827	1240	683	1030
928	1400	804	1210	542	814	15	919	1380	805	1210	654	984
889	1340	770	1160	487	732	16	895	1350	783	1180	626	940
847	1270	734	1100	433	651	17	871	1310	760	1140	597	897
802	1200	699	1050	387	581	18	847	1270	738	1110	568	854
756	1140	663	997	347	521	19	823	1240	716	1080	529	796
711	1070	626	941	313	471	20	799	1200	694	1040	490	736
622	935	546	821	259	389	22	752	1130	650	976	425	639
538	808	471	708	217	327	24	704	1060	605	910	375	563
459	690	401	603	185	278	26	651	979	544	817	335	504
396	595	346	520	160	240	28	578	869	481	723	303	455
345	518	302	453	139	209	30	519	781	430	647	276	415
303	456	265	398	122	184	32	470	707	389	584	254	382
268	404	235	353			34	430	646	354	532	235	353
239	360	209	315			36	395	594	324	488	219	329
215	323	188	282			38	365	549	299	450	205	308
194	292	170	255			40	340	511	278	417	192	289
176	264	154	231			42	317	477	259	389	181	273
160	241	140	211			44	298	448	242	364	172	258
147	220	128	193			46	281	422	228	342	163	245
135	202	118	177			48	265	398	215	323	155	233
						50	251	378	203	305	148	222
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
1340	2010	1190	1800	1180	1770	9.11	25.8	9.59	24.9	6.16	18.4	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	34.4		30.7		30.3		
1030	1550	921	1380	909	1360	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3540	297	3100	259	3000	119	
347	521	313	470	350	526	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.94		2.91		1.99		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
232	348	198	298	135	202	3.44		3.47		5.03		

^c Shape is slender for compression with $F_y = 65$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 65$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 <p style="text-align: center;">Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces</p> <p style="text-align: right;">$F_y = 65$ ksi $F_u = 80$ ksi</p> <p style="text-align: center;">W-Shapes</p>												
W24x						Shape	W24x					
94 ^c		84 ^c		76 ^c		lb/ft	94		84		76 ^v	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
995	1500	864	1300	766	1150	0	824	1240	727	1090	649	975
893	1340	772	1160	683	1030	6	824	1240	727	1090	647	973
859	1290	742	1120	655	985	7	800	1200	703	1060	624	938
821	1230	708	1060	625	939	8	773	1160	678	1020	601	904
780	1170	672	1010	592	890	9	746	1120	653	981	578	869
737	1110	634	953	557	838	10	719	1080	628	943	555	834
692	1040	594	893	522	784	11	692	1040	603	906	532	799
646	971	553	832	485	729	12	665	1000	578	868	508	764
598	898	512	770	448	674	13	638	959	553	831	485	729
544	817	471	709	411	618	14	611	918	528	793	462	695
491	739	428	643	375	564	15	584	878	503	755	439	660
441	663	383	575	337	506	16	557	837	478	718	416	625
392	590	339	510	298	448	17	530	796	453	680	387	582
350	526	303	455	266	400	18	501	753	416	626	351	528
314	472	272	408	239	359	19	460	691	381	572	320	482
283	426	245	368	215	324	20	424	638	350	527	294	442
234	352	203	304	178	268	22	366	551	301	453	252	379
197	296	170	256	150	225	24	322	484	264	396	220	330
168	252	145	218	128	192	26	287	431	234	351	194	292
145	217	125	188	110	165	28	258	388	210	315	174	261
126	189	109	164	95.8	144	30	235	353	190	286	157	236
111	166	95.7	144	84.2	127	32	215	324	174	261	143	215
						34	199	299	160	241	131	198
						36	185	277	148	223	121	183
						38	172	259	138	208	113	170
						40	162	243	129	194	106	159
						42	152	229	122	183	99.0	149
						44	144	216	115	172	93.2	140
						46	136	205	109	163	88.1	132
						48	130	195	103	155	83.6	126
						50	124	186	98.2	148	79.5	119
Available Strength in Tensile Yielding, kips						Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft						
1080	1620	961	1440	872	1310	L_p	L_r	L_p	L_r	L_p	L_r	
						6.13	18.0	6.04	17.3	5.95	16.7	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	27.7		24.7		22.4		
831	1250	741	1110	672	1010	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	2700	109	2370	94.4	2100	82.5	
325	488	295	442	246	369	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						1.98		1.95		1.92		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
122	183	106	159	92.8	139	4.98		5.02		5.05		

^c Shape is slender for compression with $F_y = 65$ ksi.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.


 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W24x						Shape	W24x						
68 ^c		62 ^c		55 ^c		lb/ft	68 ^v		62 ^v		55 ^v		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
670	1010	600	902	515	774	0	574	863	496	746	435	653	
595	894	485	729	411	618	6	570	856	454	682	393	591	
569	856	449	675	379	570	7	548	824	430	646	371	558	
542	814	411	618	345	519	8	527	792	405	609	349	524	
512	770	372	559	311	467	9	505	759	381	572	326	490	
481	723	333	500	276	415	10	484	727	356	535	304	457	
449	674	294	441	243	365	11	462	694	332	499	282	423	
416	625	251	378	211	317	12	441	662	307	462	259	390	
383	575	214	322	180	270	13	419	630	274	411	225	338	
350	526	185	277	155	233	14	398	597	241	362	197	296	
318	478	161	242	135	203	15	376	565	214	322	175	263	
287	431	141	212	119	178	16	354	533	192	289	157	235	
254	382	125	188	105	158	17	322	483	174	262	141	212	
226	340	112	168	93.7	141	18	291	437	159	239	129	193	
203	305	100	151	84.1	126	19	265	398	146	219	118	177	
183	276	90.4	136	75.9	114	20	243	365	135	202	108	163	
152	228	74.7	112	62.7	94.3	22	207	311	116	175	93.3	140	
127	191					24	180	270	102	154	81.7	123	
109	163					26	158	238	91.2	137	72.6	109	
93.6	141					28	141	212	82.2	124	65.2	98.0	
81.5	123					30	127	191	74.8	112	59.1	88.9	
						32	116	174	68.7	103	54.1	81.3	
						34	106	159	63.4	95.3	49.8	74.9	
						36	97.5	147	58.9	88.6	46.2	69.4	
						38	90.4	136	55.1	82.8	43.1	64.7	
						40	84.3	127	51.7	77.7	40.3	60.6	
						42	78.9	119	48.7	73.2	37.9	57.0	
						44	74.2	112	46.0	69.2	35.8	53.8	
						46	70.0	105	43.6	65.6	33.9	51.0	
						48	66.3	99.6	41.5	62.4	32.2	48.4	
						50	62.9	94.6	39.6	59.5	30.7	46.1	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
782	1180	708	1060	631	948	5.79	16.2	4.28	12.4	4.15	12.0		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	20.1		18.2		16.2			
603	905	546	819	486	729	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	1830	70.4	1550	34.5	1350	29.1		
230	345	238	358	214	322	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.87		1.38		1.34			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
79.5	119	50.9	76.4	43.1	64.7	5.11		6.69		6.80			

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.

^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65 \text{ ksi}$; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes														$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W21x						Shape	W21x								
275 ^h		248		223		lb/ft	275 ^h		248		223				
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$			
Available Compressive Strength, kips							Available Flexural Strength, kip-ft								
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD			
3180	4790	2870	4320	2590	3890		0	2430	3650	2180	3270	1950	2930		
3020	4550	2730	4100	2450	3690	6	2430	3650	2180	3270	1950	2930			
2970	4460	2680	4020	2410	3620	7	2430	3650	2180	3270	1950	2930			
2910	4370	2620	3940	2350	3540	8	2430	3650	2180	3270	1950	2930			
2840	4260	2560	3840	2300	3450	9	2430	3650	2180	3270	1950	2930			
2760	4150	2490	3740	2230	3350	10	2420	3640	2170	3250	1930	2910			
2680	4030	2410	3630	2160	3250	11	2390	3600	2140	3220	1910	2870			
2590	3900	2330	3510	2090	3140	12	2370	3560	2120	3180	1890	2830			
2500	3760	2250	3380	2020	3030	13	2340	3520	2090	3140	1860	2800			
2410	3620	2160	3250	1940	2910	14	2320	3490	2070	3110	1840	2760			
2310	3470	2080	3120	1850	2790	15	2290	3450	2040	3070	1810	2720			
2210	3320	1990	2980	1770	2660	16	2270	3410	2020	3030	1790	2690			
2110	3170	1890	2850	1690	2540	17	2240	3370	1990	2990	1760	2650			
2010	3020	1800	2710	1600	2410	18	2220	3330	1970	2960	1740	2610			
1900	2860	1710	2560	1520	2280	19	2190	3300	1940	2920	1710	2570			
1800	2710	1610	2420	1430	2150	20	2170	3260	1920	2880	1690	2540			
1600	2400	1430	2150	1260	1900	22	2120	3180	1870	2810	1640	2460			
1400	2110	1250	1880	1100	1660	24	2070	3110	1820	2730	1590	2390			
1210	1820	1080	1620	949	1430	26	2020	3030	1770	2660	1540	2310			
1050	1570	932	1400	818	1230	28	1970	2960	1720	2580	1490	2240			
912	1370	812	1220	713	1070	30	1920	2880	1670	2510	1440	2160			
801	1200	714	1070	626	942	32	1870	2810	1620	2440	1390	2090			
710	1070	632	950	555	834	34	1820	2730	1570	2360	1340	2020			
633	952	564	847	495	744	36	1770	2660	1520	2290	1290	1940			
568	854	506	761	444	668	38	1720	2580	1470	2210	1240	1870			
513	771	457	686	401	603	40	1670	2510	1420	2140	1190	1790			
465	699	414	623	364	547	42	1620	2430	1370	2060	1130	1700			
424	637	377	567	331	498	44	1570	2350	1320	1990	1080	1620			
388	583	345	519	303	456	46	1520	2280	1270	1900	1020	1540			
356	535	317	477	278	418	48	1470	2200	1210	1820	978	1470			
328	493	292	439	257	386	50	1410	2120	1160	1740	936	1410			
Properties															
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r				
3180	4790	2870	4320	2590	3890	9.60	48.7	9.54	44.6	9.42	40.5				
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	81.8		73.8		66.5					
2450	3680	2210	3320	2000	2990	Moment of Inertia, in. ⁴									
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y				
764	1150	678	1020	608	913	7690	787	6830	699	6080	614				
Available Strength in Shear, kips						r_y , in.									
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	3.10		3.08		3.04					
620	931	551	829	487	731	r_x/r_y									
						3.13		3.12		3.14					

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.



Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces


$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$

W-Shapes


W21x						Shape	W21x						
201		182		166		lb/ft	201		182		166		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
2310	3470	2090	3140	1900	2850	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	1720	2580	1540	2320	1400	2110
2190	3290	1980	2970	1800	2700		6	1720	2580	1540	2320	1400	2110
2140	3220	1940	2910	1760	2650		7	1720	2580	1540	2320	1400	2110
2100	3150	1890	2840	1720	2590		8	1720	2580	1540	2320	1400	2110
2040	3070	1840	2770	1680	2520		9	1720	2580	1540	2320	1400	2110
1990	2990	1790	2690	1630	2450		10	1700	2560	1530	2300	1380	2080
1920	2890	1740	2610	1580	2370		11	1680	2520	1500	2260	1360	2040
1860	2790	1680	2520	1520	2290		12	1650	2490	1480	2220	1340	2010
1790	2690	1610	2420	1470	2200		13	1630	2450	1450	2190	1310	1970
1720	2590	1550	2330	1410	2110		14	1600	2410	1430	2150	1290	1940
1650	2470	1480	2230	1350	2020		15	1580	2380	1410	2110	1270	1900
1570	2360	1410	2120	1280	1930		16	1560	2340	1380	2080	1240	1870
1500	2250	1340	2020	1220	1830		17	1530	2300	1360	2040	1220	1830
1420	2130	1270	1920	1160	1740		18	1510	2260	1330	2010	1200	1800
1340	2020	1200	1810	1090	1640		19	1480	2230	1310	1970	1170	1760
1270	1900	1140	1710	1030	1550		20	1460	2190	1290	1930	1150	1730
1120	1680	999	1500	905	1360		22	1410	2120	1240	1860	1100	1660
972	1460	869	1310	786	1180		24	1360	2040	1190	1790	1060	1590
835	1260	745	1120	674	1010		26	1310	1970	1140	1720	1010	1520
720	1080	642	965	581	873		28	1260	1890	1090	1650	961	1440
627	943	559	841	506	760		30	1210	1820	1050	1570	914	1370
551	829	492	739	445	668		32	1160	1750	999	1500	867	1300
488	734	436	655	394	592		34	1110	1670	951	1430	805	1210
436	655	389	584	351	528		36	1060	1600	888	1330	750	1130
391	588	349	524	315	474		38	1000	1510	833	1250	703	1060
353	530	315	473	285	428		40	947	1420	784	1180	661	993
320	481	285	429	258	388		42	896	1350	741	1110	624	938
292	438	260	391	235	354		44	850	1280	703	1060	591	888
267	401	238	358	215	323		46	809	1220	668	1000	562	844
245	368	219	328	198	297		48	771	1160	637	957	535	804
226	339	201	303			50	737	1110	609	915	511	768	

Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
2310	3470	2090	3140	1900	2850	9.36	36.7	9.29	34.2	9.26	32.2
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	59.3		53.6		48.8	
1780	2670	1610	2410	1460	2200	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
544	816	490	735	439	658	5310	542	4730	483	4280	435
Available Strength in Shear, kips						r_y , in.					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.02		3.00		2.99	
544	816	490	735	439	658	r_x/r_y					
Available Strength in Flexure about Y-Y Axis, kip-ft						3.14		3.13		3.13	
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$						
431	648	386	580	350	527						


Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes													
W21x						Shape	W21x						
147		132		122		lb/ft	147		132		122		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
1680	2530	1510	2270	1400	2100	0	1210	1820	1080	1620	996	1500	
1590	2390	1430	2140	1320	1980	6	1210	1820	1080	1620	996	1500	
1560	2340	1400	2100	1290	1940	7	1210	1820	1080	1620	996	1500	
1520	2290	1360	2050	1260	1900	8	1210	1820	1080	1620	996	1500	
1480	2220	1330	1990	1230	1840	9	1210	1820	1080	1620	996	1500	
1440	2160	1290	1940	1190	1790	10	1190	1790	1060	1590	976	1470	
1390	2090	1250	1870	1150	1730	11	1170	1760	1040	1560	955	1440	
1340	2020	1200	1800	1110	1670	12	1150	1720	1020	1530	935	1400	
1290	1940	1150	1730	1070	1600	13	1120	1690	996	1500	914	1370	
1240	1860	1100	1660	1020	1530	14	1100	1650	975	1460	893	1340	
1180	1770	1050	1590	974	1460	15	1080	1620	953	1430	872	1310	
1120	1690	1000	1510	926	1390	16	1060	1590	932	1400	852	1280	
1070	1600	953	1430	879	1320	17	1030	1550	910	1370	831	1250	
1010	1520	901	1350	831	1250	18	1010	1520	889	1340	810	1220	
953	1430	849	1280	783	1180	19	988	1490	868	1300	790	1190	
896	1350	798	1200	735	1110	20	966	1450	846	1270	769	1160	
896	1350	798	1200	735	1110	20	966	1450	846	1270	769	1160	
785	1180	698	1050	642	966	22	921	1380	803	1210	728	1090	
680	1020	603	906	554	833	24	876	1320	760	1140	686	1030	
580	872	514	773	473	710	26	831	1250	718	1080	645	969	
501	752	443	667	408	613	28	786	1180	675	1010	594	892	
436	655	386	581	355	534	30	737	1110	615	924	538	808	
383	576	340	510	312	469	32	676	1020	563	846	491	738	
339	510	301	452	276	415	34	625	939	519	779	452	679	
303	455	268	403	247	371	36	581	873	481	723	418	629	
272	408	241	362	221	333	38	542	815	448	674	390	585	
245	369	217	327	200	300	40	509	765	420	631	364	548	
222	334	197	296	181	272	42	480	721	395	594	342	515	
203	305	180	270	165	248	44	453	681	373	561	323	485	
185	279	164	247	151	227	46	430	646	353	531	306	459	
170	256	151	227	139	208	48	409	615	336	505	290	436	
						50	390	586	320	481	276	415	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
1680	2530	1510	2270	1400	2100	9.14	29.7	9.08	28.2	9.05	27.2		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	43.2		38.8		35.9			
1300	1940	1160	1750	1080	1620	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3630	376	3220	333	2960	305		
414	621	368	553	339	508	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.95		2.93		2.92			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
300	451	267	401	245	369	3.11		3.11		3.11			


Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes														$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W21x						Shape	W21x								
111 ^c		101 ^c		93 ^c		lb/ft	111		101		93				
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$			
Available Compressive Strength, kips							Available Flexural Strength, kip-ft								
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD			
1250	1870	1120	1680	1050	1590	0	905	1360	821	1230	717	1080			
1180	1780	1060	1590	919	1380	6	905	1360	821	1230	710	1070			
1160	1750	1040	1560	872	1310	7	905	1360	821	1230	687	1030			
1140	1710	1020	1530	820	1230	8	905	1360	821	1230	663	997			
1110	1670	992	1490	766	1150	9	905	1360	820	1230	640	962			
1080	1620	965	1450	709	1070	10	885	1330	801	1200	617	927			
1040	1570	936	1410	651	979	11	865	1300	783	1180	594	892			
1000	1510	905	1360	594	892	12	845	1270	764	1150	570	857			
964	1450	872	1310	537	806	13	826	1240	745	1120	547	822			
922	1390	839	1260	481	723	14	806	1210	727	1090	524	787			
880	1320	802	1210	428	643	15	786	1180	708	1060	500	752			
837	1260	762	1150	377	566	16	766	1150	690	1040	477	717			
793	1190	722	1090	334	502	17	747	1120	671	1010	454	682			
749	1130	682	1030	298	448	18	727	1090	652	980	427	642			
705	1060	642	965	267	402	19	707	1060	634	952	395	594			
662	995	602	905	241	363	20	687	1030	615	925	367	551			
577	867	525	789	199	300	22	648	974	578	869	321	482			
497	747	451	678	167	252	24	608	914	541	813	285	429			
423	636	384	578	143	215	26	569	855	495	744	257	386			
365	549	331	498	123	185	28	510	767	441	663	233	351			
318	478	289	434	107	161	30	461	692	397	597	214	321			
279	420	254	381			32	420	631	361	543	197	297			
248	372	225	338			34	385	579	331	497	183	276			
221	332	200	301			36	356	535	305	458	171	258			
198	298	180	270			38	331	497	283	425	161	242			
179	269	162	244			40	309	464	263	396	151	228			
162	244	147	221			42	290	436	247	371	143	215			
148	222	134	202			44	273	410	232	349	136	204			
135	203	123	185			46	258	388	219	329	129	194			
124	187	113	169			48	245	367	207	311	123	185			
						50	232	349	197	296	118	177			
Properties															
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r				
1270	1910	1160	1740	1060	1600	8.98	26.2	8.95	25.4	5.70	17.8				
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	32.6		29.8		27.3					
978	1470	894	1340	819	1230	Moment of Inertia, in. ⁴									
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y				
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	2670	274	2420	248	2070	92.9				
307	461	278	417	326	489	r_y , in.									
Available Strength in Flexure about Y-Y Axis, kip-ft						2.9		2.89		1.84					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y									
221	332	200	301	113	169	3.12		3.12		4.73					

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W21 _x						Shape	W21 _x					
83 ^c		73 ^c		68 ^c		lb/ft	83		73		68	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
912	1370	777	1170	711	1070	0	636	956	558	839	519	780
804	1210	682	1030	623	937	6	628	945	550	827	511	768
768	1150	651	979	595	894	7	607	912	530	796	491	738
728	1090	617	927	563	846	8	585	879	510	766	472	709
682	1030	580	872	529	796	9	563	846	490	736	452	680
631	949	542	815	494	743	10	541	813	470	706	433	651
579	870	502	755	458	688	11	519	780	450	676	414	622
527	792	459	689	421	633	12	497	747	429	645	394	593
476	715	413	621	381	573	13	475	714	409	615	375	563
426	641	369	555	340	511	14	453	681	389	585	355	534
379	569	327	491	301	452	15	431	648	369	555	336	505
333	501	287	432	264	397	16	409	615	349	525	315	474
295	444	254	382	234	352	17	387	581	320	481	285	429
263	396	227	341	209	314	18	354	532	292	440	260	391
236	355	204	306	187	282	19	326	491	269	404	239	359
213	320	184	276	169	254	20	302	455	248	373	220	331
176	265	152	228	140	210	22	264	396	215	324	191	286
148	223	128	192	117	176	24	233	351	190	285	168	252
126	190	109	163	100	150	26	209	314	169	255	149	224
109	164	93.8	141	86.3	130	28	190	285	153	230	135	202
94.8	142	81.7	123	75.2	113	30	173	261	140	210	122	184
						32	160	240	128	193	112	169
						34	148	223	119	178	104	156
						36	138	208	110	166	96.4	145
						38	129	195	103	155	90.0	135
						40	122	183	96.9	146	84.5	127
						42	115	173	91.3	137	79.6	120
						44	109	164	86.4	130	75.2	113
						46	104	156	82.0	123	71.3	107
						48	98.6	148	78.0	117	67.8	102
						50	94.2	142	74.4	112	64.7	97.2
Available Strength in Tensile Yielding, kips						Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft						
950	1430	837	1260	778	1170	L_p	L_r	L_p	L_r	L_p	L_r	
						5.67	17.0	5.61	16.3	5.58	15.9	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	24.4		21.5		20.0		
732	1100	645	968	600	900	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	1830	81.4	1600	70.6	1480	64.7	
287	430	251	376	236	354	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						1.83		1.81		1.80		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
98.9	149	86.3	130	79.1	119	4.74		4.77		4.78		

^c Shape is slender for compression with $F_y = 65$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes													
W21x						Shape	W21x						
62 ^c		55 ^c		48 ^c		lb/ft	62		55 ^v		48 ^{f,v}		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
636	956	549	825	462	695	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	467	702	409	614	332	499
556	835	477	717	398	598		6	458	688	398	598	332	499
529	795	453	681	377	566		7	440	661	381	573	319	480
500	752	428	643	354	532		8	422	635	365	548	305	458
469	705	400	602	329	495		9	404	608	348	523	290	435
437	657	372	559	304	458		10	386	581	332	499	275	413
404	607	343	515	279	419		11	369	554	315	474	260	391
371	557	313	471	254	381		12	351	527	299	449	245	368
338	507	284	428	229	343		13	333	500	282	424	230	346
303	455	256	385	204	307		14	315	474	265	399	215	324
266	400	225	338	180	271		15	297	447	248	372	193	290
234	351	198	297	158	238		16	273	410	221	332	172	259
207	311	175	263	140	211		17	246	370	199	299	155	233
185	278	156	235	125	188		18	224	337	181	272	140	210
166	249	140	211	112	169		19	205	309	165	248	128	192
150	225	127	190	101	152		20	189	284	152	228	117	176
124	186	105	157	83.8	126		22	163	245	130	195	99.8	150
104	156	87.9	132	70.4	106		24	143	214	113	170	86.7	130
88.5	133	74.9	113	60.0	90.2		26	127	190	100	151	76.3	115
76.3	115	64.6	97.0				28	114	171	89.8	135	68.1	102
							30	103	155	81.2	122	61.3	92.2
							32	94.4	142	74.0	111	55.8	83.8
							34	87.0	131	68.0	102	51.1	76.8
							36	80.7	121	62.9	94.6	47.1	70.8
							38	75.2	113	58.5	87.9	43.7	65.7
							40	70.4	106	54.7	82.2	40.7	61.2
							42	66.2	99.6	51.3	77.1	38.2	57.4
							44	62.5	94.0	48.4	72.7	35.9	53.9
							46	59.2	89.0	45.7	68.7	33.9	50.9
							48	56.3	84.5	43.4	65.2	32.1	48.2
						50	53.6	80.5	41.2	62.0	30.4	45.8	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
712	1070	631	948	549	825	5.48	15.5	5.36	14.9	6.15	14.3		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	18.3		16.2		14.1			
549	824	486	729	423	635	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	1330	57.5	1140	48.4	959	38.7		
218	328	182	274	168	253	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.77		1.73		1.66			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
70.4	106	59.7	89.7	45.4	68.2	4.82		4.86		4.96			


^c Shape is slender for compression with $F_y = 65$ ksi.

^f Shape exceeds compact limit for flexure with $F_y = 65$ ksi.

^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Confirm ASTM A913 material availability before specifying.


 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes														$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W21x						Shape	W21x								
57 ^c		50 ^c		44 ^c		lb/ft	57		50 ^y		44 ^y				
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$			
Available Compressive Strength, kips							Available Flexural Strength, kip-ft								
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD			
575	864	491	738	420	631	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	418	629	357	536	309	465		
458	688	385	579	325	488		6	381	572	320	481	274	411		
422	634	353	531	296	445		7	360	541	301	453	257	386		
384	577	319	480	266	400		8	339	510	283	425	240	360		
345	518	285	428	236	354		9	319	479	264	397	223	335		
306	459	251	377	206	310		10	298	448	246	369	206	309		
262	394	214	322	177	267		11	277	417	227	341	189	284		
221	332	180	271	150	225		12	257	386	204	307	164	246		
188	283	153	231	127	192		13	227	341	178	267	142	214		
162	244	132	199	110	165		14	201	302	157	236	125	188		
141	212	115	173	95.7	144		15	180	270	140	210	111	167		
124	187	101	152	84.2	126		16	163	244	126	189	99.9	150		
110	165	89.7	135	74.5	112		17	148	222	114	172	90.4	136		
98.1	147	80.0	120	66.5	99.9		18	136	204	105	157	82.4	124		
88.0	132	71.8	108	59.7	89.7		19	125	188	96.2	145	75.6	114		
79.4	119	64.8	97.4	53.9	80.9		20	116	175	89.0	134	69.8	105		
65.6	98.7						22	101	153	77.3	116	60.3	90.7		
							24	90.0	135	68.2	103	53.0	79.7		
							26	80.8	121	61.0	91.7	47.3	71.0		
							28	73.4	110	55.2	82.9	42.6	64.0		
							30	67.2	101	50.4	75.7	38.8	58.3		
							32	62.0	93.1	46.3	69.6	35.6	53.4		
							34	57.5	86.4	42.9	64.5	32.8	49.4		
							36	53.7	80.7	39.9	60.0	30.5	45.9		
							38	50.3	75.6	37.4	56.2	28.5	42.8		
							40	47.4	71.2	35.1	52.8	26.7	40.2		
							42	44.8	67.3	33.1	49.8	25.2	37.9		
							44	42.4	63.8	31.4	47.2	23.8	35.8		
							46	40.3	60.6	29.8	44.8	22.6	33.9		
							48	38.5	57.8	28.4	42.6	21.5	32.3		
							50	36.7	55.2	27.1	40.7	20.5	30.8		
Properties															
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r				
650	977	572	860	506	761	4.18	12.2	4.03	11.7	3.90	11.2				
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	16.7		14.7		13.0					
501	752	441	662	390	585	Moment of Inertia, in. ⁴									
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y				
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	1170	30.6	984	24.9	843	20.7				
222	333	185	277	169	254	r_y , in.									
Available Strength in Flexure about Y-Y Axis, kip-ft						1.35		1.30		1.26					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y									
48.0	72.2	39.6	59.5	33.1	49.7	6.19		6.29		6.40					

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.


^y Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65 \text{ ksi}$; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes														$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W18x						Shape	W18x								
311 ^h		283 ^h		258 ^h		lb/ft	311 ^h		283 ^h		258 ^h				
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$			
Available Compressive Strength, kips							Available Flexural Strength, kip-ft								
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD			
3570	5360	3240	4870	2960	4450	0	2450	3680	2190	3300	1980	2980			
3370	5060	3060	4600	2790	4190	6	2450	3680	2190	3300	1980	2980			
3300	4960	3000	4500	2730	4100	7	2450	3680	2190	3300	1980	2980			
3220	4850	2920	4390	2660	4000	8	2450	3680	2190	3300	1980	2980			
3140	4720	2840	4280	2590	3890	9	2450	3680	2190	3300	1980	2980			
3050	4580	2760	4150	2510	3770	10	2430	3650	2170	3270	1960	2950			
2950	4430	2670	4010	2420	3640	11	2410	3620	2150	3240	1940	2920			
2840	4270	2570	3860	2330	3510	12	2390	3590	2140	3210	1920	2890			
2730	4110	2470	3710	2240	3360	13	2370	3560	2120	3180	1900	2860			
2620	3940	2360	3550	2140	3220	14	2350	3540	2100	3150	1890	2830			
2500	3760	2250	3390	2040	3070	15	2330	3510	2080	3120	1870	2810			
2380	3580	2140	3220	1940	2910	16	2310	3480	2060	3100	1850	2780			
2260	3400	2030	3050	1840	2760	17	2290	3450	2040	3070	1830	2750			
2140	3220	1920	2890	1730	2600	18	2280	3420	2020	3040	1810	2720			
2020	3040	1810	2720	1630	2450	19	2260	3390	2000	3010	1790	2690			
1900	2860	1700	2550	1530	2300	20	2240	3360	1980	2980	1770	2660			
1670	2500	1480	2230	1330	2000	22	2200	3300	1950	2930	1740	2610			
1440	2170	1280	1920	1140	1720	24	2160	3250	1910	2870	1700	2550			
1230	1850	1090	1640	973	1460	26	2120	3190	1870	2810	1660	2490			
1060	1600	939	1410	839	1260	28	2080	3130	1830	2750	1620	2440			
925	1390	818	1230	731	1100	30	2040	3070	1790	2700	1580	2380			
813	1220	719	1080	643	966	32	2010	3010	1760	2640	1550	2320			
720	1080	637	957	569	855	34	1970	2960	1720	2580	1510	2270			
642	965	568	854	508	763	36	1930	2900	1680	2530	1470	2210			
576	866	510	766	456	685	38	1890	2840	1640	2470	1430	2150			
520	782	460	692	411	618	40	1850	2780	1600	2410	1400	2100			
472	709	417	627	373	561	42	1810	2730	1570	2350	1360	2040			
430	646	380	572	340	511	44	1780	2670	1530	2300	1320	1980			
393	591	348	523	311	467	46	1740	2610	1490	2240	1280	1930			
361	543	320	480	286	429	48	1700	2550	1450	2180	1240	1870			
						50	1660	2490	1410	2130	1210	1810			
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r				
3570	5360	3240	4870	2960	4450	9.14	62.6	9.02	57.0	8.92	52.1				
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	91.6		83.3		76.0					
2750	4120	2500	3750	2280	3420	Moment of Inertia, in. ⁴									
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y				
881	1320	797	1200	716	1070	6970	795	6170	704	5510	628				
Available Strength in Flexure about Y-Y Axis, kip-ft						r_y , in.									
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	2.95		2.91		2.88					
671	1010	600	902	538	809	r_x/r_y									
						2.96		2.96		2.96					

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;">  W18 </div> <div style="text-align: center;"> Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes </div> <div style="text-align: right;"> $F_y = 65$ ksi $F_u = 80$ ksi </div> </div>													
W18x						Shape	W18x						
234 ^h		211		192		lb/ft	234 ^h		211		192		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
2670	4010	2420	3640	2190	3290	0	1780	2680	1590	2390	1430	2150	
2510	3780	2280	3430	2050	3090	6	1780	2680	1590	2390	1430	2150	
2460	3700	2230	3350	2010	3020	7	1780	2680	1590	2390	1430	2150	
2400	3600	2170	3260	1950	2940	8	1780	2680	1590	2390	1430	2150	
2330	3500	2110	3170	1900	2850	9	1780	2670	1580	2380	1430	2140	
2260	3390	2040	3070	1830	2760	10	1760	2640	1570	2350	1410	2120	
2180	3270	1970	2960	1770	2660	11	1740	2620	1550	2330	1390	2090	
2090	3150	1890	2840	1700	2550	12	1720	2590	1530	2300	1370	2060	
2010	3020	1810	2720	1630	2440	13	1700	2560	1510	2270	1350	2040	
1920	2880	1730	2600	1550	2330	14	1680	2530	1490	2240	1340	2010	
1830	2750	1650	2470	1470	2210	15	1670	2500	1470	2220	1320	1980	
1730	2610	1560	2350	1390	2100	16	1650	2480	1460	2190	1300	1950	
1640	2470	1470	2220	1320	1980	17	1630	2450	1440	2160	1280	1930	
1550	2320	1390	2090	1240	1860	18	1610	2420	1420	2130	1260	1900	
1450	2180	1300	1960	1160	1740	19	1590	2390	1400	2100	1240	1870	
1360	2050	1220	1830	1080	1630	20	1570	2360	1380	2080	1230	1840	
1180	1780	1050	1580	934	1400	22	1540	2310	1350	2020	1190	1790	
1010	1520	898	1350	793	1190	24	1500	2250	1310	1970	1150	1730	
860	1290	765	1150	675	1020	26	1460	2200	1270	1910	1120	1680	
742	1120	660	991	582	875	28	1420	2140	1230	1860	1080	1620	
646	971	575	864	507	763	30	1390	2080	1200	1800	1040	1570	
568	854	505	759	446	670	32	1350	2030	1160	1750	1010	1510	
503	756	447	672	395	594	34	1310	1970	1120	1690	970	1460	
449	675	399	600	352	530	36	1280	1920	1090	1630	934	1400	
403	605	358	538	316	475	38	1240	1860	1050	1580	897	1350	
364	546	323	486	285	429	40	1200	1810	1010	1520	860	1290	
330	496	293	441	259	389	42	1160	1750	977	1470	815	1230	
300	452	267	401	236	355	44	1130	1690	937	1410	776	1170	
275	413	244	367	216	324	46	1090	1640	894	1340	740	1110	
						48	1050	1580	854	1280	707	1060	
						50	1010	1510	818	1230	677	1020	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
2670	4010	2420	3640	2190	3290	8.83	47.7	8.74	43.4	8.64	39.9		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	68.6		62.3		56.2			
2060	3090	1870	2800	1690	2530	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	4900	558	4330	493	3870	440		
636	955	570	856	509	764	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.85		2.82		2.79			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
483	726	428	644	386	580	2.96		2.96		2.97			

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Confirm ASTM A913 material availability before specifying.



Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$

W-Shapes

W18x						Shape	W18x					
175		158		143		lb/ft	175		158		143	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2000	3010	1800	2710	1630	2460	0	1290	1940	1150	1740	1040	1570
1880	2820	1690	2540	1530	2300	6	1290	1940	1150	1740	1040	1570
1830	2750	1650	2480	1490	2240	7	1290	1940	1150	1740	1040	1570
1780	2680	1600	2410	1450	2180	8	1290	1940	1150	1740	1040	1570
1730	2600	1550	2340	1410	2120	9	1280	1930	1150	1720	1030	1550
1670	2510	1500	2260	1360	2040	10	1260	1900	1130	1700	1020	1530
1610	2420	1450	2170	1310	1960	11	1250	1870	1110	1670	1000	1500
1540	2320	1390	2080	1250	1880	12	1230	1850	1090	1640	982	1480
1480	2220	1320	1990	1200	1800	13	1210	1820	1070	1620	965	1450
1410	2110	1260	1890	1140	1710	14	1190	1790	1060	1590	947	1420
1340	2010	1200	1800	1080	1620	15	1170	1770	1040	1560	930	1400
1260	1900	1130	1700	1020	1530	16	1160	1740	1020	1540	912	1370
1190	1790	1060	1600	958	1440	17	1140	1710	1000	1510	895	1350
1120	1680	998	1500	898	1350	18	1120	1680	986	1480	878	1320
1050	1570	933	1400	838	1260	19	1100	1660	968	1460	860	1290
975	1470	869	1310	780	1170	20	1080	1630	951	1430	843	1270
838	1260	746	1120	668	1000	22	1050	1580	915	1380	808	1210
710	1070	630	947	563	846	24	1010	1520	880	1320	773	1160
605	909	537	807	480	721	26	977	1470	844	1270	738	1110
521	784	463	696	414	622	28	941	1410	809	1220	703	1060
454	683	403	606	360	542	30	904	1360	773	1160	669	1000
399	600	354	533	317	476	32	868	1310	738	1110	631	948
354	531	314	472	281	422	34	832	1250	701	1050	587	883
315	474	280	421	250	376	36	796	1200	657	988	549	826
283	425	251	378	225	338	38	754	1130	618	929	516	776
255	384	227	341	203	305	40	713	1070	584	877	487	732
232	348	206	309	184	276	42	676	1020	553	831	461	693
211	317	187	282	168	252	44	643	966	525	790	438	658
193	290					46	612	920	500	752	417	626
						48	585	879	478	718	398	598
						50	560	842	457	687	380	572

Properties					
Available Strength in Tensile Yielding, kips					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
2000	3010	1800	2710	1630	2460
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
1540	2310	1390	2080	1260	1890
Available Strength in Shear, kips					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
463	694	415	622	370	555
Available Strength in Flexure about Y-Y Axis, kip-ft					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
344	517	307	462	277	416

Limiting Unbraced Lengths, ft					
L_p	L_r	L_p	L_r	L_p	L_r
8.55	36.9	8.49	33.9	8.43	31.6
Area, in. ²					
51.4	46.3	42.0			
Moment of Inertia, in. ⁴					
I_x	I_y	I_x	I_y	I_x	I_y
3450	391	3060	347	2750	311
r_y , in.					
2.76	2.74	2.72			
r_x/r_y					
2.97	2.96	2.97			

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.




Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
W-Shapes

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$


W18x						Shape	W18x					
130		119		106		lb/ft	130		119		106	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1490	2240	1370	2050	1210	1820	0	941	1410	850	1280	746	1120
1390	2090	1280	1920	1130	1700	6	941	1410	850	1280	746	1120
1360	2040	1250	1870	1100	1650	7	941	1410	850	1280	746	1120
1320	1990	1210	1820	1070	1610	8	941	1410	850	1280	746	1120
1280	1920	1170	1760	1030	1560	9	930	1400	839	1260	734	1100
1240	1860	1130	1700	998	1500	10	913	1370	822	1240	718	1080
1190	1790	1090	1630	958	1440	11	896	1350	805	1210	702	1060
1140	1710	1040	1560	916	1380	12	879	1320	789	1190	687	1030
1090	1630	992	1490	873	1310	13	862	1300	772	1160	671	1010
1030	1550	943	1420	828	1250	14	845	1270	755	1140	655	984
977	1470	893	1340	783	1180	15	828	1240	739	1110	639	961
922	1390	842	1270	738	1110	16	811	1220	722	1090	623	937
866	1300	791	1190	692	1040	17	794	1190	705	1060	608	913
811	1220	740	1110	647	972	18	777	1170	689	1040	592	890
757	1140	690	1040	602	905	19	760	1140	672	1010	576	866
703	1060	641	964	558	839	20	743	1120	655	985	560	842
601	903	547	822	475	713	22	709	1060	622	935	529	795
506	760	460	692	399	599	24	675	1010	589	885	497	747
431	648	392	589	340	511	26	640	963	555	835	465	700
372	559	338	508	293	440	28	606	912	520	782	421	633
324	487	295	443	255	384	30	568	854	476	716	384	578
285	428	259	389	224	337	32	525	789	439	660	353	531
252	379	229	345	199	299	34	488	734	407	612	327	492
225	338	205	307	177	266	36	456	686	380	571	305	458
202	303	184	276	159	239	38	428	644	356	535	285	428
182	274	166	249	144	216	40	404	607	335	504	268	402
165	248	150	226	130	196	42	382	574	316	476	252	379
151	226	137	206	119	178	44	362	544	300	451	239	359
						46	345	518	285	428	227	341
						48	329	494	272	408	216	325
						50	314	472	259	390	206	310

Properties											
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
1490	2240	1370	2050	1210	1820	8.36	29.5	8.33	27.9	8.24	26.1
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	38.3		35.1		31.1	
1150	1720	1050	1580	933	1400	Moment of Inertia, in. ⁴					
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	2460	278	2190	253	1910	220
336	504	324	485	287	430	r_y , in.					
Available Strength in Flexure about Y-Y Axis, kip-ft						2.70		2.69		2.66	
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y					
249	374	224	337	196	295	2.97		2.94		2.95	


Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W18x						Shape	W18x						
97		86 ^c		76 ^c		lb/ft	97		86		76 ^f		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
1110	1670	972	1460	835	1250	0	684	1030	603	907	527	793	
1030	1550	912	1370	783	1180	6	684	1030	603	907	527	793	
1010	1520	892	1340	765	1150	7	684	1030	603	907	527	793	
979	1470	868	1300	744	1120	8	684	1030	603	907	527	793	
947	1420	839	1260	722	1080	9	672	1010	591	888	516	776	
913	1370	808	1210	698	1050	10	657	988	577	867	503	756	
876	1320	775	1160	672	1010	11	642	965	562	845	490	736	
838	1260	741	1110	645	969	12	627	942	548	823	476	716	
798	1200	705	1060	616	926	13	611	919	533	802	463	696	
757	1140	668	1000	585	880	14	596	896	519	780	450	676	
715	1080	631	948	552	830	15	581	873	505	759	436	656	
674	1010	593	892	519	780	16	566	850	490	737	423	636	
632	949	556	835	486	730	17	551	827	476	715	410	616	
590	887	519	780	453	680	18	535	805	462	694	396	596	
549	825	482	724	420	632	19	520	782	447	672	383	575	
509	765	446	671	389	584	20	505	759	433	650	370	555	
432	649	377	567	328	492	22	474	713	404	607	343	515	
363	545	317	477	275	414	24	444	667	374	562	306	461	
309	464	270	406	235	353	26	406	610	332	499	271	407	
266	400	233	350	202	304	28	366	550	298	448	242	364	
232	349	203	305	176	265	30	333	501	270	406	219	329	
204	307	178	268	155	233	32	306	460	247	372	200	300	
181	272	158	237	137	206	34	283	425	228	343	183	276	
161	242	141	212	122	184	36	263	395	211	318	170	255	
145	217	126	190	110	165	38	245	369	197	296	158	237	
131	196	114	172	99.1	149	40	230	346	184	277	147	221	
118	178	104	156	89.9	135	42	217	326	173	261	138	208	
108	162					44	205	308	164	246	130	196	
						46	194	292	155	233	123	185	
						48	185	278	147	221	117	175	
						50	176	265	140	211	111	167	
Properties						Limiting Unbraced Lengths, ft							
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
1110	1670	985	1480	868	1300	8.21	25.1	8.15	23.9	8.18	22.8		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	28.5		25.3		22.3			
855	1280	759	1140	669	1000	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	1750	201	1530	175	1330	152		
259	388	230	344	201	302	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.65		2.63		2.61			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
179	270	157	236	136	205	2.95		2.95		2.96			

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
^f Shape exceeds compact limit for flexure with $F_y = 65 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 W18		Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes						$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$					
		W18x			60°			Shape		W18x			
71°		65°		60°		lb/ft		71		65		60	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Available Flexural Strength, kip-ft							
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending		ASD	LRFD	ASD	LRFD	ASD	LRFD
807	1210	719	1080	649	975			0	474	712	431	648	399
686	1030	619	931	557	838	6	461	693	419	630	387	582	
645	969	586	882	528	793	7	445	668	404	607	372	559	
601	903	547	822	495	745	8	428	643	388	583	357	536	
554	833	504	758	461	693	9	411	618	372	559	341	513	
507	761	460	692	422	634	10	394	593	356	535	326	490	
459	689	416	626	381	573	11	378	568	340	512	311	468	
411	618	373	560	341	512	12	361	542	325	488	296	445	
365	549	331	497	302	454	13	344	517	309	464	281	422	
322	483	291	437	265	398	14	327	492	293	441	266	399	
280	421	253	380	230	346	15	311	467	277	417	251	377	
246	370	222	334	203	304	16	294	442	259	389	230	345	
218	328	197	296	179	270	17	272	408	236	355	209	314	
195	292	176	264	160	241	18	250	376	217	326	192	288	
175	262	158	237	144	216	19	232	348	201	302	177	266	
158	237	142	214	130	195	20	216	324	187	281	164	247	
130	196	118	177	107	161	22	190	285	164	246	144	216	
109	165	98.9	149	90.0	135	24	169	254	145	219	127	192	
93.3	140	84.2	127	76.7	115	26	153	230	131	197	115	172	
80.4	121	72.6	109	66.1	99.4	28	139	209	119	179	104	156	
						30	128	192	109	164	95.2	143	
						32	118	178	101	152	87.9	132	
						34	110	166	93.9	141	81.6	123	
						36	103	155	87.8	132	76.1	114	
						38	96.9	146	82.4	124	71.4	107	
						40	91.4	137	77.6	117	67.2	101	
						42	86.6	130	73.4	110	63.5	95.5	
						44	82.2	124	69.7	105	60.2	90.5	
						46	78.2	118	66.3	99.6	57.3	86.1	
						48	74.7	112	63.2	95.0	54.6	82.1	
						50	71.4	107	60.4	90.8	52.2	78.4	
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
813	1220	743	1120	685	1030	L_p	L_r	L_p	L_r	L_p	L_r		
						5.27	16.3	5.24	15.7	5.20	15.4		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	20.9		19.1		17.6			
627	941	573	860	528	792	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	1170	60.3	1070	54.8	984	50.1		
238	357	215	323	196	295	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.70		1.69		1.68			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
80.1	120	73.0	110	66.8	100	4.41		4.43		4.45			

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W18x						Shape	W18x						
55 ^c		50 ^c		46 ^c		lb/ft	55		50		46		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
587	882	519	780	474	712	0	363	546	328	492	294	442	
504	757	444	667	368	553		6	351	528	316	474	264	397
477	716	419	630	336	505		7	337	506	302	454	249	374
447	672	393	590	303	455		8	322	485	289	434	234	351
416	625	365	548	269	404		9	308	463	275	414	219	329
384	577	336	505	231	347		10	294	441	262	393	204	306
348	523	307	461	194	291		11	279	420	248	373	189	283
311	467	277	417	163	245		12	265	398	235	353	170	255
275	413	245	368	139	209		13	250	376	221	333	149	224
241	362	213	320	120	180		14	236	354	208	312	133	200
210	315	186	279	104	157		15	220	331	189	284	119	179
184	277	163	245	91.6	138		16	198	298	170	256	108	163
163	245	145	217	81.1	122		17	180	271	154	232	99.0	149
146	219	129	194	72.4	109		18	165	248	141	212	91.1	137
131	196	116	174	65.0	97.6		19	152	228	130	195	84.4	127
118	177	104	157	58.6	88.1		20	141	212	120	180	78.5	118
97.4	146	86.3	130				22	123	184	104	156	69.0	104
81.9	123	72.5	109				24	108	163	91.5	137	61.5	92.4
69.8	105	61.8	92.9				26	97.1	146	81.7	123	55.4	83.3
							28	87.9	132	73.8	111	50.5	75.9
						30	80.4	121	67.3	101	46.4	69.7	
						32	74.0	111	61.8	92.9	42.9	64.5	
						34	68.6	103	57.2	85.9	39.9	60.0	
						36	63.9	96.1	53.2	79.9	37.4	56.2	
						38	59.9	90.0	49.7	74.8	35.1	52.8	
						40	56.3	84.6	46.7	70.2	33.1	49.8	
						42	53.2	79.9	44.0	66.2	31.3	47.1	
						44	50.3	75.7	41.7	62.6	29.7	44.7	
						46	47.8	71.9	39.5	59.4	28.3	42.5	
						48	45.6	68.5	37.6	56.6	27.0	40.6	
						50	43.5	65.4	35.9	54.0	25.8	38.8	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
631	948	572	860	525	790	5.17	14.9	5.11	14.4	4.00	11.6		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	16.2		14.7		13.5			
486	729	441	662	405	608	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	890	44.9	800	40.1	712	22.5		
184	275	166	249	169	254	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.67		1.65		1.29			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
60.0	90.2	53.8	80.9	37.9	57.0	4.44		4.47		5.62			


^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;"> Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces </div> <div style="text-align: right;"> $F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$ </div> </div>															
W18×						W16×		Shape		W18×				W16×	
40 ^c		35 ^c		100		lb/ft		40 ^v		35 ^v		100			
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Available Compressive Strength, kips								Available Flexural Strength, kip-ft							
ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
399	599	338	508	1140	1720	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	254	382	216	324	642	965		
307	461	256	384	1060	1590		6	226	340	188	283	642	965		
279	420	231	347	1030	1550		7	213	320	176	264	642	965		
251	377	206	310	996	1500		8	199	299	163	246	639	961		
222	333	181	272	960	1440		9	185	279	151	227	626	941		
193	291	156	235	921	1380		10	172	258	139	208	613	922		
164	247	132	199	880	1320		11	158	238	123	185	600	902		
138	207	111	167	837	1260		12	138	208	106	159	587	882		
118	177	94.7	142	793	1190		13	121	182	91.9	138	574	863		
101	152	81.6	123	747	1120		14	107	161	81.1	122	561	843		
88.3	133	71.1	107	702	1050		15	95.9	144	72.4	109	548	823		
77.6	117	62.5	93.9	656	986		16	86.6	130	65.2	97.9	535	804		
68.7	103	55.4	83.2	611	918		17	78.9	119	59.2	88.9	522	784		
61.3	92.2	49.4	74.2	566	851		18	72.4	109	54.1	81.3	509	764		
55.0	82.7	44.3	66.6	522	785		19	66.8	100	49.8	74.8	496	745		
49.7	74.6	40.0	60.1	480	721		20	62.0	93.2	46.1	69.2	482	725		
				399	600		22	54.2	81.4	40.0	60.1	456	686		
				336	504		24	48.0	72.2	35.3	53.1	430	647		
				286	430		26	43.2	64.9	31.6	47.5	404	607		
				247	371		28	39.2	58.9	28.6	43.0	370	557		
				215	323		30	35.9	53.9	26.1	39.2	340	511		
				189	284		32	33.1	49.8	24.0	36.1	314	472		
				167	251		34	30.7	46.2	22.2	33.4	292	439		
				149	224		36	28.7	43.1	20.7	31.1	273	410		
				134	201		38	26.9	40.4	19.4	29.1	256	385		
				121	182		40	25.3	38.1	18.2	27.4	242	363		
							42	23.9	36.0	17.2	25.8	228	343		
							44	22.7	34.1	16.3	24.4	217	326		
							46	21.6	32.4	15.4	23.2	206	310		
							48	20.6	30.9	14.7	22.1	197	296		
							50	19.6	29.5	14.0	21.1	188	283		
Properties															
Available Strength in Tensile Yielding, kips							Limiting Unbraced Lengths, ft								
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		L_p	L_r	L_p	L_r	L_p	L_r	L_p	L_r	
459	690	401	603	1140	1720		3.93	11.2	3.78	10.6	7.78	26.5			
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips							Area, in. ²								
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		11.8		10.3		29.4				
354	531	309	464	882	1320		Moment of Inertia, in. ⁴								
Available Strength in Shear, kips							I_x	I_y	I_x	I_y	I_x	I_y			
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		612	19.1	510	15.3	1490	186			
132	198	124	186	259	388	r_y , in.									
Available Strength in Flexure about Y-Y Axis, kip-ft						1.27		1.22		2.51					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y									
32.4	48.8	26.1	39.3	178	268	5.68		5.77		2.83					


^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.

^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65 \text{ ksi}$; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.


Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W16x						Shape	W16x						
89		77		67 ^c		lb/ft	89		77		67		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
1020	1530	880	1320	743	1120	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	568	853	487	731	422	634
942	1420	811	1220	691	1040		6	568	853	487	731	422	634
915	1380	788	1180	673	1010		7	568	853	487	731	422	634
885	1330	762	1150	652	980		8	564	848	482	725	417	628
853	1280	733	1100	630	947		9	551	829	471	707	407	611
818	1230	703	1060	606	911		10	539	809	459	690	396	595
781	1170	671	1010	580	872		11	526	790	447	672	385	578
742	1120	637	957	551	828		12	513	771	435	654	374	562
702	1060	602	905	521	782		13	500	752	423	636	363	545
662	994	567	852	490	736		14	488	733	412	619	352	529
621	933	531	798	459	689		15	475	714	400	601	341	512
580	871	495	744	428	643		16	462	695	388	583	330	496
539	810	460	691	397	596		17	450	676	376	565	319	479
499	750	425	639	367	551		18	437	657	364	548	308	463
460	691	391	588	337	507		19	424	638	352	530	297	446
422	634	359	539	309	464		20	412	619	341	512	286	430
350	527	297	447	256	384		22	386	580	317	476	262	395
294	442	250	376	215	323		24	361	542	287	432	230	346
251	377	213	320	183	275		26	328	493	257	386	205	308
216	325	184	276	158	237		28	298	447	232	349	184	277
188	283	160	240	138	207		30	272	409	212	318	167	252
166	249	141	211	121	182		32	251	377	194	292	153	230
147	220	124	187	107	161		34	233	350	180	270	141	213
131	197	111	167	95.5	144		36	217	327	167	252	131	197
117	176	99.7	150	85.7	129		38	204	306	157	235	122	184
106	159	89.9	135	77.4	116		40	192	288	147	221	115	172
							42	181	272	139	209	108	162
							44	172	258	131	197	102	153
							46	163	245	125	187	96.7	145
							48	156	234	119	178	91.9	138
							50	149	223	113	170	87.5	132
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
1020	1530	880	1320	763	1150	L_p	L_r	L_p	L_r	L_p	L_r		
						7.71	24.7	7.65	23.1	7.62	21.8		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
786	1180	678	1020	588	882	26.2		22.6		19.6			
Available Strength in Shear, kips						Moment of Inertia, in. ⁴							
229	344	195	293	167	251	I_x	I_y	I_x	I_y	I_x	I_y		
						1300	163	1110	138	954	119		
Available Strength in Flexure about Y-Y Axis, kip-ft						r_y , in.							
156	234	133	200	115	173	2.49		2.47		2.46			
						r_x/r_y							
						2.83		2.83		2.83			


^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A913 material availability before specifying.

 W16		Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces						$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$					
		W16x						Shape lb/ft		W16x			
57^c		50^c		45^c		Design		57		50		45	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$			M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Available Flexural Strength, kip-ft							
ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
646	971	547	823	484	727	Effective Length, L_c, ft, with respect to least radius of gyration, r_y, or unbraced length, L_b, ft, for X-X axis bending	0	341	512	298	449	267	401
539	811	462	694	406	610		6	327	492	285	429	254	382
503	756	434	653	381	573		7	315	473	273	411	243	365
464	698	405	608	355	533		8	302	454	261	393	232	348
424	637	369	555	327	491		9	289	435	249	375	221	331
383	576	333	500	297	447		10	276	415	237	357	209	315
342	515	297	447	264	397		11	264	396	225	339	198	298
303	455	262	394	233	350		12	251	377	213	321	187	281
265	398	229	344	203	304		13	238	358	201	303	176	264
229	344	198	297	175	262		14	225	339	189	284	164	246
200	300	172	259	152	229		15	213	320	173	260	147	220
175	264	152	228	134	201		16	195	293	157	236	133	199
155	233	134	202	118	178		17	179	269	143	216	121	181
139	208	120	180	106	159		18	165	248	132	198	111	166
124	187	107	162	94.8	142		19	153	230	122	183	102	154
112	169	97.0	146	85.5	129		20	143	215	114	171	94.9	143
92.8	139	80.1	120	70.7	106		22	126	189	99.6	150	82.9	125
77.9	117	67.3	101	59.4	89.3		24	112	169	88.6	133	73.5	111
66.4	99.8	57.4	86.2	50.6	76.1		26	102	153	79.9	120	66.1	99.3
							28	92.9	140	72.7	109	60.0	90.2
							30	85.5	128	66.8	100	55.0	82.6
							32	79.2	119	61.7	92.7	50.7	76.2
							34	73.8	111	57.4	86.3	47.1	70.8
							36	69.1	104	53.7	80.6	43.9	66.0
							38	65.0	97.7	50.4	75.7	41.2	61.9
							40	61.3	92.2	47.5	71.4	38.8	58.3
							42	58.1	87.3	44.9	67.5	36.7	55.1
							44	55.2	83.0	42.6	64.1	34.8	52.3
							46	52.6	79.0	40.6	61.0	33.1	49.7
							48	50.2	75.4	38.7	58.2	31.5	47.4
							50	48.0	72.2	37.0	55.6	30.1	45.2
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
654	983	572	860	518	778	L_p	L_r	L_p	L_r	L_p	L_r		
						4.96	15.3	4.93	14.4	4.86	13.9		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in.²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	16.8		14.7		13.3			
504	756	441	662	399	599	Moment of Inertia, in.⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	758	43.1	659	37.2	586	32.8		
183	275	161	242	144	217	r_y, in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.60		1.59		1.57			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
61.3	92.1	52.9	79.5	47.0	70.7	4.20		4.20		4.24			

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes													
W16 ^x						Shape	W16 ^x						
40 ^c		36 ^c		31 ^c		lb/ft	40		36 ^{f,y}		31 ^y		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
416	626	368	553	307	462		0	237	356	207	311	175	263
349	525	306	459	226	339		6	225	338	195	294	150	226
328	493	286	430	202	304		7	215	323	186	279	140	210
305	458	265	398	178	267		8	204	307	176	265	130	195
281	422	243	365	154	231		9	194	292	167	251	119	179
256	385	220	331	130	196		10	184	276	157	236	109	163
231	348	198	297	108	162		11	173	260	148	222	93.1	140
206	310	176	264	90.6	136		12	163	245	138	208	80.4	121
180	270	151	227	77.2	116		13	153	229	129	194	70.5	106
155	233	130	196	66.6	100		14	139	209	114	171	62.6	94.0
135	203	114	171	58.0	87.1		15	124	186	101	152	56.1	84.4
119	178	99.9	150	51.0	76.6		16	112	168	90.8	136	50.8	76.4
105	158	88.5	133	45.1	67.8		17	101	152	82.2	124	46.4	69.7
93.7	141	78.9	119	40.3	60.5		18	92.8	139	75.0	113	42.6	64.0
84.1	126	70.8	106	36.1	54.3		19	85.4	128	68.8	103	39.4	59.2
75.9	114	63.9	96.1				20	79.0	119	63.6	95.5	36.6	55.0
62.7	94.3	52.8	79.4				22	68.7	103	55.0	82.6	32.0	48.2
52.7	79.2	44.4	66.7				24	60.7	91.2	48.4	72.7	28.5	42.8
44.9	67.5						26	54.3	81.7	43.1	64.8	25.6	38.5
						28	49.2	73.9	38.9	58.4	23.3	35.1	
						30	44.9	67.5	35.4	53.2	21.4	32.1	
						32	41.3	62.1	32.5	48.8	19.8	29.7	
						34	38.3	57.5	30.0	45.1	18.4	27.6	
						36	35.7	53.6	27.9	41.9	17.2	25.8	
						38	33.4	50.2	26.0	39.1	16.1	24.2	
						40	31.4	47.2	24.4	36.7	15.2	22.8	
						42	29.6	44.5	23.0	34.6	14.4	21.6	
						44	28.0	42.1	21.8	32.7	13.6	20.5	
						46	26.6	40.0	20.6	31.0	13.0	19.5	
						48	25.4	38.1	19.6	29.5	12.4	18.6	
						50	24.2	36.4	18.7	28.1	11.8	17.7	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
459	690	413	620	355	534	4.86	13.5	4.77	13.1	3.62	10.1		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	11.8		10.6		9.13			
354	531	318	477	274	411	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	518	28.9	448	24.5	375	12.4		
127	190	110	165	102	153	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.57		1.52		1.17			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
41.2	61.9	34.9	52.4	22.8	34.3	4.22		4.28		5.48			

^c Shape is slender for compression with $F_y = 65$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 65$ ksi.
^y Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces													
												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W-Shapes													
W16 \times		W14 \times				Shape		W16 \times		W14 \times			
26 ^c		873 ^h		808 ^h		lb/ft		26 ^v		873 ^h		808 ^h	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips								Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending		ASD	LRFD	ASD	LRFD	ASD	LRFD
248	372	10000	15000	9260	13900			0	143	215	6580	9900	5940
178	267	9800	14700	9070	13600	6	120	181	6580	9900	5940	8920	
158	237	9730	14600	9000	13500	7	111	167	6580	9900	5940	8920	
138	207	9640	14500	8920	13400	8	102	153	6580	9900	5940	8920	
118	177	9550	14400	8830	13300	9	93.0	140	6580	9900	5940	8920	
99.1	149	9450	14200	8740	13100	10	81.5	122	6580	9900	5940	8920	
83.1	125	9340	14000	8630	13000	11	68.8	103	6580	9900	5940	8920	
69.8	105	9210	13800	8510	12800	12	59.1	88.8	6580	9900	5940	8920	
59.5	89.4	9080	13700	8390	12600	13	51.5	77.5	6580	9900	5940	8920	
51.3	77.1	8950	13400	8260	12400	14	45.5	68.4	6580	9900	5940	8920	
44.7	67.2	8800	13200	8120	12200	15	40.6	61.1	6580	9900	5940	8920	
39.3	59.0	8640	13000	7970	12000	16	36.6	55.0	6570	9880	5920	8900	
34.8	52.3	8480	12800	7820	11800	17	33.2	50.0	6560	9860	5910	8880	
31.0	46.6	8320	12500	7660	11500	18	30.4	45.7	6550	9840	5900	8860	
		8140	12200	7500	11300	19	28.0	42.1	6530	9820	5890	8850	
		7960	12000	7330	11000	20	25.9	39.0	6520	9800	5870	8830	
		7590	11400	6970	10500	22	22.6	33.9	6500	9760	5850	8790	
		7200	10800	6610	9930	24	19.9	30.0	6470	9720	5820	8750	
		6800	10200	6230	9360	26	17.8	26.8	6440	9680	5800	8710	
		6400	9620	5850	8790	28	16.2	24.3	6420	9640	5770	8680	
		5990	9000	5460	8210	30	14.8	22.2	6390	9610	5750	8640	
		5580	8390	5080	7630	32	13.6	20.4	6360	9570	5720	8600	
		5180	7780	4700	7070	34	12.6	18.9	6340	9530	5700	8560	
		4780	7180	4330	6510	36	11.7	17.6	6310	9490	5670	8530	
		4390	6600	3970	5970	38	11.0	16.5	6290	9450	5650	8490	
		4020	6040	3620	5450	40	10.3	15.5	6260	9410	5620	8450	
		3650	5490	3290	4940	42	9.74	14.6	6230	9370	5600	8410	
		3330	5000	2990	4500	44	9.22	13.9	6210	9330	5570	8380	
		3040	4570	2740	4120	46	8.76	13.2	6180	9290	5550	8340	
		2800	4200	2520	3780	48	8.34	12.5	6160	9250	5520	8300	
		2580	3870	2320	3480	50	7.96	12.0	6130	9210	5500	8270	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
299	449	10000	15000	9260	13900	3.47	9.64	15.2	253	15.0	238		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	7.68		257		238			
230	346	7710	11600	7140	10700	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	301	9.59	18100	6170	15900	5550		
86.6	130	2420	3630	2220	3330	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.12		4.90		4.83			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
17.8	26.7	3310	4970	3020	4530	5.59		1.71		1.69			

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65 \text{ ksi}$; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.



Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$

W-Shapes

W14 ^x						Shape	W14 ^x					
730 ^h		665 ^h		605 ^h		lb/ft	730 ^h		665 ^h		605 ^h	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
8370	12600	7630	11500	6930	10400	0	5380	8090	4800	7220	4280	6440
8180	12300	7450	11200	6770	10200	6	5380	8090	4800	7220	4280	6440
8120	12200	7390	11100	6710	10100	7	5380	8090	4800	7220	4280	6440
8040	12100	7320	11000	6640	9980	8	5380	8090	4800	7220	4280	6440
7960	12000	7240	10900	6570	9870	9	5380	8090	4800	7220	4280	6440
7860	11800	7150	10800	6480	9750	10	5380	8090	4800	7220	4280	6440
7760	11700	7060	10600	6400	9610	11	5380	8090	4800	7220	4280	6440
7650	11500	6960	10500	6300	9470	12	5380	8090	4800	7220	4280	6440
7530	11300	6850	10300	6200	9310	13	5380	8090	4800	7220	4280	6440
7410	11100	6730	10100	6090	9150	14	5380	8090	4800	7220	4280	6440
7270	10900	6600	9930	5970	8970	15	5380	8080	4790	7200	4270	6420
7140	10700	6470	9730	5850	8790	16	5370	8060	4780	7180	4260	6400
6990	10500	6340	9530	5720	8600	17	5350	8050	4770	7170	4250	6380
6840	10300	6200	9310	5590	8410	18	5340	8030	4760	7150	4240	6370
6680	10000	6050	9100	5460	8200	19	5330	8010	4740	7130	4220	6350
6520	9810	5900	8870	5320	7990	20	5320	7990	4730	7110	4210	6330
6190	9310	5590	8410	5030	7560	22	5290	7950	4710	7070	4190	6300
5850	8790	5270	7920	4730	7120	24	5270	7910	4680	7040	4170	6260
5490	8260	4950	7430	4430	6660	26	5240	7880	4660	7000	4140	6230
5140	7720	4610	6940	4130	6200	28	5210	7840	4630	6970	4120	6190
4780	7180	4280	6440	3820	5740	30	5190	7800	4610	6930	4100	6160
4420	6650	3960	5950	3520	5290	32	5160	7760	4590	6890	4070	6120
4080	6130	3640	5460	3230	4850	34	5140	7720	4560	6860	4050	6090
3740	5620	3320	4990	2940	4420	36	5110	7690	4540	6820	4030	6050
3410	5120	3020	4540	2660	4000	38	5090	7650	4510	6780	4000	6020
3090	4640	2730	4100	2400	3610	40	5060	7610	4490	6750	3980	5980
2800	4210	2480	3720	2180	3280	42	5040	7570	4460	6710	3960	5940
2550	3830	2260	3390	1990	2990	44	5010	7540	4440	6670	3930	5910
2330	3510	2060	3100	1820	2730	46	4990	7500	4420	6640	3910	5870
2140	3220	1900	2850	1670	2510	48	4960	7460	4390	6600	3890	5840
1970	2970	1750	2630	1540	2310	50	4940	7420	4370	6560	3860	5800

Properties											
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
8370	12600	7630	11500	6930	10400	14.5	212	14.3	195	14.1	178
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	215		196		178	
6450	9680	5880	8820	5340	8010	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
1790	2680	1590	2380	1410	2120	14300	4720	12400	4170	10800	3680
Available Strength in Shear, kips						r_y , in.					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	4.69		4.62		4.55	
1790	2680	1590	2380	1410	2120	r_x/r_y					
Available Strength in Flexure about Y-Y Axis, kip-ft						1.74		1.73		1.71	
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$						
2650	3980	2370	3560	2110	3180						

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.




Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$

W-Shapes

W14x						Shape	W14x					
550 ^h		500 ^h		455 ^h		lb/ft	550 ^h		500 ^h		455 ^h	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
6310	9480	5720	8600	5220	7840	0	3830	5750	3410	5120	3040	4560
6150	9250	5580	8390	5080	7640	6	3830	5750	3410	5120	3040	4560
6100	9170	5530	8310	5040	7570	7	3830	5750	3410	5120	3040	4560
6040	9070	5470	8220	4980	7490	8	3830	5750	3410	5120	3040	4560
5970	8970	5410	8130	4920	7400	9	3830	5750	3410	5120	3040	4560
5890	8850	5340	8020	4860	7300	10	3830	5750	3410	5120	3040	4560
5810	8730	5260	7900	4780	7190	11	3830	5750	3410	5120	3040	4560
5720	8590	5170	7780	4710	7070	12	3830	5750	3410	5120	3040	4560
5620	8450	5090	7640	4620	6950	13	3830	5750	3410	5120	3040	4560
5520	8300	4990	7500	4530	6820	14	3830	5750	3400	5110	3030	4560
5410	8130	4890	7350	4440	6680	15	3810	5730	3390	5100	3020	4540
5300	7970	4790	7190	4340	6530	16	3800	5720	3380	5080	3010	4520
5180	7790	4680	7030	4240	6380	17	3790	5700	3370	5060	3000	4510
5060	7610	4560	6860	4140	6220	18	3780	5680	3360	5050	2990	4490
4930	7420	4450	6690	4030	6060	19	3770	5670	3350	5030	2980	4480
4810	7220	4330	6510	3920	5890	20	3760	5650	3340	5020	2970	4460
4540	6820	4080	6140	3690	5550	22	3740	5610	3310	4980	2950	4430
4260	6410	3830	5750	3460	5200	24	3710	5580	3290	4950	2930	4400
3980	5990	3570	5370	3220	4840	26	3690	5550	3270	4920	2900	4360
3700	5570	3310	4980	2980	4480	28	3670	5510	3250	4880	2880	4330
3420	5140	3050	4590	2740	4120	30	3640	5480	3230	4850	2860	4300
3150	4730	2800	4210	2510	3780	32	3620	5440	3200	4820	2840	4270
2880	4320	2550	3840	2290	3440	34	3600	5410	3180	4780	2820	4240
2620	3930	2320	3480	2070	3110	36	3580	5370	3160	4750	2800	4210
2360	3550	2090	3130	1860	2790	38	3550	5340	3140	4720	2780	4170
2130	3200	1880	2830	1680	2520	40	3530	5310	3120	4690	2760	4140
1930	2900	1710	2570	1520	2290	42	3510	5270	3100	4650	2730	4110
1760	2650	1560	2340	1390	2080	44	3480	5240	3070	4620	2710	4080
1610	2420	1420	2140	1270	1910	46	3460	5200	3050	4590	2690	4050
1480	2220	1310	1960	1160	1750	48	3440	5170	3030	4550	2670	4010
1360	2050	1200	1810	1070	1610	50	3420	5130	3010	4520	2650	3980
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
6310	9480	5720	8600	5220	7840	13.9	164	13.7	151	13.6	138	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	162		147		134		
4860	7290	4410	6620	4020	6030	Moment of Inertia, in. ⁴						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y	
1250	1870	1120	1670	998	1500	9430	3250	8210	2880	7190	2560	
Available Strength in Shear, kips						r_y , in.						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	4.49		4.43		4.38		
1250	1870	1120	1670	998	1500	r_x/r_y						
Available Strength in Flexure about Y-Y Axis, kip-ft						1.70		1.69		1.67		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$							
1890	2840	1690	2540	1520	2280							

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

 <div style="text-align: center;"> Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes </div> <div style="text-align: right;"> $F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$ </div>													
W14x						Shape	W14x						
426 ^h		398 ^h		370 ^h		lb/ft	426 ^h		398 ^h		370 ^h		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
4870	7310	4550	6840	4240	6380	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	2820	4240	2600	3900	2390	3590
4740	7120	4430	6670	4130	6210		6	2820	4240	2600	3900	2390	3590
4700	7060	4390	6600	4090	6150		7	2820	4240	2600	3900	2390	3590
4640	6980	4340	6530	4040	6080		8	2820	4240	2600	3900	2390	3590
4590	6890	4290	6450	3990	6000		9	2820	4240	2600	3900	2390	3590
4520	6800	4230	6360	3940	5920		10	2820	4240	2600	3900	2390	3590
4460	6700	4170	6260	3870	5820		11	2820	4240	2600	3900	2390	3590
4380	6590	4100	6160	3810	5720		12	2820	4240	2600	3900	2390	3590
4300	6470	4020	6040	3740	5620		13	2820	4240	2600	3900	2390	3590
4220	6340	3940	5920	3660	5500		14	2810	4230	2590	3890	2380	3580
4130	6210	3860	5800	3580	5390		15	2800	4210	2580	3880	2370	3560
4040	6070	3770	5670	3500	5260		16	2790	4200	2570	3860	2360	3550
3940	5930	3680	5530	3420	5130		17	2780	4180	2560	3850	2350	3530
3840	5780	3590	5390	3330	5000		18	2770	4160	2550	3830	2340	3520
3740	5630	3490	5250	3240	4860		19	2760	4150	2540	3820	2330	3500
3640	5470	3390	5100	3140	4720		20	2750	4130	2530	3800	2320	3490
3420	5140	3190	4790	2950	4430		22	2730	4100	2510	3770	2300	3460
3200	4810	2980	4480	2750	4140		24	2710	4070	2490	3740	2280	3430
2980	4470	2770	4160	2550	3840		26	2690	4040	2470	3710	2260	3400
2750	4140	2560	3840	2360	3540		28	2670	4010	2450	3680	2240	3370
2530	3800	2350	3530	2160	3240		30	2650	3980	2430	3650	2220	3340
2310	3470	2140	3220	1970	2960		32	2620	3940	2410	3620	2200	3310
2100	3160	1940	2920	1780	2680		34	2600	3910	2390	3590	2180	3280
1900	2850	1750	2630	1600	2410		36	2580	3880	2370	3560	2160	3250
1700	2560	1570	2360	1440	2160		38	2560	3850	2350	3530	2140	3220
1540	2310	1420	2130	1300	1950		40	2540	3820	2330	3490	2120	3190
1390	2090	1290	1930	1180	1770		42	2520	3790	2300	3460	2100	3160
1270	1910	1170	1760	1070	1610		44	2500	3760	2280	3430	2080	3120
1160	1750	1070	1610	980	1470		46	2480	3720	2260	3400	2060	3090
1070	1600	985	1480	900	1350		48	2460	3690	2240	3370	2040	3060
983	1480	907	1360	830	1250		50	2440	3660	2220	3340	2020	3030
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
4870	7310	4550	6840	4240	6380	13.4	130	13.4	122	13.2	114		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	125		117		109			
3750	5630	3510	5270	3270	4910	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
914	1370	842	1260	773	1160	6600	2360	6000	2170	5440	1990		
Available Strength in Flexure about Y-Y Axis, kip-ft						r_y , in.							
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	4.34		4.31		4.27			
1410	2120	1300	1960	1200	1800	r_x/r_y							
						1.67		1.66		1.66			

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.



Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$

W-Shapes

W14 _x						Shape	W14 _x					
342 ^h		311 ^h		283 ^h		lb/ft	342 ^h		311 ^h		283 ^h	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
3930	5910	3560	5350	3240	4870	0	2180	3280	1960	2940	1760	2640
3820	5750	3460	5200	3150	4740	6	2180	3280	1960	2940	1760	2640
3790	5690	3420	5150	3120	4690	7	2180	3280	1960	2940	1760	2640
3740	5630	3390	5090	3080	4630	8	2180	3280	1960	2940	1760	2640
3700	5560	3340	5020	3040	4570	9	2180	3280	1960	2940	1760	2640
3640	5480	3290	4950	3000	4500	10	2180	3280	1960	2940	1760	2640
3590	5390	3240	4870	2950	4430	11	2180	3280	1960	2940	1760	2640
3520	5290	3180	4780	2890	4350	12	2180	3280	1960	2940	1760	2640
3460	5200	3120	4690	2840	4270	13	2180	3280	1960	2940	1760	2640
3390	5090	3060	4590	2780	4180	14	2170	3260	1950	2930	1750	2630
3310	4980	2990	4490	2720	4080	15	2160	3250	1940	2910	1740	2610
3230	4860	2920	4380	2650	3980	16	2150	3230	1930	2900	1730	2600
3150	4740	2840	4270	2580	3880	17	2140	3220	1920	2880	1720	2580
3070	4620	2770	4160	2510	3780	18	2130	3200	1910	2870	1710	2570
2990	4490	2690	4040	2440	3670	19	2120	3190	1900	2850	1700	2560
2900	4360	2610	3920	2370	3560	20	2110	3170	1890	2840	1690	2540
2720	4090	2440	3670	2220	3330	22	2090	3150	1870	2810	1670	2510
2540	3810	2280	3420	2060	3100	24	2070	3120	1850	2780	1650	2480
2350	3530	2110	3160	1900	2860	26	2050	3090	1830	2750	1630	2460
2160	3250	1940	2910	1750	2630	28	2030	3060	1810	2720	1610	2430
1980	2980	1770	2660	1600	2400	30	2010	3030	1790	2690	1600	2400
1800	2710	1610	2420	1450	2180	32	1990	3000	1770	2660	1580	2370
1630	2450	1450	2180	1310	1960	34	1980	2970	1750	2640	1560	2340
1460	2200	1300	1950	1170	1750	36	1960	2940	1730	2610	1540	2310
1310	1970	1170	1750	1050	1570	38	1940	2910	1710	2580	1520	2280
1180	1780	1050	1580	945	1420	40	1920	2880	1700	2550	1500	2260
1070	1610	954	1430	857	1290	42	1900	2850	1680	2520	1480	2230
979	1470	869	1310	781	1170	44	1880	2820	1660	2490	1460	2200
896	1350	795	1200	715	1070	46	1860	2790	1640	2460	1440	2170
823	1240	730	1100	656	986	48	1840	2760	1620	2430	1420	2140
758	1140	673	1010	605	909	50	1820	2730	1600	2400	1410	2110

Properties											
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
3930	5910	3560	5350	3240	4870	13.1	106	13.0	96.7	12.9	88.3
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	101		91.4		83.3	
3030	4550	2740	4110	2500	3750	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
701	1050	627	940	560	840	4900	1810	4330	1610	3840	1440
Available Strength in Flexure about Y-Y Axis, kip-ft						r_y , in.					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	4.24		4.20		4.17	
1100	1650	986	1480	889	1340	r_x/r_y					
						1.65		1.64		1.63	

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.



Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$

W-Shapes

W14x						Shape	W14x					
257		233		211		lb/ft	257		233		211	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2940	4420	2670	4010	2410	3630	0	1580	2370	1410	2130	1260	1900
2860	4300	2590	3890	2340	3520	6	1580	2370	1410	2130	1260	1900
2830	4250	2560	3850	2320	3480	7	1580	2370	1410	2130	1260	1900
2800	4200	2530	3800	2290	3440	8	1580	2370	1410	2130	1260	1900
2760	4140	2500	3750	2260	3390	9	1580	2370	1410	2130	1260	1900
2720	4080	2460	3690	2220	3340	10	1580	2370	1410	2130	1260	1900
2670	4010	2420	3630	2180	3280	11	1580	2370	1410	2130	1260	1900
2620	3940	2370	3560	2140	3220	12	1580	2370	1410	2130	1260	1900
2570	3860	2320	3490	2100	3150	13	1580	2370	1410	2120	1260	1900
2510	3780	2270	3420	2050	3080	14	1570	2360	1400	2110	1250	1880
2460	3690	2220	3340	2000	3010	15	1560	2340	1390	2090	1240	1870
2400	3600	2160	3250	1950	2940	16	1550	2330	1380	2080	1230	1850
2330	3510	2110	3170	1900	2860	17	1540	2310	1370	2070	1220	1840
2270	3410	2050	3080	1850	2780	18	1530	2300	1370	2050	1220	1830
2200	3310	1990	2990	1790	2690	19	1520	2290	1360	2040	1210	1810
2130	3210	1930	2890	1730	2610	20	1510	2270	1350	2020	1200	1800
2000	3000	1800	2700	1620	2430	22	1490	2240	1330	2000	1180	1770
1850	2790	1670	2510	1500	2250	24	1470	2220	1310	1970	1160	1750
1710	2570	1540	2310	1380	2070	26	1460	2190	1290	1940	1140	1720
1570	2360	1410	2120	1260	1900	28	1440	2160	1270	1910	1120	1690
1430	2150	1280	1930	1150	1720	30	1420	2130	1250	1880	1110	1660
1290	1940	1160	1740	1040	1560	32	1400	2100	1240	1860	1090	1640
1160	1750	1040	1560	927	1390	34	1380	2070	1220	1830	1070	1610
1040	1560	927	1390	827	1240	36	1360	2050	1200	1800	1050	1580
932	1400	832	1250	742	1120	38	1340	2020	1180	1770	1030	1550
841	1260	751	1130	670	1010	40	1320	1990	1160	1750	1020	1530
763	1150	681	1020	608	913	42	1310	1960	1140	1720	997	1500
695	1040	621	933	554	832	44	1290	1930	1120	1690	979	1470
636	956	568	854	507	761	46	1270	1910	1110	1660	961	1440
584	878	522	784	465	699	48	1250	1880	1090	1630	943	1420
538	809	481	723	429	644	50	1230	1850	1070	1610	924	1390
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
2940	4420	2670	4010	2410	3630	12.8	80.7	12.7	73.5	12.6	67.2	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	75.6		68.5		62.0		
2270	3400	2060	3080	1860	2790	Moment of Inertia, in. ⁴						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y	
503	755	445	668	400	600	3400	1290	3010	1150	2660	1030	
Available Strength in Shear, kips						r_y , in.						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	4.13		4.10		4.07		
503	755	445	668	400	600	r_x/r_y						
Available Strength in Flexure about Y-Y Axis, kip-ft						1.62		1.62		1.61		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$							
798	1200	717	1080	642	965							

Note: Confirm ASTM A913 material availability before specifying.



Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$

W-Shapes

W14x						Shape	W14x					
193		176		159		lb/ft	193		176		159	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2210	3320	2020	3030	1820	2730	0	1150	1730	1040	1560	931	1400
2150	3220	1960	2940	1760	2650	6	1150	1730	1040	1560	931	1400
2120	3190	1930	2910	1740	2620	7	1150	1730	1040	1560	931	1400
2100	3150	1910	2870	1720	2590	8	1150	1730	1040	1560	931	1400
2070	3110	1880	2830	1700	2550	9	1150	1730	1040	1560	931	1400
2030	3060	1850	2780	1670	2510	10	1150	1730	1040	1560	931	1400
2000	3000	1820	2740	1640	2460	11	1150	1730	1040	1560	931	1400
1960	2950	1780	2680	1610	2420	12	1150	1730	1040	1560	931	1400
1920	2890	1750	2630	1570	2360	13	1150	1720	1030	1550	925	1390
1880	2820	1710	2570	1540	2310	14	1140	1710	1020	1540	917	1380
1830	2750	1670	2500	1500	2250	15	1130	1700	1020	1530	908	1360
1790	2680	1620	2440	1460	2190	16	1120	1680	1010	1510	899	1350
1740	2610	1580	2370	1420	2130	17	1110	1670	997	1500	890	1340
1690	2540	1530	2300	1380	2070	18	1100	1660	988	1490	881	1320
1640	2460	1490	2230	1330	2010	19	1090	1640	979	1470	872	1310
1580	2380	1440	2160	1290	1940	20	1080	1630	970	1460	863	1300
1480	2220	1340	2010	1200	1810	22	1070	1600	952	1430	846	1270
1370	2050	1240	1860	1110	1670	24	1050	1570	935	1400	828	1240
1260	1890	1140	1710	1020	1530	26	1030	1550	917	1380	810	1220
1150	1730	1040	1560	929	1400	28	1010	1520	899	1350	793	1190
1040	1570	941	1410	842	1270	30	993	1490	881	1320	775	1160
941	1410	847	1270	757	1140	32	975	1460	863	1300	757	1140
841	1260	756	1140	675	1010	34	957	1440	845	1270	739	1110
750	1130	674	1010	602	905	36	938	1410	827	1240	722	1080
673	1010	605	909	540	812	38	920	1380	809	1220	704	1060
608	914	546	821	487	733	40	902	1360	791	1190	686	1030
551	829	495	744	442	665	42	884	1330	773	1160	669	1000
502	755	451	678	403	605	44	866	1300	756	1140	651	978
460	691	413	621	369	554	46	848	1270	738	1110	633	951
422	634	379	570	339	509	48	829	1250	720	1080	615	925
389	585	350	525	312	469	50	811	1220	702	1050	598	898
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
2210	3320	2020	3030	1820	2730	12.5	61.8	12.5	57.1	12.4	52.4	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	56.8		51.8		46.7		
1700	2560	1550	2330	1400	2100	Moment of Inertia, in. ⁴						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y	
359	538	328	492	291	436	2400	931	2140	838	1900	748	
Available Strength in Shear, kips						r_y , in.						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	4.05		4.02		4.00		
359	538	328	492	291	436	r_x/r_y						
Available Strength in Flexure about Y-Y Axis, kip-ft						1.60		1.60		1.60		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$							
584	878	529	795	474	712							

Note: Confirm ASTM A913 material availability before specifying.



Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
W-Shapes

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$

W14x						Shape	W14x					
145		132		120		lb/ft	145		132		120	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1660	2500	1510	2270	1370	2070	0	843	1270	759	1140	688	1030
1610	2420	1460	2190	1330	1990	6	843	1270	759	1140	688	1030
1590	2390	1440	2160	1310	1970	7	843	1270	759	1140	688	1030
1570	2360	1420	2130	1290	1940	8	843	1270	759	1140	688	1030
1550	2330	1400	2100	1270	1910	9	843	1270	759	1140	688	1030
1520	2290	1370	2060	1250	1870	10	843	1270	759	1140	688	1030
1500	2250	1340	2020	1220	1830	11	843	1270	759	1140	688	1030
1470	2210	1310	1970	1190	1790	12	843	1270	756	1140	684	1030
1440	2160	1280	1930	1160	1750	13	837	1260	747	1120	675	1020
1400	2110	1250	1880	1130	1700	14	829	1250	738	1110	667	1000
1370	2060	1210	1830	1100	1660	15	820	1230	730	1100	658	989
1330	2000	1180	1770	1070	1610	16	811	1220	721	1080	650	977
1290	1950	1140	1720	1040	1560	17	803	1210	712	1070	641	964
1260	1890	1100	1660	1000	1500	18	794	1190	704	1060	633	951
1220	1830	1060	1600	965	1450	19	785	1180	695	1040	624	938
1180	1770	1030	1540	929	1400	20	777	1170	686	1030	615	925
1090	1640	945	1420	856	1290	22	759	1140	669	1010	598	899
1010	1520	865	1300	782	1180	24	742	1110	651	979	581	873
927	1390	785	1180	709	1070	26	724	1090	634	953	564	848
844	1270	707	1060	638	959	28	707	1060	616	927	547	822
764	1150	632	950	569	856	30	690	1040	599	900	530	796
686	1030	559	840	503	756	32	672	1010	582	874	513	770
611	918	495	744	446	670	34	655	984	564	848	495	745
545	819	442	664	398	598	36	637	958	547	822	478	719
489	735	397	596	357	536	38	620	932	529	796	461	693
441	663	358	538	322	484	40	603	906	512	769	444	667
400	602	325	488	292	439	42	585	879	494	743	424	638
365	548	296	445	266	400	44	568	853	477	717	402	604
334	501	271	407	244	366	46	550	827	454	682	381	573
306	461	249	374	224	336	48	533	801	432	650	363	545
282	424	229	344	206	310	50	511	768	413	620	346	520
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
1660	2500	1510	2270	1370	2070	12.3	48.7	11.6	44.3	11.6	41.5	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	42.7		38.8		35.3		
1280	1920	1160	1750	1060	1590	Moment of Inertia, in. ⁴						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y	
262	392	247	370	222	334	1710	677	1530	548	1380	495	
Available Strength in Shear, kips						r_y , in.						
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	3.98		3.76		3.74		
431	648	367	551	331	497	r_x/r_y						
						1.59		1.67		1.67		

Note: Confirm ASTM A913 material availability before specifying.




Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$


W-Shapes

W14x						Shape	W14x					
109		99		90		lb/ft	109 ^f		99 ^f		90 ^f	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1250	1870	1130	1700	1030	1550	0	615	924	541	813	479	719
1200	1810	1090	1640	995	1500	6	615	924	541	813	479	719
1190	1780	1080	1620	982	1480	7	615	924	541	813	479	719
1170	1760	1060	1600	968	1450	8	615	924	541	813	479	719
1150	1730	1040	1570	951	1430	9	615	924	541	813	479	719
1130	1700	1030	1540	933	1400	10	615	924	541	813	479	719
1110	1660	1000	1510	914	1370	11	615	924	541	813	479	719
1080	1620	982	1480	893	1340	12	615	924	541	813	479	719
1050	1590	957	1440	871	1310	13	611	918	541	813	479	719
1030	1540	932	1400	848	1270	14	602	905	541	813	479	719
998	1500	906	1360	824	1240	15	594	893	533	801	479	719
968	1460	878	1320	799	1200	16	586	880	525	789	473	712
937	1410	850	1280	773	1160	17	577	868	517	776	466	700
906	1360	821	1230	746	1120	18	569	855	509	764	458	688
873	1310	791	1190	719	1080	19	561	842	500	752	450	676
840	1260	761	1140	691	1040	20	552	830	492	740	442	664
774	1160	700	1050	636	956	22	535	805	476	716	426	640
707	1060	639	960	580	872	24	519	780	460	691	410	617
640	963	578	869	525	789	26	502	754	444	667	395	593
576	866	519	781	471	708	28	485	729	428	643	379	569
514	772	463	696	419	630	30	469	704	411	618	363	546
454	682	408	614	370	556	32	452	679	395	594	347	522
402	604	362	544	328	492	34	435	654	379	570	331	498
359	539	323	485	292	439	36	418	629	363	545	310	467
322	484	290	435	262	394	38	402	604	342	513	289	434
290	437	261	393	237	356	40	381	573	320	481	270	406
263	396	237	356	215	323	42	359	539	301	452	253	381
240	361	216	325	196	294	44	339	510	284	427	239	359
220	330	198	297	179	269	46	321	483	269	404	226	339
202	303	181	273	164	247	48	306	459	255	384	214	322
186	279	167	251	151	228	50	291	438	243	365	204	306
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
1250	1870	1130	1700	1030	1550	12.5	39.1	14.0	36.8	15.3	34.9	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	32.0		29.1		26.5		
960	1440	873	1310	795	1190	Moment of Inertia, in. ⁴						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y	
195	293	179	269	160	240	1240	447	1110	402	999	362	
Available Strength in Shear, kips						r_y , in.						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.73		3.71		3.70		
195	293	179	269	160	240	r_x/r_y						
Available Strength in Flexure about Y-Y Axis, kip-ft						1.67		1.66		1.66		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$							
295	443	257	386	223	336							


^f Shape exceeds compact limit for flexure with $F_y = 65 \text{ ksi}$.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W14x						Shape	W14x					
82		74		68		lb/ft	82		74		68	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
934	1400	849	1280	778	1170	0	451	678	409	614	373	561
862	1300	783	1180	718	1080	6	451	678	409	614	373	561
838	1260	761	1140	697	1050	7	451	678	409	614	373	561
810	1220	736	1110	674	1010	8	448	673	406	610	370	556
780	1170	709	1060	648	974	9	439	660	397	597	361	543
748	1120	679	1020	621	933	10	430	646	388	584	353	530
714	1070	648	974	592	890	11	421	633	379	570	344	517
678	1020	616	926	562	845	12	412	619	371	557	336	505
641	964	583	876	531	798	13	403	606	362	544	327	492
604	908	549	824	500	751	14	394	592	353	531	319	479
566	851	514	773	468	703	15	385	578	344	517	310	466
528	794	480	721	436	656	16	376	565	335	504	302	453
491	738	446	670	405	609	17	367	551	327	491	293	441
454	683	413	620	374	562	18	358	538	318	478	285	428
418	629	380	571	344	517	19	349	524	309	465	276	415
384	576	348	524	315	473	20	340	511	300	451	268	402
318	478	289	435	261	392	22	322	484	283	425	251	377
267	402	243	365	219	330	24	304	456	265	398	233	351
228	343	207	311	187	281	26	286	429	244	367	210	315
197	295	179	268	161	242	28	263	396	222	334	190	286
171	257	156	234	140	211	30	242	364	204	306	174	262
150	226	137	205	123	185	32	224	337	188	283	161	242
133	200	121	182	109	164	34	209	313	175	263	149	224
119	179	108	162	97.5	147	36	195	293	164	246	139	209
107	160	96.9	146	87.5	131	38	183	276	154	231	131	196
96.3	145	87.5	131	79.0	119	40	173	260	145	218	123	185
						42	164	246	137	206	116	175
						44	156	234	130	195	110	166
						46	148	223	124	186	105	157
						48	141	212	118	177	99.9	150
						50	135	203	113	169	95.4	143
Available Strength in Tensile Yielding, kips						Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft						
934	1400	849	1280	778	1170	L_p	L_r	L_p	L_r	L_p	L_r	
						7.68	26.7	7.68	25.2	7.62	24.0	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	24.0		21.8		20.0		
720	1080	654	981	600	900	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	881	148	795	134	722	121	
190	284	166	249	151	227	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.48		2.48		2.46		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
145	218	131	197	120	180	2.44		2.44		2.44		


Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W14x						Shape	W14x						
61		53		48 ^c		lb/ft	61		53		48		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
697	1050	607	913	542	815		0	331	497	283	425	254	382
642	965	531	798	479	721	6	331	497	282	424	254	381	
623	936	506	761	457	686	7	331	497	274	411	245	369	
602	905	479	720	432	649	8	328	492	265	398	237	357	
579	871	449	676	405	609	9	320	480	257	386	229	344	
555	834	419	630	377	567	10	311	468	248	373	221	332	
529	795	387	582	349	524	11	303	456	239	360	213	320	
502	754	356	535	320	481	12	295	444	231	347	205	308	
474	712	324	487	291	438	13	287	432	222	334	197	295	
446	670	293	441	263	395	14	279	420	214	321	188	283	
417	627	263	396	236	355	15	271	408	205	309	180	271	
389	584	234	352	210	315	16	263	396	197	296	172	259	
360	542	208	312	186	279	17	255	384	188	283	164	246	
333	500	185	278	166	249	18	247	372	180	270	153	231	
306	460	166	250	149	224	19	239	360	168	253	142	213	
280	421	150	226	134	202	20	231	347	157	236	132	198	
232	348	124	186	111	167	22	215	323	138	207	116	174	
195	293	104	157	93.2	140	24	194	291	123	185	103	155	
166	249	88.8	133	79.4	119	26	173	261	111	167	92.7	139	
143	215	76.6	115	68.5	103	28	157	236	101	153	84.3	127	
125	187	66.7	100	59.7	89.7	30	143	215	93.3	140	77.4	116	
110	165	58.6	88.1			32	132	198	86.4	130	71.5	107	
97.0	146					34	122	184	80.4	121	66.5	99.9	
86.5	130					36	114	171	75.3	113	62.1	93.4	
77.7	117					38	107	160	70.8	106	58.3	87.6	
70.1	105					40	100	151	66.8	100	55.0	82.6	
						42	94.6	142	63.2	95.0	52.0	78.1	
						44	89.5	135	60.0	90.2	49.3	74.1	
						46	85.0	128	57.1	85.9	46.9	70.5	
						48	81.0	122	54.5	82.0	44.8	67.3	
						50	77.3	116	52.2	78.4	42.8	64.3	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
697	1050	607	913	549	825	7.59	22.7	5.95	18.4	5.92	17.6		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	17.9		15.6		14.1			
537	806	468	702	423	635	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
136	203	134	201	122	183	640	107	541	57.7	484	51.4		
Available Strength in Shear, kips						r_y , in.							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	2.45		1.92		1.91			
136	203	134	201	122	183	r_x/r_y							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.44		3.07		3.06			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$								
106	160	71.4	107	63.6	95.6								
Properties													

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W14x						Shape	W14x						
43 ^c		38 ^c		34 ^c		lb/ft	43		38		34		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
475	713	413	621	361	542	0	226	339	199	300	177	266	
419	630	345	518	300	450	6	225	338	189	285	167	251	
400	602	323	485	280	421	7	217	326	181	272	159	239	
380	571	299	450	260	390	8	209	315	172	259	151	228	
358	539	275	413	238	357	9	202	303	164	246	144	216	
334	502	247	371	216	324	10	194	292	155	234	136	204	
308	464	219	329	192	288	11	186	280	147	221	128	192	
282	425	192	288	168	252	12	179	269	138	208	120	180	
257	386	166	250	145	217	13	171	257	130	195	112	169	
231	348	143	215	125	187	14	164	246	120	180	100	151	
207	311	125	188	109	163	15	156	234	108	162	89.9	135	
184	276	110	165	95.4	143	16	148	223	97.4	146	81.2	122	
163	244	97.2	146	84.5	127	17	140	210	88.9	134	73.9	111	
145	218	86.7	130	75.4	113	18	128	192	81.8	123	67.7	102	
130	196	77.8	117	67.7	102	19	118	177	75.6	114	62.5	93.9	
117	177	70.2	106	61.1	91.8	20	109	164	70.3	106	57.9	87.1	
97.1	146	58.0	87.2	50.5	75.9	22	95.5	144	61.6	92.6	50.6	76.0	
81.6	123	48.8	73.3	42.4	63.8	24	84.6	127	54.8	82.4	44.8	67.4	
69.5	104					26	76.0	114	49.4	74.2	40.2	60.5	
59.9	90.1					28	68.9	104	44.9	67.5	36.5	54.9	
52.2	78.5					30	63.1	94.8	41.2	62.0	33.4	50.2	
						32	58.2	87.4	38.1	57.3	30.8	46.3	
						34	54.0	81.1	35.4	53.2	28.6	43.0	
						36	50.4	75.7	33.1	49.8	26.7	40.1	
						38	47.2	70.9	31.1	46.7	25.0	37.6	
						40	44.4	66.8	29.3	44.0	23.5	35.4	
						42	42.0	63.1	27.7	41.7	22.2	33.4	
						44	39.8	59.8	26.3	39.5	21.1	31.7	
						46	37.8	56.8	25.0	37.6	20.0	30.1	
						48	36.0	54.2	23.9	35.9	19.1	28.7	
						50	34.4	51.7	22.8	34.3	18.2	27.4	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
490	737	436	655	389	585	5.86	16.8	4.80	13.7	4.74	13.2		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	12.6		11.2		10.0			
378	567	336	504	300	450	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	428	45.2	385	26.7	340	23.3		
109	163	114	170	104	156	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.89		1.55		1.53			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
56.1	84.3	39.2	59.0	34.4	51.7	3.08		3.79		3.81			

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 <div style="text-align: center;"> Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes </div> <div style="text-align: right;"> $F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$ </div>													
W14x						Shape	W14x						
30 ^c		26 ^c		22 ^c		lb/ft	30 ^f		26 ^v		22 ^v		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
313	471	266	399	216	324	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	150	226	130	196	108	162
258	388	185	278	146	220		6	143	216	108	163	87.5	131
241	362	162	244	127	191		7	136	205	100	151	80.2	121
222	334	139	209	108	163		8	129	194	91.9	138	72.9	110
203	305	116	174	90.1	135		9	122	183	83.7	126	65.4	98.2
183	275	93.6	141	73.3	110		10	115	173	72.5	109	54.4	81.7
163	246	77.4	116	60.6	91.0		11	108	162	61.9	93.1	46.2	69.4
142	213	65.0	97.7	50.9	76.5		12	100	151	53.9	81.0	39.9	60.0
121	182	55.4	83.3	43.4	65.2		13	91.7	138	47.5	71.5	35.0	52.7
105	157	47.8	71.8	37.4	56.2		14	80.9	122	42.5	63.8	31.1	46.8
91.1	137	41.6	62.5	32.6	48.9		15	72.1	108	38.3	57.6	28.0	42.0
80.1	120	36.6	55.0	28.6	43.0		16	64.9	97.5	34.9	52.4	25.3	38.1
71.0	107	32.4	48.7	25.4	38.1		17	58.9	88.5	32.0	48.1	23.1	34.8
63.3	95.1	28.9	43.4				18	53.8	80.9	29.5	44.4	21.3	32.0
56.8	85.4						19	49.5	74.4	27.4	41.2	19.7	29.6
51.3	77.1						20	45.8	68.8	25.6	38.5	18.3	27.5
42.4	63.7						22	39.7	59.7	22.6	34.0	16.1	24.1
35.6	53.5						24	35.1	52.7	20.2	30.4	14.3	21.5
							26	31.3	47.1	18.3	27.5	12.9	19.4
							28	28.3	42.6	16.7	25.1	11.7	17.6
							30	25.9	38.9	15.4	23.2	10.8	16.2
							32	23.8	35.7	14.3	21.5	9.94	14.9
							34	22.0	33.1	13.3	20.0	9.25	13.9
							36	20.5	30.8	12.5	18.8	8.64	13.0
							38	19.2	28.8	11.7	17.6	8.12	12.2
							40	18.0	27.1	11.1	16.7	7.65	11.5
							42	17.0	25.5	10.5	15.8	7.24	10.9
							44	16.1	24.2	9.98	15.0	6.87	10.3
							46	15.3	22.9	9.51	14.3	6.54	9.82
							48	14.5	21.8	9.08	13.6	6.23	9.37
							50	13.9	20.8	8.69	13.1	5.96	8.96
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
344	518	299	450	253	380	5.06	12.7	3.35	9.42	3.22	8.97		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	8.85		7.69		6.49			
266	398	231	346	195	292	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	291	19.6	245	8.91	199	7.00		
96.9	145	82.8	124	73.6	111	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.49		1.08		1.04			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
28.3	42.5	18.0	27.0	14.2	21.4	3.85		5.23		5.33			

^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
^f Shape exceeds compact limit for flexure with $F_y = 65 \text{ ksi}$.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65 \text{ ksi}$; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.




Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
W-Shapes

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$

W12 \times						Shape	W12 \times					
336 ^h		305 ^h		279 ^h		lb/ft	336 ^h		305 ^h		279 ^h	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
3850	5790	3480	5240	3190	4790	0	1960	2940	1740	2620	1560	2340
3700	5550	3340	5020	3050	4590	6	1960	2940	1740	2620	1560	2340
3640	5470	3290	4940	3010	4520	7	1960	2940	1740	2620	1560	2340
3580	5380	3230	4860	2950	4440	8	1960	2940	1740	2620	1560	2340
3510	5280	3170	4760	2890	4350	9	1960	2940	1740	2620	1560	2340
3440	5160	3100	4660	2830	4250	10	1960	2940	1740	2620	1560	2340
3350	5040	3020	4540	2760	4140	11	1950	2940	1740	2610	1560	2340
3270	4910	2940	4420	2680	4030	12	1950	2920	1730	2600	1550	2330
3180	4770	2860	4300	2600	3910	13	1940	2910	1720	2590	1540	2320
3080	4630	2770	4160	2520	3790	14	1930	2900	1710	2580	1530	2300
2980	4480	2680	4020	2430	3660	15	1920	2890	1710	2570	1530	2290
2880	4320	2580	3880	2350	3530	16	1910	2880	1700	2550	1520	2280
2770	4170	2480	3730	2250	3390	17	1900	2860	1690	2540	1510	2270
2660	4000	2380	3580	2160	3250	18	1900	2850	1680	2530	1500	2260
2550	3840	2280	3430	2070	3110	19	1890	2840	1670	2520	1490	2250
2440	3670	2180	3280	1970	2970	20	1880	2830	1670	2510	1490	2230
2220	3340	1980	2970	1790	2680	22	1860	2800	1650	2480	1470	2210
2000	3010	1780	2670	1600	2400	24	1850	2780	1630	2460	1460	2190
1790	2680	1580	2370	1420	2130	26	1830	2750	1620	2430	1440	2160
1580	2370	1390	2090	1250	1870	28	1810	2730	1600	2410	1420	2140
1380	2080	1210	1820	1090	1630	30	1800	2700	1590	2390	1410	2120
1210	1820	1070	1600	954	1430	32	1780	2680	1570	2360	1390	2090
1080	1620	945	1420	845	1270	34	1770	2650	1560	2340	1380	2070
959	1440	843	1270	754	1130	36	1750	2630	1540	2310	1360	2050
861	1290	757	1140	676	1020	38	1730	2600	1520	2290	1350	2020
777	1170	683	1030	610	917	40	1720	2580	1510	2270	1330	2000
705	1060	619	931	554	832	42	1700	2560	1490	2240	1320	1980
642	965	564	848	504	758	44	1680	2530	1480	2220	1300	1960
587	883	516	776	462	694	46	1670	2510	1460	2190	1290	1930
539	811	474	713	424	637	48	1650	2480	1440	2170	1270	1910
497	747	437	657	391	587	50	1630	2460	1430	2150	1250	1890

Properties											
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
3850	5790	3480	5240	3190	4790	10.7	116	10.6	105	10.5	96.8
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	98.9		89.5		81.9	
2970	4450	2690	4030	2460	3690	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
778	1170	691	1040	633	949	4060	1190	3550	1050	3110	937
Available Strength in Shear, kips						r_y , in.					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.47		3.42		3.38	
778	1170	691	1040	633	949	r_x/r_y					
778	1170	691	1040	633	949	1.85		1.84		1.82	

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

<div style="display: flex; justify-content: space-between; align-items: center;">  <div style="text-align: center;"> <p>Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces</p> </div> <div style="text-align: right;"> <p>$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$</p> </div> </div>													
W12 \times						Shape	W12 \times						
252 ^h		230 ^h		210		lb/ft	252 ^h		230 ^h		210		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
2880	4330	2640	3960	2410	3620	0	1390	2090	1250	1880	1130	1700	
2760	4150	2520	3790	2300	3450	6	1390	2090	1250	1880	1130	1700	
2720	4080	2480	3730	2260	3400	7	1390	2090	1250	1880	1130	1700	
2670	4010	2430	3660	2220	3330	8	1390	2090	1250	1880	1130	1700	
2610	3920	2380	3580	2170	3260	9	1390	2090	1250	1880	1130	1700	
2550	3830	2330	3500	2120	3180	10	1390	2090	1250	1880	1130	1700	
2490	3740	2270	3400	2060	3100	11	1380	2080	1250	1870	1120	1690	
2420	3630	2200	3310	2000	3010	12	1380	2070	1240	1860	1120	1680	
2340	3520	2130	3210	1940	2920	13	1370	2060	1230	1850	1110	1670	
2270	3410	2060	3100	1870	2820	14	1360	2050	1220	1840	1100	1650	
2190	3290	1990	2990	1810	2720	15	1350	2030	1220	1830	1090	1640	
2110	3170	1910	2880	1740	2610	16	1350	2020	1210	1820	1090	1630	
2020	3040	1840	2760	1670	2500	17	1340	2010	1200	1810	1080	1620	
1940	2910	1760	2640	1590	2390	18	1330	2000	1190	1800	1070	1610	
1850	2780	1680	2520	1520	2280	19	1320	1990	1190	1780	1060	1600	
1770	2650	1600	2400	1450	2170	20	1320	1980	1180	1770	1060	1590	
1590	2390	1440	2160	1300	1950	22	1300	1950	1160	1750	1040	1570	
1420	2140	1280	1930	1160	1740	24	1290	1930	1150	1730	1030	1540	
1260	1890	1130	1700	1020	1530	26	1270	1910	1140	1710	1010	1520	
1100	1650	988	1480	885	1330	28	1250	1890	1120	1680	998	1500	
959	1440	860	1290	771	1160	30	1240	1860	1110	1660	984	1480	
843	1270	756	1140	678	1020	32	1220	1840	1090	1640	969	1460	
746	1120	670	1010	600	902	34	1210	1820	1080	1620	955	1430	
666	1000	597	898	535	805	36	1190	1800	1060	1590	940	1410	
598	898	536	806	481	722	38	1180	1770	1050	1570	925	1390	
539	811	484	727	434	652	40	1160	1750	1030	1550	911	1370	
489	735	439	660	393	591	42	1150	1730	1020	1530	896	1350	
446	670	400	601	358	539	44	1130	1700	1000	1510	882	1320	
408	613	366	550	328	493	46	1120	1680	987	1480	867	1300	
374	563	336	505	301	453	48	1100	1660	972	1460	852	1280	
345	519	310	465	278	417	50	1090	1640	957	1440	838	1260	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
2880	4330	2640	3960	2410	3620	10.3	88.0	10.3	80.7	10.2	73.9		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	74.1		67.7		61.8			
2220	3330	2030	3050	1850	2780	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
561	841	506	760	451	676	2720	828	2420	742	2140	664		
Available Strength in Shear, kips						r_y , in.							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.34		3.31		3.28			
561	841	506	760	451	676	r_x/r_y							
561	841	506	760	451	676	1.81		1.80		1.80			
Available Strength in Flexure about Y-Y Axis, kip-ft													
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$								
636	956	574	863	516	775								

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.



Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
W-Shapes

$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$

W12x						Shape	W12x					
190		170		152		lb/ft	190		170		152	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2180	3280	1950	2920	1740	2610	0	1010	1520	892	1340	788	1180
2080	3130	1860	2790	1660	2490	6	1010	1520	892	1340	788	1180
2050	3070	1820	2740	1630	2450	7	1010	1520	892	1340	788	1180
2010	3020	1790	2690	1600	2400	8	1010	1520	892	1340	788	1180
1960	2950	1750	2630	1560	2350	9	1010	1520	892	1340	788	1180
1910	2880	1710	2560	1520	2290	10	1010	1520	892	1340	787	1180
1860	2800	1660	2490	1480	2220	11	1000	1510	885	1330	780	1170
1810	2720	1610	2420	1430	2150	12	995	1500	878	1320	773	1160
1750	2630	1560	2340	1390	2080	13	988	1480	871	1310	766	1150
1690	2540	1500	2260	1340	2010	14	980	1470	864	1300	759	1140
1630	2450	1450	2170	1290	1930	15	973	1460	856	1290	752	1130
1560	2350	1390	2090	1230	1850	16	966	1450	849	1280	745	1120
1500	2250	1330	2000	1180	1770	17	959	1440	842	1270	738	1110
1430	2150	1270	1910	1130	1690	18	952	1430	835	1260	731	1100
1370	2050	1210	1820	1070	1610	19	945	1420	828	1240	724	1090
1300	1950	1150	1730	1020	1530	20	937	1410	821	1230	717	1080
1160	1750	1030	1540	907	1360	22	923	1390	807	1210	703	1060
1030	1550	910	1370	802	1210	24	909	1370	793	1190	690	1040
908	1360	797	1200	701	1050	26	894	1340	779	1170	676	1020
788	1180	690	1040	606	910	28	880	1320	765	1150	662	994
686	1030	601	904	528	793	30	866	1300	751	1130	648	973
603	906	528	794	464	697	32	851	1280	736	1110	634	952
534	803	468	704	411	617	34	837	1260	722	1090	620	931
476	716	418	628	366	551	36	823	1240	708	1060	606	910
428	643	375	563	329	494	38	808	1210	694	1040	592	889
386	580	338	508	297	446	40	794	1190	680	1020	578	868
350	526	307	461	269	405	42	779	1170	666	1000	564	847
319	479	280	420	245	369	44	765	1150	652	979	550	826
292	439	256	384	224	337	46	751	1130	637	958	536	805
268	403	235	353	206	310	48	736	1110	623	937	522	784
247	371	216	325	190	285	50	722	1090	609	916	508	763

Properties											
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
2180	3280	1950	2930	1740	2610	10.1	67.4	9.98	60.7	9.88	54.8
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	56.0		50.0		44.7	
1680	2520	1500	2250	1340	2010	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
397	595	349	524	310	465	1890	589	1650	517	1430	454
Available Strength in Flexure about Y-Y Axis, kip-ft						r_y , in.					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	3.25		3.22		3.19	
464	697	409	614	360	541	r_x/r_y					
						1.79		1.78		1.77	

Note: Confirm ASTM A913 material availability before specifying.



Table 6-A (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces


$F_y = 65 \text{ ksi}$
 $F_u = 80 \text{ ksi}$

W-Shapes


W12x						Shape	W12x					
136		120		106		lb/ft	136		120		106	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1550	2330	1370	2060	1210	1830	0	694	1040	603	907	532	800
1480	2220	1300	1960	1150	1730	6	694	1040	603	907	532	800
1450	2180	1280	1920	1130	1700	7	694	1040	603	907	532	800
1420	2140	1250	1880	1110	1670	8	694	1040	603	907	532	800
1390	2090	1220	1840	1080	1630	9	694	1040	603	907	532	800
1350	2040	1190	1790	1050	1580	10	693	1040	601	904	529	796
1320	1980	1160	1740	1020	1540	11	686	1030	594	893	523	786
1270	1920	1120	1680	990	1490	12	679	1020	588	883	516	776
1230	1850	1080	1630	956	1440	13	672	1010	581	873	509	766
1190	1780	1040	1570	920	1380	14	665	1000	574	863	503	756
1140	1710	1000	1500	883	1330	15	658	989	567	853	496	745
1090	1640	958	1440	845	1270	16	651	979	561	843	489	735
1050	1570	915	1380	807	1210	17	644	968	554	832	483	725
996	1500	871	1310	768	1150	18	637	958	547	822	476	715
947	1420	827	1240	729	1100	19	630	948	540	812	469	705
898	1350	783	1180	689	1040	20	624	937	534	802	462	695
800	1200	697	1050	612	920	22	610	916	520	782	449	675
705	1060	613	921	537	808	24	596	896	507	761	436	655
615	924	532	800	466	700	26	582	875	493	741	422	635
530	797	459	690	402	604	28	568	854	479	721	409	615
462	695	400	601	350	526	30	554	833	466	700	395	594
406	610	352	528	308	462	32	541	813	452	680	382	574
360	541	311	468	272	410	34	527	792	439	660	369	554
321	482	278	417	243	365	36	513	771	425	639	355	534
288	433	249	375	218	328	38	499	750	412	619	342	514
260	391	225	338	197	296	40	485	730	398	599	328	493
236	354	204	307	179	268	42	472	709	385	578	311	467
215	323	186	279	163	245	44	458	688	371	558	295	444
197	295	170	256	149	224	46	444	667	354	532	281	423
181	271	156	235	137	205	48	430	646	338	508	268	404
166	250	144	216	126	189	50	414	623	324	487	257	386

Properties											
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
1550	2330	1370	2060	1210	1830	9.79	49.1	9.70	44.2	9.63	39.9
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	39.9		35.2		31.2	
1200	1800	1060	1580	936	1400	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
275	413	242	363	205	307	1240	398	1070	345	933	301
Available Strength in Shear, kips						r_y , in.					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.16		3.13		3.11	
275	413	242	363	205	307	r_x/r_y					
275	413	242	363	205	307	1.77		1.76		1.76	


Note: Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W12x						Shape	W12x						
96		87		79		lb/ft	96		87		79 ^f		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
1100	1650	996	1500	903	1360	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	477	717	428	644	384	577
1040	1570	946	1420	856	1290		6	477	717	428	644	384	577
1020	1540	928	1390	840	1260		7	477	717	428	644	384	577
1000	1510	908	1360	822	1240		8	477	717	428	644	384	577
977	1470	886	1330	802	1200		9	477	717	428	644	384	577
951	1430	862	1300	779	1170		10	474	712	425	639	382	575
923	1390	836	1260	756	1140		11	467	703	419	629	376	565
893	1340	808	1210	731	1100		12	461	693	412	619	370	556
861	1290	780	1170	704	1060		13	454	683	406	610	364	546
829	1250	750	1130	677	1020		14	448	673	399	600	357	537
795	1190	719	1080	648	975		15	441	663	393	590	351	527
760	1140	687	1030	620	931		16	435	653	386	581	345	518
725	1090	655	984	590	887		17	428	644	380	571	338	508
690	1040	622	936	561	843		18	422	634	373	561	332	499
654	983	590	887	531	798		19	415	624	367	552	326	490
619	930	557	838	501	753		20	409	614	361	542	319	480
548	824	493	742	443	666		22	395	594	348	522	307	461
481	722	432	649	387	582		24	382	575	335	503	294	442
416	625	373	560	333	501		26	369	555	322	484	282	423
358	539	321	483	287	432		28	356	535	309	464	269	404
312	469	280	421	250	376		30	343	516	296	445	256	385
274	413	246	370	220	331		32	330	496	283	426	244	366
243	365	218	327	195	293		34	317	476	270	406	226	340
217	326	194	292	174	261		36	304	456	253	381	211	317
195	293	174	262	156	234		38	288	433	238	357	198	297
176	264	157	237	141	212		40	272	408	224	337	186	280
159	239	143	215	128	192		42	257	386	212	318	176	264
145	218	130	196	116	175		44	244	367	201	302	167	250
133	200	119	179	106	160		46	232	349	191	287	158	238
122	183	109	164	97.8	147		48	222	333	182	274	151	227
112	169	101	151	90.1	135		50	212	319	174	262	144	217
Properties													
Available Strength in Tensile Yielding, kips							Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		L_p	L_r	L_p	L_r	L_p	L_r	
1100	1650	996	1500	903	1360		9.57	37.0	9.51	34.4	9.78	32.1	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips							Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		28.2		25.6		23.2		
846	1270	768	1150	696	1040		Moment of Inertia, in. ⁴						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		I_x	I_y	I_x	I_y	I_x	I_y	
182	272	167	251	152	227		833	270	740	241	662	216	
Available Strength in Flexure about Y-Y Axis, kip-ft							r_y , in.						
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		3.09		3.07		3.05		
219	329	196	294	175	263		r_x/r_y						
							1.76		1.75		1.75		


^f Shape exceeds compact limit for flexure with $F_y = 65 \text{ ksi}$.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes														$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W12x						Shape	W12x								
72		65		58		lb/ft	72 ^f		65 ^f		58				
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$			
Available Compressive Strength, kips							Available Flexural Strength, kip-ft								
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD			
821	1230	743	1120	662	994	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	341	512	297	447	280	421		
779	1170	704	1060	612	920		6	341	512	297	447	280	421		
764	1150	691	1040	595	894		7	341	512	297	447	280	421		
747	1120	675	1020	576	865		8	341	512	297	447	279	419		
728	1090	658	989	555	834		9	341	512	297	447	273	410		
708	1060	640	962	532	800		10	341	512	297	447	266	400		
687	1030	620	932	509	765		11	341	512	297	447	260	391		
664	997	599	900	484	727		12	334	503	297	447	254	382		
639	961	577	867	458	689		13	328	493	293	440	248	372		
614	923	554	833	432	650		14	322	484	287	431	242	363		
589	885	530	797	406	610		15	316	475	281	422	235	354		
562	845	506	761	379	570		16	310	466	275	413	229	344		
535	805	482	724	353	531		17	304	456	269	404	223	335		
508	764	457	687	327	492		18	298	447	263	395	217	326		
481	723	432	650	302	454		19	291	438	257	387	210	316		
454	683	408	613	277	417		20	285	429	251	378	204	307		
401	603	360	540	231	347		22	273	410	240	360	192	288		
350	526	313	471	194	292		24	261	392	228	342	179	270		
301	453	269	404	165	249		26	248	373	216	325	162	244		
260	390	232	349	143	214		28	236	355	204	307	148	222		
226	340	202	304	124	187		30	224	336	189	284	135	203		
199	299	178	267	109	164		32	207	311	173	260	125	188		
176	265	157	236	96.7	145		34	192	288	160	241	116	174		
157	236	140	211	86.3	130		36	179	268	149	224	108	163		
141	212	126	189	77.4	116		38	167	251	139	209	102	153		
127	191	114	171	69.9	105		40	157	236	130	196	95.7	144		
115	173	103	155				42	148	223	123	185	90.5	136		
105	158	93.9	141				44	140	211	116	175	85.8	129		
96.2	145	85.9	129				46	133	200	110	166	81.6	123		
88.3	133	78.9	119				48	127	191	105	158	77.8	117		
81.4	122	72.7	109				50	121	182	100	150	74.3	112		
Properties															
Available Strength in Tensile Yielding, kips							Limiting Unbraced Lengths, ft								
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		L_p	L_r	L_p	L_r	L_p	L_r			
821	1230	743	1120	662	995		11.0	30.4	12.2	28.8	7.78	24.4			
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips							Area, in. ²								
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		21.1		19.1		17.0				
633	950	573	860	510	765		Moment of Inertia, in. ⁴								
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		I_x	I_y	I_x	I_y	I_x	I_y			
138	206	123	184	114	171		597	195	533	174	475	107			
Available Strength in Flexure about Y-Y Axis, kip-ft							r_y , in.								
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		3.04		3.02		2.51				
153	230	132	198	105	158		r_x/r_y								
							1.75		1.75		2.10				


^f Shape exceeds compact limit for flexure with $F_y = 65 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes														$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W12x						Shape	W12x								
53		50		45		lb/ft	53 ^f		50		45				
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$			
Available Compressive Strength, kips							Available Flexural Strength, kip-ft								
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD			
607	913	568	854	510	766	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	248	373	233	351	208	313		
560	842	500	751	448	673		6	248	373	233	351	208	313		
544	818	477	717	427	642		7	248	373	227	341	202	304		
527	791	452	680	405	609		8	248	373	221	332	196	295		
507	762	426	640	381	573		9	245	368	214	322	190	285		
486	731	398	598	356	535		10	239	359	208	312	184	276		
464	697	369	555	330	496		11	233	350	201	302	177	267		
441	662	340	511	304	456		12	227	341	195	292	171	257		
417	627	311	468	278	417		13	221	332	188	283	165	248		
393	590	283	425	252	378		14	215	323	181	273	159	239		
368	553	255	383	227	341		15	209	314	175	263	153	229		
343	516	228	343	203	305		16	203	306	168	253	146	220		
319	480	203	304	180	270		17	197	297	162	243	140	211		
295	444	181	272	160	241		18	191	288	155	233	134	201		
272	409	162	244	144	216		19	185	279	149	224	126	189		
249	375	146	220	130	195		20	180	270	140	211	117	176		
207	311	121	182	107	161		22	168	252	124	186	103	155		
174	261	102	153	90.3	136		24	153	230	111	167	92.0	138		
148	223	86.6	130	76.9	116		26	137	206	101	151	83.1	125		
128	192	74.7	112	66.3	99.7		28	124	187	91.9	138	75.8	114		
111	167	65.0	97.8	57.8	86.8		30	114	171	84.6	127	69.7	105		
97.8	147	57.2	85.9	50.8	76.3		32	105	157	78.5	118	64.5	97.0		
86.6	130						34	97.2	146	73.2	110	60.1	90.3		
77.3	116						36	90.6	136	68.6	103	56.2	84.5		
69.4	104						38	84.9	128	64.5	97.0	52.9	79.4		
62.6	94.1						40	79.8	120	60.9	91.6	49.9	75.0		
							42	75.4	113	57.7	86.8	47.2	71.0		
							44	71.4	107	54.9	82.5	44.8	67.4		
							46	67.9	102	52.3	78.6	42.7	64.2		
							48	64.7	97.2	49.9	75.1	40.7	61.2		
							50	61.7	92.8	47.8	71.8	39.0	58.6		
Properties															
Available Strength in Tensile Yielding, kips							Limiting Unbraced Lengths, ft								
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		L_p	L_r	L_p	L_r	L_p	L_r			
607	913	568	854	510	766		8.47	23.2	6.07	19.5	6.04	18.5			
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips							Area, in. ²								
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		15.6		14.6		13.1				
468	702	438	657	393	590		Moment of Inertia, in. ⁴								
Available Strength in Shear, kips							I_x	I_y	I_x	I_y	I_x	I_y			
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		425	95.8	391	56.3	348	50.0			
109	163	117	176	105	158		r_y , in.								
Available Strength in Flexure about Y-Y Axis, kip-ft							2.48		1.96		1.95				
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		r_x/r_y								
91.8	138	69.1	104	61.6	92.6		2.11		2.64		2.64				


^f Shape exceeds compact limit for flexure with $F_y = 65 \text{ ksi}$.
Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W12x						Shape	W12x						
40 ^c		35 ^c		30 ^c		lb/ft	40		35		30		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
450	677	389	584	321	483	0	185	278	166	250	140	210	
400	600	323	486	266	399	6	185	278	158	237	132	198	
381	573	302	454	248	373	7	179	269	151	227	126	189	
361	542	277	416	229	345	8	173	260	144	216	120	180	
339	510	251	378	210	315	9	167	252	137	206	113	171	
317	476	225	338	189	284	10	161	243	130	196	107	161	
293	441	199	300	167	251	11	156	234	124	186	101	152	
270	405	175	262	146	219	12	150	225	117	175	95.1	143	
246	370	151	227	125	189	13	144	216	110	165	88.9	134	
223	336	130	196	108	163	14	138	207	103	154	79.8	120	
201	302	113	170	94.2	142	15	132	199	92.6	139	71.6	108	
179	270	99.6	150	82.8	124	16	126	190	84.3	127	64.8	97.4	
159	239	88.2	133	73.3	110	17	120	181	77.2	116	59.1	88.9	
142	213	78.7	118	65.4	98.3	18	113	170	71.3	107	54.4	81.7	
127	191	70.6	106	58.7	88.3	19	104	157	66.1	99.4	50.3	75.5	
115	173	63.7	95.8	53.0	79.7	20	97.0	146	61.7	92.7	46.7	70.2	
95.0	143	52.7	79.2	43.8	65.8	22	85.0	128	54.4	81.7	40.9	61.5	
79.8	120	44.3	66.5	36.8	55.3	24	75.6	114	48.6	73.1	36.4	54.7	
68.0	102					26	68.0	102	44.0	66.1	32.8	49.3	
58.6	88.1					28	61.9	93.0	40.2	60.4	29.8	44.8	
51.1	76.8					30	56.8	85.3	37.0	55.6	27.3	41.1	
44.9	67.5					32	52.4	78.8	34.3	51.5	25.3	38.0	
						34	48.7	73.3	31.9	48.0	23.5	35.3	
						36	45.6	68.5	29.9	44.9	21.9	33.0	
						38	42.8	64.3	28.1	42.3	20.6	31.0	
						40	40.3	60.6	26.6	39.9	19.4	29.2	
						42	38.1	57.3	25.2	37.8	18.4	27.6	
						44	36.2	54.3	23.9	35.9	17.4	26.2	
						46	34.4	51.7	22.8	34.2	16.6	24.9	
						48	32.8	49.3	21.7	32.7	15.8	23.8	
						50	31.4	47.1	20.8	31.3	15.1	22.7	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
455	684	401	603	342	514	6.01	17.6	4.77	13.9	4.71	13.2		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	11.7		10.3		8.79			
351	527	309	464	264	396	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	307	44.1	285	24.5	238	20.3		
91.3	137	97.5	146	83.1	125	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.94		1.54		1.52			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
54.5	81.9	37.3	56.1	31.0	46.6	2.64		3.41		3.43			


^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W12x						Shape	W12x						
26 ^c		22 ^c		19 ^c		lb/ft	26 ^f		22		19		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
272	409	231	348	192	288		0	119	179	95.0	143	80.1	120
224	337	127	191	104	156	6	113	170	70.4	106	57.3	86.2	
209	315	99.2	149	80.2	120	7	108	162	63.1	94.8	50.7	76.2	
193	290	76.0	114	61.4	92.3	8	102	153	54.6	82.1	41.9	63.0	
176	265	60.0	90.3	48.5	72.9	9	96.5	145	45.3	68.1	34.5	51.9	
160	240	48.6	73.1	39.3	59.0	10	90.9	137	38.6	58.0	29.2	43.9	
143	214	40.2	60.4	32.5	48.8	11	85.3	128	33.5	50.4	25.2	37.9	
125	189	33.8	50.8	27.3	41.0	12	79.8	120	29.6	44.5	22.1	33.3	
108	162	28.8	43.3	23.2	34.9	13	72.8	109	26.5	39.8	19.7	29.6	
92.9	140	24.8	37.3			14	64.4	96.8	24.0	36.0	17.7	26.7	
80.9	122					15	57.5	86.5	21.9	32.9	16.1	24.2	
71.1	107					16	51.9	78.0	20.1	30.3	14.8	22.2	
63.0	94.7					17	47.2	70.9	18.6	28.0	13.6	20.5	
56.2	84.5					18	43.2	64.9	17.4	26.1	12.7	19.0	
50.4	75.8					19	39.8	59.9	16.2	24.4	11.8	17.8	
45.5	68.4					20	36.9	55.5	15.3	23.0	11.1	16.7	
37.6	56.5					22	32.1	48.3	13.6	20.5	9.86	14.8	
31.6	47.5					24	28.4	42.8	12.3	18.5	8.88	13.3	
						26	25.5	38.3	11.3	16.9	8.08	12.2	
						28	23.1	34.7	10.4	15.6	7.42	11.2	
						30	21.1	31.8	9.60	14.4	6.86	10.3	
						32	19.5	29.3	8.95	13.4	6.39	9.60	
						34	18.0	27.1	8.38	12.6	5.97	8.97	
						36	16.8	25.3	7.88	11.8	5.61	8.43	
						38	15.8	23.7	7.44	11.2	5.29	7.95	
						40	14.8	22.3	7.04	10.6	5.00	7.52	
						42	14.0	21.0	6.69	10.1	4.75	7.14	
						44	13.3	19.9	6.37	9.58	4.52	6.79	
						46	12.6	18.9	6.08	9.14	4.31	6.48	
						48	12.0	18.0	5.82	8.74	4.12	6.19	
						50	11.5	17.2	5.58	8.38	3.95	5.93	
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
298	448	252	379	217	326	L_p	L_r	L_p	L_r	L_p	L_r		
						4.99	12.7	2.63	7.74	2.55	7.36		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	7.65		6.48		5.57			
230	344	194	292	167	251	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	204	17.3	156	4.66	130	3.76		
73.0	109	83.1	125	74.5	112	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.51		0.848		0.822			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
25.9	39.0	11.9	17.8	9.67	14.5	3.42		5.79		5.86			


^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
^f Shape exceeds compact limit for flexure with $F_y = 65 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$							
W12x						W10x		Shape		W12x				W10x					
16 ^c		14 ^c		112		lb/ft		16 ^v		14 ^{f,v}		112							
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$				
Available Compressive Strength, kips						Available Flexural Strength, kip-ft													
ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
156	235	133	199	1280	1920	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	65.2	98.0	55.1	82.8	477	717						
79.3	119	65.2	98.0	1200	1800		6	44.2	66.4	37.4	56.2	477	717						
60.0	90.1	50.2	75.5	1170	1750		7	38.0	57.2	31.0	46.6	477	717						
45.9	69.0	38.5	57.8	1130	1700		8	30.1	45.3	24.4	36.7	477	717						
36.3	54.5	30.4	45.7	1100	1650		9	24.7	37.1	19.9	29.9	474	712						
29.4	44.2	24.6	37.0	1060	1590		10	20.7	31.1	16.7	25	469	705						
24.3	36.5	20.3	30.6	1020	1530		11	17.8	26.7	14.2	21.4	464	698						
20.4	30.7	17.1	25.7	973	1460		12	15.5	23.3	12.4	18.6	460	691						
				928	1390		13	13.8	20.7	10.9	16.4	455	684						
				881	1320		14	12.3	18.5	9.76	14.7	450	677						
				834	1250		15	11.2	16.8	8.80	13.2	446	670						
				786	1180		16	10.2	15.3	8.01	12.0	441	663						
				738	1110		17	9.37	14.1	7.35	11.0	437	656						
				691	1040		18	8.67	13.0	6.78	10.2	432	649						
				644	967		19	8.07	12.1	6.30	9.46	427	642						
				597	898		20	7.55	11.3	5.87	8.83	423	635						
				509	765		22	6.68	10.0	5.18	7.79	414	622						
				428	644		24	6.00	9.02	4.64	6.97	404	608						
				365	548		26	5.45	8.18	4.20	6.31	395	594						
				315	473		28	4.99	7.50	3.83	5.76	386	580						
				274	412		30	4.60	6.92	3.53	5.31	377	566						
				241	362		32	4.27	6.42	3.27	4.92	367	552						
				213	321		34	3.99	6.00	3.05	4.59	358	538						
				190	286		36	3.74	5.62	2.86	4.30	349	524						
				171	257		38	3.52	5.30	2.69	4.04	340	511						
				154	232		40	3.33	5.01	2.54	3.82	330	497						
				140	210		42	3.16	4.75	2.41	3.61	321	483						
				127	191		44	3.00	4.51	2.29	3.43	312	469						
							46	2.86	4.30	2.18	3.27	303	455						
							48	2.74	4.11	2.08	3.12	294	441						
						50	2.62	3.94	1.99	2.99	284	426							
Properties												Limiting Unbraced Lengths, ft							
Available Strength in Tensile Yielding, kips												L_p	L_r	L_p	L_r	L_p	L_r		
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$														
183	276	162	243	1280	1920									2.39	6.92	2.60	6.68	8.30	49.6
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips												Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$									4.71		4.16		32.9	
141	212	125	187	987	1480									Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$									I_x	I_y	I_x	I_y	I_x	I_y
61.7	92.7	55	82.6	224	336								103	2.82	88.6	2.36	716	236	
Available Strength in Shear, kips												r_y , in.							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$									0.773		0.753		2.68	
61.7	92.7	55	82.6	224	336									r_x/r_y					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$									6.04		6.14		1.74	
7.32	11.0	5.95	8.95	224	337														


^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
^f Shape exceeds compact limit for flexure with $F_y = 65 \text{ ksi}$.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 65 \text{ ksi}$; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 <div style="text-align: center;"> Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes </div> <div style="text-align: right;"> $F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$ </div>													
W10x						Shape	W10x						
100		88		77		lb/ft	100		88		77		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
1140	1710	1010	1520	884	1330	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	422	634	367	551	317	476
1060	1600	942	1420	821	1230		6	422	634	367	551	317	476
1040	1560	918	1380	800	1200		7	422	634	367	551	317	476
1010	1510	892	1340	776	1170		8	422	634	367	551	317	476
974	1460	862	1300	750	1130		9	418	628	363	545	312	469
938	1410	830	1250	722	1080		10	413	621	358	538	308	463
901	1350	796	1200	692	1040		11	409	615	354	532	304	456
861	1290	761	1140	660	992		12	404	608	349	525	299	449
820	1230	724	1090	627	943		13	400	601	345	518	295	443
778	1170	687	1030	594	893		14	395	594	340	511	290	436
736	1110	648	974	560	842		15	391	587	336	505	286	429
692	1040	610	916	526	791		16	386	580	331	498	281	423
649	976	571	859	492	740		17	381	573	327	491	277	416
606	912	533	801	458	689		18	377	567	322	484	272	409
564	848	495	745	425	639		19	372	560	318	477	268	403
523	786	459	689	393	591		20	368	553	313	471	264	396
444	667	388	583	331	497		22	359	539	304	457	255	383
373	560	326	490	278	418		24	350	525	295	444	246	369
318	478	278	417	237	356		26	340	512	286	430	237	356
274	412	239	360	204	307		28	331	498	277	417	228	343
239	359	209	313	178	267		30	322	484	268	403	219	329
210	315	183	276	156	235		32	313	470	259	389	210	316
186	279	162	244	139	208		34	304	457	250	376	201	303
166	249	145	218	124	186		36	295	443	241	362	192	288
149	224	130	195	111	167		38	286	429	232	349	181	272
134	202	117	176	100	150		40	276	415	223	335	171	257
122	183	106	160	90.8	136		42	267	402	212	318	162	244
111	167						44	258	388	202	303	155	232
							46	248	372	192	289	147	222
							48	237	356	184	277	141	212
							50	227	341	176	265	135	203
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
1140	1710	1010	1520	884	1330	8.21	44.8	8.15	39.9	8.05	35.5		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	29.3		26.0		22.7			
879	1320	780	1170	681	1020	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	623	207	534	179	455	154		
196	294	170	255	146	219	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.65		2.63		2.60			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
198	297	172	259	149	224	1.74		1.73		1.73			


Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;">  W10 </div> <div style="text-align: center;"> Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes </div> <div style="text-align: right;"> $F_y = 65$ ksi $F_u = 80$ ksi </div> </div>													
W10x						Shape	W10x						
68		60		54		lb/ft	68		60		54 ^f		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
775	1160	689	1040	615	924	0	277	416	242	364	215	324	
720	1080	639	961	570	857	6	277	416	242	364	215	324	
701	1050	622	935	555	834	7	277	416	242	364	215	324	
680	1020	603	907	538	809	8	277	416	242	363	215	324	
657	987	582	875	519	780	9	272	409	238	357	212	318	
632	949	560	842	499	750	10	268	403	233	351	207	312	
605	909	536	806	478	718	11	264	396	229	344	203	305	
577	868	511	768	455	684	12	259	390	225	338	199	299	
549	825	485	730	432	649	13	255	383	220	331	195	293	
519	780	459	690	408	614	14	251	377	216	325	191	287	
489	736	432	650	384	578	15	246	370	212	318	186	280	
459	690	405	609	360	542	16	242	364	208	312	182	274	
429	646	379	569	336	505	17	238	357	203	306	178	268	
400	601	352	529	313	470	18	233	350	199	299	174	261	
371	557	326	490	289	435	19	229	344	195	293	170	255	
342	515	301	452	267	401	20	224	337	191	286	166	249	
288	433	252	379	223	336	22	216	324	182	274	157	236	
242	364	212	318	188	282	24	207	311	173	261	149	224	
206	310	181	271	160	240	26	198	298	165	248	140	211	
178	267	156	234	138	207	28	190	285	156	235	130	196	
155	233	136	204	120	180	30	181	272	146	220	120	180	
136	205	119	179	106	159	32	172	259	136	204	111	167	
121	181	106	159	93.5	141	34	161	242	127	190	103	155	
108	162	94.2	142	83.4	125	36	151	227	119	178	96.7	145	
96.5	145	84.5	127	74.8	112	38	142	214	112	168	91.0	137	
87.1	131	76.3	115	67.6	102	40	134	202	105	159	85.8	129	
79.0	119	69.2	104	61.3	92.1	42	128	192	100	150	81.3	122	
						44	121	182	95.0	143	77.2	116	
						46	116	174	90.5	136	73.5	110	
						48	111	166	86.5	130	70.2	105	
						50	106	159	82.8	124	67.1	101	
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
775	1160	689	1040	615	924	L_p	L_r	L_p	L_r	L_p	L_r		
						8.02	32.1	7.96	29.2	8.11	27.0		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	19.9		17.7		15.8			
597	896	531	797	474	711	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	394	134	341	116	303	103		
127	191	111	167	97.2	146	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.59		2.57		2.56			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
130	195	114	171	101	152	1.71		1.71		1.71			


^f Shape exceeds compact limit for flexure with $F_y = 65$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes														$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W10x						Shape	W10x								
49		45		39		lb/ft	49 ^f		45		39				
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$			
Available Compressive Strength, kips							Available Flexural Strength, kip-ft								
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD			
560	842	518	778	448	673	0	191	287	178	268	152	228			
519	780	458	689	395	593	6	191	287	178	268	152	228			
505	759	438	659	377	567	7	191	287	175	263	148	223			
489	735	417	626	358	538	8	191	287	170	256	144	217			
472	709	393	591	337	507	9	191	287	166	250	140	210			
453	681	369	554	316	474	10	187	281	162	243	136	204			
434	652	344	516	293	441	11	183	275	157	237	132	198			
413	621	318	478	271	407	12	179	269	153	230	128	192			
392	589	292	439	248	373	13	175	263	149	224	123	186			
370	556	266	401	226	339	14	171	257	144	217	119	179			
348	523	242	363	204	307	15	167	251	140	211	115	173			
326	489	217	327	183	275	16	163	245	136	204	111	167			
304	456	194	292	163	245	17	159	239	131	198	107	161			
282	424	173	260	145	218	18	155	233	127	191	103	154			
261	392	155	234	130	196	19	151	227	123	185	98.6	148			
240	361	140	211	118	177	20	147	221	118	178	93.9	141			
200	301	116	174	97.2	146	22	139	208	109	164	83.0	125			
168	253	97.4	146	81.7	123	24	131	196	98.1	147	74.4	112			
143	216	83.0	125	69.6	105	26	122	183	89.2	134	67.4	101			
124	186	71.5	108	60.0	90.2	28	111	166	81.9	123	61.7	92.8			
108	162	62.3	93.7	52.3	78.6	30	102	153	75.7	114	56.9	85.5			
94.7	142	54.8	82.3	46.0	69.1	32	93.9	141	70.3	106	52.8	79.4			
83.9	126					34	87.3	131	65.8	98.8	49.3	74.0			
74.8	112					36	81.6	123	61.7	92.8	46.2	69.4			
67.2	101					38	76.7	115	58.2	87.5	43.5	65.4			
60.6	91.1					40	72.3	109	55.0	82.7	41.1	61.7			
55.0	82.6					42	68.4	103	52.2	78.5	38.9	58.5			
						44	64.9	97.5	49.7	74.7	37.0	55.6			
						46	61.7	92.8	47.4	71.2	35.3	53.0			
						48	58.9	88.5	45.3	68.1	33.7	50.7			
						50	56.3	84.6	43.4	65.2	32.3	48.5			
Properties															
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r				
560	842	518	778	448	673	9.09	25.6	6.23	21.6	6.13	19.7				
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in.²									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	14.4		13.3		11.5					
432	648	399	599	345	518	Moment of Inertia, in.⁴									
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y				
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	272	93.4	248	53.4	209	45.0				
88.4	133	91.9	138	81.2	122	r_y, in.									
Available Strength in Flexure about Y-Y Axis, kip-ft						2.54		2.01		1.98					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y									
88.4	133	65.8	99.0	55.8	83.9	1.71		2.15		2.16					



^f Shape exceeds compact limit for flexure with $F_y = 65 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W10 ^x						Shape	W10 ^x					
33		30		26 ^c		lb/ft	33 ^f		30		26	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
378	568	344	517	291	438	0	122	183	119	178	102	153
332	498	265	398	227	341	6	122	183	110	165	93.2	140
316	475	241	362	206	310	7	122	183	105	158	88.6	133
299	450	216	324	184	277	8	118	178	100	150	84.0	126
282	423	191	286	163	244	9	114	172	95.0	143	79.4	119
263	395	166	249	141	212	10	110	166	90.0	135	74.7	112
243	366	142	214	121	182	11	107	160	85.0	128	70.1	105
224	336	120	181	102	153	12	103	154	80.0	120	65.5	98.4
204	307	102	154	86.9	131	13	98.8	149	75.0	113	59.4	89.3
185	278	88.4	133	75.0	113	14	95.0	143	68.4	103	53.3	80.1
167	251	77.0	116	65.3	98.1	15	91.1	137	62.2	93.5	48.3	72.7
149	224	67.7	102	57.4	86.3	16	87.2	131	57.1	85.8	44.2	66.4
132	198	59.9	90.1	50.8	76.4	17	83.4	125	52.8	79.3	40.7	61.2
118	177	53.5	80.3	45.3	68.2	18	79.5	119	49.0	73.7	37.7	56.7
106	159	48.0	72.1	40.7	61.2	19	73.6	111	45.8	68.9	35.1	52.8
95.4	143	43.3	65.1	36.7	55.2	20	68.5	103	43.0	64.6	32.9	49.5
78.8	118	35.8	53.8	30.4	45.6	22	60.2	90.5	38.3	57.6	29.2	43.9
66.2	99.5					24	53.7	80.8	34.6	51.9	26.2	39.4
56.4	84.8					26	48.5	72.9	31.5	47.3	23.8	35.8
48.7	73.1					28	44.2	66.5	28.9	43.5	21.9	32.9
42.4	63.7					30	40.6	61.1	26.8	40.3	20.2	30.3
37.3	56.0					32	37.6	56.5	24.9	37.5	18.8	28.2
						34	35.0	52.6	23.3	35.1	17.5	26.3
						36	32.8	49.2	21.9	32.9	16.4	24.7
						38	30.8	46.3	20.7	31.1	15.5	23.3
						40	29.0	43.7	19.6	29.4	14.7	22.0
						42	27.5	41.3	18.6	27.9	13.9	20.9
						44	26.1	39.2	17.7	26.6	13.2	19.9
						46	24.9	37.4	16.9	25.4	12.6	18.9
						48	23.7	35.6	16.1	24.3	12.0	18.1
						50	22.7	34.1	15.5	23.2	11.5	17.3
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
378	568	344	517	296	445	7.04	18.0	4.24	13.3	4.21	12.5	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	9.71		8.84		7.61		
291	437	265	398	228	342	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	171	36.6	170	16.7	144	14.1	
73.4	110	81.9	123	69.6	104	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						1.94		1.37		1.36		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
43.3	65.1	28.7	43.1	24.3	36.6	2.16		3.20		3.20		


^c Shape is slender for compression with $F_y = 65$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 65$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W10x						Shape	W10x						
22 ^c		19 ^c		17 ^c		lb/ft	22		19		17		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
244	366	212	318	185	278	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	84.3	127	70.1	105	60.7	91.2
190	286	115	172	97.4	146		6	76.4	115	53.6	80.5	44.9	67.5
173	260	90.9	137	75.9	114		7	72.2	109	48.5	72.9	40.3	60.6
154	231	70.0	105	58.1	87.3		8	68.0	102	43.5	65.4	34.9	52.5
135	203	55.3	83.1	45.9	69.0		9	63.8	95.9	36.8	55.3	29	43.6
117	175	44.8	67.3	37.2	55.9		10	59.6	89.6	31.5	47.4	24.7	37.2
99.0	149	37.0	55.7	30.7	46.2		11	55.4	83.2	27.5	41.4	21.5	32.3
83.2	125	31.1	46.8	25.8	38.8		12	50.1	75.3	24.4	36.7	19.0	28.5
70.9	107	26.5	39.9	22.0	33.1		13	44.2	66.5	21.9	33.0	17.0	25.5
61.1	91.9	22.9	34.4	19.0	28.5		14	39.5	59.3	19.9	30.0	15.4	23.1
53.3	80.0						15	35.6	53.5	18.3	27.4	14.0	21.1
46.8	70.4						16	32.4	48.7	16.8	25.3	12.9	19.4
41.5	62.3						17	29.7	44.7	15.6	23.5	12.0	18.0
37.0	55.6						18	27.4	41.2	14.6	21.9	11.1	16.7
33.2	49.9						19	25.5	38.3	13.7	20.6	10.4	15.7
30.0	45.0						20	23.8	35.7	12.9	19.4	9.81	14.7
24.8	37.2						22	21.0	31.5	11.5	17.4	8.76	13.2
							24	18.8	28.2	10.5	15.7	7.92	11.9
							26	17.0	25.5	9.57	14.4	7.23	10.9
							28	15.5	23.3	8.82	13.3	6.66	10.0
							30	14.3	21.5	8.19	12.3	6.17	9.27
							32	13.2	19.9	7.64	11.5	5.75	8.64
							34	12.3	18.5	7.16	10.8	5.39	8.09
							36	11.6	17.4	6.74	10.1	5.06	7.61
							38	10.9	16.3	6.36	9.56	4.78	7.19
							40	10.3	15.4	6.03	9.06	4.53	6.81
							42	9.73	14.6	5.73	8.61	4.30	6.46
							44	9.24	13.9	5.46	8.21	4.10	6.16
							46	8.80	13.2	5.21	7.84	3.91	5.88
							48	8.41	12.6	4.99	7.50	3.74	5.62
							50	8.05	12.1	4.78	7.19	3.58	5.39
Available Strength in Tensile Yielding, kips							Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
253	380	219	329	194	292	L_p	L_r	L_p	L_r	L_p	L_r		
						4.12	11.6	2.71	8.17	2.62	7.75		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	6.49		5.62		4.99			
195	292	169	253	150	225	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	118	11.4	96.3	4.29	81.9	3.56		
63.6	95.5	66.3	99.5	63.0	94.5	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.33		0.874		0.845			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
19.8	29.7	10.9	16.3	9.08	13.7	3.21		4.74		4.79			


^c Shape is slender for compression with $F_y = 65 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes													
 W10-W8						$F_y = 65$ ksi $F_u = 80$ ksi							
W10x				W8x		Shape	W10x				W8x		
15 ^c		12 ^c		67		lb/ft	15		12 ^f		67		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
161	242	121	182	767	1150	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	51.9	78.0	39.1	58.8	227	342
81.0	122	61.9	93.1	687	1030		6	37.0	55.7	28.1	42.2	227	342
61.6	92.6	46.5	69.8	660	993		7	32.8	49.3	24.3	36.5	226	340
47.2	70.9	35.6	53.5	631	948		8	27.1	40.8	19.2	28.9	223	335
37.3	56.0	28.1	42.3	599	901		9	22.4	33.7	15.7	23.7	220	331
30.2	45.4	22.8	34.2	565	850		10	19.0	28.6	13.2	19.9	217	326
25.0	37.5	18.8	28.3	530	797		11	16.5	24.7	11.4	17.1	214	322
21.0	31.5	15.8	23.8	495	743		12	14.5	21.8	9.92	14.9	211	317
17.9	26.9	13.5	20.3	458	689		13	12.9	19.4	8.79	13.2	208	313
				422	634		14	11.6	17.5	7.88	11.8	205	309
				386	581		15	10.6	15.9	7.13	10.7	202	304
				352	528		16	9.73	14.6	6.51	9.79	199	300
				318	478		17	9.00	13.5	5.99	9.00	196	295
				285	429		18	8.36	12.6	5.54	8.33	193	291
				256	385		19	7.81	11.7	5.16	7.76	190	286
				231	347		20	7.33	11.0	4.83	7.25	187	282
				191	287		22	6.54	9.82	4.27	6.43	181	273
				160	241		24	5.90	8.86	3.84	5.77	176	264
				137	205		26	5.37	8.08	3.48	5.24	170	255
				118	177		28	4.94	7.42	3.19	4.80	164	246
				103	154		30	4.57	6.87	2.94	4.43	158	237
				90.3	136		32	4.26	6.40	2.73	4.11	152	228
				79.9	120		34	3.98	5.98	2.55	3.84	146	219
							36	3.74	5.62	2.39	3.60	140	210
							38	3.53	5.31	2.26	3.39	133	200
							40	3.34	5.02	2.13	3.20	126	190
							42	3.17	4.77	2.02	3.04	120	180
							44	3.02	4.54	1.92	2.89	114	172
							46	2.88	4.33	1.83	2.75	109	164
							48	2.76	4.14	1.75	2.63	105	157
							50	2.64	3.97	1.68	2.52	100	151
Available Strength in Tensile Yielding, kips							Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
172	258	138	207	767	1150	L_p	L_r	L_p	L_r	L_p	L_r		
						2.51	7.34	2.91	6.93	6.57	36.9		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	4.41		3.54		19.7			
132	198	106	159	591	887	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	68.9	2.89	53.8	2.18	272	88.6		
59.7	89.6	48.8	73.1	133	200	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						0.810		0.785		2.12			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
7.46	11.2	5.31	7.98	106	159	4.88		4.97		1.75			

^c Shape is slender for compression with $F_y = 65$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 65$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.


 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W8x						Shape	W8x						
58		48		40		lb/ft	58		48		40		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
666	1000	549	825	455	684		0	194	292	159	239	129	194
595	895	490	736	405	608	6	194	292	159	239	129	194	
572	859	470	706	388	583	7	193	289	157	236	127	191	
546	820	448	674	369	555	8	190	285	154	232	124	187	
518	778	425	638	349	524	9	187	281	152	228	122	183	
488	733	400	601	328	493	10	184	276	149	224	119	179	
457	687	374	562	306	460	11	181	272	146	219	116	175	
426	640	348	523	284	426	12	178	267	143	215	113	170	
394	592	322	483	261	393	13	175	263	140	211	111	166	
362	544	295	444	239	359	14	172	258	137	206	108	162	
331	498	269	405	217	327	15	169	254	134	202	105	158	
301	452	244	367	196	295	16	166	250	131	198	102	154	
271	408	220	331	176	264	17	163	245	129	193	99.4	149	
243	365	197	295	157	236	18	160	241	126	189	96.7	145	
218	328	176	265	141	212	19	157	236	123	185	93.9	141	
197	296	159	239	127	191	20	154	232	120	180	91.1	137	
163	244	132	198	105	158	22	148	223	114	172	85.6	129	
137	205	111	166	88.2	133	24	143	214	109	163	79.7	120	
116	175	94.2	142	75.2	113	26	137	206	103	154	72.7	109	
100	151	81.2	122	64.8	97.4	28	131	197	96.6	145	66.8	100	
87.5	131	70.7	106	56.5	84.9	30	125	188	89.6	135	61.8	92.9	
76.9	116	62.2	93.5	49.6	74.6	32	119	179	83.6	126	57.6	86.5	
68.1	102	55.1	82.8	44.0	66.1	34	112	168	78.3	118	53.9	81.0	
						36	106	159	73.7	111	50.6	76.1	
						38	99.7	150	69.6	105	47.8	71.8	
						40	94.6	142	65.9	99.1	45.2	67.9	
						42	89.9	135	62.7	94.2	42.9	64.5	
						44	85.7	129	59.7	89.7	40.9	61.4	
						46	81.8	123	57.0	85.7	39.0	58.6	
						48	78.3	118	54.5	82.0	37.3	56.0	
						50	75.1	113	52.3	78.6	35.7	53.7	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
666	1000	549	825	455	684	6.51	32.4	6.44	27.6	6.32	23.8		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	17.1		14.1		11.7			
513	770	423	635	351	527	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	228	75.1	184	60.9	146	49.1		
116	174	88.4	133	77.2	116	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.10		2.08		2.04			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
90.5	136	74.3	112	60.0	90.2	1.74		1.74		1.73			

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes														$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W8x						Shape	W8x								
35		31		28		lb/ft	35 ^f		31 ^f		28				
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$			
Available Compressive Strength, kips							Available Flexural Strength, kip-ft								
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD			
401	603	355	534	321	483	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	112	169	95.4	143	88.2	133		
356	535	315	473	266	400		6	112	169	95.4	143	85.5	129		
341	512	301	453	249	374		7	111	166	95.4	143	82.7	124		
324	487	287	431	230	346		8	108	162	94.1	141	80.0	120		
306	460	271	407	210	316		9	105	158	91.5	137	77.2	116		
288	432	254	382	191	286		10	102	154	88.8	134	74.4	112		
268	403	237	356	171	257		11	99.8	150	86.2	130	71.7	108		
248	373	219	329	152	228		12	97.1	146	83.6	126	68.9	104		
229	344	202	303	133	200		13	94.4	142	81.0	122	66.1	99.4		
209	314	184	277	115	173		14	91.7	138	78.4	118	63.4	95.2		
190	285	167	251	100	151		15	89.0	134	75.8	114	60.6	91.1		
171	257	151	226	88.3	133		16	86.2	130	73.2	110	57.8	86.9		
153	230	135	202	78.2	118		17	83.5	126	70.6	106	55.0	82.6		
137	206	120	180	69.8	105		18	80.8	121	68.0	102	51.2	76.9		
123	184	108	162	62.6	94.1		19	78.1	117	65.4	98.3	47.9	71.9		
111	166	97.2	146	56.5	84.9		20	75.4	113	62.8	94.4	45.0	67.6		
91.5	138	80.3	121	46.7	70.2		22	69.5	105	55.7	83.7	40.1	60.3		
76.9	116	67.5	101	39.2	59.0		24	62.6	94.1	49.9	75.0	36.3	54.5		
65.5	98.5	57.5	86.5	33.4	50.2		26	56.9	85.5	45.3	68.1	33.1	49.8		
56.5	84.9	49.6	74.5				28	52.2	78.5	41.4	62.3	30.5	45.8		
49.2	74.0	43.2	64.9				30	48.2	72.5	38.2	57.4	28.2	42.4		
43.3	65.0	38.0	57.1				32	44.8	67.4	35.5	53.3	26.3	39.5		
							34	41.9	63.0	33.1	49.8	24.6	37.0		
							36	39.3	59.1	31.0	46.7	23.1	34.8		
							38	37.1	55.7	29.2	43.9	21.8	32.8		
							40	35.1	52.7	27.6	41.5	20.7	31.1		
							42	33.3	50.0	26.2	39.3	19.6	29.5		
							44	31.7	47.6	24.9	37.4	18.7	28.1		
							46	30.2	45.4	23.7	35.7	17.8	26.8		
							48	28.9	43.4	22.7	34.1	17.1	25.7		
							50	27.6	41.5	21.7	32.6	16.4	24.6		
Available Strength in Tensile Yielding, kips							Limiting Unbraced Lengths, ft								
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		L_p	L_r	L_p	L_r	L_p	L_r			
401	603	355	534	321	483		6.38	21.7	7.49	20.1	5.02	17.0			
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips							Area, in. ²								
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		10.3		9.13		8.25				
309	464	274	411	248	371		Moment of Inertia, in. ⁴								
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		I_x	I_y	I_x	I_y	I_x	I_y			
65.4	98.2	59.3	88.9	59.7	89.6		127	42.6	110	37.1	98.0	21.7			
Available Strength in Flexure about Y-Y Axis, kip-ft							r_y , in.								
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		2.03		2.02		1.62				
52.1	78.2	43.5	65.4	32.8	49.2		r_x/r_y								
							1.73		1.72		2.13				


^f Shape exceeds compact limit for flexure with $F_y = 65 \text{ ksi}$.

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.


 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W8x						Shape	W8x						
24		21		18		lb/ft	24 ^f		21		18		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
276	414	240	360	205	308		0	74.7	112	66.2	99.5	55.1	82.9
228	342	176	264	148	222	6	72.3	109	59.9	90.0	49.1	73.8	
213	320	157	236	131	198	7	69.7	105	56.9	85.5	46.3	69.6	
197	295	138	208	115	172	8	67.0	101	53.9	81.0	43.5	65.4	
180	270	119	179	98.4	148	9	64.4	96.8	50.9	76.5	40.8	61.3	
163	244	101	152	82.8	125	10	61.8	92.9	47.9	72.0	38.0	57.1	
145	219	84.4	127	68.6	103	11	59.2	89.0	44.9	67.5	35.2	52.9	
129	194	70.9	107	57.7	86.7	12	56.6	85.1	41.9	62.9	31.4	47.1	
113	170	60.4	90.8	49.2	73.9	13	54.0	81.1	37.8	56.8	27.9	42.0	
97.7	147	52.1	78.3	42.4	63.7	14	51.4	77.2	34.2	51.4	25.2	37.8	
85.1	128	45.4	68.2	36.9	55.5	15	48.7	73.3	31.2	46.9	22.9	34.4	
74.8	112	39.9	59.9	32.4	48.8	16	45.4	68.2	28.7	43.2	21.0	31.5	
66.3	99.6	35.3	53.1	28.7	43.2	17	41.9	63.0	26.6	40.0	19.4	29.1	
59.1	88.9	31.5	47.4	25.6	38.5	18	38.9	58.4	24.8	37.3	18.0	27.1	
53.1	79.8	28.3	42.5	23.0	34.6	19	36.3	54.5	23.2	34.9	16.8	25.3	
47.9	72.0	25.5	38.4	20.8	31.2	20	34.0	51.1	21.8	32.8	15.8	23.7	
39.6	59.5					22	30.3	45.5	19.5	29.3	14.0	21.1	
33.3	50.0					24	27.2	41.0	17.6	26.5	12.6	19.0	
28.3	42.6					26	24.8	37.3	16.1	24.2	11.5	17.3	
						28	22.8	34.2	14.8	22.3	10.6	15.9	
						30	21.1	31.6	13.7	20.6	9.79	14.7	
						32	19.6	29.4	12.8	19.2	9.11	13.7	
						34	18.3	27.5	12.0	18.0	8.52	12.8	
						36	17.2	25.8	11.3	17.0	8.00	12.0	
						38	16.2	24.4	10.6	16.0	7.55	11.3	
						40	15.3	23.1	10.1	15.2	7.14	10.7	
						42	14.6	21.9	9.58	14.4	6.78	10.2	
						44	13.9	20.8	9.12	13.7	6.45	9.69	
						46	13.2	19.9	8.71	13.1	6.15	9.25	
						48	12.6	19.0	8.33	12.5	5.88	8.84	
						50	12.1	18.2	7.98	12.0	5.64	8.47	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
276	414	240	360	205	308	5.06	15.5	3.90	12.2	3.81	11.3		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	7.08		6.16		5.26			
212	319	185	277	158	237	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	82.7	18.3	75.3	9.77	61.9	7.97		
50.5	75.8	53.8	80.7	48.7	73.0	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.61		1.26		1.23			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
27.7	41.6	18.5	27.7	15.1	22.7	2.12		2.77		2.79			

^f Shape exceeds compact limit for flexure with $F_y = 65 \text{ ksi}$.


Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes													
W8x						Shape	W8x						
15		13		10 ^c		lb/ft	15		13		10 ^f		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
173	260	149	225	107	162	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	44.1	66.3	37.0	55.6	27.4	41.2
90.9	137	74.7	112	57.4	86.3		6	34.1	51.2	27.6	41.4	20.8	31.2
72.1	108	58.1	87.4	44.6	67.0		7	31.0	46.6	24.8	37.2	18.4	27.7
55.6	83.5	44.5	66.9	34.1	51.3		8	28.0	42.0	21.7	32.6	15.1	22.7
43.9	66.0	35.2	52.9	27.0	40.5		9	24.1	36.2	18.1	27.2	12.5	18.7
35.6	53.5	28.5	42.8	21.9	32.8		10	20.7	31.2	15.5	23.3	10.5	15.8
29.4	44.2	23.5	35.4	18.1	27.1		11	18.2	27.3	13.5	20.3	9.11	13.7
24.7	37.1	19.8	29.7	15.2	22.8		12	16.2	24.3	12.0	18.0	8.00	12.0
21.0	31.6	16.9	25.3	12.9	19.4		13	14.6	21.9	10.7	16.1	7.12	10.7
18.1	27.3	14.5	21.8	11.1	16.8		14	13.3	20.0	9.75	14.6	6.41	9.64
							15	12.2	18.3	8.92	13.4	5.83	8.76
							16	11.3	16.9	8.23	12.4	5.35	8.03
							17	10.5	15.7	7.63	11.5	4.93	7.42
							18	9.79	14.7	7.12	10.7	4.58	6.89
							19	9.19	13.8	6.67	10.0	4.28	6.43
							20	8.67	13.0	6.28	9.44	4.01	6.03
							22	7.78	11.7	5.63	8.46	3.57	5.36
							24	7.06	10.6	5.10	7.66	3.22	4.83
							26	6.47	9.72	4.66	7.00	2.93	4.40
							28	5.97	8.97	4.29	6.45	2.69	4.04
							30	5.54	8.33	3.98	5.99	2.49	3.74
						32	5.17	7.78	3.72	5.58	2.31	3.48	
						34	4.85	7.29	3.48	5.23	2.16	3.25	
						36	4.57	6.87	3.28	4.92	2.03	3.06	
						38	4.32	6.49	3.09	4.65	1.92	2.88	
						40	4.09	6.15	2.93	4.41	1.81	2.73	
						42	3.89	5.85	2.79	4.19	1.72	2.59	
						44	3.71	5.57	2.65	3.99	1.64	2.46	
						46	3.54	5.32	2.53	3.81	1.56	2.35	
						48	3.39	5.10	2.42	3.64	1.49	2.25	
						50	3.25	4.89	2.32	3.49	1.43	2.15	
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
173	260	149	225	115	173	L_p	L_r	L_p	L_r	L_p	L_r		
						2.71	8.38	2.61	7.82	3.17	7.28		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	4.44		3.84		2.96			
133	200	115	173	88.8	133	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	48.0	3.41	39.6	2.73	30.8	2.09		
51.7	77.5	47.8	71.7	34.9	52.3	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						0.876		0.843		0.841			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
8.66	13.0	6.97	10.5	5.02	7.55	3.76		3.81		3.83			


^c Shape is slender for compression with $F_y = 65$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 65$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W6x						Shape	W6x						
25		20		15		lb/ft	25		20 ^f		15 ^f		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
286	429	228	343	172	259	0	61.3	92.1	48.3	72.7	31.6	47.5	
231	347	184	276	136	205	6	59.2	88.9	46.5	69.8	31.6	47.5	
214	321	170	255	125	188	7	57.5	86.4	44.8	67.4	31.5	47.3	
196	294	155	233	114	171	8	55.8	83.9	43.2	65.0	30.1	45.2	
177	266	140	210	102	153	9	54.2	81.4	41.6	62.5	28.6	43.0	
158	237	124	187	89.9	135	10	52.5	78.9	40.0	60.1	27.2	40.9	
139	210	109	164	78.4	118	11	50.8	76.4	38.4	57.7	25.8	38.8	
122	183	95.1	143	67.5	101	12	49.2	73.9	36.8	55.2	24.4	36.6	
105	157	81.6	123	57.5	86.5	13	47.5	71.4	35.1	52.8	23.0	34.5	
90.3	136	70.3	106	49.6	74.6	14	45.8	68.9	33.5	50.4	21.2	31.9	
78.7	118	61.3	92.1	43.2	64.9	15	44.2	66.4	31.9	48.0	19.3	29.0	
69.1	104	53.9	80.9	38.0	57.1	16	42.5	63.9	30.2	45.4	17.6	26.5	
61.2	92.1	47.7	71.7	33.6	50.6	17	40.9	61.4	28.0	42.1	16.3	24.5	
54.6	82.1	42.5	64.0	30.0	45.1	18	39.2	58.9	26.1	39.3	15.1	22.7	
49.0	73.7	38.2	57.4	26.9	40.5	19	37.4	56.2	24.5	36.8	14.1	21.2	
44.3	66.5	34.5	51.8	24.3	36.5	20	35.3	53.0	23.1	34.7	13.2	19.9	
36.6	55.0	28.5	42.8	20.1	30.2	22	31.7	47.6	20.6	31.0	11.7	17.7	
30.7	46.2	23.9	36.0	16.9	25.4	24	28.8	43.3	18.7	28.1	10.6	15.9	
						26	26.4	39.7	17.1	25.7	9.62	14.5	
						28	24.4	36.7	15.8	23.7	8.83	13.3	
						30	22.7	34.1	14.6	22.0	8.17	12.3	
						32	21.2	31.8	13.6	20.5	7.59	11.4	
						34	19.9	29.9	12.8	19.2	7.10	10.7	
						36	18.7	28.1	12.0	18.1	6.67	10.0	
						38	17.7	26.6	11.4	17.1	6.29	9.45	
						40	16.8	25.2	10.8	16.2	5.95	8.94	
						42	15.9	24.0	10.2	15.4	5.64	8.48	
						44	15.2	22.8	9.73	14.6	5.37	8.07	
						46	14.5	21.8	9.30	14.0	5.12	7.70	
						48	13.9	20.9	8.89	13.4	4.90	7.36	
						50	13.3	20.0	8.53	12.8	4.69	7.05	
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
286	429	228	343	172	259	L_p	L_r	L_p	L_r	L_p	L_r		
						4.71	18.8	4.84	15.9	6.91	13.6		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	7.34		5.87		4.43			
220	330	176	264	133	199	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	53.4	17.1	41.4	13.3	29.1	9.32		
53.1	79.6	41.9	62.9	35.8	53.7	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.52		1.50		1.45			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
27.8	41.7	21.6	32.5	13.2	19.8	1.78		1.77		1.77			

^f Shape exceeds compact limit for flexure with $F_y = 65 \text{ ksi}$.
Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A913 material availability before specifying.


 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$	
W6x						Shape	W6x						
16		12		9		lb/ft	16		12		9 ^f		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
184	277	138	208	104	157	0	37.9	57.0	26.9	40.5	19.6	29.4	
109	164	77.0	116	57.2	85.9	6	32.6	48.9	21.8	32.8	15.7	23.6	
90	135	62.3	93.7	46.0	69.1	7	30.8	46.3	20.2	30.3	14.3	21.5	
72.3	109	48.8	73.3	35.8	53.8	8	29.0	43.6	18.5	27.9	12.9	19.4	
57.1	85.8	38.6	57.9	28.3	42.5	9	27.2	40.9	16.9	25.4	10.9	16.4	
46.3	69.5	31.2	46.9	22.9	34.4	10	25.4	38.2	14.8	22.3	9.36	14.1	
38.2	57.5	25.8	38.8	18.9	28.5	11	23.6	35.5	13.1	19.7	8.17	12.3	
32.1	48.3	21.7	32.6	15.9	23.9	12	21.4	32.2	11.7	17.6	7.25	10.9	
27.4	41.1	18.5	27.8	13.6	20.4	13	19.5	29.4	10.6	15.9	6.52	9.80	
23.6	35.5	15.9	23.9	11.7	17.6	14	17.9	27.0	9.70	14.6	5.92	8.90	
20.6	30.9	13.9	20.9	10.2	15.3	15	16.6	24.9	8.94	13.4	5.42	8.15	
18.1	27.2					16	15.4	23.2	8.29	12.5	5.01	7.52	
						17	14.5	21.7	7.73	11.6	4.65	6.98	
						18	13.6	20.4	7.24	10.9	4.34	6.52	
						19	12.8	19.2	6.82	10.2	4.07	6.12	
						20	12.1	18.2	6.44	9.68	3.83	5.76	
						22	10.9	16.5	5.80	8.71	3.43	5.16	
						24	9.99	15.0	5.28	7.93	3.11	4.68	
						26	9.19	13.8	4.84	7.28	2.85	4.28	
						28	8.50	12.8	4.48	6.73	2.63	3.95	
						30	7.92	11.9	4.16	6.26	2.44	3.66	
						32	7.41	11.1	3.89	5.85	2.27	3.42	
						34	6.96	10.5	3.65	5.49	2.13	3.20	
						36	6.57	9.87	3.44	5.17	2.00	3.01	
						38	6.21	9.34	3.25	4.89	1.89	2.85	
						40	5.90	8.86	3.09	4.64	1.79	2.70	
						42	5.61	8.43	2.94	4.41	1.71	2.56	
						44	5.35	8.04	2.80	4.21	1.62	2.44	
						46	5.12	7.69	2.67	4.02	1.55	2.33	
						48	4.90	7.36	2.56	3.85	1.48	2.23	
						50	4.70	7.07	2.46	3.69	1.42	2.14	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
184	277	138	208	104	157	3.00	11.2	2.84	9.20	3.27	8.18		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	4.74		3.55		2.68			
142	213	107	160	80.4	121	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	32.1	4.43	22.1	2.99	16.4	2.20		
42.5	63.7	36.1	54.1	26.1	39.1	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						0.967		0.918		0.905			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
11.0	16.5	7.52	11.3	5.31	7.99	2.69		2.71		2.73			

^f Shape exceeds compact limit for flexure with $F_y = 65 \text{ ksi}$.
Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A913 material availability before specifying.


 Table 6-A (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes													
						$F_y = 65 \text{ ksi}$ $F_u = 80 \text{ ksi}$							
W6x		W5x				Shape	W6x		W5x				
8.5		19		16		lb/ft	8.5 ^f		19		16		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
98.1	147	216	325	183	276	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	17.5	26.3	37.6	56.6	31.2	46.9
52.7	79.1	160	241	134	202		6	14.2	21.4	35.5	53.4	29.1	43.8
42.1	63.2	144	216	120	181		7	12.9	19.4	34.5	51.8	28.1	42.3
32.6	48.9	127	191	106	159		8	11.5	17.3	33.5	50.3	27.1	40.7
25.7	38.7	110	165	91.2	137		9	9.63	14.5	32.4	48.7	26.1	39.2
20.8	31.3	93.9	141	77.4	116		10	8.23	12.4	31.4	47.2	25.1	37.7
17.2	25.9	78.6	118	64.5	97.0		11	7.18	10.8	30.3	45.6	24.1	36.2
14.5	21.7	66.0	99.2	54.2	81.5		12	6.36	9.56	29.3	44.1	23.1	34.7
12.3	18.5	56.3	84.6	46.2	69.4		13	5.71	8.58	28.3	42.5	22.1	33.2
10.6	16.0	48.5	72.9	39.8	59.9		14	5.18	7.78	27.2	41.0	21.1	31.7
		42.3	63.5	34.7	52.1		15	4.74	7.12	26.2	39.4	20.1	30.1
		37.1	55.8	30.5	45.8		16	4.37	6.56	25.2	37.8	18.9	28.4
		32.9	49.5	27.0	40.6		17	4.05	6.09	24.1	36.3	17.7	26.5
		29.3	44.1	24.1	36.2		18	3.78	5.68	23.1	34.7	16.6	24.9
		26.3	39.6	21.6	32.5		19	3.54	5.32	21.8	32.7	15.6	23.5
		23.8	35.7	19.5	29.3		20	3.33	5.01	20.6	31.0	14.8	22.2
							22	2.98	4.49	18.6	28.0	13.3	20.0
							24	2.70	4.06	17.0	25.6	12.1	18.3
							26	2.47	3.71	15.6	23.5	11.2	16.8
							28	2.28	3.42	14.5	21.8	10.3	15.5
							30	2.11	3.17	13.5	20.3	9.61	14.4
							32	1.97	2.96	12.6	19.0	8.99	13.5
							34	1.85	2.77	11.9	17.8	8.44	12.7
							36	1.74	2.61	11.2	16.8	7.96	12.0
							38	1.64	2.46	10.6	15.9	7.53	11.3
							40	1.55	2.34	10.0	15.1	7.14	10.7
							42	1.48	2.22	9.56	14.4	6.80	10.2
							44	1.41	2.11	9.12	13.7	6.48	9.74
							46	1.34	2.02	8.72	13.1	6.19	9.31
							48	1.28	1.93	8.35	12.5	5.93	8.92
							50	1.23	1.85	8.01	12.0	5.69	8.55
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
98.1	147	216	325	183	276	3.59	7.99	3.97	18.0	3.90	15.6		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	2.52		5.56		4.71			
75.6	113	167	250	141	212	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	14.9	1.99	26.3	9.13	21.4	7.51		
25.8	38.7	36.2	54.2	31.3	46.9	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						0.890		1.28		1.26			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
4.62	6.95	17.9	27.0	14.9	22.3	2.73		1.70		1.69			

^f Shape exceeds compact limit for flexure with $F_y = 65 \text{ ksi}$.

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.


 W4		Table 6-A (continued)		Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces		$F_y = 65$ ksi $F_u = 80$ ksi	
		W4x		Shape	W4x		
13		lb/ft		13			
P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$		
Available Compressive Strength, kips				Available Flexural Strength, kip-ft			
ASD	LRFD			ASD	LRFD		
149	224	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	20.4	30.6		
91.1	137		6	18.4	27.7		
76.2	115		7	17.8	26.7		
62.1	93.3		8	17.1	25.7		
49.4	74.2		9	16.4	24.7		
40	60.1		10	15.7	23.7		
33	49.7		11	15.1	22.6		
27.8	41.7		12	14.4	21.6		
23.7	35.6		13	13.7	20.6		
20.4	30.7		14	13.1	19.6		
17.8	26.7		15	12.4	18.6		
15.6	23.5		16	11.6	17.4		
			17	10.8	16.3		
			18	10.2	15.3		
			19	9.64	14.5		
			20	9.14	13.7		
			22	8.28	12.4		
			24	7.57	11.4		
			26	6.97	10.5		
			28	6.46	9.72		
			30	6.03	9.06		
			32	5.64	8.48		
			34	5.31	7.98		
			36	5.01	7.53		
			38	4.74	7.13		
			40	4.50	6.77		
			42	4.29	6.44		
			44	4.09	6.15		
			46	3.91	5.88		
		48	3.75	5.63			
		50	3.59	5.40			
Available Strength in Tensile Yielding, kips		Properties		Limiting Unbraced Lengths, ft			
P_n/Ω_t	$\phi_t P_n$			L_p	L_r		
149	224			3.10	15.0		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips				Area, in. ²			
P_n/Ω_t	$\phi_t P_n$			3.83			
115	172			Moment of Inertia, in. ⁴			
Available Strength in Shear, kips				I_x	I_y		
V_n/Ω_v	$\phi_v V_n$			11.3	3.86		
30.3	45.4			r_y , in.			
Available Strength in Flexure about Y-Y Axis, kip-ft				1.00			
M_{ny}/Ω_b	$\phi_b M_{ny}$			r_x/r_y			
9.47	14.2			1.72			

Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A913 material availability before specifying.

 Table 6-B Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W44x						Shape	W44x					
335 ^c		290 ^c		262 ^c		lb/ft	335		290		262 ^v	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
3870	5820	3210	4830	2830	4260	0	5660	8510	4930	7400	4440	6670
3730	5610	3100	4650	2730	4100	6	5660	8510	4930	7400	4440	6670
3680	5530	3050	4590	2690	4040	7	5660	8510	4930	7400	4440	6670
3620	5440	3010	4520	2650	3980	8	5660	8510	4930	7400	4440	6670
3560	5350	2950	4440	2600	3900	9	5660	8510	4930	7400	4440	6670
3490	5250	2890	4350	2550	3830	10	5660	8510	4930	7400	4440	6670
3410	5130	2830	4260	2490	3740	11	5600	8410	4870	7320	4380	6580
3330	5010	2760	4150	2430	3650	12	5490	8250	4770	7170	4290	6440
3250	4880	2690	4050	2370	3560	13	5380	8090	4670	7030	4190	6300
3160	4750	2620	3930	2300	3460	14	5280	7930	4580	6880	4100	6160
3070	4610	2540	3820	2230	3350	15	5170	7770	4480	6730	4010	6030
2970	4460	2460	3700	2160	3240	16	5060	7610	4380	6590	3920	5890
2870	4310	2380	3570	2080	3130	17	4960	7450	4290	6440	3830	5750
2770	4160	2290	3440	2010	3020	18	4850	7290	4190	6290	3730	5610
2660	4000	2200	3310	1930	2900	19	4740	7130	4090	6150	3640	5470
2540	3820	2120	3180	1850	2780	20	4640	6970	3990	6000	3550	5340
2300	3450	1940	2910	1700	2550	22	4420	6650	3800	5710	3370	5060
2060	3090	1760	2650	1540	2310	24	4210	6320	3610	5420	3180	4780
1820	2740	1580	2370	1380	2080	26	3990	6000	3410	5130	3000	4510
1600	2400	1380	2080	1230	1850	28	3780	5680	3220	4830	2820	4230
1390	2090	1210	1810	1080	1620	30	3570	5360	3010	4530	2580	3870
1220	1840	1060	1590	948	1420	32	3300	4960	2710	4070	2310	3480
1080	1630	939	1410	839	1260	34	3000	4510	2460	3700	2090	3150
966	1450	838	1260	749	1130	36	2750	4140	2250	3380	1910	2870
867	1300	752	1130	672	1010	38	2540	3820	2070	3110	1750	2630
783	1180	679	1020	606	911	40	2360	3550	1920	2880	1620	2430
710	1070	616	925	550	827	42	2200	3310	1780	2680	1500	2260
647	972	561	843	501	753	44	2060	3100	1660	2500	1400	2100
592	890	513	771	459	689	46	1940	2910	1560	2350	1310	1970
544	817	471	708	421	633	48	1830	2750	1470	2210	1230	1850
501	753	434	653	388	583	50	1730	2600	1390	2090	1160	1740

Properties					
Available Strength in Tensile Yielding, kips					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
4130	6210	3580	5380	3240	4860
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
3320	4990	2880	4320	2610	3910
Available Strength in Shear, kips					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
1270	1900	1060	1580	855	1280
Available Strength in Flexure about Y-Y Axis, kip-ft					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
824	1240	716	1080	636	956
Limiting Unbraced Lengths, ft					
L_p	L_r	L_p	L_r	L_p	L_r
10.4	31.1	10.4	29.9	10.4	29.1
Area, in. ²					
98.5		85.4		77.2	
Moment of Inertia, in. ⁴					
I_x	I_y	I_x	I_y	I_x	I_y
31100	1200	27000	1040	24100	923
r_y , in.					
3.49		3.49		3.47	
r_x/r_y					
5.10		5.10		5.10	

^c Shape is slender for compression with $F_y = 70$ ksi.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Note: Confirm ASTM A913 material availability before specifying.



W44-W40

Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70$ ksi
 $F_u = 90$ ksi

W-Shapes

W44 _x		W40 _x				Shape	W44 _x		W40 _x			
230 ^c		655 ^h		593 ^h		lb/ft	230 ^v		655 ^h		593 ^h	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2410	3630	8090	12200	7290	11000	0	3840	5780	10800	16200	9640	14500
2320	3490	7810	11700	7030	10600	6	3840	5780	10800	16200	9640	14500
2290	3440	7710	11600	6940	10400	7	3840	5780	10800	16200	9640	14500
2250	3380	7590	11400	6830	10300	8	3840	5780	10800	16200	9640	14500
2210	3320	7470	11200	6710	10100	9	3840	5780	10800	16200	9640	14500
2160	3250	7330	11000	6590	9900	10	3840	5780	10800	16200	9640	14500
2110	3180	7180	10800	6450	9690	11	3780	5680	10800	16200	9640	14500
2060	3100	7020	10500	6300	9460	12	3700	5560	10700	16100	9570	14400
2010	3020	6840	10300	6140	9230	13	3620	5440	10600	15900	9460	14200
1950	2930	6660	10000	5970	8970	14	3540	5310	10500	15800	9350	14100
1890	2840	6480	9730	5800	8710	15	3450	5190	10400	15600	9240	13900
1830	2750	6280	9440	5620	8440	16	3370	5070	10300	15400	9130	13700
1760	2650	6080	9140	5430	8160	17	3290	4950	10100	15300	9020	13600
1700	2550	5870	8820	5240	7880	18	3210	4820	10000	15100	8910	13400
1630	2450	5660	8510	5050	7580	19	3130	4700	9930	14900	8810	13200
1560	2350	5450	8190	4850	7290	20	3050	4580	9820	14800	8700	13100
1430	2150	5010	7530	4450	6690	22	2880	4330	9590	14400	8480	12700
1290	1940	4580	6880	4050	6090	24	2720	4090	9370	14100	8260	12400
1160	1750	4140	6230	3660	5500	26	2560	3840	9150	13800	8040	12100
1030	1550	3720	5600	3280	4920	28	2390	3600	8930	13400	7820	11800
917	1380	3320	4990	2910	4370	30	2130	3200	8700	13100	7610	11400
813	1220	2930	4410	2560	3850	32	1910	2870	8480	12700	7390	11100
720	1080	2600	3900	2270	3410	34	1720	2590	8260	12400	7170	10800
642	966	2320	3480	2020	3040	36	1570	2350	8040	12100	6950	10400
577	867	2080	3120	1820	2730	38	1430	2150	7820	11700	6730	10100
520	782	1880	2820	1640	2460	40	1320	1980	7590	11400	6510	9790
472	709	1700	2560	1490	2230	42	1220	1830	7370	11100	6300	9460
430	646	1550	2330	1350	2040	44	1130	1700	7150	10700	6080	9140
393	591	1420	2130	1240	1860	46	1060	1590	6930	10400	5860	8810
361	543	1300	1960	1140	1710	48	991	1490	6700	10100	5620	8440
333	501	1200	1800	1050	1580	50	932	1400	6480	9740	5360	8060
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
2840	4270	8090	12200	7290	11000	10.2	28.2	11.5	51.3	11.3	47.3	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	67.8		193		174		
2290	3430	6510	9770	5870	8810	Moment of Inertia, in. ⁴						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y	
723	1090	2400	3610	2160	3230	20800	796	56500	2870	50400	2520	
Available Strength in Shear, kips						r_y , in.						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.43		3.86		3.80		
723	1090	2400	3610	2160	3230	r_x/r_y						
Available Strength in Flexure about Y-Y Axis, kip-ft						5.10		4.43		4.47		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$							
548	824	1890	2850	1680	2530							

^c Shape is slender for compression with $F_y = 70$ ksi.
^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Note: Confirm ASTM A913 material availability before specifying.



Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70 \text{ ksi}$
 $F_u = 90 \text{ ksi}$

W-Shapes

W40 \times						Shape	W40 \times					
503 ^h		431 ^h		397 ^h		lb/ft	503 ^h		431 ^h		397 ^h	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
6200	9320	5320	8000	4900	7370	0	8100	12200	6850	10300	6290	9450
5970	8970	5120	7690	4710	7080	6	8100	12200	6850	10300	6290	9450
5890	8850	5040	7580	4640	6980	7	8100	12200	6850	10300	6290	9450
5790	8710	4960	7450	4570	6860	8	8100	12200	6850	10300	6290	9450
5690	8550	4870	7320	4480	6740	9	8100	12200	6850	10300	6290	9450
5580	8380	4770	7160	4390	6590	10	8100	12200	6850	10300	6290	9450
5450	8200	4660	7000	4290	6440	11	8100	12200	6840	10300	6270	9430
5320	8000	4540	6820	4180	6280	12	8010	12000	6730	10100	6180	9280
5180	7790	4420	6640	4060	6110	13	7900	11900	6630	9970	6080	9140
5030	7570	4290	6440	3940	5930	14	7790	11700	6530	9820	5980	8990
4880	7340	4150	6240	3820	5740	15	7690	11600	6430	9660	5880	8840
4720	7100	4010	6030	3690	5540	16	7580	11400	6330	9510	5780	8690
4560	6850	3870	5810	3560	5340	17	7470	11200	6230	9360	5690	8540
4390	6600	3720	5590	3420	5140	18	7360	11100	6120	9200	5590	8400
4220	6350	3570	5370	3280	4930	19	7260	10900	6020	9050	5490	8250
4050	6090	3420	5140	3140	4720	20	7150	10700	5920	8900	5390	8100
3700	5570	3120	4680	2860	4300	22	6940	10400	5720	8590	5190	7810
3360	5050	2810	4230	2580	3880	24	6720	10100	5510	8290	5000	7510
3020	4540	2520	3790	2310	3470	26	6510	9780	5310	7980	4800	7220
2690	4050	2240	3360	2050	3080	28	6290	9460	5110	7670	4610	6920
2380	3570	1960	2950	1800	2700	30	6080	9140	4900	7370	4410	6630
2090	3140	1720	2590	1580	2380	32	5860	8810	4700	7060	4210	6330
1850	2780	1530	2300	1400	2100	34	5650	8490	4500	6760	4020	6040
1650	2480	1360	2050	1250	1880	36	5440	8170	4290	6450	3820	5740
1480	2230	1220	1840	1120	1680	38	5220	7850	4070	6110	3550	5340
1340	2010	1100	1660	1010	1520	40	5010	7530	3810	5720	3320	4990
1210	1820	1000	1500	917	1380	42	4770	7170	3580	5370	3110	4680
1100	1660	912	1370	836	1260	44	4510	6780	3370	5070	2930	4410
1010	1520	835	1250	765	1150	46	4280	6430	3190	4800	2770	4170
928	1390	767	1150	702	1060	48	4070	6110	3030	4550	2630	3950
855	1290	706	1060	647	973	50	3880	5830	2880	4330	2500	3760
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
6200	9320	5320	8000	4900	7370	11.1	41.5	10.9	37.6	10.9	36.1	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	148		127		117		
5000	7490	4290	6430	3950	5920	Moment of Inertia, in. ⁴						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y	
1820	2720	1550	2320	1400	2100	41600	2040	34800	1690	32000	1540	
Available Strength in Shear, kips						r_y , in.						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.72		3.65		3.64		
1820	2720	1550	2320	1400	2100	r_x/r_y						
Available Strength in Flexure about Y-Y Axis, kip-ft						4.52		4.55		4.56		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$							
1380	2070	1150	1720	1050	1580							

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.



Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70$ ksi
 $F_u = 90$ ksi

W-Shapes

W40 ^x						Shape	W40 ^x					
372 ^h		362 ^{h,c}		324 ^c		lb/ft	372 ^h		362 ^h		324	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
4610	6930	4440	6670	3880	5830	0	5870	8820	5730	8610	5100	7670
4430	6650	4260	6410	3740	5620	6	5870	8820	5730	8610	5100	7670
4360	6550	4200	6320	3690	5550	7	5870	8820	5730	8610	5100	7670
4290	6440	4130	6210	3630	5460	8	5870	8820	5730	8610	5100	7670
4200	6320	4050	6090	3570	5370	9	5870	8820	5730	8610	5100	7670
4120	6180	3970	5960	3510	5270	10	5870	8820	5730	8610	5100	7670
4020	6040	3870	5820	3430	5160	11	5840	8780	5700	8570	5070	7620
3910	5880	3770	5670	3350	5040	12	5750	8640	5610	8430	4980	7490
3800	5720	3670	5510	3270	4920	13	5650	8490	5510	8290	4890	7350
3690	5550	3560	5340	3180	4780	14	5560	8350	5420	8140	4800	7220
3570	5370	3440	5170	3080	4630	15	5460	8200	5320	8000	4710	7080
3450	5180	3320	4990	2980	4470	16	5360	8060	5230	7860	4620	6950
3320	4990	3200	4810	2860	4310	17	5270	7920	5130	7710	4530	6810
3190	4790	3070	4620	2750	4140	18	5170	7770	5040	7570	4440	6680
3060	4600	2950	4430	2640	3960	19	5070	7630	4940	7420	4350	6540
2930	4400	2820	4240	2520	3790	20	4980	7480	4840	7280	4260	6410
2660	4000	2560	3850	2290	3440	22	4780	7190	4650	6990	4080	6140
2390	3600	2310	3470	2060	3100	24	4590	6900	4460	6710	3900	5860
2140	3210	2060	3100	1840	2760	26	4400	6610	4270	6420	3720	5590
1890	2840	1820	2740	1620	2440	28	4210	6320	4080	6130	3540	5320
1650	2490	1590	2390	1420	2130	30	4010	6030	3890	5850	3360	5050
1450	2180	1400	2100	1250	1870	32	3820	5740	3700	5560	3180	4780
1290	1930	1240	1860	1100	1660	34	3630	5450	3510	5270	2940	4410
1150	1730	1110	1660	984	1480	36	3380	5080	3250	4880	2700	4060
1030	1550	993	1490	883	1330	38	3140	4710	3020	4530	2500	3760
930	1400	896	1350	797	1200	40	2930	4400	2810	4230	2330	3500
844	1270	813	1220	723	1090	42	2740	4120	2640	3960	2180	3270
769	1160	741	1110	659	990	44	2580	3880	2480	3730	2050	3070
703	1060	678	1020	603	906	46	2440	3660	2340	3520	1930	2900
646	971	622	935	553	832	48	2310	3470	2220	3330	1820	2740
595	895	574	862	510	766	50	2190	3300	2110	3170	1730	2600
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
4610	6930	4440	6680	3990	6000	10.7	34.6	10.7	34.4	10.7	32.6	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	110		106		95.3		
3710	5570	3580	5370	3220	4820	Moment of Inertia, in. ⁴						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y	
1320	1980	1270	1910	1130	1690	29600	1420	28900	1380	25600	1220	
Available Strength in Shear, kips						r_y , in.						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.60		3.60		3.58		
1320	1980	1270	1910	1130	1690	r_x/r_y						
Available Strength in Flexure about Y-Y Axis, kip-ft						4.58		4.58		4.58		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$							
968	1450	943	1420	835	1250							

^c Shape is slender for compression with $F_y = 70$ ksi.
^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.



Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70$ ksi
 $F_u = 90$ ksi

W-Shapes

W40 \times						Shape	W40 \times					
297 ^c		277 ^c		249 ^c		lb/ft	297		277		249 ^v	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
3480	5240	3170	4770	2790	4200	0	4650	6980	4370	6560	3910	5880
3360	5050	3060	4600	2690	4050	6	4650	6980	4370	6560	3910	5880
3310	4980	3020	4540	2660	3990	7	4650	6980	4370	6560	3910	5880
3260	4900	2970	4470	2620	3930	8	4650	6980	4370	6560	3910	5880
3210	4820	2920	4390	2570	3860	9	4650	6980	4370	6560	3910	5880
3140	4730	2870	4310	2520	3790	10	4650	6980	4370	6560	3910	5880
3080	4620	2810	4220	2470	3710	11	4610	6930	4340	6520	3880	5830
3010	4520	2740	4120	2410	3620	12	4520	6800	4260	6400	3810	5720
2930	4400	2670	4020	2350	3530	13	4440	6670	4180	6280	3730	5600
2850	4280	2600	3910	2280	3430	14	4350	6540	4090	6150	3650	5490
2770	4160	2530	3800	2220	3330	15	4270	6410	4010	6030	3580	5380
2680	4030	2450	3680	2150	3220	16	4180	6280	3930	5910	3500	5260
2590	3890	2370	3560	2070	3120	17	4090	6150	3850	5780	3420	5150
2500	3750	2290	3440	2000	3010	18	4010	6020	3770	5660	3350	5030
2390	3600	2200	3310	1930	2890	19	3920	5890	3680	5540	3270	4920
2290	3440	2120	3180	1850	2780	20	3840	5770	3600	5410	3200	4800
2070	3110	1940	2920	1700	2550	22	3660	5510	3440	5170	3040	4570
1860	2790	1760	2650	1540	2320	24	3490	5250	3270	4920	2890	4350
1650	2480	1570	2360	1390	2090	26	3320	4990	3110	4670	2740	4120
1460	2190	1390	2080	1230	1850	28	3150	4730	2940	4430	2590	3890
1270	1910	1210	1820	1070	1610	30	2980	4480	2780	4180	2430	3660
1120	1680	1060	1600	944	1420	32	2770	4160	2570	3860	2190	3300
988	1480	943	1420	836	1260	34	2530	3800	2340	3520	1990	2990
881	1320	841	1260	746	1120	36	2320	3490	2150	3220	1820	2740
791	1190	755	1130	670	1010	38	2150	3220	1980	2970	1680	2520
714	1070	681	1020	604	908	40	1990	3000	1840	2760	1550	2330
647	973	618	929	548	824	42	1860	2800	1710	2570	1440	2170
590	887	563	846	499	751	44	1740	2620	1600	2410	1350	2030
540	811	515	774	457	687	46	1640	2470	1510	2260	1270	1900
496	745	473	711	420	631	48	1550	2330	1420	2140	1190	1790
457	687	436	655	387	581	50	1470	2210	1340	2020	1130	1690
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
3660	5500	3420	5130	3080	4630	10.6	31.4	10.7	31.1	10.6	30.1	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	87.3		81.5		73.5		
2950	4420	2750	4130	2480	3720	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	23200	1090	21900	1040	19600	926	
1040	1550	923	1380	743	1120	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						3.54		3.58		3.55		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
751	1130	713	1070	636	956	4.60		4.58		4.59		

^c Shape is slender for compression with $F_y = 70$ ksi.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Note: Confirm ASTM A913 material availability before specifying.



Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70$ ksi
 $F_u = 90$ ksi


W-Shapes

W40 ^x						Shape	W40 ^x					
215 ^c		199 ^f		392 ^h		lb/ft	215 ^v		199 ^v		392 ^h	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2340	3510	2140	3220	4860	7310	0	3370	5060	3040	4560	5970	8980
2250	3380	2060	3090	4510	6770	6	3370	5060	3040	4560	5970	8980
2220	3340	2030	3050	4380	6590	7	3370	5060	3040	4560	5970	8980
2190	3290	2000	3000	4250	6380	8	3370	5060	3040	4560	5960	8960
2150	3230	1960	2950	4100	6160	9	3370	5060	3040	4560	5840	8780
2110	3160	1920	2890	3940	5910	10	3370	5060	3040	4560	5730	8610
2060	3100	1880	2820	3760	5660	11	3340	5020	2990	4490	5610	8440
2010	3020	1830	2750	3590	5390	12	3270	4910	2930	4400	5500	8260
1960	2940	1780	2680	3400	5110	13	3200	4810	2860	4300	5380	8090
1900	2860	1730	2600	3210	4830	14	3130	4710	2800	4200	5270	7910
1850	2780	1680	2520	3020	4540	15	3060	4610	2730	4110	5150	7740
1790	2690	1620	2440	2830	4250	16	3000	4500	2670	4010	5030	7570
1730	2600	1560	2350	2640	3970	17	2930	4400	2600	3910	4920	7390
1670	2510	1510	2260	2450	3680	18	2860	4300	2540	3820	4800	7220
1600	2410	1450	2170	2270	3410	19	2790	4200	2480	3720	4690	7050
1540	2320	1390	2080	2090	3140	20	2720	4090	2410	3620	4570	6870
1410	2120	1270	1900	1740	2620	22	2590	3890	2280	3430	4340	6520
1280	1930	1150	1720	1470	2200	24	2450	3680	2150	3240	4110	6180
1160	1740	1030	1550	1250	1880	26	2310	3480	2030	3040	3880	5830
1040	1560	916	1380	1080	1620	28	2180	3270	1900	2850	3650	5480
918	1380	812	1220	938	1410	30	1990	3000	1690	2540	3380	5090
811	1220	713	1070	824	1240	32	1790	2690	1510	2270	3120	4690
719	1080	632	950	730	1100	34	1620	2430	1370	2050	2900	4360
641	963	564	847	651	979	36	1470	2220	1240	1870	2710	4070
575	865	506	760	584	878	38	1350	2030	1140	1710	2540	3810
519	780	457	686	527	793	40	1250	1880	1050	1570	2390	3590
471	708	414	622	478	719	42	1160	1740	969	1460	2260	3390
429	645	377	567	436	655	44	1080	1620	901	1350	2140	3220
393	590	345	519			46	1010	1520	841	1260	2040	3060
361	542	317	477			48	947	1420	788	1190	1940	2920
332	499	292	439			50	892	1340	742	1110	1850	2790


Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending

Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
2660	4000	2460	3700	4860	7310	10.6	29.1	10.3	28.2	7.88	29.1
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	63.5		58.8		116	
2140	3210	1980	2980	3920	5870	Moment of Inertia, in. ⁴					
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	16700	803	14900	695	29900	803
627	943	622	935	1650	2480	r_y , in.					
Available Strength in Flexure about Y-Y Axis, kip-ft						3.54		3.45		2.64	
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y					
545	819	479	719	727	1090	4.58		4.64		6.10	


^c Shape is slender for compression with $F_y = 70$ ksi.
^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 <p style="text-align: center;">Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces</p> <p style="text-align: right;">$F_y = 70$ ksi $F_u = 90$ ksi</p> <p style="text-align: center;">W-Shapes</p>												
W40 ^x						Shape	W40 ^x					
331 ^h		327 ^h		294 ^c		lb/ft	331 ^h		327 ^h		294	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
4100	6160	4020	6040	3550	5340	0	5000	7510	4930	7400	4440	6670
3780	5680	3710	5580	3310	4980	6	5000	7510	4930	7400	4440	6670
3670	5520	3610	5420	3230	4850	7	5000	7510	4930	7400	4440	6670
3550	5340	3490	5240	3130	4700	8	4960	7450	4890	7350	4400	6610
3420	5140	3360	5050	3010	4520	9	4850	7290	4780	7190	4290	6450
3280	4920	3220	4840	2880	4330	10	4740	7120	4680	7030	4190	6290
3130	4700	3070	4620	2750	4130	11	4630	6960	4570	6870	4080	6130
2970	4460	2920	4390	2610	3920	12	4520	6790	4460	6700	3980	5970
2810	4220	2760	4160	2460	3700	13	4410	6620	4350	6540	3870	5820
2640	3970	2600	3910	2320	3480	14	4300	6460	4240	6380	3770	5660
2480	3730	2440	3670	2170	3260	15	4190	6290	4130	6210	3660	5500
2310	3480	2280	3430	2020	3040	16	4080	6130	4030	6050	3550	5340
2150	3230	2120	3190	1880	2820	17	3970	5960	3920	5890	3450	5190
1990	2990	1960	2950	1730	2610	18	3860	5800	3810	5730	3340	5030
1830	2750	1810	2720	1590	2400	19	3750	5630	3700	5560	3240	4870
1680	2520	1660	2490	1460	2190	20	3640	5470	3590	5400	3130	4710
1390	2090	1380	2070	1210	1820	22	3420	5130	3380	5070	2920	4400
1170	1760	1160	1740	1020	1530	24	3200	4800	3160	4750	2710	4080
996	1500	986	1480	865	1300	26	2980	4470	2940	4420	2450	3680
859	1290	850	1280	746	1120	28	2690	4050	2660	4000	2210	3320
748	1120	740	1110	650	977	30	2460	3690	2430	3650	2010	3020
658	989	651	978	571	859	32	2260	3400	2230	3360	1850	2770
583	876	576	866	506	761	34	2090	3140	2070	3110	1710	2560
520	781	514	773	451	679	36	1950	2930	1920	2890	1580	2380
466	701	461	694	405	609	38	1820	2740	1800	2710	1480	2220
421	633	416	626	366	550	40	1710	2570	1690	2540	1390	2090
382	574	378	568	332	499	42	1620	2430	1600	2400	1310	1970
						44	1530	2300	1510	2270	1240	1860
						46	1450	2180	1430	2150	1170	1760
						48	1380	2080	1360	2050	1120	1680
						50	1320	1980	1300	1960	1060	1600
Available Strength in Tensile Yielding, kips						Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft						
4100	6160	4020	6040	3610	5430	L_p	L_r	L_p	L_r	L_p	L_r	
						7.67	26.1	7.70	26.1	7.61	24.7	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	97.7		95.9		86.2		
3300	4950	3240	4850	2910	4360	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	24700	644	24500	640	21900	562	
1390	2090	1350	2020	1200	1800	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.57		2.58		2.55		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
592	890	587	882	523	785	6.19		6.20		6.24		

^c Shape is slender for compression with $F_y = 70$ ksi.
^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W40 \times						Shape	W40 \times						
278 ^c		264 ^c		235 ^c		lb/ft	278		264		235		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
3350	5040	3090	4650	2650	3990	0	4160	6250	3950	5930	3530	5300	
3120	4700	2880	4330	2470	3720	6	4160	6250	3950	5930	3530	5300	
3050	4580	2810	4220	2410	3620	7	4160	6250	3950	5930	3530	5300	
2960	4440	2730	4100	2340	3520	8	4110	6180	3900	5860	3490	5250	
2860	4300	2640	3960	2260	3400	9	4010	6020	3800	5710	3400	5110	
2740	4110	2540	3820	2180	3280	10	3910	5870	3700	5570	3310	4970	
2600	3920	2440	3660	2090	3150	11	3810	5720	3610	5420	3220	4830	
2470	3710	2320	3490	2000	3010	12	3700	5570	3510	5270	3120	4700	
2330	3500	2190	3290	1910	2860	13	3600	5420	3410	5120	3030	4560	
2190	3290	2060	3090	1810	2720	14	3500	5270	3310	4980	2940	4420	
2050	3080	1920	2890	1710	2570	15	3400	5110	3210	4830	2850	4280	
1900	2860	1790	2690	1610	2420	16	3300	4960	3110	4680	2760	4150	
1760	2650	1660	2490	1500	2250	17	3200	4810	3020	4530	2670	4010	
1630	2440	1530	2300	1380	2080	18	3100	4660	2920	4390	2580	3870	
1490	2240	1400	2110	1270	1910	19	3000	4510	2820	4240	2490	3740	
1360	2050	1280	1930	1160	1750	20	2900	4350	2720	4090	2390	3600	
1130	1690	1060	1590	961	1450	22	2700	4050	2530	3800	2210	3320	
947	1420	891	1340	808	1210	24	2490	3740	2300	3460	1970	2960	
807	1210	759	1140	688	1030	26	2220	3330	2050	3080	1740	2620	
696	1050	654	984	594	892	28	2000	3000	1840	2760	1560	2350	
606	911	570	857	517	777	30	1810	2730	1670	2510	1410	2120	
533	801	501	753	454	683	32	1660	2500	1530	2300	1290	1940	
472	709	444	667	403	605	34	1530	2300	1410	2120	1180	1780	
421	633	396	595	359	540	36	1420	2140	1310	1960	1100	1650	
378	568	355	534	322	484	38	1330	2000	1220	1830	1020	1530	
341	512	321	482	291	437	40	1250	1870	1140	1710	953	1430	
309	465	291	437	264	396	42	1170	1760	1070	1610	895	1350	
						44	1110	1670	1010	1520	844	1270	
						46	1050	1580	959	1440	798	1200	
						48	998	1500	911	1370	757	1140	
						50	951	1430	867	1300	720	1080	
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
3450	5180	3240	4880	2900	4350	L_p	L_r	L_p	L_r	L_p	L_r		
						7.52	24.0	7.52	23.5	7.58	22.8		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	82.3		77.4		69.1			
2780	4170	2610	3920	2330	3500	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	20500	521	19400	493	17400	444		
1160	1740	1080	1610	923	1380	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.52		2.52		2.54			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
487	732	461	693	412	620	6.27		6.27		6.26			

^c Shape is slender for compression with $F_y = 70 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.


 <p style="text-align: center;">Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces</p> <p style="text-align: right;">$F_y = 70$ ksi $F_u = 90$ ksi</p> <p style="text-align: center;">W-Shapes</p>												
W40 ^x						Shape	W40 ^x					
211 ^c		183 ^c		167 ^c		lb/ft	211 ^y		183 ^y		167 ^y	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2320	3480	1910	2870	1740	2620	0	3160	4760	2700	4060	2420	3640
2150	3240	1770	2670	1610	2420	6	3160	4760	2700	4060	2420	3640
2100	3150	1730	2600	1570	2350	7	3160	4760	2700	4060	2420	3640
2040	3060	1670	2520	1520	2280	8	3120	4690	2660	4000	2360	3550
1970	2960	1620	2430	1460	2200	9	3040	4560	2580	3880	2290	3440
1890	2850	1560	2340	1400	2110	10	2950	4430	2510	3770	2220	3330
1820	2730	1490	2240	1340	2010	11	2860	4300	2430	3650	2140	3220
1730	2610	1420	2140	1270	1910	12	2780	4170	2350	3540	2070	3110
1650	2480	1350	2030	1210	1810	13	2690	4040	2270	3420	2000	3010
1560	2350	1280	1920	1140	1710	14	2610	3920	2200	3300	1930	2900
1470	2220	1210	1810	1070	1610	15	2520	3790	2120	3190	1860	2790
1390	2080	1130	1700	1000	1500	16	2430	3660	2040	3070	1780	2680
1300	1950	1060	1590	932	1400	17	2350	3530	1970	2960	1710	2570
1210	1820	986	1480	864	1300	18	2260	3400	1890	2840	1640	2460
1120	1680	914	1370	798	1200	19	2180	3270	1810	2720	1570	2350
1020	1530	844	1270	732	1100	20	2090	3140	1740	2610	1490	2250
844	1270	713	1070	612	920	22	1910	2870	1540	2310	1280	1930
709	1070	599	900	515	773	24	1660	2500	1330	2000	1110	1660
604	908	510	767	438	659	26	1470	2200	1170	1750	967	1450
521	783	440	661	378	568	28	1310	1970	1040	1560	857	1290
454	682	383	576	329	495	30	1180	1770	929	1400	767	1150
399	599	337	506	289	435	32	1070	1610	842	1270	693	1040
353	531	298	448	256	385	34	985	1480	769	1160	631	949
315	474	266	400	229	344	36	909	1370	707	1060	579	870
283	425	239	359	205	309	38	844	1270	654	982	535	803
255	384	216	324	185	278	40	787	1180	608	914	496	746
						42	738	1110	568	854	463	695
						44	694	1040	533	801	433	651
						46	656	986	502	754	407	612
						48	621	934	474	713	384	578
						50	590	887	449	676	364	547
Available Strength in Tensile Yielding, kips						Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft						
2600	3910	2230	3360	2070	3110	L_p	L_r	L_p	L_r	L_p	L_r	
						7.49	22.0	7.43	21.1	7.16	20.4	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	62.1		53.3		49.3		
2100	3140	1800	2700	1660	2500	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	15500	390	13200	331	11600	283	
743	1120	627	943	621	933	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.51		2.49		2.40		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
367	551	308	464	265	399	6.29		6.31		6.38		

^c Shape is slender for compression with $F_y = 70$ ksi.

^y Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Confirm ASTM A913 material availability before specifying.



W40-W36

Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70$ ksi
 $F_u = 90$ ksi


W-Shapes

W40 \times		W36 \times				Shape	W40 \times		W36 \times			
149 ^c		925 ^h		853 ^h		lb/ft	149 ^v		925 ^h		853 ^h	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1510	2260	11400	17100	10500	15800	0	2090	3140	14400	21700	13700	20600
1380	2080	11100	16600	10200	15400	6	2090	3140	14400	21700	13700	20600
1340	2020	11000	16500	10100	15200	7	2080	3120	14400	21700	13700	20600
1300	1950	10800	16300	9990	15000	8	2010	3020	14400	21700	13700	20600
1240	1870	10700	16000	9860	14800	9	1950	2920	14400	21700	13700	20600
1190	1790	10500	15800	9710	14600	10	1880	2830	14400	21700	13700	20600
1130	1700	10300	15500	9540	14300	11	1810	2730	14400	21700	13700	20600
1070	1610	10100	15200	9370	14100	12	1750	2630	14400	21700	13700	20600
1010	1520	9940	14900	9180	13800	13	1680	2530	14400	21600	13700	20500
952	1430	9720	14600	8990	13500	14	1620	2430	14300	21500	13600	20400
890	1340	9500	14300	8780	13200	15	1550	2330	14200	21400	13500	20300
828	1240	9260	13900	8560	12900	16	1480	2230	14100	21200	13400	20100
767	1150	9020	13600	8340	12500	17	1420	2130	14000	21100	13300	20000
707	1060	8760	13200	8110	12200	18	1350	2030	13900	20900	13200	19800
647	973	8500	12800	7870	11800	19	1290	1930	13800	20800	13100	19700
595	894	8240	12400	7630	11500	20	1190	1790	13700	20600	13000	19500
495	745	7700	11600	7130	10700	22	1010	1510	13500	20300	12800	19200
416	626	7140	10700	6620	9950	24	866	1300	13300	20100	12600	18900
355	533	6580	9900	6110	9180	26	755	1140	13200	19800	12400	18700
306	460	6030	9060	5600	8410	28	667	1000	13000	19500	12200	18400
266	400	5490	8250	5100	7660	30	595	895	12800	19200	12000	18100
234	352	4960	7460	4620	6940	32	537	806	12600	18900	11800	17800
207	312	4460	6700	4150	6240	34	487	733	12400	18600	11600	17500
185	278	3980	5980	3700	5570	36	446	670	12200	18300	11400	17200
166	250	3570	5360	3320	5000	38	411	617	12000	18000	11300	16900
		3220	4840	3000	4510	40	380	572	11800	17800	11100	16600
		2920	4390	2720	4090	42	354	532	11600	17500	10900	16300
		2660	4000	2480	3730	44	331	497	11400	17200	10700	16000
		2430	3660	2270	3410	46	310	466	11200	16900	10500	15800
		2240	3360	2080	3130	48	292	439	11000	16600	10300	15500
		2060	3100	1920	2890	50	276	415	10900	16300	10100	15200


Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending

Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
1840	2760	11400	17100	10500	15800	6.84	19.5	12.7	76.8	12.8	72.2
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	43.8		272		251	
1480	2220	9180	13800	8470	12700	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
577	867	3640	5470	3040	4560	9800	229	73000	4940	70000	4600
Available Strength in Shear, kips						r_y , in.					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	2.29		4.26		4.28	
577	867	3640	5470	3040	4560	r_x/r_y					
Available Strength in Flexure about Y-Y Axis, kip-ft						6.55		3.85		3.90	
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$						
217	326	2970	4460	2810	4230						

^c Shape is slender for compression with $F_y = 70$ ksi.
^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W36 \times						Shape	W36 \times						
802 ^h		723 ^h		652 ^h		lb/ft	802 ^h		723 ^h		652 ^h		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
9890	14900	8930	13400	8050	12100	0	12800	19200	11400	17200	10200	15300	
9600	14400	8660	13000	7800	11700	6	12800	19200	11400	17200	10200	15300	
9500	14300	8560	12900	7710	11600	7	12800	19200	11400	17200	10200	15300	
9380	14100	8460	12700	7610	11400	8	12800	19200	11400	17200	10200	15300	
9250	13900	8340	12500	7500	11300	9	12800	19200	11400	17200	10200	15300	
9110	13700	8200	12300	7370	11100	10	12800	19200	11400	17200	10200	15300	
8950	13500	8060	12100	7240	10900	11	12800	19200	11400	17200	10200	15300	
8780	13200	7900	11900	7090	10700	12	12800	19200	11400	17200	10200	15300	
8600	12900	7740	11600	6940	10400	13	12700	19200	11400	17100	10100	15200	
8410	12600	7560	11400	6780	10200	14	12600	19000	11300	16900	10000	15000	
8210	12300	7380	11100	6610	9930	15	12600	18900	11200	16800	9910	14900	
8000	12000	7190	10800	6430	9660	16	12500	18700	11100	16700	9810	14800	
7790	11700	6990	10500	6250	9390	17	12400	18600	11000	16500	9720	14600	
7570	11400	6780	10200	6060	9100	18	12300	18400	10900	16400	9630	14500	
7340	11000	6570	9880	5860	8810	19	12200	18300	10800	16200	9540	14300	
7100	10700	6360	9560	5670	8520	20	12100	18100	10700	16100	9440	14200	
6630	9960	5920	8900	5260	7910	22	11900	17900	10500	15800	9260	13900	
6140	9230	5480	8240	4860	7300	24	11700	17600	10300	15500	9070	13600	
5650	8500	5030	7570	4450	6690	26	11500	17300	10100	15200	8880	13400	
5170	7770	4590	6900	4050	6080	28	11300	17000	9940	14900	8700	13100	
4700	7060	4160	6260	3660	5490	30	11100	16700	9750	14700	8510	12800	
4240	6370	3750	5630	3280	4930	32	10900	16400	9560	14400	8320	12500	
3790	5700	3340	5030	2910	4380	34	10700	16100	9370	14100	8140	12200	
3380	5090	2980	4480	2600	3910	36	10500	15800	9180	13800	7950	12000	
3040	4570	2680	4020	2330	3510	38	10300	15600	8990	13500	7770	11700	
2740	4120	2420	3630	2110	3160	40	10200	15300	8800	13200	7580	11400	
2490	3740	2190	3290	1910	2870	42	9960	15000	8610	12900	7390	11100	
2270	3410	2000	3000	1740	2620	44	9770	14700	8420	12700	7210	10800	
2070	3120	1830	2750	1590	2390	46	9580	14400	8230	12400	7020	10600	
1900	2860	1680	2520	1460	2200	48	9390	14100	8040	12100	6840	10300	
1750	2640	1550	2320	1350	2030	50	9200	13800	7850	11800	6650	9990	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
9890	14900	8930	13400	8050	12100	12.6	68.4	12.4	62.1	12.2	56.8		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	236		213		192			
7970	11900	7190	10800	6480	9720	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
2840	4260	2540	3810	2270	3400	64800	4210	57300	3700	50600	3230		
Available Strength in Shear, kips						r_y , in.							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	4.22		4.17		4.10			
2840	4260	2540	3810	2270	3400	r_x/r_y							
Available Strength in Flexure about Y-Y Axis, kip-ft						3.93		3.93		3.95			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$								
2600	3910	2300	3450	2030	3050								

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes														$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W36 \times						Shape	W36 \times								
529 ^h		487 ^h		441 ^h		lb/ft	529 ^h		487 ^h		441 ^h				
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$			
Available Compressive Strength, kips							Available Flexural Strength, kip-ft								
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD			
6540	9830	5990	9010	5450	8190	0	8140	12200	7440	11200	6670	10000			
6330	9510	5790	8710	5260	7910	6	8140	12200	7440	11200	6670	10000			
6250	9390	5720	8600	5200	7810	7	8140	12200	7440	11200	6670	10000			
6160	9270	5640	8480	5120	7700	8	8140	12200	7440	11200	6670	10000			
6070	9120	5550	8350	5040	7580	9	8140	12200	7440	11200	6670	10000			
5960	8960	5460	8200	4950	7440	10	8140	12200	7440	11200	6670	10000			
5850	8790	5350	8040	4850	7290	11	8140	12200	7440	11200	6670	10000			
5730	8610	5240	7870	4750	7130	12	8130	12200	7420	11200	6650	9990			
5600	8410	5110	7690	4630	6960	13	8040	12100	7330	11000	6560	9860			
5460	8200	4990	7490	4520	6790	14	7950	11900	7240	10900	6470	9730			
5310	7990	4850	7290	4390	6600	15	7860	11800	7160	10800	6380	9600			
5170	7760	4710	7080	4260	6410	16	7770	11700	7070	10600	6300	9470			
5010	7530	4570	6870	4130	6210	17	7680	11500	6980	10500	6210	9330			
4850	7290	4420	6640	3990	6000	18	7590	11400	6890	10300	6120	9200			
4690	7050	4270	6420	3850	5790	19	7490	11300	6800	10200	6040	9070			
4520	6800	4120	6190	3710	5580	20	7400	11100	6710	10100	5950	8940			
4190	6290	3800	5720	3430	5150	22	7220	10900	6530	9810	5780	8680			
3850	5780	3490	5240	3140	4710	24	7040	10600	6350	9540	5600	8420			
3510	5270	3180	4770	2850	4280	26	6850	10300	6170	9270	5430	8160			
3180	4770	2870	4310	2570	3860	28	6670	10000	5990	9000	5250	7900			
2850	4290	2570	3870	2300	3450	30	6490	9750	5810	8730	5080	7630			
2540	3820	2290	3440	2040	3060	32	6310	9480	5630	8460	4900	7370			
2250	3390	2020	3040	1800	2710	34	6120	9200	5450	8190	4730	7110			
2010	3020	1810	2710	1610	2420	36	5940	8930	5270	7920	4560	6850			
1800	2710	1620	2440	1440	2170	38	5760	8650	5090	7650	4380	6590			
1630	2450	1460	2200	1300	1960	40	5580	8380	4910	7380	4210	6320			
1480	2220	1330	1990	1180	1780	42	5390	8110	4730	7110	4030	6060			
1350	2020	1210	1820	1080	1620	44	5210	7830	4550	6840	3800	5720			
1230	1850	1110	1660	985	1480	46	5030	7560	4340	6530	3600	5410			
1130	1700	1020	1530	905	1360	48	4840	7270	4130	6200	3420	5140			
1040	1570	936	1410	834	1250	50	4610	6930	3930	5910	3260	4890			
Properties															
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r				
6540	9830	5990	9010	5450	8190	11.9	47.8	11.8	44.9	11.7	42.0				
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	156		143		130					
5270	7900	4830	7240	4390	6580	Moment of Inertia, in. ⁴									
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y				
1790	2690	1650	2480	1480	2220	39600	2490	36000	2250	32100	1990				
Available Strength in Shear, kips						r_y , in.									
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	4.00		3.96		3.92					
1790	2690	1650	2480	1480	2220	r_x/r_y									
Available Strength in Flexure about Y-Y Axis, kip-ft						4.00		3.99		4.01					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$										
1590	2380	1440	2160	1290	1930										

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.



Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70$ ksi
 $F_u = 90$ ksi

W-Shapes

W36 ^x						Shape	W36 ^x					
395 ^h		361 ^h		330 ^c		lb/ft	395 ^h		361 ^h		330	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
4860	7310	4440	6680	4030	6060	0	5970	8980	5410	8140	4930	7400
4690	7050	4290	6440	3900	5860	6	5970	8980	5410	8140	4930	7400
4630	6970	4230	6360	3860	5800	7	5970	8980	5410	8140	4930	7400
4570	6860	4170	6270	3810	5720	8	5970	8980	5410	8140	4930	7400
4490	6750	4100	6160	3740	5630	9	5970	8980	5410	8140	4930	7400
4410	6630	4020	6050	3670	5520	10	5970	8980	5410	8140	4930	7400
4320	6490	3940	5920	3600	5410	11	5970	8980	5410	8140	4930	7400
4220	6350	3850	5790	3510	5280	12	5940	8920	5370	8080	4880	7340
4120	6190	3760	5640	3430	5150	13	5850	8800	5290	7950	4800	7220
4010	6030	3660	5500	3340	5010	14	5770	8670	5210	7830	4720	7100
3900	5860	3550	5340	3240	4870	15	5680	8540	5130	7710	4650	6980
3780	5690	3440	5180	3140	4720	16	5600	8410	5050	7580	4570	6860
3660	5510	3330	5010	3040	4570	17	5510	8290	4960	7460	4490	6750
3540	5320	3220	4840	2930	4410	18	5430	8160	4880	7340	4410	6630
3410	5130	3100	4660	2830	4250	19	5340	8030	4800	7210	4330	6510
3290	4940	2980	4490	2720	4080	20	5260	7900	4720	7090	4250	6390
3030	4550	2750	4130	2500	3750	22	5090	7650	4550	6840	4100	6160
2770	4160	2510	3770	2280	3420	24	4920	7390	4390	6600	3940	5920
2510	3770	2270	3410	2060	3090	26	4750	7140	4230	6350	3780	5690
2260	3390	2040	3060	1850	2780	28	4580	6880	4060	6110	3630	5450
2010	3030	1820	2730	1640	2470	30	4410	6630	3900	5860	3470	5220
1780	2680	1600	2410	1450	2180	32	4240	6370	3740	5610	3310	4980
1580	2370	1420	2130	1280	1930	34	4070	6120	3570	5370	3160	4750
1410	2110	1270	1900	1140	1720	36	3900	5860	3410	5120	2980	4480
1260	1900	1140	1710	1030	1540	38	3730	5610	3220	4830	2760	4150
1140	1710	1030	1540	927	1390	40	3530	5300	3000	4510	2570	3870
1030	1550	930	1400	841	1260	42	3310	4970	2810	4230	2410	3620
942	1420	847	1270	766	1150	44	3120	4690	2650	3980	2260	3400
861	1290	775	1160	701	1050	46	2950	4430	2500	3750	2130	3200
791	1190	712	1070	644	968	48	2800	4200	2370	3560	2020	3030
729	1100	656	986	593	892	50	2660	4000	2250	3380	1910	2880

Properties											
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
4860	7310	4440	6680	4060	6100	11.6	39.0	11.5	37.3	11.4	35.6
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	116		106		96.9	
3920	5870	3580	5370	3270	4910	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
1310	1970	1190	1790	1080	1620	28500	1750	25700	1570	23300	1420
Available Strength in Shear, kips						r_y , in.					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.88		3.85		3.83	
1310	1970	1190	1790	1080	1620	r_x/r_y					
Available Strength in Flexure about Y-Y Axis, kip-ft						4.05		4.05		4.05	
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$						
1140	1710	1020	1540	926	1390						

^c Shape is slender for compression with $F_y = 70$ ksi.
^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.



Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
W-Shapes

$F_y = 70$ ksi
 $F_u = 90$ ksi

W36 \times						Shape	W36 \times					
302 c		282 c		262 c		lb/ft	302		282		262	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
3630	5460	3330	5010	3060	4600	0	4470	6720	4160	6250	3840	5780
3520	5290	3230	4850	2960	4450	6	4470	6720	4160	6250	3840	5780
3480	5230	3190	4790	2930	4400	7	4470	6720	4160	6250	3840	5780
3430	5160	3150	4730	2890	4340	8	4470	6720	4160	6250	3840	5780
3380	5080	3100	4660	2840	4270	9	4470	6720	4160	6250	3840	5780
3320	5000	3050	4580	2790	4200	10	4470	6720	4160	6250	3840	5780
3260	4900	2990	4490	2740	4120	11	4470	6720	4160	6250	3840	5780
3200	4800	2930	4400	2680	4030	12	4430	6650	4110	6180	3790	5690
3130	4700	2860	4300	2620	3940	13	4350	6540	4040	6070	3720	5590
3050	4590	2790	4200	2560	3840	14	4280	6430	3970	5960	3650	5490
2970	4470	2720	4090	2490	3740	15	4210	6320	3900	5860	3580	5390
2880	4330	2650	3980	2420	3640	16	4130	6210	3820	5750	3510	5280
2790	4190	2570	3860	2350	3530	17	4060	6100	3750	5640	3450	5180
2690	4040	2490	3740	2270	3420	18	3980	5990	3680	5530	3380	5080
2590	3890	2400	3610	2200	3300	19	3910	5880	3610	5430	3310	4970
2490	3740	2310	3470	2120	3190	20	3840	5760	3540	5320	3240	4870
2290	3440	2120	3190	1950	2940	22	3690	5540	3400	5100	3100	4660
2080	3130	1930	2900	1770	2670	24	3540	5320	3250	4890	2960	4460
1880	2830	1740	2620	1600	2400	26	3390	5100	3110	4670	2830	4250
1690	2540	1560	2350	1430	2150	28	3240	4880	2970	4460	2690	4040
1500	2260	1390	2080	1270	1900	30	3100	4650	2820	4250	2550	3840
1320	1990	1220	1830	1110	1670	32	2950	4430	2680	4030	2410	3630
1170	1760	1080	1620	985	1480	34	2800	4210	2520	3790	2220	3330
1050	1570	964	1450	879	1320	36	2590	3900	2310	3470	2030	3050
939	1410	865	1300	789	1190	38	2400	3600	2130	3210	1870	2810
847	1270	781	1170	712	1070	40	2230	3350	1980	2970	1730	2600
768	1160	708	1060	646	971	42	2080	3130	1850	2770	1610	2420
700	1050	645	970	588	884	44	1950	2930	1730	2600	1510	2270
641	963	591	888	538	809	46	1840	2760	1630	2440	1420	2130
588	884	542	815	494	743	48	1730	2610	1530	2300	1330	2000
542	815	500	751	456	685	50	1640	2470	1450	2180	1260	1900

Properties					
Available Strength in Tensile Yielding, kips					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
3730	5610	3470	5220	3240	4860
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
3000	4510	2800	4200	2610	3910
Available Strength in Shear, kips					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
987	1480	919	1380	868	1300
Available Strength in Flexure about Y-Y Axis, kip-ft					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
842	1270	779	1170	713	1070
Limiting Unbraced Lengths, ft					
L_p	L_r	L_p	L_r	L_p	L_r
11.4	34.5	11.3	33.6	11.2	32.6
Area, in.²					
89.0		82.9		77.2	
Moment of Inertia, in.⁴					
I_x	I_y	I_x	I_y	I_x	I_y
21100	1300	19600	1200	17900	1090
r_y, in.					
3.82		3.80		3.76	
r_x/r_y					
4.03		4.05		4.07	

^c Shape is slender for compression with $F_y = 70$ ksi.
 Note: Confirm ASTM A913 material availability before specifying.



Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70$ ksi
 $F_u = 90$ ksi

W-Shapes

W36 ^x						Shape	W36 ^x					
247 ^c		231 ^c		256 ^c		lb/ft	247		231		256	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2840	4270	2630	3960	3060	4600	0	3600	5410	3360	5060	3630	5460
2740	4130	2550	3830	2870	4310	6	3600	5410	3360	5060	3630	5460
2710	4080	2520	3780	2800	4210	7	3600	5410	3360	5060	3630	5460
2670	4020	2480	3730	2730	4100	8	3600	5410	3360	5060	3630	5450
2630	3960	2440	3670	2640	3980	9	3600	5410	3360	5060	3540	5320
2590	3890	2400	3600	2560	3840	10	3600	5410	3360	5060	3450	5190
2540	3810	2350	3530	2450	3680	11	3600	5410	3360	5060	3370	5060
2480	3730	2300	3460	2330	3510	12	3540	5320	3310	4970	3280	4940
2430	3650	2250	3380	2210	3330	13	3480	5220	3240	4870	3200	4810
2370	3560	2190	3290	2090	3140	14	3410	5130	3180	4780	3110	4680
2300	3460	2130	3210	1970	2960	15	3340	5030	3120	4680	3030	4550
2240	3370	2070	3110	1840	2770	16	3280	4930	3050	4590	2940	4420
2170	3260	2010	3020	1720	2590	17	3210	4830	2990	4490	2860	4290
2100	3160	1940	2920	1600	2400	18	3150	4730	2930	4400	2770	4170
2030	3050	1880	2820	1480	2220	19	3080	4630	2860	4300	2690	4040
1960	2950	1810	2720	1360	2050	20	3010	4530	2800	4210	2600	3910
1810	2730	1670	2510	1140	1710	22	2880	4330	2670	4020	2430	3650
1660	2490	1530	2310	958	1440	24	2750	4130	2550	3830	2260	3400
1490	2240	1390	2080	817	1230	26	2620	3930	2420	3640	2040	3070
1330	2000	1230	1860	704	1060	28	2480	3730	2290	3450	1840	2760
1180	1770	1090	1640	613	922	30	2350	3530	2170	3260	1670	2510
1030	1550	957	1440	539	810	32	2210	3320	2000	3010	1530	2290
916	1380	848	1270	477	718	34	2000	3010	1820	2730	1410	2120
817	1230	756	1140	426	640	36	1830	2750	1660	2490	1310	1960
733	1100	679	1020	382	575	38	1680	2530	1520	2290	1220	1830
662	994	612	920	345	518	40	1560	2340	1410	2120	1140	1710
600	902	555	835	313	470	42	1450	2180	1310	1960	1070	1610
547	822	506	761	285	429	44	1350	2030	1220	1830	1010	1520
500	752	463	696			46	1270	1910	1140	1720	960	1440
459	691	425	639			48	1200	1800	1070	1610	912	1370
423	636	392	589			50	1130	1700	1010	1520	868	1310

Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending

Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
3040	4570	2860	4300	3160	4740	11.2	31.8	11.1	31.2	7.91	24.8
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	72.5		68.2		75.3	
2450	3670	2300	3450	2540	3810	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
822	1230	777	1170	1010	1510	16700	1010	15600	940	16800	528
Available Strength in Shear, kips						r_y , in.					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.74		3.71		2.65	
822	1230	777	1170	1010	1510	r_x/r_y					
Available Strength in Flexure about Y-Y Axis, kip-ft						4.06		4.07		5.62	
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$						
664	998	615	924	479	719						

^c Shape is slender for compression with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.




Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70$ ksi
 $F_u = 90$ ksi

W-Shapes

W36 ^x						Shape	W36 ^x					
232 ^c		210 ^c		194 ^c		lb/ft	232		210		194	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2680	4030	2400	3610	2160	3240	0	3270	4910	2910	4370	2680	4030
2510	3780	2240	3370	2010	3030	6	3270	4910	2910	4370	2680	4030
2450	3690	2190	3290	1970	2950	7	3270	4910	2910	4370	2680	4030
2390	3590	2130	3200	1910	2870	8	3260	4890	2890	4340	2650	3990
2310	3480	2060	3100	1850	2780	9	3170	4770	2810	4230	2580	3880
2230	3360	1990	2990	1780	2680	10	3090	4650	2740	4110	2510	3770
2150	3230	1910	2880	1710	2570	11	3010	4530	2660	4000	2440	3660
2060	3100	1830	2750	1640	2460	12	2930	4410	2590	3890	2370	3560
1970	2960	1750	2630	1560	2350	13	2850	4290	2510	3770	2290	3450
1870	2810	1660	2500	1480	2230	14	2770	4170	2430	3660	2220	3340
1760	2640	1570	2370	1400	2110	15	2690	4050	2360	3540	2150	3230
1640	2470	1470	2210	1320	1990	16	2610	3930	2280	3430	2080	3130
1530	2300	1370	2060	1240	1870	17	2530	3800	2210	3320	2010	3020
1420	2140	1270	1900	1150	1730	18	2450	3680	2130	3200	1940	2910
1310	1970	1170	1750	1060	1590	19	2370	3560	2060	3090	1860	2800
1210	1810	1070	1610	972	1460	20	2290	3440	1980	2980	1790	2690
1010	1510	889	1340	806	1210	22	2130	3200	1830	2750	1650	2480
846	1270	747	1120	677	1020	24	1960	2950	1640	2460	1440	2170
721	1080	636	956	577	867	26	1740	2610	1440	2170	1270	1910
621	934	549	825	497	748	28	1560	2340	1290	1940	1130	1700
541	814	478	718	433	651	30	1410	2120	1160	1750	1020	1530
476	715	420	631	381	572	32	1290	1930	1060	1590	925	1390
421	633	372	559	337	507	34	1180	1780	970	1460	847	1270
376	565	332	499	301	452	36	1100	1650	895	1350	780	1170
337	507	298	448	270	406	38	1020	1530	831	1250	723	1090
305	458	269	404	244	366	40	954	1430	776	1170	674	1010
276	415	244	366	221	332	42	896	1350	727	1090	630	948
						44	844	1270	684	1030	593	891
						46	799	1200	646	971	559	840
						48	758	1140	612	920	529	795
						50	721	1080	581	874	502	754
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
2850	4280	2590	3900	2390	3590	7.82	23.9	7.70	23.0	7.64	22.4	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	68.0		61.9		57.0		
2300	3440	2090	3130	1920	2890	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	15000	468	13200	411	12100	375	
904	1360	853	1280	782	1170	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.62		2.58		2.56		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
426	641	374	562	341	513	5.65		5.66		5.70		

^c Shape is slender for compression with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W36 \times						Shape	W36 \times						
182 ^c		170 ^c		160 ^c		lb/ft	182		170 ^v		160 ^v		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
1990	3000	1830	2740	1690	2540		0	2510	3770	2330	3510	2180	3280
1860	2800	1700	2560	1570	2360	6	2510	3770	2330	3510	2180	3280	
1810	2730	1660	2490	1530	2300	7	2510	3770	2330	3510	2180	3280	
1760	2650	1610	2420	1490	2230	8	2480	3730	2300	3460	2150	3230	
1710	2560	1560	2340	1440	2160	9	2410	3630	2240	3370	2080	3130	
1650	2470	1500	2260	1380	2080	10	2340	3520	2170	3270	2020	3040	
1580	2370	1440	2160	1330	1990	11	2280	3420	2110	3170	1960	2950	
1510	2270	1380	2070	1270	1900	12	2210	3320	2040	3070	1900	2850	
1440	2170	1310	1970	1200	1810	13	2140	3210	1980	2970	1840	2760	
1370	2060	1240	1870	1140	1720	14	2070	3110	1910	2880	1770	2670	
1290	1950	1180	1770	1080	1620	15	2000	3010	1850	2780	1710	2570	
1220	1830	1110	1660	1010	1520	16	1930	2900	1780	2680	1650	2480	
1140	1720	1040	1560	949	1430	17	1860	2800	1720	2580	1590	2390	
1070	1610	970	1460	885	1330	18	1790	2700	1650	2480	1520	2290	
991	1490	902	1360	822	1240	19	1730	2590	1590	2390	1460	2200	
907	1360	834	1250	760	1140	20	1660	2490	1520	2290	1400	2110	
752	1130	690	1040	634	952	22	1520	2280	1370	2060	1240	1870	
632	949	580	872	532	800	24	1310	1970	1180	1780	1070	1610	
538	809	494	743	454	682	26	1150	1730	1040	1560	936	1410	
464	697	426	640	391	588	28	1020	1540	920	1380	829	1250	
404	608	371	558	341	512	30	921	1380	825	1240	742	1120	
355	534	326	490	299	450	32	835	1250	746	1120	670	1010	
315	473	289	434	265	399	34	763	1150	681	1020	610	917	
281	422	258	387	237	356	36	702	1050	625	940	560	841	
252	379	231	348	212	319	38	650	976	578	869	516	776	
227	342	209	314	192	288	40	604	908	537	807	479	720	
206	310	189	285			42	565	849	501	753	447	671	
						44	530	797	470	706	418	629	
						46	500	751	442	665	393	591	
						48	473	710	418	628	371	557	
						50	448	674	396	595	351	528	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
2250	3380	2100	3150	1970	2960	7.61	22.0	7.55	21.6	7.46	21.2		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	53.6		50.0		47.0			
1810	2710	1690	2530	1590	2380	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	11300	347	10500	320	9760	295		
737	1110	619	930	589	885	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.55		2.53		2.50			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
317	476	293	440	270	406	5.69		5.73		5.76			

^c Shape is slender for compression with $F_y = 70 \text{ ksi}$.


^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70 \text{ ksi}$; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Confirm ASTM A913 material availability before specifying.

<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;"> Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces </div> <div style="text-align: right;"> $F_y = 70$ ksi $F_u = 90$ ksi </div> </div>													
W-Shapes													
W36 \times				W33 \times		Shape		W36 \times				W33 \times	
150 ^c		135 ^c		387 ^h		lb/ft		150 ^v		135 ^v		387 ^h	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips								Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending		ASD	LRFD	ASD	LRFD	ASD	LRFD
1570	2360	1380	2070	4780	7180			0	2030	3050	1780	2670	5450
1460	2190	1270	1910	4600	6920	6	2030	3050	1780	2670	5450	8190	
1420	2130	1240	1860	4540	6830	7	2030	3050	1780	2670	5450	8190	
1370	2070	1200	1800	4470	6720	8	1990	2990	1730	2600	5450	8190	
1330	2000	1150	1730	4390	6600	9	1930	2910	1680	2520	5450	8190	
1280	1920	1110	1660	4310	6470	10	1870	2820	1620	2440	5450	8190	
1220	1840	1060	1590	4210	6330	11	1810	2730	1570	2350	5450	8190	
1170	1750	1010	1510	4120	6190	12	1760	2640	1510	2270	5390	8110	
1110	1670	953	1430	4010	6030	13	1700	2550	1460	2190	5320	8000	
1050	1580	899	1350	3900	5860	14	1640	2460	1400	2110	5250	7890	
990	1490	844	1270	3780	5690	15	1580	2370	1350	2030	5170	7770	
930	1400	790	1190	3660	5510	16	1520	2280	1290	1950	5100	7660	
870	1310	736	1110	3540	5320	17	1460	2190	1240	1860	5020	7550	
810	1220	682	1030	3410	5130	18	1400	2100	1190	1780	4950	7440	
752	1130	630	947	3290	4940	19	1340	2010	1130	1700	4880	7330	
693	1040	578	869	3160	4740	20	1280	1920	1080	1620	4800	7220	
583	876	487	733	2890	4350	22	1120	1680	909	1370	4650	7000	
490	736	410	616	2630	3950	24	960	1440	780	1170	4510	6770	
417	627	349	525	2370	3560	26	838	1260	679	1020	4360	6550	
360	541	301	452	2120	3190	28	741	1110	598	899	4210	6330	
313	471	262	394	1880	2820	30	662	994	533	801	4060	6110	
275	414	230	346	1650	2480	32	597	897	479	720	3920	5890	
244	367	204	307	1460	2200	34	542	815	435	653	3770	5660	
218	327	182	274	1300	1960	36	497	746	397	597	3620	5440	
195	294	163	246	1170	1760	38	457	688	365	548	3470	5220	
176	265			1060	1590	40	424	637	337	507	3320	5000	
				959	1440	42	395	593	313	471	3140	4710	
				874	1310	44	369	555	292	439	2960	4450	
				799	1200	46	346	521	274	412	2810	4220	
				734	1100	48	326	491	258	387	2670	4010	
				676	1020	50	309	464	243	365	2540	3820	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
1860	2790	1670	2510	4780	7180	7.37	20.8	7.10	20.1	11.3	40.3		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	44.3		39.9		114			
1500	2240	1350	2020	3850	5770	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
563	845	514	772	1270	1910	9040	270	7800	225	24300	1620		
Available Strength in Shear, kips						r_y , in.							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	2.47		2.38		3.77			
563	845	514	772	1270	1910	r_x/r_y							
						5.79		5.88		3.87			


^c Shape is slender for compression with $F_y = 70$ ksi.
^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W33 ^x						Shape	W33 ^x						
354 ^h		318		291 ^c		lb/ft	354 ^h		318		291		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
4360	6550	3930	5900	3570	5370		0	4960	7460	4440	6670	4050	6090
4200	6310	3780	5680	3450	5180		6	4960	7460	4440	6670	4050	6090
4140	6220	3730	5600	3400	5110		7	4960	7460	4440	6670	4050	6090
4070	6120	3670	5510	3350	5030		8	4960	7460	4440	6670	4050	6090
4000	6020	3600	5410	3290	4940		9	4960	7460	4440	6670	4050	6090
3920	5900	3530	5300	3220	4840		10	4960	7460	4440	6670	4050	6090
3840	5770	3450	5190	3150	4730		11	4960	7460	4440	6670	4050	6090
3750	5630	3370	5060	3070	4610		12	4900	7370	4370	6570	3980	5990
3650	5480	3280	4930	2990	4490		13	4830	7260	4300	6470	3920	5890
3550	5330	3180	4790	2900	4360		14	4760	7150	4230	6360	3850	5790
3440	5170	3090	4640	2810	4220		15	4690	7040	4160	6260	3780	5690
3330	5000	2990	4490	2720	4080		16	4610	6930	4100	6160	3720	5580
3210	4830	2880	4330	2620	3940		17	4540	6830	4030	6050	3650	5480
3100	4660	2780	4170	2520	3790		18	4470	6720	3960	5950	3580	5380
2980	4480	2670	4010	2420	3640		19	4400	6610	3890	5840	3510	5280
2860	4300	2560	3850	2320	3490		20	4330	6500	3820	5740	3450	5180
2620	3930	2340	3520	2120	3180		22	4180	6290	3680	5530	3310	4980
2380	3570	2120	3190	1920	2880		24	4040	6070	3540	5320	3180	4780
2140	3210	1900	2860	1720	2580		26	3900	5860	3400	5120	3050	4580
1910	2870	1700	2550	1530	2300	28	3750	5640	3270	4910	2910	4380	
1690	2540	1500	2250	1340	2020	30	3610	5430	3130	4700	2780	4170	
1480	2230	1310	1980	1180	1780	32	3470	5210	2990	4490	2640	3970	
1310	1970	1160	1750	1050	1570	34	3330	5000	2850	4290	2510	3770	
1170	1760	1040	1560	934	1400	36	3180	4780	2710	4070	2320	3490	
1050	1580	932	1400	838	1260	38	3040	4570	2520	3790	2150	3240	
949	1430	841	1260	756	1140	40	2840	4280	2350	3540	2010	3020	
861	1290	763	1150	686	1030	42	2670	4020	2210	3320	1880	2830	
784	1180	695	1050	625	939	44	2520	3790	2080	3120	1770	2660	
718	1080	636	956	572	859	46	2390	3590	1960	2950	1670	2510	
659	991	584	878	525	789	48	2270	3400	1860	2800	1580	2370	
607	913	538	809	484	727	50	2160	3240	1770	2660	1500	2260	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
4360	6550	3930	5900	3590	5390	11.2	38.1	11.1	36.0	11.0	34.2		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	104		93.7		85.6			
3510	5270	3160	4740	2890	4330	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	22000	1460	19500	1290	17700	1160		
1160	1730	1030	1540	935	1400	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						3.74		3.71		3.68			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
985	1480	873	1310	789	1190	3.88		3.91		3.91			

^c Shape is slender for compression with $F_y = 70 \text{ ksi}$.

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.

Note: Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes														
W33 ^x						Shape	W33 ^x							
263 ^c		241 ^c		221 ^c		lb/ft	263		241		221			
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft							
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD		
3150	4740	2860	4300	2580	3880	0	3630	5460	3280	4940	2990	4500		
3040	4580	2760	4150	2490	3740	6	3630	5460	3280	4940	2990	4500		
3010	4520	2730	4100	2460	3690	7	3630	5460	3280	4940	2990	4500		
2960	4450	2690	4040	2420	3640	8	3630	5460	3280	4940	2990	4500		
2910	4380	2640	3970	2380	3580	9	3630	5460	3280	4940	2990	4500		
2860	4300	2590	3900	2330	3510	10	3630	5460	3280	4940	2990	4500		
2800	4210	2540	3820	2290	3440	11	3630	5450	3270	4920	2980	4480		
2740	4120	2480	3730	2230	3360	12	3560	5360	3210	4830	2920	4390		
2670	4020	2420	3640	2180	3270	13	3500	5260	3150	4740	2860	4300		
2610	3920	2360	3540	2120	3190	14	3440	5170	3090	4650	2810	4220		
2530	3810	2290	3440	2060	3100	15	3380	5070	3030	4560	2750	4130		
2450	3680	2220	3340	2000	3000	16	3310	4980	2970	4470	2690	4050		
2360	3550	2150	3230	1930	2900	17	3250	4880	2910	4380	2640	3960		
2270	3410	2070	3110	1860	2800	18	3190	4790	2850	4290	2580	3880		
2180	3280	1990	2980	1800	2700	19	3120	4690	2790	4200	2520	3790		
2090	3140	1900	2860	1730	2600	20	3060	4600	2730	4110	2470	3710		
1900	2860	1730	2600	1570	2370	22	2930	4410	2610	3930	2350	3540		
1720	2590	1560	2340	1420	2130	24	2810	4220	2490	3750	2240	3370		
1540	2320	1390	2090	1260	1900	26	2680	4030	2370	3570	2130	3190		
1370	2060	1230	1850	1120	1680	28	2550	3840	2260	3390	2010	3020		
1200	1810	1080	1620	976	1470	30	2430	3650	2140	3210	1900	2850		
1060	1590	950	1430	858	1290	32	2300	3460	2000	3010	1740	2610		
936	1410	841	1260	760	1140	34	2140	3210	1830	2740	1580	2380		
835	1260	750	1130	678	1020	36	1970	2950	1680	2520	1450	2180		
749	1130	674	1010	608	914	38	1820	2730	1550	2330	1330	2010		
676	1020	608	914	549	825	40	1690	2540	1440	2160	1240	1860		
614	922	551	829	498	748	42	1580	2380	1340	2010	1150	1730		
559	840	502	755	454	682	44	1490	2230	1260	1890	1080	1620		
511	769	460	691	415	624	46	1400	2100	1180	1780	1010	1520		
470	706	422	634	381	573	48	1320	1990	1110	1680	953	1430		
433	651	389	585	351	528	50	1260	1890	1060	1590	901	1350		
Properties														
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft								
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r			
3240	4880	2980	4480	2740	4110	10.9	32.9	10.8	31.7	10.7	30.7			
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²								
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	77.4		71.1		65.3				
2610	3920	2400	3600	2200	3310	Moment of Inertia, in. ⁴								
I_x	I_y	I_x	I_y	I_x	I_y	15900		1040		14200				
15900	1040	14200	933	12900	840	r_y , in.								
3.66			3.62			3.59			r_x/r_y					
3.91			3.90			3.93								
Available Strength in Shear, kips						Available Strength in Flexure about Y-Y Axis, kip-ft								
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$			
840	1260	795	1190	736	1100	706	1060	636	956	573	861			

^c Shape is slender for compression with $F_y = 70$ ksi.
 Note: Confirm ASTM A913 material availability before specifying.




Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70$ ksi
 $F_u = 90$ ksi

W-Shapes

W33 ^x						Shape	W33 ^x					
201 ^c		169 ^c		152 ^c		lb/ft	201		169		152 ^v	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2290	3440	1860	2800	1650	2480	0	2700	4060	2200	3300	1950	2930
2210	3310	1730	2600	1530	2310	6	2700	4060	2200	3300	1950	2930
2180	3270	1680	2530	1490	2250	7	2700	4060	2200	3300	1950	2930
2140	3220	1630	2460	1450	2180	8	2700	4060	2160	3250	1920	2880
2110	3170	1580	2370	1400	2100	9	2700	4060	2100	3160	1860	2800
2070	3110	1520	2280	1340	2020	10	2700	4060	2040	3070	1810	2710
2020	3040	1460	2190	1290	1930	11	2680	4030	1980	2980	1750	2630
1980	2970	1390	2090	1230	1850	12	2630	3950	1920	2890	1690	2550
1930	2890	1320	1980	1170	1750	13	2570	3870	1860	2800	1640	2460
1870	2820	1250	1880	1100	1660	14	2520	3790	1800	2710	1580	2380
1820	2730	1180	1770	1040	1560	15	2470	3710	1740	2620	1530	2290
1760	2650	1110	1660	975	1470	16	2410	3630	1680	2530	1470	2210
1700	2560	1040	1560	911	1370	17	2360	3550	1620	2440	1410	2120
1640	2470	965	1450	847	1270	18	2310	3470	1560	2340	1360	2040
1580	2380	886	1330	785	1180	19	2250	3390	1500	2250	1300	1960
1520	2290	807	1210	715	1070	20	2200	3310	1440	2160	1250	1870
1400	2100	667	1000	591	888	22	2090	3150	1300	1950	1100	1650
1270	1910	561	843	496	746	24	1990	2990	1130	1700	949	1430
1130	1700	478	718	423	636	26	1880	2830	997	1500	834	1250
995	1500	412	619	365	548	28	1770	2670	890	1340	741	1110
869	1310	359	539	318	478	30	1660	2490	803	1210	666	1000
763	1150	315	474	279	420	32	1490	2240	730	1100	604	908
676	1020	279	420	247	372	34	1350	2030	670	1010	552	830
603	907	249	375	221	332	36	1240	1860	618	929	508	763
541	814	224	336	198	298	38	1140	1710	574	862	470	707
489	734	202	303	179	269	40	1050	1580	535	805	438	658
443	666					42	976	1470	502	754	409	615
404	607					44	911	1370	472	710	384	577
369	555					46	854	1280	446	670	362	544
339	510					48	804	1210	422	635	342	514
313	470					50	759	1140	401	603	324	488
Properties						Limiting Unbraced Lengths, ft						
Available Strength in Tensile Yielding, kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
2480	3720	2070	3120	1880	2830	10.6	29.8	7.46	21.6	7.37	21.0	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Moment of Inertia, in. ⁴						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	I_x	I_y	I_x	I_y	I_x	I_y	
1990	2990	1670	2510	1520	2270	11600	749	9290	310	8160	273	
Available Strength in Shear, kips						r_y , in.						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.56		2.50		2.47		
675	1010	634	951	535	804	r_x/r_y						
Available Strength in Flexure about Y-Y Axis, kip-ft						3.93		5.48		5.47		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$							
513	772	295	443	258	388							

^c Shape is slender for compression with $F_y = 70$ ksi.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W33 ^x						Shape	W33 ^x					
141 ^c		130 ^c		118 ^c		lb/ft	141 ^v		130 ^v		118 ^{f,v}	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1500	2250	1360	2040	1200	1800	0	1800	2700	1630	2450	1450	2180
1390	2090	1260	1890	1100	1660	6	1800	2700	1630	2450	1450	2180
1350	2030	1220	1830	1070	1610	7	1800	2700	1630	2450	1450	2170
1310	1970	1180	1770	1040	1560	8	1760	2640	1590	2390	1400	2100
1260	1900	1140	1710	996	1500	9	1700	2560	1540	2310	1350	2040
1210	1820	1090	1640	953	1430	10	1650	2480	1490	2240	1310	1970
1160	1740	1040	1570	908	1370	11	1600	2400	1440	2160	1260	1900
1100	1660	992	1490	862	1300	12	1540	2320	1390	2090	1220	1830
1050	1570	939	1410	814	1220	13	1490	2240	1340	2010	1170	1760
989	1490	886	1330	765	1150	14	1440	2160	1290	1940	1130	1690
930	1400	832	1250	716	1080	15	1390	2080	1240	1860	1080	1620
871	1310	777	1170	667	1000	16	1330	2000	1190	1790	1030	1550
812	1220	724	1090	619	930	17	1280	1920	1140	1710	988	1490
754	1130	671	1010	571	859	18	1230	1840	1090	1640	942	1420
698	1050	619	930	524	788	19	1170	1770	1040	1570	896	1350
639	961	568	854	481	723	20	1120	1690	989	1490	830	1250
528	794	472	709	403	605	22	968	1460	837	1260	700	1050
444	667	396	596	338	509	24	836	1260	721	1080	601	903
378	569	338	508	288	433	26	732	1100	630	946	524	787
326	490	291	438	249	374	28	649	976	557	837	462	694
284	427	254	381	217	326	30	582	875	498	749	412	619
250	375	223	335	190	286	32	527	792	450	676	371	558
221	333	198	297	169	253	34	480	722	409	615	337	506
197	297	176	265	150	226	36	441	663	375	564	308	463
177	266	158	238	135	203	38	408	613	346	520	283	426
160	240					40	379	569	321	482	262	394
						42	353	531	299	449	244	366
						44	331	498	280	420	228	342
						46	312	468	263	395	213	321
						48	294	442	248	372	201	302
						50	279	419	234	352	190	285
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
1740	2610	1610	2410	1450	2190	7.25	20.5	7.13	20.0	6.95	19.4	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	41.5		38.3		34.7		
1400	2100	1290	1940	1170	1760	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	7450	246	6710	218	5900	187	
507	762	483	726	432	649	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.43		2.39		2.32		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
234	351	208	312	179	269	5.51		5.52		5.60		


^c Shape is slender for compression with $F_y = 70$ ksi.

^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.


^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.

Notes: Heavy line indicates L_c/r equal to or greater than 200.


Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W30 \times						Shape	W30 \times						
391 ^h		357 ^h		326 ^h		lb/ft	391 ^h		357 ^h		326 ^h		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
4820	7240	4400	6610	4020	6040	0	5060	7610	4610	6930	4160	6250	
4630	6970	4230	6360	3860	5800	6	5060	7610	4610	6930	4160	6250	
4570	6870	4170	6260	3800	5710	7	5060	7610	4610	6930	4160	6250	
4490	6750	4100	6160	3740	5620	8	5060	7610	4610	6930	4160	6250	
4410	6630	4020	6040	3670	5510	9	5060	7610	4610	6930	4160	6250	
4320	6490	3940	5920	3590	5390	10	5060	7610	4610	6930	4160	6250	
4220	6350	3850	5780	3500	5260	11	5060	7610	4600	6920	4140	6230	
4120	6190	3750	5640	3410	5130	12	5000	7520	4540	6830	4080	6140	
4010	6020	3650	5480	3320	4990	13	4940	7420	4480	6730	4020	6050	
3890	5850	3540	5320	3220	4830	14	4880	7330	4420	6640	3970	5960	
3770	5660	3430	5150	3110	4680	15	4820	7240	4360	6550	3910	5870	
3640	5470	3310	4980	3000	4520	16	4750	7150	4300	6460	3850	5780	
3510	5280	3190	4800	2890	4350	17	4690	7050	4240	6370	3790	5700	
3380	5080	3070	4610	2780	4180	18	4630	6960	4180	6280	3730	5610	
3250	4880	2950	4430	2670	4010	19	4570	6870	4110	6180	3670	5520	
3110	4680	2820	4240	2550	3830	20	4510	6780	4050	6090	3610	5430	
2840	4270	2570	3860	2320	3480	22	4390	6590	3930	5910	3500	5260	
2570	3860	2320	3490	2090	3140	24	4260	6410	3810	5730	3380	5080	
2300	3460	2070	3120	1860	2800	26	4140	6220	3690	5540	3260	4900	
2040	3070	1840	2770	1650	2480	28	4020	6040	3570	5360	3150	4730	
1800	2700	1610	2430	1440	2170	30	3890	5850	3440	5180	3030	4550	
1580	2370	1420	2130	1270	1900	32	3770	5670	3320	4990	2910	4370	
1400	2100	1260	1890	1120	1690	34	3650	5480	3200	4810	2790	4200	
1250	1880	1120	1680	1000	1500	36	3530	5300	3080	4630	2680	4020	
1120	1680	1010	1510	898	1350	38	3400	5110	2960	4440	2560	3850	
1010	1520	908	1360	811	1220	40	3280	4930	2830	4260	2410	3610	
917	1380	823	1240	735	1110	42	3160	4740	2690	4040	2270	3400	
835	1260	750	1130	670	1010	44	3020	4550	2540	3820	2140	3220	
764	1150	686	1030	613	921	46	2870	4320	2410	3630	2030	3050	
702	1050	630	947	563	846	48	2740	4110	2300	3450	1930	2900	
647	972	581	873	519	780	50	2610	3930	2190	3290	1840	2770	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
4820	7250	4400	6620	4020	6040	11.0	43.6	10.9	40.8	10.7	38.3		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	115		105		95.9			
3880	5820	3540	5320	3240	4850	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
1260	1900	1140	1710	1030	1550	20700	1550	18700	1390	16800	1240		
Available Strength in Shear, kips						r_y , in.							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.67		3.64		3.60			
1260	1900	1140	1710	1030	1550	r_x/r_y							
Available Strength in Flexure about Y-Y Axis, kip-ft						3.65		3.65		3.67			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$								
1080	1630	975	1460	880	1320								


^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

												
Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W30x						Shape	W30x					
292		261		235 ^c		lb/ft	292		261		235	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
3600	5420	3230	4850	2870	4310	0	3700	5570	3290	4950	2960	4450
3460	5200	3090	4650	2760	4150	6	3700	5570	3290	4950	2960	4450
3410	5120	3050	4580	2720	4090	7	3700	5570	3290	4950	2960	4450
3350	5030	2990	4500	2680	4020	8	3700	5570	3290	4950	2960	4450
3280	4940	2930	4410	2630	3950	9	3700	5570	3290	4950	2960	4450
3210	4830	2870	4310	2580	3870	10	3700	5570	3290	4950	2960	4450
3140	4710	2800	4200	2510	3780	11	3680	5540	3270	4910	2930	4410
3050	4590	2720	4090	2450	3670	12	3630	5450	3210	4830	2880	4330
2970	4460	2640	3970	2370	3570	13	3570	5370	3160	4750	2830	4250
2880	4320	2560	3850	2300	3450	14	3510	5280	3100	4670	2780	4170
2780	4180	2470	3720	2220	3340	15	3460	5200	3050	4580	2720	4090
2690	4040	2380	3580	2140	3210	16	3400	5110	2990	4500	2670	4010
2590	3890	2290	3450	2060	3090	17	3340	5030	2940	4420	2620	3940
2480	3730	2200	3310	1970	2960	18	3290	4940	2890	4340	2570	3860
2380	3580	2110	3160	1890	2830	19	3230	4860	2830	4250	2510	3780
2280	3420	2010	3020	1800	2710	20	3170	4770	2780	4170	2460	3700
2070	3110	1820	2740	1630	2450	22	3060	4600	2670	4010	2360	3540
1860	2790	1630	2450	1460	2190	24	2950	4430	2560	3840	2250	3390
1660	2490	1450	2180	1290	1940	26	2830	4260	2450	3680	2150	3230
1460	2200	1280	1920	1140	1710	28	2720	4090	2340	3510	2050	3080
1280	1920	1110	1670	990	1490	30	2610	3920	2230	3350	1940	2920
1120	1690	978	1470	870	1310	32	2490	3750	2120	3180	1840	2760
995	1500	866	1300	771	1160	34	2380	3580	2000	3000	1690	2540
888	1330	773	1160	688	1030	36	2260	3400	1850	2780	1560	2340
797	1200	694	1040	617	928	38	2110	3170	1720	2580	1450	2170
719	1080	626	941	557	837	40	1980	2970	1610	2410	1350	2030
652	980	568	853	505	759	42	1860	2790	1510	2270	1260	1900
594	893	517	778	460	692	44	1750	2640	1420	2130	1190	1790
544	817	473	711	421	633	46	1660	2500	1340	2020	1120	1690
499	751	435	653	387	581	48	1580	2370	1270	1910	1060	1600
460	692	401	602	356	536	50	1500	2260	1210	1820	1010	1520
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
3600	5420	3230	4850	2900	4370	10.7	35.9	10.5	33.7	10.5	32.2	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	86.0		77.0		69.3		
2900	4350	2600	3900	2340	3510	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	14900	1100	13100	959	11700	855	
914	1370	823	1230	727	1090	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						3.58		3.53		3.51		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
779	1170	685	1030	611	919	3.69		3.71		3.70		


^c Shape is slender for compression with $F_y = 70$ ksi.
 Note: Confirm ASTM A913 material availability before specifying.

 W30		Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes						$F_y = 70$ ksi $F_u = 90$ ksi					
		W30x			W30x			Shape		W30x			
211 ^c		191 ^c		173 ^c		lb/ft		211		191		173	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending		Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD			ASD	LRFD	ASD	LRFD	ASD	LRFD
2530	3810	2230	3360	1990	2990	0	2620	3940	2360	3540	2120	3190	
2440	3670	2150	3230	1910	2870	6	2620	3940	2360	3540	2120	3190	
2410	3620	2120	3180	1880	2830	7	2620	3940	2360	3540	2120	3190	
2370	3560	2080	3130	1850	2780	8	2620	3940	2360	3540	2120	3190	
2320	3490	2050	3080	1820	2730	9	2620	3940	2360	3540	2120	3190	
2280	3420	2000	3010	1780	2670	10	2620	3940	2360	3540	2120	3190	
2230	3350	1960	2940	1740	2610	11	2590	3900	2330	3500	2090	3140	
2170	3270	1910	2870	1690	2550	12	2550	3830	2280	3430	2040	3070	
2120	3180	1860	2790	1650	2480	13	2500	3750	2230	3360	2000	3010	
2060	3090	1810	2710	1600	2400	14	2450	3680	2190	3290	1960	2940	
1990	2990	1750	2630	1550	2330	15	2400	3610	2140	3220	1910	2880	
1920	2880	1690	2540	1500	2250	16	2350	3530	2100	3150	1870	2810	
1840	2770	1630	2450	1440	2170	17	2300	3460	2050	3080	1830	2750	
1760	2650	1570	2360	1390	2090	18	2250	3380	2000	3010	1780	2680	
1690	2540	1510	2270	1330	2000	19	2200	3310	1960	2940	1740	2620	
1610	2420	1440	2160	1280	1920	20	2150	3240	1910	2870	1700	2550	
1450	2180	1300	1950	1160	1740	22	2060	3090	1820	2730	1610	2420	
1300	1950	1160	1740	1030	1550	24	1960	2940	1730	2590	1530	2290	
1150	1730	1020	1540	910	1370	26	1860	2800	1630	2450	1440	2160	
1010	1520	894	1340	793	1190	28	1760	2650	1540	2310	1350	2030	
880	1320	779	1170	690	1040	30	1660	2500	1430	2150	1230	1850	
773	1160	685	1030	607	912	32	1530	2300	1300	1950	1110	1670	
685	1030	606	911	538	808	34	1400	2100	1180	1770	1010	1510	
611	919	541	813	479	721	36	1290	1940	1080	1630	922	1390	
549	824	485	730	430	647	38	1190	1790	1000	1500	850	1280	
495	744	438	659	388	584	40	1110	1670	928	1400	787	1180	
449	675	397	597	352	529	42	1040	1560	866	1300	733	1100	
409	615	362	544	321	482	44	973	1460	812	1220	685	1030	
374	563	331	498	294	441	46	917	1380	763	1150	643	967	
344	517	304	457	270	405	48	866	1300	720	1080	606	911	
317	476	280	421	249	374	50	822	1230	682	1030	573	861	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
2610	3920	2350	3530	2130	3210	10.4	30.8	10.3	29.6	10.2	28.7		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	62.3		56.1		50.9			
2100	3150	1890	2840	1720	2580	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	10300	757	9200	673	8230	598		
671	1010	610	915	558	836	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						3.49		3.46		3.42			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
541	814	482	725	430	646	3.70		3.70		3.71			

^c Shape is slender for compression with $F_y = 70$ ksi.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W30 ^x						Shape	W30 ^x					
148 ^c		132 ^c		124 ^c		lb/ft	148		132		124 ^v	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1670	2510	1460	2190	1350	2030	0	1750	2630	1530	2290	1430	2140
1530	2300	1330	2000	1230	1850	6	1750	2630	1530	2290	1430	2140
1480	2230	1290	1940	1190	1790	7	1740	2610	1510	2270	1410	2120
1430	2150	1240	1870	1150	1720	8	1690	2530	1470	2200	1360	2050
1370	2060	1190	1790	1100	1650	9	1630	2460	1420	2130	1320	1980
1310	1970	1140	1710	1050	1570	10	1580	2380	1370	2060	1270	1910
1250	1870	1080	1620	993	1490	11	1530	2300	1320	1990	1230	1850
1180	1770	1020	1530	938	1410	12	1480	2220	1280	1920	1180	1780
1110	1660	958	1440	880	1320	13	1430	2150	1230	1850	1140	1710
1040	1560	896	1350	823	1240	14	1380	2070	1180	1780	1090	1640
966	1450	834	1250	765	1150	15	1330	1990	1130	1710	1050	1580
884	1330	772	1160	707	1060	16	1270	1910	1090	1630	1000	1510
805	1210	701	1050	650	976	17	1220	1840	1040	1560	958	1440
729	1100	633	951	585	879	18	1170	1760	993	1490	912	1370
655	985	568	854	525	789	19	1120	1680	946	1420	866	1300
591	889	513	770	474	712	20	1070	1610	878	1320	794	1190
489	735	424	637	391	588	22	919	1380	751	1130	677	1020
411	617	356	535	329	494	24	805	1210	654	983	588	884
350	526	303	456	280	421	26	714	1070	578	868	518	779
302	454	262	393	242	363	28	641	963	516	776	462	695
263	395	228	342	211	316	30	581	874	466	701	417	626
231	347	200	301	185	278	32	531	799	425	638	379	569
205	308	177	267	164	246	34	489	736	390	586	347	522
183	274	158	238	146	220	36	454	682	360	541	320	481
164	246					38	423	635	335	503	297	446
						40	396	595	312	469	277	416
						42	372	559	293	440	259	390
						44	351	528	276	415	244	367
						46	332	500	261	392	230	346
						48	316	474	247	371	218	328
						50	300	452	235	353	207	311
Available Strength in Tensile Yielding, kips						Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft						
1830	2750	1630	2440	1530	2300	L_p	L_r	L_p	L_r	L_p	L_r	
						6.81	20.0	6.72	19.3	6.66	19.0	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	43.6		38.8		36.5		
1470	2210	1310	1960	1230	1850	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	6680	227	5770	196	5360	181	
559	838	522	783	444	668	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.28		2.25		2.23		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
238	357	204	307	189	284	5.44		5.42		5.43		

^c Shape is slender for compression with $F_y = 70$ ksi.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70$ ksi $F_u = 90$ ksi	
W30 \times						Shape	W30 \times						
116 ^c		108 ^c		99 ^c		lb/ft	116 ^v		108 ^v		99 ^{f,v}		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
1250	1870	1130	1700	1020	1530		0	1320	1980	1210	1820	1090	1630
1130	1700	1030	1550	918	1380		6	1320	1980	1210	1820	1090	1630
1100	1650	994	1490	885	1330		7	1300	1950	1180	1780	1060	1600
1050	1580	955	1440	849	1280		8	1260	1890	1140	1720	1020	1540
1010	1520	912	1370	809	1220		9	1210	1830	1100	1660	986	1480
960	1440	867	1300	768	1150		10	1170	1760	1060	1600	948	1420
909	1370	820	1230	724	1090		11	1130	1700	1020	1540	910	1370
856	1290	771	1160	679	1020		12	1090	1630	982	1480	872	1310
802	1210	721	1080	634	952		13	1040	1570	941	1410	834	1250
748	1120	671	1010	588	884		14	1000	1500	900	1350	796	1200
694	1040	621	933	543	815		15	957	1440	860	1290	758	1140
640	962	572	859	498	748		16	915	1370	819	1230	720	1080
588	883	523	787	454	682		17	872	1310	779	1170	682	1030
528	794	472	710	412	619		18	829	1250	738	1110	634	952
474	713	424	637	370	556		19	772	1160	675	1010	575	865
428	643	382	575	334	502		20	707	1060	617	927	525	790
354	532	316	475	276	415		22	602	904	524	788	445	669
297	447	266	399	232	348		24	521	784	453	681	384	577
253	381	226	340	197	297		26	458	689	397	597	336	504
218	328	195	293	170	256	28	408	613	353	530	297	447	
190	286	170	255	148	223	30	367	552	317	476	266	400	
167	251	149	224	130	196	32	333	501	287	431	241	362	
148	223	132	199	115	174	34	305	458	262	393	219	329	
132	199					36	281	422	241	362	201	302	
						38	260	391	222	334	186	279	
						40	242	364	207	311	172	259	
						42	226	340	193	290	161	241	
						44	213	320	181	272	150	226	
						46	201	301	171	257	142	213	
						48	190	285	161	242	134	201	
						50	180	271	153	230	126	190	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
1430	2150	1330	2000	1220	1830	6.54	18.6	6.42	18.2	6.33	17.6		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	34.2		31.7		29.0			
1150	1730	1070	1600	979	1470	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	4930	164	4470	146	3990	128		
426	641	408	614	387	582	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.19		2.15		2.10			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
172	258	153	230	134	202	5.48		5.53		5.57			

^c Shape is slender for compression with $F_y = 70$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;"> Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces </div> <div style="text-align: right;"> $F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$ </div> </div>													
W30-W27						W-Shapes							
W30 \times		W27 \times				Shape		W30 \times		W27 \times			
90 ^c		539 ^h		368 ^h		lb/ft		90 ^{f,v}		539 ^h		368 ^h	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips								Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending		ASD	LRFD	ASD	LRFD	ASD	LRFD
892	1340	6660	10000	4570	6870			0	964	1450	6600	9920	4330
805	1210	6400	9630	4370	6570	6	964	1450	6600	9920	4330	6510	
776	1170	6310	9490	4300	6470	7	962	1450	6600	9920	4330	6510	
743	1120	6210	9330	4230	6350	8	927	1390	6600	9920	4330	6510	
708	1060	6090	9160	4140	6220	9	892	1340	6600	9920	4330	6510	
671	1010	5970	8970	4050	6080	10	857	1290	6600	9920	4330	6510	
633	951	5830	8760	3940	5930	11	822	1230	6600	9910	4300	6460	
593	891	5680	8540	3830	5760	12	787	1180	6540	9840	4250	6390	
553	831	5530	8310	3720	5590	13	751	1130	6490	9760	4200	6320	
512	770	5370	8060	3600	5410	14	716	1080	6440	9680	4150	6240	
472	710	5200	7810	3470	5220	15	681	1020	6390	9600	4100	6170	
433	651	5020	7550	3350	5030	16	646	971	6340	9520	4050	6090	
394	593	4840	7280	3210	4830	17	611	919	6280	9440	4000	6020	
359	539	4660	7000	3080	4630	18	559	840	6230	9370	3950	5940	
328	493	4470	6720	2940	4430	19	507	762	6180	9290	3900	5870	
300	451	4280	6430	2810	4220	20	462	695	6130	9210	3850	5790	
248	372	3900	5860	2530	3810	22	390	587	6020	9050	3760	5640	
208	313	3520	5300	2270	3410	24	335	504	5920	8890	3660	5500	
177	267	3150	4740	2010	3020	26	293	440	5810	8740	3560	5350	
153	230	2800	4210	1760	2640	28	259	389	5710	8580	3460	5200	
133	200	2460	3690	1530	2300	30	231	347	5600	8420	3360	5050	
117	176	2160	3250	1350	2020	32	208	313	5500	8270	3260	4900	
104	156	1910	2870	1190	1790	34	189	284	5400	8110	3160	4750	
		1710	2560	1060	1600	36	173	260	5290	7950	3060	4600	
		1530	2300	954	1430	38	159	240	5190	7800	2960	4450	
		1380	2080	861	1290	40	148	222	5080	7640	2860	4300	
		1250	1880	781	1170	42	137	206	4980	7480	2760	4150	
		1140	1720	712	1070	44	128	193	4870	7320	2670	4010	
		1040	1570	651	979	46	121	181	4770	7170	2560	3840	
		960	1440	598	899	48	114	171	4660	7010	2440	3670	
		884	1330	551	828	50	107	161	4560	6850	2330	3510	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	L_p	L_r
1100	1660	6660	10000	4570	6870	6.93	17.3	10.9	63.8	10.4	45.5		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	26.3		159		109			
888	1330	5370	8050	3680	5520	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	I_x	I_y
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3610	115	25600	2110	16200	1310		
314	472	1790	2690	1170	1760	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.09		3.65		3.48			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
117	176	1530	2290	975	1460	5.60		3.48		3.51			

^c Shape is slender for compression with $F_y = 70 \text{ ksi}$.
^f Shape exceeds compact limit for flexure with $F_y = 70 \text{ ksi}$.
^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70 \text{ ksi}$; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Note: Heavy line indicates L_c/r equal to or greater than 200.



Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces


$F_y = 70 \text{ ksi}$
 $F_u = 90 \text{ ksi}$

W-Shapes


W27 ^x						Shape	W27 ^x					
336 ^h		307 ^h		281		lb/ft	336 ^h		307 ^h		281	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
4160	6250	3780	5680	3480	5240	0	3950	5930	3600	5410	3270	4910
3980	5980	3610	5430	3330	5000	6	3950	5930	3600	5410	3270	4910
3910	5880	3550	5340	3270	4920	7	3950	5930	3600	5410	3270	4910
3840	5770	3490	5240	3210	4820	8	3950	5930	3600	5410	3270	4910
3760	5650	3410	5130	3140	4720	9	3950	5930	3600	5410	3270	4910
3670	5520	3330	5010	3060	4610	10	3950	5930	3600	5410	3270	4910
3580	5380	3240	4870	2980	4480	11	3910	5880	3560	5350	3230	4850
3480	5230	3150	4730	2900	4350	12	3860	5810	3510	5270	3180	4780
3370	5070	3050	4590	2800	4220	13	3810	5730	3460	5200	3130	4710
3260	4900	2950	4430	2710	4070	14	3760	5660	3410	5120	3080	4640
3150	4730	2840	4270	2610	3920	15	3720	5580	3360	5050	3040	4560
3030	4550	2730	4110	2510	3770	16	3670	5510	3310	4980	2990	4490
2910	4370	2620	3940	2400	3610	17	3620	5440	3260	4900	2940	4420
2780	4180	2510	3770	2300	3460	18	3570	5360	3210	4830	2890	4350
2660	4000	2390	3600	2190	3290	19	3520	5290	3160	4750	2850	4280
2530	3810	2280	3420	2090	3130	20	3470	5210	3110	4680	2800	4210
2280	3430	2050	3080	1870	2810	22	3370	5070	3020	4530	2700	4060
2040	3060	1820	2740	1660	2500	24	3270	4920	2920	4380	2610	3920
1800	2710	1600	2410	1460	2200	26	3170	4770	2820	4240	2510	3780
1570	2360	1400	2100	1270	1910	28	3070	4620	2720	4090	2420	3630
1370	2060	1220	1830	1110	1660	30	2980	4470	2620	3940	2320	3490
1200	1810	1070	1610	973	1460	32	2880	4320	2520	3790	2230	3350
1070	1600	947	1420	862	1300	34	2780	4180	2420	3640	2130	3200
951	1430	845	1270	769	1160	36	2680	4030	2330	3500	2040	3060
853	1280	758	1140	690	1040	38	2580	3880	2230	3350	1920	2890
770	1160	684	1030	623	936	40	2480	3730	2120	3180	1810	2710
699	1050	621	933	565	849	42	2380	3580	2000	3000	1700	2560
637	957	565	850	515	774	44	2260	3400	1890	2850	1610	2420
582	875	517	778	471	708	46	2150	3230	1800	2700	1530	2300
535	804	475	714	433	650	48	2050	3080	1710	2580	1460	2190
493	741	438	658	399	599	50	1960	2940	1640	2460	1390	2090

Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
4160	6250	3780	5680	3480	5240	10.3	42.1	10.2	39.2	10.1	36.9
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	99.2		90.2		83.1	
3350	5020	3040	4570	2800	4210	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
1060	1590	961	1440	870	1300	14600	1180	13100	1050	11900	953
Available Strength in Shear, kips						r_y , in.					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.45		3.41		3.39	
1060	1590	961	1440	870	1300	r_x/r_y					
Available Strength in Flexure about Y-Y Axis, kip-ft						3.51		3.52		3.54	
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$						
880	1320	793	1190	720	1080						


^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W27x						Shape	W27x						
258		235		217		lb/ft	258		235		217		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
3190	4790	2910	4370	2680	4030	0	2980	4470	2700	4050	2480	3730	
3040	4570	2770	4170	2550	3840	6	2980	4470	2700	4050	2480	3730	
2990	4500	2730	4100	2510	3770	7	2980	4470	2700	4050	2480	3730	
2930	4410	2670	4020	2460	3700	8	2980	4470	2700	4050	2480	3730	
2870	4310	2610	3930	2400	3610	9	2980	4470	2700	4050	2480	3730	
2800	4210	2550	3830	2340	3520	10	2980	4470	2690	4050	2480	3730	
2720	4090	2480	3720	2280	3420	11	2930	4410	2650	3980	2440	3660	
2640	3970	2400	3610	2210	3320	12	2880	4340	2600	3910	2390	3600	
2560	3840	2320	3490	2140	3210	13	2840	4270	2560	3850	2350	3530	
2470	3710	2240	3370	2060	3100	14	2790	4200	2510	3780	2300	3460	
2380	3570	2160	3240	1980	2980	15	2750	4130	2470	3710	2260	3400	
2280	3430	2070	3110	1900	2860	16	2700	4060	2420	3640	2220	3330	
2190	3290	1980	2980	1820	2740	17	2650	3990	2380	3570	2170	3270	
2090	3140	1890	2840	1740	2610	18	2610	3920	2330	3510	2130	3200	
1990	2990	1800	2710	1650	2480	19	2560	3850	2290	3440	2090	3140	
1890	2840	1710	2570	1570	2360	20	2510	3780	2240	3370	2040	3070	
1700	2550	1530	2300	1400	2110	22	2420	3640	2150	3230	1950	2940	
1500	2260	1350	2030	1240	1860	24	2330	3500	2060	3100	1870	2810	
1320	1980	1180	1780	1080	1630	26	2230	3360	1970	2960	1780	2680	
1140	1720	1020	1540	938	1410	28	2140	3220	1880	2830	1690	2540	
996	1500	893	1340	817	1230	30	2050	3080	1790	2690	1610	2410	
876	1320	784	1180	718	1080	32	1950	2940	1700	2550	1510	2270	
776	1170	695	1040	636	956	34	1860	2800	1590	2390	1390	2090	
692	1040	620	932	567	853	36	1750	2630	1470	2220	1290	1940	
621	933	556	836	509	765	38	1630	2460	1380	2070	1200	1800	
560	842	502	755	459	691	40	1530	2300	1290	1940	1120	1690	
508	764	455	684	417	626	42	1450	2170	1210	1820	1060	1590	
463	696	415	624	380	571	44	1370	2050	1150	1720	997	1500	
424	637	380	571	347	522	46	1300	1950	1090	1630	944	1420	
389	585	349	524	319	480	48	1230	1850	1030	1550	896	1350	
359	539	321	483	294	442	50	1180	1770	984	1480	853	1280	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
3190	4790	2910	4370	2680	4030	10.0	34.9	9.94	33.0	9.91	31.6		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	76.1		69.4		63.9			
2570	3850	2340	3510	2160	3230	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
796	1190	731	1100	660	990	10800	859	9700	769	8910	704		
Available Strength in Shear, kips						r_y , in.							
796	1190	731	1100	660	990	3.36		3.33		3.32			
Available Strength in Flexure about Y-Y Axis, kip-ft						r_x/r_y							
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	3.54		3.54		3.55			
653	982	587	882	538	809								


Note: Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W27 ^x						Shape	W27 ^x						
194 ^c		178 ^c		161 ^c		lb/ft	194		178		161		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
2370	3560	2160	3250	1920	2880		0	2200	3310	1990	2990	1800	2700
2270	3410	2070	3110	1830	2750	6	2200	3310	1990	2990	1800	2700	
2230	3350	2030	3060	1800	2710	7	2200	3310	1990	2990	1800	2700	
2190	3290	2000	3000	1770	2660	8	2200	3310	1990	2990	1800	2700	
2140	3220	1950	2940	1730	2600	9	2200	3310	1990	2990	1800	2700	
2090	3140	1910	2870	1690	2540	10	2200	3300	1980	2970	1790	2680	
2030	3050	1860	2790	1650	2480	11	2160	3240	1940	2920	1750	2630	
1970	2960	1800	2710	1600	2410	12	2110	3180	1900	2860	1710	2570	
1900	2860	1740	2610	1550	2330	13	2070	3110	1860	2800	1670	2510	
1830	2750	1670	2520	1500	2250	14	2030	3050	1820	2740	1640	2460	
1760	2650	1610	2420	1450	2170	15	1990	2990	1780	2680	1600	2400	
1690	2540	1540	2310	1390	2090	16	1950	2930	1740	2620	1560	2350	
1610	2430	1470	2210	1330	1990	17	1910	2860	1700	2560	1520	2290	
1540	2310	1400	2100	1260	1900	18	1860	2800	1660	2500	1490	2230	
1460	2200	1330	2000	1200	1800	19	1820	2740	1620	2440	1450	2180	
1390	2090	1260	1890	1130	1700	20	1780	2680	1580	2380	1410	2120	
1240	1860	1120	1680	1010	1510	22	1700	2550	1510	2260	1340	2010	
1090	1640	985	1480	884	1330	24	1620	2430	1430	2140	1260	1900	
953	1430	856	1290	767	1150	26	1530	2300	1350	2030	1190	1780	
823	1240	738	1110	661	994	28	1450	2180	1270	1910	1100	1660	
717	1080	643	967	576	866	30	1360	2050	1160	1750	993	1490	
630	947	565	850	506	761	32	1240	1870	1060	1590	900	1350	
558	839	501	753	448	674	34	1140	1720	969	1460	823	1240	
498	748	447	671	400	601	36	1060	1590	894	1340	757	1140	
447	671	401	602	359	540	38	982	1480	829	1250	701	1050	
403	606	362	544	324	487	40	918	1380	773	1160	652	980	
366	550	328	493	294	442	42	861	1290	724	1090	610	916	
333	501	299	449	268	402	44	811	1220	681	1020	572	860	
305	458	274	411	245	368	46	767	1150	643	966	539	811	
280	421	251	378	225	338	48	727	1090	608	914	510	766	
258	388	232	348	207	312	50	692	1040	578	868	484	727	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
2390	3600	2200	3310	2000	3000	9.82	30.0	9.70	28.9	9.64	27.8		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	57.1		52.5		47.6			
1930	2890	1770	2660	1610	2410	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	7860	619	7020	555	6310	497		
590	885	564	847	510	765	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						3.29		3.25		3.23			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
475	714	426	641	381	572	3.56		3.57		3.56			


^c Shape is slender for compression with $F_y = 70 \text{ ksi}$.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W27 ^x						Shape	W27 ^x					
146 ^c		129 ^c		114 ^c		lb/ft	146		129		114	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1700	2560	1470	2210	1280	1920	0	1620	2440	1380	2070	1200	1800
1630	2450	1340	2010	1160	1750	6	1620	2440	1380	2070	1200	1800
1600	2410	1300	1950	1120	1690	7	1620	2440	1360	2050	1180	1770
1570	2360	1250	1870	1080	1620	8	1620	2440	1320	1990	1140	1720
1540	2310	1190	1790	1030	1550	9	1620	2440	1280	1920	1100	1660
1500	2260	1130	1710	980	1470	10	1610	2410	1240	1860	1070	1600
1460	2200	1070	1610	927	1390	11	1570	2360	1200	1800	1030	1540
1420	2130	1010	1520	872	1310	12	1540	2310	1150	1730	989	1490
1370	2070	948	1420	816	1230	13	1500	2250	1110	1670	951	1430
1330	2000	877	1320	760	1140	14	1470	2200	1070	1610	913	1370
1280	1920	803	1210	701	1050	15	1430	2150	1030	1550	874	1310
1230	1850	732	1100	637	957	16	1400	2100	987	1480	836	1260
1180	1770	662	995	575	864	17	1360	2040	945	1420	798	1200
1130	1700	595	894	514	773	18	1330	1990	904	1360	760	1140
1080	1620	534	802	462	694	19	1290	1940	862	1300	715	1070
1020	1530	482	724	417	626	20	1250	1890	805	1210	657	988
902	1360	398	598	344	518	22	1180	1780	695	1050	564	848
790	1190	335	503	289	435	24	1110	1680	611	918	493	740
683	1030	285	428	247	371	26	1040	1570	544	817	436	655
589	885	246	369	213	320	28	949	1430	489	736	391	587
513	771	214	322	185	278	30	851	1280	445	669	354	532
451	678	188	283	163	245	32	769	1160	408	613	323	485
399	600	167	251	144	217	34	701	1050	376	566	297	446
356	535	149	223	129	193	36	644	967	349	525	275	413
320	481					38	594	893	326	490	256	384
289	434					40	552	830	306	460	239	359
262	393					42	515	774	288	433	225	338
239	358					44	483	725	272	409	212	318
218	328					46	454	682	258	388	200	301
200	301					48	429	644	245	368	190	286
185	278					50	406	610	234	351	181	272
Available Strength in Tensile Yielding, kips						Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft						
1810	2720	1580	2380	1410	2120	L_p	L_r	L_p	L_r	L_p	L_r	
						9.55	26.9	6.60	19.4	6.51	18.8	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	43.2		37.8		33.6		
1460	2190	1280	1910	1130	1700	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	5660	443	4760	184	4080	159	
464	696	471	707	436	654	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						3.20		2.21		2.18		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
341	513	201	302	172	259	3.59		5.07		5.05		

^c Shape is slender for compression with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.


 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W27 ^x						Shape	W27 ^x						
102 ^c		94 ^c		84 ^c		lb/ft	102 ^v		94 ^v		84 ^{f,v}		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
1110	1670	1000	1500	872	1310	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	1070	1600	971	1460	851	1280
1000	1510	904	1360	785	1180		6	1070	1600	971	1460	851	1280
969	1460	872	1310	756	1140		7	1040	1570	949	1430	827	1240
930	1400	836	1260	723	1090		8	1010	1520	916	1380	797	1200
888	1330	797	1200	688	1030		9	975	1470	883	1330	767	1150
843	1270	756	1140	651	979		10	940	1410	850	1280	737	1110
796	1200	713	1070	613	921		11	905	1360	817	1230	707	1060
747	1120	668	1000	573	861		12	870	1310	784	1180	676	1020
698	1050	623	937	533	801		13	835	1250	751	1130	646	971
649	975	578	869	493	741		14	800	1200	718	1080	616	926
599	901	533	802	453	681		15	765	1150	685	1030	586	880
551	828	489	735	414	623		16	729	1100	652	979	555	835
500	752	446	670	376	565		17	694	1040	619	930	525	789
447	671	400	601	341	512		18	659	991	578	869	477	717
401	603	359	539	306	460		19	605	910	527	791	433	651
362	544	324	487	276	415		20	555	834	482	725	396	595
299	450	268	402	228	343		22	474	713	411	618	336	505
251	378	225	338	192	288		24	413	620	356	535	290	437
214	322	192	288	163	246		26	364	547	313	471	255	383
185	277	165	248	141	212		28	325	488	279	419	226	340
161	242	144	216	123	184		30	293	441	251	377	203	305
141	212	126	190	108	162		32	267	401	228	343	184	276
125	188	112	168	95.6	144		34	245	368	209	314	167	252
							36	226	340	192	289	154	231
							38	210	315	178	268	142	214
							40	196	294	166	249	132	199
							42	183	276	155	233	123	186
							44	173	260	146	219	116	174
							46	163	245	138	207	109	164
							48	155	232	130	196	103	155
							50	147	221	124	186	97.5	147
Available Strength in Tensile Yielding, kips							Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
1260	1890	1160	1740	1040	1560	L_p	L_r	L_p	L_r	L_p	L_r		
						6.42	18.2	6.33	17.7	6.22	17.1		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	30.0		27.6		24.7			
1010	1520	932	1400	834	1250	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3620	139	3270	124	2850	106		
351	528	331	498	303	456	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.15		2.12		2.07			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
152	228	136	204	116	174	5.12		5.14		5.17			

^c Shape is slender for compression with $F_y = 70 \text{ ksi}$.
^f Shape exceeds compact limit for flexure with $F_y = 70 \text{ ksi}$.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70 \text{ ksi}$; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.


 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W24x						Shape	W24x						
370 ^h		335 ^h		306 ^h		lb/ft	370 ^h		335 ^h		306 ^h		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
4570	6870	4120	6190	3760	5650		0	3950	5930	3560	5360	3220	4840
4350	6530	3920	5890	3570	5370		6	3950	5930	3560	5360	3220	4840
4270	6420	3840	5780	3500	5270		7	3950	5930	3560	5360	3220	4840
4180	6290	3760	5660	3430	5150		8	3950	5930	3560	5360	3220	4840
4090	6140	3670	5520	3350	5030		9	3950	5930	3560	5360	3220	4840
3980	5980	3580	5380	3260	4890		10	3940	5920	3550	5330	3200	4810
3870	5810	3470	5220	3160	4750		11	3900	5860	3510	5270	3160	4760
3750	5630	3360	5050	3060	4590		12	3860	5800	3470	5210	3120	4700
3620	5440	3250	4880	2950	4430		13	3820	5740	3430	5150	3090	4640
3490	5240	3120	4690	2840	4260		14	3780	5680	3390	5090	3050	4580
3350	5040	3000	4510	2720	4090		15	3740	5620	3350	5030	3010	4520
3210	4830	2870	4310	2600	3910		16	3700	5560	3310	4970	2970	4460
3070	4610	2740	4120	2480	3730		17	3660	5500	3270	4910	2930	4400
2920	4390	2610	3920	2360	3540		18	3620	5440	3230	4850	2890	4340
2780	4170	2470	3720	2240	3360		19	3580	5380	3190	4790	2850	4280
2630	3960	2340	3520	2110	3180		20	3540	5320	3150	4730	2810	4220
2340	3520	2080	3130	1870	2820		22	3460	5200	3070	4610	2730	4110
2070	3100	1830	2740	1640	2470		24	3380	5080	2990	4490	2650	3990
1800	2700	1580	2380	1420	2130		26	3300	4960	2910	4370	2570	3870
1550	2330	1370	2050	1220	1840	28	3220	4840	2830	4250	2500	3750	
1350	2030	1190	1790	1070	1600	30	3140	4720	2750	4130	2420	3630	
1190	1790	1050	1570	936	1410	32	3060	4600	2670	4010	2340	3510	
1050	1580	926	1390	829	1250	34	2980	4480	2590	3890	2260	3400	
939	1410	826	1240	740	1110	36	2900	4360	2510	3770	2180	3280	
843	1270	741	1110	664	998	38	2820	4240	2430	3650	2100	3160	
760	1140	669	1010	599	901	40	2740	4120	2350	3530	2020	3040	
690	1040	607	912	544	817	42	2660	4000	2270	3410	1950	2920	
628	944	553	831	495	744	44	2580	3880	2190	3290	1850	2780	
575	864	506	760	453	681	46	2510	3770	2110	3170	1760	2650	
528	794	465	698	416	625	48	2430	3650	2020	3030	1680	2530	
487	731	428	644	384	576	50	2350	3530	1930	2900	1610	2420	

Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
4570	6870	4120	6190	3760	5650	9.76	50.1	9.64	46.0	9.55	42.4
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	109		98.3		89.7	
3680	5520	3320	4980	3030	4540	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
1190	1790	1060	1590	956	1430	13400	1160	11900	1030	10700	919
Available Strength in Shear, kips						r_y , in.					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.27		3.23		3.20	
1190	1790	1060	1590	956	1430	r_x/r_y					
Available Strength in Flexure about Y-Y Axis, kip-ft						3.39		3.41		3.41	
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$						
933	1400	831	1250	748	1120						


^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

 <div style="text-align: center;"> Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes </div> <div style="text-align: right;"> $F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$ </div>												
W24x						Shape	W24x					
279 ^h		250		229		lb/ft	279 ^h		250		229	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD
3430	5160	3080	4630	2820	4230		0	2920	4380	2600	3910	2360
3260	4890	2920	4390	2670	4010	6	2920	4380	2600	3910	2360	3540
3190	4800	2860	4300	2610	3930	7	2920	4380	2600	3910	2360	3540
3130	4700	2800	4210	2560	3840	8	2920	4380	2600	3910	2360	3540
3050	4580	2730	4100	2490	3740	9	2920	4380	2600	3910	2360	3540
2960	4460	2650	3990	2420	3640	10	2900	4350	2570	3870	2330	3500
2870	4320	2570	3860	2340	3520	11	2860	4290	2540	3810	2290	3450
2780	4180	2480	3730	2260	3400	12	2820	4240	2500	3760	2260	3390
2680	4030	2390	3600	2180	3270	13	2780	4180	2460	3700	2220	3340
2580	3870	2300	3450	2090	3140	14	2740	4120	2420	3640	2180	3280
2470	3710	2200	3310	2000	3000	15	2700	4060	2380	3580	2140	3220
2360	3540	2100	3160	1910	2870	16	2660	4000	2350	3530	2110	3170
2250	3380	2000	3010	1810	2730	17	2620	3940	2310	3470	2070	3110
2130	3210	1900	2850	1720	2580	18	2590	3890	2270	3410	2030	3060
2020	3040	1800	2700	1620	2440	19	2550	3830	2230	3360	2000	3000
1910	2870	1690	2550	1530	2300	20	2510	3770	2190	3300	1960	2940
1690	2540	1490	2250	1350	2020	22	2430	3650	2120	3180	1880	2830
1470	2220	1300	1960	1170	1760	24	2350	3540	2040	3070	1810	2720
1270	1910	1120	1680	1000	1510	26	2280	3420	1970	2960	1730	2610
1100	1650	965	1450	865	1300	28	2200	3300	1890	2840	1660	2500
955	1430	840	1260	754	1130	30	2120	3190	1810	2730	1590	2380
839	1260	739	1110	663	996	32	2040	3070	1740	2610	1510	2270
743	1120	654	983	587	882	34	1970	2950	1660	2500	1440	2160
663	996	584	877	523	787	36	1890	2840	1590	2380	1340	2010
595	894	524	787	470	706	38	1810	2720	1490	2240	1260	1890
537	807	473	711	424	637	40	1720	2590	1400	2110	1180	1780
487	732	429	645	385	578	42	1630	2450	1330	2000	1120	1680
444	667	391	587	350	527	44	1550	2330	1260	1890	1060	1590
406	610	357	537	321	482	46	1480	2220	1200	1800	1010	1510
373	560	328	493	294	443	48	1410	2120	1140	1720	958	1440
344	516	303	455	271	408	50	1350	2020	1090	1640	915	1380
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
3430	5160	3080	4630	2820	4230	9.46	39.4	9.37	36.3	9.28	34.0	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	81.9		73.5		67.2		
2760	4150	2480	3720	2270	3400	Moment of Inertia, in. ⁴						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y	
867	1300	766	1150	699	1050	9600	823	8490	724	7650	651	
Available Strength in Shear, kips						r_y , in.						
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	3.17		3.14		3.11		
674	1010	597	898	538	809	r_x/r_y						
						3.41				3.44		


^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W24x						Shape	W24x					
207		192		176		lb/ft	207		192		176	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Effective Length, L_e , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2540	3820	2370	3560	2170	3260	0	2120	3180	1950	2930	1780	2680
2410	3620	2240	3360	2050	3080	6	2120	3180	1950	2930	1780	2680
2360	3540	2190	3300	2000	3010	7	2120	3180	1950	2930	1780	2680
2300	3460	2140	3220	1960	2940	8	2120	3180	1950	2930	1780	2680
2240	3370	2090	3140	1900	2860	9	2120	3180	1950	2930	1780	2680
2180	3270	2030	3040	1850	2780	10	2090	3140	1920	2890	1750	2640
2110	3170	1960	2950	1790	2690	11	2050	3080	1890	2840	1720	2580
2030	3060	1890	2840	1720	2590	12	2010	3030	1850	2780	1680	2530
1960	2940	1820	2730	1660	2490	13	1980	2970	1820	2730	1650	2480
1880	2820	1740	2620	1590	2380	14	1940	2920	1780	2680	1620	2430
1790	2700	1670	2500	1510	2270	15	1910	2860	1750	2620	1580	2380
1710	2570	1590	2390	1440	2170	16	1870	2810	1710	2570	1550	2330
1620	2440	1510	2270	1370	2050	17	1830	2760	1680	2520	1510	2270
1540	2310	1430	2140	1290	1940	18	1800	2700	1640	2470	1480	2220
1450	2180	1350	2020	1220	1830	19	1760	2650	1600	2410	1440	2170
1370	2050	1270	1900	1140	1720	20	1720	2590	1570	2360	1410	2120
1200	1800	1110	1670	1000	1510	22	1650	2480	1500	2250	1340	2020
1040	1560	962	1450	865	1300	24	1580	2370	1430	2150	1270	1910
889	1340	822	1240	738	1110	26	1510	2260	1360	2040	1200	1810
767	1150	709	1070	636	956	28	1430	2160	1290	1930	1140	1710
668	1000	618	928	554	833	30	1360	2050	1220	1830	1050	1580
587	882	543	816	487	732	32	1280	1930	1120	1690	963	1450
520	781	481	723	431	648	34	1190	1790	1040	1560	889	1340
464	697	429	645	385	578	36	1110	1660	966	1450	826	1240
416	626	385	579	345	519	38	1040	1560	903	1360	771	1160
376	565	347	522	312	468	40	975	1460	848	1270	723	1090
341	512	315	474	283	425	42	920	1380	800	1200	681	1020
310	467	287	432	258	387	44	871	1310	757	1140	643	967
284	427	263	395	236	354	46	827	1240	718	1080	610	916
261	392	241	363	216	325	48	787	1180	683	1030	580	871
240	361	222	334	199	300	50	752	1130	652	979	552	830
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
2540	3820	2370	3560	2170	3260	9.19	31.7	9.16	30.4	9.08	29.0	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	60.7		56.5		51.7		
2050	3070	1910	2860	1740	2620	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	6820	578	6260	530	5680	479	
626	939	578	868	529	794	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						3.08		3.07		3.04		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
479	719	440	662	402	604	3.44		3.42		3.45		


Note: Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W24x						Shape	W24x					
162 ^c		146 ^c		131 ^c		lb/ft	162		146		131	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD
2000	3010	1770	2650	1560	2340		0	1630	2460	1460	2190	1290
1890	2840	1680	2520	1480	2220	6	1630	2460	1460	2190	1290	1940
1850	2790	1650	2470	1450	2180	7	1630	2460	1460	2190	1290	1940
1810	2720	1610	2420	1420	2130	8	1630	2460	1460	2190	1290	1940
1760	2650	1570	2360	1380	2080	9	1630	2460	1460	2190	1290	1940
1710	2570	1530	2300	1340	2020	10	1610	2410	1430	2150	1260	1890
1650	2490	1480	2220	1300	1960	11	1570	2360	1400	2100	1230	1850
1590	2400	1430	2140	1260	1890	12	1540	2310	1370	2050	1200	1800
1530	2300	1370	2060	1210	1830	13	1510	2260	1330	2010	1170	1760
1470	2210	1310	1970	1170	1750	14	1470	2210	1300	1960	1140	1720
1400	2110	1250	1880	1110	1670	15	1440	2170	1270	1910	1110	1670
1340	2010	1190	1790	1050	1590	16	1410	2120	1240	1870	1080	1630
1270	1900	1130	1690	998	1500	17	1370	2070	1210	1820	1050	1580
1200	1800	1060	1600	942	1420	18	1340	2020	1180	1770	1030	1540
1130	1700	1000	1510	885	1330	19	1310	1970	1150	1720	996	1500
1060	1600	940	1410	829	1250	20	1280	1920	1120	1680	967	1450
931	1400	820	1230	721	1080	22	1210	1820	1050	1580	908	1360
804	1210	706	1060	617	927	24	1140	1720	991	1490	850	1280
687	1030	602	904	526	790	26	1080	1620	929	1400	781	1170
592	890	519	780	453	681	28	1010	1520	844	1270	697	1050
516	775	452	679	395	594	30	917	1380	763	1150	628	943
453	681	397	597	347	522	32	839	1260	696	1050	570	857
402	603	352	529	307	462	34	773	1160	639	960	523	785
358	538	314	472	274	412	36	716	1080	591	888	482	724
321	483	282	423	246	370	38	667	1000	549	826	447	672
290	436	254	382	222	334	40	625	939	513	771	417	626
263	395	231	346	201	303	42	587	883	482	724	390	586
240	360	210	316	184	276	44	554	833	454	682	367	551
219	330	192	289	168	252	46	525	789	429	645	346	520
201	303	176	265	154	232	48	498	749	407	611	328	493
186	279	163	244			50	474	713	387	581	311	468
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
2000	3010	1800	2710	1620	2430	9.11	28.0	8.99	26.7	8.87	25.5	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	47.8		43.0		38.6		
1610	2420	1450	2180	1300	1950	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	5170	443	4580	391	4020	340	
494	740	450	674	415	623	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						3.05		3.01		2.97		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
367	551	326	489	285	428	3.41		3.42		3.43		


^c Shape is slender for compression with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes													
W24x						Shape	W24x						
117 ^c		104 ^c		103 ^c		lb/ft	117		104 ^f		103		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
1360	2040	1180	1780	1180	1780	0	1140	1720	987	1480	978	1470	
1280	1930	1120	1680	1050	1590	6	1140	1720	987	1480	976	1470	
1260	1890	1100	1650	1010	1520	7	1140	1720	987	1480	943	1420	
1230	1850	1070	1610	964	1450	8	1140	1720	987	1480	911	1370	
1200	1800	1040	1570	913	1370	9	1140	1710	987	1480	878	1320	
1170	1750	1010	1520	859	1290	10	1110	1670	977	1470	846	1270	
1130	1700	982	1480	803	1210	11	1080	1630	952	1430	813	1220	
1090	1640	948	1420	743	1120	12	1050	1590	927	1390	780	1170	
1050	1580	912	1370	677	1020	13	1030	1540	902	1360	748	1120	
1010	1520	875	1320	612	920	14	1000	1500	877	1320	715	1070	
967	1450	837	1260	550	826	15	973	1460	852	1280	683	1030	
923	1390	799	1200	489	735	16	946	1420	826	1240	650	977	
879	1320	759	1140	433	651	17	919	1380	801	1200	617	928	
830	1250	720	1080	387	581	18	892	1340	776	1170	576	865	
779	1170	680	1020	347	521	19	865	1300	751	1130	529	796	
729	1100	641	963	313	471	20	838	1260	726	1090	490	736	
632	949	554	833	259	389	22	783	1180	676	1020	425	639	
539	810	471	708	217	327	24	729	1100	622	935	375	563	
459	690	401	603	185	278	26	651	979	544	817	335	504	
396	595	346	520	160	240	28	578	869	481	723	303	455	
345	518	302	453	139	209	30	519	781	430	647	276	415	
303	456	265	398	122	184	32	470	707	389	584	254	382	
268	404	235	353			34	430	646	354	532	235	353	
239	360	209	315			36	395	594	324	488	219	329	
215	323	188	282			38	365	549	299	450	205	308	
194	292	170	255			40	340	511	278	417	192	289	
176	264	154	231			42	317	477	259	389	181	273	
160	241	140	211			44	298	448	242	364	172	258	
147	220	128	193			46	281	422	228	342	163	245	
135	202	118	177			48	265	398	215	323	155	233	
						50	251	378	203	305	148	222	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
1440	2170	1290	1930	1270	1910	8.78	24.6	9.60	23.8	5.94	17.6		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	34.4		30.7		30.3			
1160	1740	1040	1550	1020	1530	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3540	297	3100	259	3000	119		
374	561	337	506	377	566	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.94		2.91		1.99			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
249	375	211	317	145	218	3.44		3.47		5.03			

^c Shape is slender for compression with $F_y = 70$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes													
W24x						Shape	W24x						
94 ^c		84 ^c		76 ^c		lb/ft	94		84 ^v		76 ^v		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
1060	1590	920	1380	816	1230	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	887	1330	782	1180	699	1050
944	1420	816	1230	721	1080		6	884	1330	777	1170	692	1040
905	1360	782	1170	690	1040		7	854	1280	749	1130	665	1000
862	1300	744	1120	655	985		8	823	1240	721	1080	639	961
816	1230	703	1060	618	929		9	793	1190	693	1040	613	922
768	1150	660	991	580	871		10	762	1150	664	999	587	882
717	1080	615	925	539	811		11	731	1100	636	956	561	843
666	1000	570	857	499	750		12	701	1050	608	914	535	804
614	923	525	788	458	688		13	670	1010	580	871	509	765
556	835	480	721	418	628		14	639	961	551	829	483	725
498	749	433	650	379	569		15	609	915	523	786	456	686
443	665	383	576	337	506		16	578	869	495	744	430	647
392	590	339	510	298	448		17	547	823	458	688	387	582
350	526	303	455	266	400		18	501	753	416	626	351	528
314	472	272	408	239	359		19	460	691	381	572	320	482
283	426	245	368	215	324		20	424	638	350	527	294	442
234	352	203	304	178	268		22	366	551	301	453	252	379
197	296	170	256	150	225		24	322	484	264	396	220	330
168	252	145	218	128	192		26	287	431	234	351	194	292
145	217	125	188	110	165		28	258	388	210	315	174	261
126	189	109	164	95.8	144		30	235	353	190	286	157	236
111	166	95.7	144	84.2	127		32	215	324	174	261	143	215
							34	199	299	160	241	131	198
							36	185	277	148	223	121	183
							38	172	259	138	208	113	170
						40	162	243	129	194	106	159	
						42	152	229	122	183	99.0	149	
						44	144	216	115	172	93.2	140	
						46	136	205	109	163	88.1	132	
						48	130	195	103	155	83.6	126	
						50	124	186	98.2	148	79.5	119	
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
1160	1750	1040	1560	939	1410	L_p	L_r	L_p	L_r	L_p	L_r		
						5.91	17.2	5.82	16.6	5.73	16.0		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	27.7		24.7		22.4			
935	1400	834	1250	756	1130	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	2700	109	2370	94.4	2100	82.5		
350	526	285	428	264	398	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.98		1.95		1.92			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
131	197	114	171	99.9	150	4.98		5.02		5.05			

^c Shape is slender for compression with $F_y = 70$ ksi.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes													
W24x						Shape	W24x						
68 ^c		62 ^c		55 ^c		lb/ft	68 ^v		62 ^v		55 ^v		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
714	1070	638	959	547	823	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	618	929	534	803	468	704
627	943	507	762	429	645		6	608	914	483	725	418	628
599	900	467	702	394	592		7	584	878	455	684	393	590
568	853	424	638	356	535		8	560	841	428	643	368	552
534	803	381	573	318	478		9	535	805	400	601	342	515
499	750	338	508	280	421		10	511	768	372	560	317	477
463	696	295	444	243	365		11	487	732	345	518	292	439
427	641	251	378	211	317		12	463	696	315	473	259	390
390	587	214	322	180	270		13	439	659	274	411	225	338
355	533	185	277	155	233		14	414	623	241	362	197	296
320	480	161	242	135	203		15	390	586	214	322	175	263
287	431	141	212	119	178		16	358	538	192	289	157	235
254	382	125	188	105	158		17	322	483	174	262	141	212
226	340	112	168	93.7	141		18	291	437	159	239	129	193
203	305	100	151	84.1	126		19	265	398	146	219	118	177
183	276	90.4	136	75.9	114		20	243	365	135	202	108	163
152	228	74.7	112	62.7	94.3		22	207	311	116	175	93.3	140
127	191						24	180	270	102	154	81.7	123
109	163						26	158	238	91.2	137	72.6	109
93.6	141						28	141	212	82.2	124	65.2	98.0
81.5	123						30	127	191	74.8	112	59.1	88.9
							32	116	174	68.7	103	54.1	81.3
							34	106	159	63.4	95.3	49.8	74.9
							36	97.5	147	58.9	88.6	46.2	69.4
							38	90.4	136	55.1	82.8	43.1	64.7
							40	84.3	127	51.7	77.7	40.3	60.6
							42	78.9	119	48.7	73.2	37.9	57.0
							44	74.2	112	46.0	69.2	35.8	53.8
							46	70.0	105	43.6	65.6	33.9	51.0
							48	66.3	99.6	41.5	62.4	32.2	48.4
						50	62.9	94.6	39.6	59.5	30.7	46.1	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
843	1270	763	1150	679	1020	5.58	15.6	4.12	11.9	4.00	11.5		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	20.1		18.2		16.2			
678	1020	614	921	547	820	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	1830	70.4	1550	34.5	1350	29.1		
246	370	256	385	222	334	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.87		1.38		1.34			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
85.6	129	54.8	82.3	46.4	69.7	5.11		6.69		6.80			

^c Shape is slender for compression with $F_y = 70$ ksi.

^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Confirm ASTM A913 material availability before specifying.



Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70$ ksi
 $F_u = 90$ ksi

W-Shapes

W21x						Shape	W21x					
275 ^h		248		223		lb/ft	275 ^h		248		223	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
3430	5150	3090	4650	2790	4190	0	2620	3930	2340	3520	2100	3160
3240	4880	2930	4400	2630	3960	6	2620	3930	2340	3520	2100	3160
3180	4780	2870	4310	2580	3870	7	2620	3930	2340	3520	2100	3160
3110	4670	2800	4210	2520	3780	8	2620	3930	2340	3520	2100	3160
3030	4550	2730	4100	2450	3680	9	2620	3930	2340	3520	2100	3160
2940	4420	2650	3980	2380	3570	10	2590	3900	2320	3490	2070	3120
2850	4280	2560	3850	2300	3450	11	2570	3860	2290	3440	2040	3070
2750	4130	2470	3720	2220	3330	12	2540	3810	2260	3400	2020	3030
2650	3980	2380	3580	2130	3200	13	2510	3770	2230	3360	1990	2990
2540	3820	2280	3430	2040	3060	14	2480	3720	2210	3310	1960	2940
2430	3650	2180	3280	1950	2930	15	2450	3680	2180	3270	1930	2900
2320	3480	2080	3120	1850	2790	16	2420	3640	2150	3230	1900	2860
2200	3310	1970	2970	1760	2640	17	2390	3590	2120	3190	1870	2810
2090	3140	1870	2810	1660	2500	18	2360	3550	2090	3140	1840	2770
1970	2960	1770	2650	1570	2360	19	2330	3500	2060	3100	1810	2730
1860	2790	1660	2500	1470	2210	20	2300	3460	2030	3060	1790	2680
1630	2450	1460	2190	1290	1940	22	2240	3370	1980	2970	1730	2600
1420	2130	1260	1900	1110	1670	24	2190	3290	1920	2880	1670	2510
1210	1820	1080	1620	949	1430	26	2130	3200	1860	2800	1610	2420
1050	1570	932	1400	818	1230	28	2070	3110	1800	2710	1560	2340
912	1370	812	1220	713	1070	30	2010	3020	1750	2620	1500	2250
801	1200	714	1070	626	942	32	1950	2930	1690	2540	1440	2170
710	1070	632	950	555	834	34	1890	2850	1630	2450	1380	2080
633	952	564	847	495	744	36	1840	2760	1570	2360	1330	1990
568	854	506	761	444	668	38	1780	2670	1510	2280	1270	1900
513	771	457	686	401	603	40	1720	2580	1460	2190	1200	1800
465	699	414	623	364	547	42	1660	2500	1400	2100	1130	1700
424	637	377	567	331	498	44	1600	2410	1330	2000	1080	1620
388	583	345	519	303	456	46	1540	2310	1270	1900	1020	1540
356	535	317	477	278	418	48	1470	2210	1210	1820	978	1470
328	493	292	439	257	386	50	1410	2120	1160	1740	936	1410


Properties

Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
3430	5150	3090	4650	2790	4190	9.25	45.4	9.19	41.7	9.08	37.9
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	81.8			66.5		
2760	4140	2490	3740	2240	3370	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
823	1230	730	1090	655	983	7690	787	6830	699	6080	614
Available Strength in Shear, kips						r_y , in.					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	3.10		3.08		3.04	
667	1000	594	893	524	788	r_x/r_y					
						3.13		3.12		3.14	

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Confirm ASTM A913 material availability before specifying.

<div style="display: flex; justify-content: space-between; align-items: center;">  <div style="text-align: center;"> Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces </div> <div style="text-align: right;"> $F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$ </div> </div>													
W21x						Shape	W21x						
201		182		166		lb/ft	201		182		166		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
2490	3740	2250	3380	2050	3070	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	1850	2780	1660	2500	1510	2270
2350	3520	2120	3180	1930	2900		6	1850	2780	1660	2500	1510	2270
2300	3450	2070	3120	1890	2840		7	1850	2780	1660	2500	1510	2270
2240	3370	2020	3040	1840	2770		8	1850	2780	1660	2500	1510	2270
2180	3280	1970	2960	1790	2690		9	1850	2780	1660	2500	1510	2260
2110	3180	1910	2870	1730	2610		10	1820	2740	1630	2460	1480	2220
2040	3070	1840	2770	1680	2520		11	1790	2700	1610	2410	1450	2180
1970	2960	1770	2670	1610	2420		12	1770	2650	1580	2370	1430	2140
1890	2840	1700	2560	1550	2330		13	1740	2610	1550	2330	1400	2100
1810	2720	1630	2450	1480	2230		14	1710	2570	1520	2290	1370	2060
1730	2600	1550	2340	1410	2120		15	1680	2530	1500	2250	1340	2020
1640	2470	1480	2220	1340	2020		16	1650	2480	1470	2210	1320	1980
1560	2340	1400	2100	1270	1910		17	1620	2440	1440	2160	1290	1940
1470	2210	1320	1990	1200	1800		18	1600	2400	1410	2120	1260	1900
1390	2080	1240	1870	1130	1700		19	1570	2360	1380	2080	1240	1860
1300	1960	1170	1750	1060	1590		20	1540	2310	1360	2040	1210	1820
1140	1710	1020	1530	921	1380		22	1480	2230	1300	1960	1160	1740
980	1470	874	1310	791	1190		24	1420	2140	1250	1870	1100	1660
835	1260	745	1120	674	1010		26	1370	2060	1190	1790	1050	1570
720	1080	642	965	581	873		28	1310	1970	1130	1710	993	1490
627	943	559	841	506	760		30	1250	1880	1080	1620	939	1410
551	829	492	739	445	668		32	1200	1800	1020	1540	868	1310
488	734	436	655	394	592		34	1140	1710	952	1430	805	1210
436	655	389	584	351	528		36	1070	1610	888	1330	750	1130
391	588	349	524	315	474		38	1000	1510	833	1250	703	1060
353	530	315	473	285	428		40	947	1420	784	1180	661	993
320	481	285	429	258	388		42	896	1350	741	1110	624	938
292	438	260	391	235	354		44	850	1280	703	1060	591	888
267	401	238	358	215	323		46	809	1220	668	1000	562	844
245	368	219	328	198	297		48	771	1160	637	957	535	804
226	339	201	303			50	737	1110	609	915	511	768	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
2490	3740	2250	3380	2050	3070	9.02	34.5	8.96	32.2	8.93	30.4		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	59.3		53.6		48.8			
2000	3000	1810	2710	1650	2470	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	5310	542	4730	483	4280	435		
586	879	528	791	473	709	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						3.02		3.00		2.99			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
465	698	416	625	377	567	3.14		3.13		3.13			

Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A913 material availability before specifying.



Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70$ ksi
 $F_u = 90$ ksi

W-Shapes

W21x						Shape	W21x					
147		132		122 ^c		lb/ft	147		132		122	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1810	2720	1630	2440	1490	2250	0	1300	1960	1160	1750	1070	1610
1700	2560	1530	2300	1410	2130	6	1300	1960	1160	1750	1070	1610
1670	2500	1500	2250	1380	2080	7	1300	1960	1160	1750	1070	1610
1620	2440	1460	2190	1350	2020	8	1300	1960	1160	1750	1070	1610
1580	2370	1420	2130	1310	1970	9	1300	1950	1160	1740	1070	1600
1530	2300	1370	2060	1270	1900	10	1270	1910	1130	1700	1040	1570
1480	2220	1320	1990	1220	1830	11	1250	1870	1110	1670	1020	1530
1420	2130	1270	1910	1170	1760	12	1220	1830	1080	1630	995	1500
1360	2040	1220	1830	1120	1690	13	1190	1800	1060	1590	971	1460
1300	1950	1160	1750	1070	1610	14	1170	1760	1030	1560	948	1420
1240	1860	1110	1660	1020	1530	15	1140	1720	1010	1520	924	1390
1170	1760	1050	1570	967	1450	16	1120	1680	986	1480	900	1350
1110	1670	990	1490	913	1370	17	1090	1640	961	1440	877	1320
1050	1570	932	1400	859	1290	18	1070	1600	937	1410	853	1280
982	1480	875	1320	806	1210	19	1040	1560	912	1370	830	1250
920	1380	818	1230	754	1130	20	1010	1520	888	1330	806	1210
798	1200	708	1060	652	980	22	963	1450	839	1260	759	1140
681	1020	604	907	555	834	24	911	1370	790	1190	712	1070
580	872	514	773	473	710	26	860	1290	741	1110	662	995
501	752	443	667	408	613	28	808	1210	677	1020	594	892
436	655	386	581	355	534	30	737	1110	615	924	538	808
383	576	340	510	312	469	32	676	1020	563	846	491	738
339	510	301	452	276	415	34	625	939	519	779	452	679
303	455	268	403	247	371	36	581	873	481	723	418	629
272	408	241	362	221	333	38	542	815	448	674	390	585
245	369	217	327	200	300	40	509	765	420	631	364	548
222	334	197	296	181	272	42	480	721	395	594	342	515
203	305	180	270	165	248	44	453	681	373	561	323	485
185	279	164	247	151	227	46	430	646	353	531	306	459
170	256	151	227	139	208	48	409	615	336	505	290	436
						50	390	586	320	481	276	415
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
1810	2720	1630	2440	1500	2260	8.81	28.1	8.75	26.8	8.72	25.9	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	43.2		38.8		35.9		
1460	2190	1310	1960	1210	1820	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3630	376	3220	333	2960	305	
446	668	397	595	365	547	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.95		2.93		2.92		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
323	486	287	432	264	397	3.11		3.11		3.11		

^c Shape is slender for compression with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.




Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70$ ksi
 $F_u = 90$ ksi


W-Shapes

W21 ^x						Shape	W21 ^x					
111 ^c		101 ^c		93 ^c		lb/ft	111		101		93	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1330	2000	1190	1790	1120	1690	0	975	1460	884	1330	772	1160
1260	1890	1130	1690	978	1470	6	975	1460	884	1330	759	1140
1230	1850	1100	1660	924	1390	7	975	1460	884	1330	732	1100
1210	1810	1080	1620	866	1300	8	975	1460	884	1330	706	1060
1170	1760	1050	1580	804	1210	9	967	1450	876	1320	679	1020
1140	1710	1020	1530	740	1110	10	944	1420	855	1280	653	981
1100	1660	986	1480	676	1020	11	922	1390	834	1250	626	941
1060	1600	951	1430	611	919	12	899	1350	813	1220	600	901
1020	1530	914	1370	548	824	13	877	1320	791	1190	573	861
969	1460	876	1320	487	733	14	855	1280	770	1160	547	822
921	1380	837	1260	429	644	15	832	1250	749	1130	520	782
872	1310	795	1190	377	566	16	810	1220	728	1090	494	742
823	1240	750	1130	334	502	17	787	1180	707	1060	465	700
774	1160	705	1060	298	448	18	765	1150	686	1030	427	642
726	1090	661	993	267	402	19	742	1120	665	999	395	594
678	1020	617	927	241	363	20	720	1080	644	968	367	551
585	879	532	799	199	300	22	675	1010	602	904	321	482
497	747	451	678	167	252	24	630	947	559	841	285	429
423	636	384	578	143	215	26	570	857	495	744	257	386
365	549	331	498	123	185	28	510	767	441	663	233	351
318	478	289	434	107	161	30	461	692	397	597	214	321
279	420	254	381			32	420	631	361	543	197	297
248	372	225	338			34	385	579	331	497	183	276
221	332	200	301			36	356	535	305	458	171	258
198	298	180	270			38	331	497	283	425	161	242
179	269	162	244			40	309	464	263	396	151	228
162	244	147	221			42	290	436	247	371	143	215
148	222	134	202			44	273	410	232	349	136	204
135	203	123	185			46	258	388	219	329	129	194
124	187	113	169			48	245	367	207	311	123	185
						50	232	349	197	296	118	177
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
1370	2050	1250	1880	1140	1720	8.66	24.9	8.63	24.2	5.49	16.9	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	32.6		29.8		27.3		
1100	1650	1010	1510	921	1380	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	2670	274	2420	248	2070	92.9	
331	497	300	449	351	526	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.9		2.89		1.84		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
238	358	216	324	121	182	3.12		3.12		4.73		


^c Shape is slender for compression with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W21x						Shape	W21x						
83 ^c		73 ^c		68 ^c		lb/ft	83		73		68		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
973	1460	828	1240	757	1140	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	685	1030	601	903	559	840
848	1280	720	1080	658	989		6	671	1010	587	883	545	819
808	1210	685	1030	625	939		7	646	972	564	848	523	786
763	1150	646	971	589	886		8	622	934	542	814	501	753
715	1070	605	909	552	829		9	597	897	519	780	479	720
659	990	562	845	512	770		10	572	859	496	746	457	687
600	902	518	778	472	709		11	547	822	474	712	435	654
543	816	471	709	431	648		12	522	785	451	677	413	621
486	731	421	633	389	584		13	497	747	428	643	392	588
432	649	373	561	344	517		14	472	710	405	609	370	555
379	570	327	491	301	452		15	447	673	383	575	348	522
333	501	287	432	264	397		16	423	635	353	531	315	474
295	444	254	382	234	352		17	387	581	320	481	285	429
263	396	227	341	209	314		18	354	532	292	440	260	391
236	355	204	306	187	282		19	326	491	269	404	239	359
213	320	184	276	169	254		20	302	455	248	373	220	331
176	265	152	228	140	210		22	264	396	215	324	191	286
148	223	128	192	117	176		24	233	351	190	285	168	252
126	190	109	163	100	150		26	209	314	169	255	149	224
109	164	93.8	141	86.3	130		28	190	285	153	230	135	202
94.8	142	81.7	123	75.2	113		30	173	261	140	210	122	184
							32	160	240	128	193	112	169
							34	148	223	119	178	104	156
							36	138	208	110	166	96.4	145
							38	129	195	103	155	90.0	135
							40	122	183	96.9	146	84.5	127
							42	115	173	91.3	137	79.6	120
							44	109	164	86.4	130	75.2	113
							46	104	156	82.0	123	71.3	107
							48	98.6	148	78.0	117	67.8	102
							50	94.2	142	74.4	112	64.7	97.2
Available Strength in Tensile Yielding, kips							Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		L_p	L_r	L_p	L_r	L_p	L_r	
1020	1540	901	1350	838	1260		5.46	16.2	5.40	15.6	5.37	15.2	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips							Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		24.4		21.5		20.0		
824	1240	726	1090	675	1010		Moment of Inertia, in. ⁴						
Available Strength in Shear, kips							I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		1830	81.4	1600	70.6	1480	64.7	
309	463	270	405	254	381		r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft							1.83		1.81		1.80		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		r_x/r_y						
107	160	92.9	140	85.2	128		4.74		4.77		4.78		


^c Shape is slender for compression with $F_y = 70 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70$ ksi $F_u = 90$ ksi	
W21 \times						Shape	W21 \times						
62 ^c		55 ^c		48 ^c		lb/ft	62 ^v		55 ^{f,v}		48 ^{f,v}		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
678	1020	585	879	492	740		0	503	756	438	659	354	531
586	881	502	755	418	629	6	489	734	425	638	354	531	
556	836	476	715	395	593	7	468	704	406	610	340	510	
523	786	447	671	369	554	8	448	674	387	582	323	485	
488	734	416	625	342	513	9	428	644	368	554	306	460	
452	680	384	578	314	472	10	408	613	350	526	289	435	
416	625	352	529	286	429	11	388	583	331	498	273	410	
379	569	320	481	258	387	12	368	553	312	470	256	385	
343	515	288	433	230	346	13	348	523	294	441	239	360	
305	458	257	386	204	307	14	328	492	275	413	219	329	
266	400	225	338	180	271	15	305	458	248	372	193	290	
234	351	198	297	158	238	16	273	410	221	332	172	259	
207	311	175	263	140	211	17	246	370	199	299	155	233	
185	278	156	235	125	188	18	224	337	181	272	140	210	
166	249	140	211	112	169	19	205	309	165	248	128	192	
150	225	127	190	101	152	20	189	284	152	228	117	176	
124	186	105	157	83.8	126	22	163	245	130	195	99.8	150	
104	156	87.9	132	70.4	106	24	143	214	113	170	86.7	130	
88.5	133	74.9	113	60.0	90.2	26	127	190	100	151	76.3	115	
76.3	115	64.6	97.0			28	114	171	89.8	135	68.1	102	
						30	103	155	81.2	122	61.3	92.2	
						32	94.4	142	74.0	111	55.8	83.8	
						34	87.0	131	68.0	102	51.1	76.8	
						36	80.7	121	62.9	94.6	47.1	70.8	
						38	75.2	113	58.5	87.9	43.7	65.7	
						40	70.4	106	54.7	82.2	40.7	61.2	
						42	66.2	99.6	51.3	77.1	38.2	57.4	
						44	62.5	94.0	48.4	72.7	35.9	53.9	
						46	59.2	89.0	45.7	68.7	33.9	50.9	
						48	56.3	84.5	43.4	65.2	32.1	48.2	
						50	53.6	80.5	41.2	62.0	30.4	45.8	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
767	1150	679	1020	591	888	5.28	14.8	5.26	14.3	6.16	13.7		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	18.3		16.2		14.1			
618	926	547	820	476	714	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	1330	57.5	1140	48.4	959	38.7		
211	318	196	295	175	263	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.77		1.73		1.66			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
75.8	114	63.9	96.0	48.1	72.3	4.82		4.86		4.96			

^c Shape is slender for compression with $F_y = 70$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W21 ^x						Shape	W21 ^x					
57 ^c		50 ^c		44 ^c		lb/ft	57 ^v		50 ^v		44 ^v	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
612	920	523	785	446	671	0	451	677	384	578	333	501
479	720	402	605	338	508	6	405	608	340	511	290	436
438	659	366	550	306	460	7	381	573	319	479	271	408
396	595	328	494	273	410	8	358	538	298	448	252	379
353	530	290	436	240	360	9	334	503	277	416	233	350
310	466	253	380	207	312	10	311	467	256	385	214	322
263	395	214	322	177	267	11	288	432	235	353	191	287
221	332	180	271	150	225	12	259	390	204	307	164	246
188	283	153	231	127	192	13	227	341	178	267	142	214
162	244	132	199	110	165	14	201	302	157	236	125	188
141	212	115	173	95.7	144	15	180	270	140	210	111	167
124	187	101	152	84.2	126	16	163	244	126	189	99.9	150
110	165	89.7	135	74.5	112	17	148	222	114	172	90.4	136
98.1	147	80.0	120	66.5	99.9	18	136	204	105	157	82.4	124
88.0	132	71.8	108	59.7	89.7	19	125	188	96.2	145	75.6	114
79.4	119	64.8	97.4	53.9	80.9	20	116	175	89.0	134	69.8	105
65.6	98.7					22	101	153	77.3	116	60.3	90.7
						24	90.0	135	68.2	103	53.0	79.7
						26	80.8	121	61.0	91.7	47.3	71.0
						28	73.4	110	55.2	82.9	42.6	64.0
						30	67.2	101	50.4	75.7	38.8	58.3
						32	62.0	93.1	46.3	69.6	35.6	53.4
						34	57.5	86.4	42.9	64.5	32.8	49.4
						36	53.7	80.7	39.9	60.0	30.5	45.9
						38	50.3	75.6	37.4	56.2	28.5	42.8
						40	47.4	71.2	35.1	52.8	26.7	40.2
						42	44.8	67.3	33.1	49.8	25.2	37.9
						44	42.4	63.8	31.4	47.2	23.8	35.8
						46	40.3	60.6	29.8	44.8	22.6	33.9
						48	38.5	57.8	28.4	42.6	21.5	32.3
						50	36.7	55.2	27.1	40.7	20.5	30.8
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
700	1050	616	926	545	819	4.03	11.7	3.88	11.2	3.76	10.8	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	16.7		14.7		13.0		
564	845	496	744	439	658	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	1170	30.6	984	24.9	843	20.7	
215	323	199	299	176	264	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						1.35		1.30		1.26		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
51.7	77.7	42.6	64.1	35.6	53.5	6.19		6.29		6.40		

^c Shape is slender for compression with $F_y = 70$ ksi.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W18x						Shape	W18x						
311 ^h		283 ^h		258 ^h		lb/ft	311 ^h		283 ^h		258 ^h		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
3840	5770	3490	5250	3190	4790		0	2630	3960	2360	3550	2130	3210
3610	5430	3280	4930	2990	4490		6	2630	3960	2360	3550	2130	3210
3530	5310	3210	4820	2920	4390		7	2630	3960	2360	3550	2130	3210
3450	5180	3120	4690	2840	4270		8	2630	3960	2360	3550	2130	3210
3350	5030	3030	4560	2760	4150		9	2630	3950	2350	3540	2130	3190
3240	4870	2930	4410	2670	4010		10	2610	3920	2330	3510	2100	3160
3130	4700	2830	4250	2570	3860		11	2580	3880	2310	3470	2080	3130
3010	4520	2720	4080	2470	3710		12	2560	3850	2290	3440	2060	3100
2880	4330	2600	3910	2360	3550		13	2540	3820	2270	3410	2040	3060
2750	4140	2480	3730	2250	3380		14	2520	3780	2240	3370	2020	3030
2620	3940	2360	3550	2140	3210		15	2490	3750	2220	3340	1990	3000
2490	3740	2240	3360	2020	3040		16	2470	3720	2200	3310	1970	2960
2350	3540	2110	3170	1910	2860		17	2450	3680	2180	3270	1950	2930
2220	3330	1990	2990	1790	2690		18	2430	3650	2160	3240	1930	2900
2080	3130	1860	2800	1680	2520		19	2410	3620	2130	3210	1910	2860
1950	2930	1740	2620	1560	2350		20	2380	3580	2110	3170	1880	2830
1690	2540	1500	2260	1350	2030		22	2340	3510	2070	3110	1840	2770
1440	2170	1280	1920	1140	1720		24	2290	3450	2020	3040	1800	2700
1230	1850	1090	1640	973	1460		26	2250	3380	1980	2970	1750	2630
1060	1600	939	1410	839	1260	28	2200	3310	1930	2910	1710	2570	
925	1390	818	1230	731	1100	30	2160	3240	1890	2840	1660	2500	
813	1220	719	1080	643	966	32	2110	3180	1850	2770	1620	2430	
720	1080	637	957	569	855	34	2070	3110	1800	2710	1580	2370	
642	965	568	854	508	763	36	2020	3040	1760	2640	1530	2300	
576	866	510	766	456	685	38	1980	2980	1710	2570	1490	2240	
520	782	460	692	411	618	40	1930	2910	1670	2510	1440	2170	
472	709	417	627	373	561	42	1890	2840	1620	2440	1400	2100	
430	646	380	572	340	511	44	1850	2770	1580	2380	1360	2040	
393	591	348	523	311	467	46	1800	2710	1540	2310	1310	1970	
361	543	320	480	286	429	48	1760	2640	1490	2240	1270	1910	
						50	1710	2570	1450	2180	1220	1830	
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
3840	5770	3490	5250	3190	4790	L_p	L_r	L_p	L_r	L_p	L_r		
						8.81	58.2	8.69	53.0	8.60	48.5		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	91.6		83.3		76.0			
3090	4640	2810	4220	2570	3850	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	6970	795	6170	704	5510	628		
949	1420	858	1290	771	1160	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.95		2.91		2.88			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
723	1090	646	971	580	872	2.96		2.96		2.96			

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.




Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
W-Shapes

$F_y = 70$ ksi
 $F_u = 90$ ksi

W18x						Shape	W18x					
234 ^h		211		192		lb/ft	234 ^h		211		192	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2880	4320	2610	3920	2360	3540	0	1920	2880	1710	2570	1540	2320
2690	4050	2440	3670	2200	3310	6	1920	2880	1710	2570	1540	2320
2630	3950	2380	3580	2150	3230	7	1920	2880	1710	2570	1540	2320
2560	3850	2320	3490	2090	3140	8	1920	2880	1710	2570	1540	2320
2480	3730	2250	3380	2020	3040	9	1910	2870	1700	2550	1530	2300
2400	3600	2170	3260	1950	2930	10	1890	2830	1680	2520	1510	2270
2310	3470	2090	3140	1870	2820	11	1860	2800	1660	2490	1490	2240
2210	3330	2000	3010	1790	2700	12	1840	2770	1630	2460	1470	2200
2120	3180	1910	2870	1710	2570	13	1820	2740	1610	2420	1440	2170
2010	3030	1820	2730	1630	2440	14	1800	2700	1590	2390	1420	2140
1910	2870	1720	2590	1540	2310	15	1780	2670	1570	2360	1400	2110
1810	2720	1620	2440	1450	2180	16	1760	2640	1550	2330	1380	2080
1700	2560	1530	2300	1360	2050	17	1730	2610	1530	2300	1360	2040
1600	2400	1430	2150	1280	1920	18	1710	2570	1510	2260	1340	2010
1490	2240	1340	2010	1190	1790	19	1690	2540	1480	2230	1320	1980
1390	2090	1240	1870	1100	1660	20	1670	2510	1460	2200	1300	1950
1190	1800	1060	1600	942	1420	22	1630	2440	1420	2140	1250	1880
1010	1520	898	1350	793	1190	24	1580	2380	1380	2070	1210	1820
860	1290	765	1150	675	1020	26	1540	2310	1330	2010	1170	1760
742	1120	660	991	582	875	28	1500	2250	1290	1940	1130	1690
646	971	575	864	507	763	30	1450	2180	1250	1880	1080	1630
568	854	505	759	446	670	32	1410	2120	1210	1810	1040	1560
503	756	447	672	395	594	34	1370	2050	1160	1750	999	1500
449	675	399	600	352	530	36	1320	1990	1120	1680	956	1440
403	605	358	538	316	475	38	1280	1920	1080	1620	909	1370
364	546	323	486	285	429	40	1240	1860	1030	1560	860	1290
330	496	293	441	259	389	42	1190	1790	984	1480	815	1230
300	452	267	401	236	355	44	1150	1730	937	1410	776	1170
275	413	244	367	216	324	46	1100	1650	894	1340	740	1110
						48	1050	1580	854	1280	707	1060
						50	1010	1510	818	1230	677	1020
Properties						Limiting Unbraced Lengths, ft						
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
2880	4320	2610	3920	2360	3540	8.51	44.4	8.42	40.5	8.33	37.3	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	68.6		62.3		56.2		
2320	3470	2100	3150	1900	2850	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	4900	558	4330	493	3870	440	
685	1030	614	922	548	823	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.85		2.82		2.79		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
520	782	461	693	416	625	2.96		2.96		2.97		

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.




Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70$ ksi
 $F_u = 90$ ksi


W-Shapes

W18x						Shape	W18x					
175		158		143		lb/ft	175		158		143	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
2150	3240	1940	2920	1760	2650	0	1390	2090	1240	1870	1120	1690
2010	3020	1810	2720	1640	2460	6	1390	2090	1240	1870	1120	1690
1960	2950	1760	2650	1600	2400	7	1390	2090	1240	1870	1120	1690
1900	2860	1710	2570	1550	2330	8	1390	2090	1240	1870	1120	1690
1840	2770	1660	2490	1500	2250	9	1370	2070	1230	1840	1110	1660
1780	2670	1590	2400	1440	2170	10	1350	2030	1210	1810	1090	1630
1700	2560	1530	2300	1380	2080	11	1330	2000	1190	1780	1070	1600
1630	2450	1460	2200	1320	1990	12	1310	1970	1170	1750	1050	1570
1550	2330	1390	2090	1260	1890	13	1290	1940	1140	1720	1030	1540
1470	2220	1320	1990	1190	1790	14	1270	1910	1120	1690	1010	1510
1390	2100	1250	1880	1120	1690	15	1250	1880	1100	1660	986	1480
1310	1970	1170	1760	1060	1590	16	1230	1850	1080	1630	966	1450
1230	1850	1100	1650	990	1490	17	1210	1810	1060	1600	946	1420
1150	1730	1030	1540	923	1390	18	1190	1780	1040	1570	926	1390
1070	1610	955	1440	858	1290	19	1170	1750	1020	1530	906	1360
994	1490	885	1330	793	1190	20	1140	1720	1000	1500	886	1330
845	1270	750	1130	670	1010	22	1100	1660	960	1440	845	1270
710	1070	630	947	563	846	24	1060	1590	919	1380	805	1210
605	909	537	807	480	721	26	1020	1530	878	1320	765	1150
521	784	463	696	414	622	28	977	1470	836	1260	724	1090
454	683	403	606	360	542	30	935	1410	795	1200	682	1020
399	600	354	533	317	476	32	893	1340	752	1130	631	948
354	531	314	472	281	422	34	851	1280	701	1050	587	883
315	474	280	421	250	376	36	801	1200	657	988	549	826
283	425	251	378	225	338	38	754	1130	618	929	516	776
255	384	227	341	203	305	40	713	1070	584	877	487	732
232	348	206	309	184	276	42	676	1020	553	831	461	693
211	317	187	282	168	252	44	643	966	525	790	438	658
193	290					46	612	920	500	752	417	626
						48	585	879	478	718	398	598
						50	560	842	457	687	380	572
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
2150	3240	1940	2920	1760	2650	8.24	34.5	8.18	31.8	8.12	29.7	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	51.4		46.3		42.0		
1730	2600	1560	2340	1420	2130	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3450	391	3060	347	2750	311	
498	748	447	670	399	598	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.76		2.74		2.72		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
370	557	331	498	298	448	2.97		2.96		2.97		


Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;">  W18 </div> <div style="text-align: center;"> Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes </div> <div style="text-align: right;"> $F_y = 70$ ksi $F_u = 90$ ksi </div> </div>													
W18x						Shape	W18x						
130		119		106		lb/ft	130		119		106		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
1610	2410	1470	2210	1300	1960	0	1010	1520	915	1380	803	1210	
1490	2240	1370	2050	1210	1820	6	1010	1520	915	1380	803	1210	
1450	2190	1330	2000	1180	1770	7	1010	1520	915	1380	803	1210	
1410	2120	1290	1940	1140	1710	8	1010	1520	915	1380	802	1210	
1360	2050	1250	1870	1100	1660	9	995	1490	897	1350	784	1180	
1310	1970	1200	1800	1060	1590	10	975	1470	877	1320	766	1150	
1260	1890	1150	1730	1010	1520	11	955	1440	858	1290	748	1120	
1200	1800	1100	1650	966	1450	12	936	1410	839	1260	730	1100	
1140	1710	1040	1570	917	1380	13	916	1380	820	1230	712	1070	
1080	1620	987	1480	867	1300	14	896	1350	801	1200	694	1040	
1020	1530	930	1400	816	1230	15	877	1320	782	1170	676	1020	
957	1440	873	1310	765	1150	16	857	1290	763	1150	658	988	
895	1350	817	1230	714	1070	17	838	1260	743	1120	640	961	
834	1250	760	1140	664	998	18	818	1230	724	1090	622	934	
774	1160	705	1060	615	924	19	798	1200	705	1060	603	907	
715	1070	651	979	567	852	20	779	1170	686	1030	585	880	
602	905	548	823	475	713	22	740	1110	648	973	549	825	
506	760	460	692	399	599	24	700	1050	609	916	513	771	
431	648	392	589	340	511	26	661	994	571	858	466	701	
372	559	338	508	293	440	28	620	931	520	782	421	633	
324	487	295	443	255	384	30	568	854	476	716	384	578	
285	428	259	389	224	337	32	525	789	439	660	353	531	
252	379	229	345	199	299	34	488	734	407	612	327	492	
225	338	205	307	177	266	36	456	686	380	571	305	458	
202	303	184	276	159	239	38	428	644	356	535	285	428	
182	274	166	249	144	216	40	404	607	335	504	268	402	
165	248	150	226	130	196	42	382	574	316	476	252	379	
151	226	137	206	119	178	44	362	544	300	451	239	359	
						46	345	518	285	428	227	341	
						48	329	494	272	408	216	325	
						50	314	472	259	390	206	310	
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
1610	2410	1470	2210	1300	1960	L_p	L_r	L_p	L_r	L_p	L_r		
						8.06	27.8	8.03	26.3	7.94	24.8		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	38.3		35.1		31.1			
1290	1940	1180	1780	1050	1570	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	2460	278	2190	253	1910	220		
362	543	348	523	309	463	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.70		2.69		2.66			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
268	403	241	363	211	318	2.97		2.94		2.95			


Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W18x						Shape	W18x					
97		86 ^c		76 ^c		lb/ft	97		86		76 ^f	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1190	1800	1040	1560	892	1340	0	737	1110	650	977	563	846
1110	1660	970	1460	832	1250	6	737	1110	650	977	563	846
1080	1620	946	1420	811	1220	7	737	1110	650	977	563	846
1040	1570	920	1380	788	1180	8	735	1110	647	973	563	846
1010	1510	890	1340	763	1150	9	718	1080	631	948	551	828
968	1460	857	1290	735	1100	10	701	1050	615	924	536	805
927	1390	819	1230	706	1060	11	683	1030	598	899	521	783
883	1330	780	1170	675	1010	12	666	1000	582	874	506	760
838	1260	740	1110	643	967	13	649	975	565	850	490	737
792	1190	698	1050	611	918	14	631	949	549	825	475	714
745	1120	657	987	574	863	15	614	923	533	801	460	692
698	1050	615	924	537	807	16	596	896	516	776	445	669
651	979	573	861	500	752	17	579	870	500	751	430	646
605	910	532	799	464	697	18	562	844	484	727	415	623
560	842	491	738	428	643	19	544	818	467	702	400	601
516	775	452	680	393	591	20	527	792	451	678	384	578
432	649	377	567	328	492	22	492	740	418	628	352	528
363	545	317	477	275	414	24	456	685	374	562	306	461
309	464	270	406	235	353	26	406	610	332	499	271	407
266	400	233	350	202	304	28	366	550	298	448	242	364
232	349	203	305	176	265	30	333	501	270	406	219	329
204	307	178	268	155	233	32	306	460	247	372	200	300
181	272	158	237	137	206	34	283	425	228	343	183	276
161	242	141	212	122	184	36	263	395	211	318	170	255
145	217	126	190	110	165	38	245	369	197	296	158	237
131	196	114	172	99.1	149	40	230	346	184	277	147	221
118	178	104	156	89.9	135	42	217	326	173	261	138	208
108	162					44	205	308	164	246	130	196
						46	194	292	155	233	123	185
						48	185	278	147	221	117	175
						50	176	265	140	211	111	167
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
1190	1800	1060	1590	935	1400	7.91	23.9	7.85	22.7	8.21	21.8	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	28.5		25.3		22.3		
962	1440	854	1280	753	1130	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	1750	201	1530	175	1330	152	
279	418	247	371	217	325	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.65		2.63		2.61		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
193	290	169	254	145	218	2.95		2.95		2.96		


^c Shape is slender for compression with $F_y = 70$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W18x						Shape	W18x					
71 ^c		65 ^c		60 ^c		lb/ft	71		65		60	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
861	1290	767	1150	692	1040	0	510	767	465	698	430	646
729	1100	653	981	588	883	6	492	740	447	673	413	620
682	1030	616	925	554	833	7	473	711	430	646	396	595
632	950	575	865	518	778	8	454	683	412	619	378	569
580	871	527	792	479	720	9	435	654	394	592	361	543
526	791	478	718	438	658	10	416	625	376	565	344	517
473	710	429	644	392	589	11	397	597	358	538	327	491
420	632	381	572	348	523	12	378	568	340	511	310	465
370	556	335	503	305	459	13	359	539	322	484	292	440
322	483	291	437	265	398	14	340	511	304	457	275	414
280	421	253	380	230	346	15	321	482	286	430	254	382
246	370	222	334	203	304	16	297	446	259	389	230	345
218	328	197	296	179	270	17	272	408	236	355	209	314
195	292	176	264	160	241	18	250	376	217	326	192	288
175	262	158	237	144	216	19	232	348	201	302	177	266
158	237	142	214	130	195	20	216	324	187	281	164	247
130	196	118	177	107	161	22	190	285	164	246	144	216
109	165	98.9	149	90.0	135	24	169	254	145	219	127	192
93.3	140	84.2	127	76.7	115	26	153	230	131	197	115	172
80.4	121	72.6	109	66.1	99.4	28	139	209	119	179	104	156
						30	128	192	109	164	95.2	143
						32	118	178	101	152	87.9	132
						34	110	166	93.9	141	81.6	123
						36	103	155	87.8	132	76.1	114
						38	96.9	146	82.4	124	71.4	107
						40	91.4	137	77.6	117	67.2	101
						42	86.6	130	73.4	110	63.5	95.5
						44	82.2	124	69.7	105	60.2	90.5
						46	78.2	118	66.3	99.6	57.3	86.1
						48	74.7	112	63.2	95.0	54.6	82.1
						50	71.4	107	60.4	90.8	52.2	78.4
Available Strength in Tensile Yielding, kips						Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft						
876	1320	801	1200	738	1110	L_p	L_r	L_p	L_r	L_p	L_r	
						5.07	15.5	5.05	15.0	5.02	14.7	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	20.9		19.1		17.6		
705	1060	645	967	594	891	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	1170	60.3	1070	54.8	984	50.1	
256	385	232	348	211	317	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						1.70		1.69		1.68		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
86.3	130	78.6	118	72.0	108	4.41		4.43		4.45		


^c Shape is slender for compression with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W18x						Shape	W18x						
55 ^c		50 ^c		46 ^c		lb/ft	55		50		46		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
626	941	554	832	505	758		0	391	588	353	530	317	476
531	798	468	703	384	578	6	375	563	336	506	280	421	
500	752	440	661	349	524	7	358	539	321	483	263	395	
467	702	410	616	311	468	8	342	514	306	460	246	370	
432	649	379	569	274	412	9	326	489	291	437	229	344	
396	595	346	521	233	351	10	309	465	276	414	212	319	
358	538	314	472	194	291	11	293	440	260	391	195	293	
317	477	282	424	163	245	12	277	416	245	368	170	255	
278	418	247	371	139	209	13	260	391	230	345	149	224	
241	362	213	320	120	180	14	244	367	212	319	133	200	
210	315	186	279	104	157	15	220	331	189	284	119	179	
184	277	163	245	91.6	138	16	198	298	170	256	108	163	
163	245	145	217	81.1	122	17	180	271	154	232	99.0	149	
146	219	129	194	72.4	109	18	165	248	141	212	91.1	137	
131	196	116	174	65.0	97.6	19	152	228	130	195	84.4	127	
118	177	104	157	58.6	88.1	20	141	212	120	180	78.5	118	
97.4	146	86.3	130			22	123	184	104	156	69.0	104	
81.9	123	72.5	109			24	108	163	91.5	137	61.5	92.4	
69.8	105	61.8	92.9			26	97.1	146	81.7	123	55.4	83.3	
						28	87.9	132	73.8	111	50.5	75.9	
						30	80.4	121	67.3	101	46.4	69.7	
						32	74.0	111	61.8	92.9	42.9	64.5	
						34	68.6	103	57.2	85.9	39.9	60.0	
						36	63.9	96.1	53.2	79.9	37.4	56.2	
						38	59.9	90.0	49.7	74.8	35.1	52.8	
						40	56.3	84.6	46.7	70.2	33.1	49.8	
						42	53.2	79.9	44.0	66.2	31.3	47.1	
						44	50.3	75.7	41.7	62.6	29.7	44.7	
						46	47.8	71.9	39.5	59.4	28.3	42.5	
						48	45.6	68.5	37.6	56.6	27.0	40.6	
						50	43.5	65.4	35.9	54.0	25.8	38.8	
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
679	1020	616	926	566	851	L_p	L_r	L_p	L_r	L_p	L_r		
						4.99	14.2	4.93	13.8	3.85	11.1		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	16.2		14.7		13.5			
547	820	496	744	456	683	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	890	44.9	800	40.1	712	22.5		
198	296	179	268	182	274	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.67		1.65		1.29			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
64.6	97.1	58.0	87.2	40.9	61.4	4.44		4.47		5.62			


^c Shape is slender for compression with $F_y = 70 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes															
W18x						W16x		Shape		W18x				W16x	
40 ^c		35 ^c		100		lb/ft		40 ^v		35 ^v		100			
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Available Compressive Strength, kips						Available Flexural Strength, kip-ft									
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending		ASD	LRFD	ASD	LRFD	ASD	LRFD		
425	638	360	540	1230	1850			0	274	412	232	349	692	1040	
320	482	266	400	1130	1700	6	240	361	199	300	692	1040			
290	435	239	359	1100	1650	7	225	338	185	279	692	1040			
258	387	211	317	1060	1590	8	209	315	171	258	684	1030			
226	339	183	276	1020	1530	9	194	292	158	237	669	1010			
195	293	156	235	975	1470	10	179	268	144	216	654	983			
164	247	132	199	928	1400	11	160	241	123	185	639	960			
138	207	111	167	880	1320	12	138	208	106	159	624	938			
118	177	94.7	142	830	1250	13	121	182	91.9	138	609	915			
101	152	81.6	123	779	1170	14	107	161	81.1	122	594	892			
88.3	133	71.1	107	728	1090	15	95.9	144	72.4	109	579	870			
77.6	117	62.5	93.9	677	1020	16	86.6	130	65.2	97.9	564	847			
68.7	103	55.4	83.2	627	942	17	78.9	119	59.2	88.9	549	825			
61.3	92.2	49.4	74.2	577	868	18	72.4	109	54.1	81.3	534	802			
55.0	82.7	44.3	66.6	530	796	19	66.8	100	49.8	74.8	519	780			
49.7	74.6	40.0	60.1	483	727	20	62.0	93.2	46.1	69.2	504	757			
				399	600	22	54.2	81.4	40.0	60.1	474	712			
				336	504	24	48.0	72.2	35.3	53.1	443	667			
				286	430	26	43.2	64.9	31.6	47.5	407	612			
				247	371	28	39.2	58.9	28.6	43.0	370	557			
				215	323	30	35.9	53.9	26.1	39.2	340	511			
				189	284	32	33.1	49.8	24.0	36.1	314	472			
				167	251	34	30.7	46.2	22.2	33.4	292	439			
				149	224	36	28.7	43.1	20.7	31.1	273	410			
				134	201	38	26.9	40.4	19.4	29.1	256	385			
				121	182	40	25.3	38.1	18.2	27.4	242	363			
						42	23.9	36.0	17.2	25.8	228	343			
						44	22.7	34.1	16.3	24.4	217	326			
						46	21.6	32.4	15.4	23.2	206	310			
						48	20.6	30.9	14.7	22.1	197	296			
						50	19.6	29.5	14.0	21.1	188	283			
Properties															
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	L_p	L_r		
495	743	432	649	1230	1850	3.79	10.7	3.64	10.2	7.49	25.0				
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	11.8		10.3		29.4					
398	597	348	521	992	1490	Moment of Inertia, in. ⁴									
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y	I_x	I_y		
142	213	129	194	278	418	612	19.1	510	15.3	1490	186				
Available Strength in Shear, kips						r_y , in.									
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	1.27		1.22		2.51					
142	213	129	194	278	418	r_x/r_y									
Available Strength in Flexure about Y-Y Axis, kip-ft						5.68		5.77		2.83					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$										
34.9	52.5	28.2	42.3	192	288										


^c Shape is slender for compression with $F_y = 70$ ksi.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W16x						Shape	W16x						
89		77 ^c		67 ^c		lb/ft	89		77		67		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
1100	1650	942	1420	795	1190	0	611	919	524	788	454	683	
1010	1520	868	1310	734	1100	6	611	919	524	788	454	683	
977	1470	842	1260	714	1070	7	611	919	524	788	454	683	
943	1420	812	1220	690	1040	8	603	906	516	775	446	670	
906	1360	779	1170	665	1000	9	588	884	502	755	433	651	
866	1300	744	1120	638	959	10	574	863	489	734	421	633	
824	1240	707	1060	609	916	11	559	841	475	714	409	614	
780	1170	669	1010	579	869	12	545	819	462	694	396	595	
735	1100	630	946	544	818	13	530	797	448	674	384	577	
689	1040	590	887	510	766	14	516	775	435	653	371	558	
643	967	550	827	475	714	15	501	753	421	633	359	539	
598	898	510	767	440	662	16	487	731	408	613	346	520	
552	830	471	708	406	611	17	472	709	394	592	334	502	
508	764	433	651	373	561	18	457	688	381	572	321	483	
466	700	396	595	341	513	19	443	666	367	552	309	464	
424	637	360	541	310	465	20	428	644	354	532	296	445	
350	527	297	447	256	384	22	399	600	326	490	262	395	
294	442	250	376	215	323	24	365	549	287	432	230	346	
251	377	213	320	183	275	26	328	493	257	386	205	308	
216	325	184	276	158	237	28	298	447	232	349	184	277	
188	283	160	240	138	207	30	272	409	212	318	167	252	
166	249	141	211	121	182	32	251	377	194	292	153	230	
147	220	124	187	107	161	34	233	350	180	270	141	213	
131	197	111	167	95.5	144	36	217	327	167	252	131	197	
117	176	99.7	150	85.7	129	38	204	306	157	235	122	184	
106	159	89.9	135	77.4	116	40	192	288	147	221	115	172	
						42	181	272	139	209	108	162	
						44	172	258	131	197	102	153	
						46	163	245	125	187	96.7	145	
						48	156	234	119	178	91.9	138	
						50	149	223	113	170	87.5	132	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
1100	1650	947	1420	822	1230	7.43	23.4	7.37	21.9	7.34	20.8		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	26.2		22.6		19.6			
884	1330	763	1140	662	992	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	1300	163	1110	138	954	119		
247	370	210	315	180	270	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.49		2.47		2.46			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
168	253	144	216	124	186	2.83		2.83		2.83			


^c Shape is slender for compression with $F_y = 70 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W16x						Shape	W16x						
57 ^c		50 ^c		45 ^c		lb/ft	57		50		45		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
689	1040	584	878	516	775	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	367	551	321	483	287	432
572	860	486	731	427	643		6	349	525	304	457	271	407
531	798	455	684	399	600		7	335	503	291	437	258	388
487	732	422	634	369	555		8	320	481	277	416	245	369
442	664	384	577	338	508		9	306	459	263	396	233	350
396	595	344	517	306	460		10	291	437	250	375	220	331
351	527	304	457	270	406		11	277	416	236	355	207	312
307	462	266	400	236	354		12	262	394	222	334	195	292
266	399	230	345	202	304		13	248	372	209	314	182	273
229	344	198	297	175	262		14	233	350	193	290	164	246
200	300	172	259	152	229		15	215	323	173	260	147	220
175	264	152	228	134	201		16	195	293	157	236	133	199
155	233	134	202	118	178		17	179	269	143	216	121	181
139	208	120	180	106	159		18	165	248	132	198	111	166
124	187	107	162	94.8	142		19	153	230	122	183	102	154
112	169	97.0	146	85.5	129		20	143	215	114	171	94.9	143
92.8	139	80.1	120	70.7	106		22	126	189	99.6	150	82.9	125
77.9	117	67.3	101	59.4	89.3		24	112	169	88.6	133	73.5	111
66.4	99.8	57.4	86.2	50.6	76.1		26	102	153	79.9	120	66.1	99.3
							28	92.9	140	72.7	109	60.0	90.2
							30	85.5	128	66.8	100	55.0	82.6
							32	79.2	119	61.7	92.7	50.7	76.2
							34	73.8	111	57.4	86.3	47.1	70.8
							36	69.1	104	53.7	80.6	43.9	66.0
							38	65.0	97.7	50.4	75.7	41.2	61.9
							40	61.3	92.2	47.5	71.4	38.8	58.3
							42	58.1	87.3	44.9	67.5	36.7	55.1
							44	55.2	83.0	42.6	64.1	34.8	52.3
							46	52.6	79.0	40.6	61.0	33.1	49.7
							48	50.2	75.4	38.7	58.2	31.5	47.4
							50	48.0	72.2	37.0	55.6	30.1	45.2
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
704	1060	616	926	557	838	L_p	L_r	L_p	L_r	L_p	L_r		
						4.78	14.5	4.75	13.8	4.69	13.3		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	16.8		14.7		13.3			
567	851	496	744	449	673	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	758	43.1	659	37.2	586	32.8		
197	296	173	260	156	233	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.60		1.59		1.57			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
66.0	99.2	56.9	85.6	50.6	76.1	4.20		4.20		4.24			

^c Shape is slender for compression with $F_y = 70 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes													
W16 ^x						Shape	W16 ^x						
40 ^c		36 ^c		31 ^c		lb/ft	40 ^v		36 ^{f,v}		31 ^v		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
444	668	392	589	327	492	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	255	383	221	332	189	284
368	553	321	483	235	353		6	240	360	208	312	159	239
344	516	299	449	208	313		7	228	343	197	296	147	222
318	477	275	414	182	273		8	216	325	187	280	136	204
291	437	251	377	155	234		9	205	307	176	264	124	186
263	396	226	339	130	196		10	193	290	165	248	110	165
236	355	201	302	108	162		11	181	272	154	232	93.1	140
209	314	177	266	90.6	136		12	170	255	144	216	80.4	121
180	270	151	227	77.2	116		13	157	236	129	194	70.5	106
155	233	130	196	66.6	100		14	139	209	114	171	62.6	94.0
135	203	114	171	58.0	87.1		15	124	186	101	152	56.1	84.4
119	178	99.9	150	51.0	76.6		16	112	168	90.8	136	50.8	76.4
105	158	88.5	133	45.1	67.8		17	101	152	82.2	124	46.4	69.7
93.7	141	78.9	119	40.3	60.5		18	92.8	139	75.0	113	42.6	64.0
84.1	126	70.8	106	36.1	54.3		19	85.4	128	68.8	103	39.4	59.2
75.9	114	63.9	96.1				20	79.0	119	63.6	95.5	36.6	55.0
62.7	94.3	52.8	79.4				22	68.7	103	55.0	82.6	32.0	48.2
52.7	79.2	44.4	66.7				24	60.7	91.2	48.4	72.7	28.5	42.8
44.9	67.5						26	54.3	81.7	43.1	64.8	25.6	38.5
							28	49.2	73.9	38.9	58.4	23.3	35.1
							30	44.9	67.5	35.4	53.2	21.4	32.1
							32	41.3	62.1	32.5	48.8	19.8	29.7
							34	38.3	57.5	30.0	45.1	18.4	27.6
							36	35.7	53.6	27.9	41.9	17.2	25.8
							38	33.4	50.2	26.0	39.1	16.1	24.2
							40	31.4	47.2	24.4	36.7	15.2	22.8
							42	29.6	44.5	23.0	34.6	14.4	21.6
							44	28.0	42.1	21.8	32.7	13.6	20.5
							46	26.6	40.0	20.6	31.0	13.0	19.5
							48	25.4	38.1	19.6	29.5	12.4	18.6
							50	24.2	36.4	18.7	28.1	11.8	17.7
Available Strength in Tensile Yielding, kips							Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		Limiting Unbraced Lengths, ft						
495	743	444	668	383	575	L_p	L_r	L_p	L_r	L_p	L_r		
						4.69	13.0	4.78	12.5	3.49	9.72		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	11.8		10.6		9.13			
398	597	358	537	308	462	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	518	28.9	448	24.5	375	12.4		
123	184	118	177	110	165	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.57		1.52		1.17			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
44.4	66.7	37.1	55.8	24.6	36.9	4.22		4.28		5.48			

^c Shape is slender for compression with $F_y = 70$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces														$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W16-W14						W-Shapes									
W16 \times		W14 \times				Shape		W16 \times		W14 \times					
26 ^c		873 ^h		808 ^h		lb/ft		26 ^{f,v}		873 ^h		808 ^h			
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Available Compressive Strength, kips						Available Flexural Strength, kip-ft									
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending		ASD	LRFD	ASD	LRFD	ASD	LRFD		
264	397	10800	16200	9980	15000			0	153	230	7090	10700	6390	9610	
184	277	10500	15800	9750	14700	6	127	191	7090	10700	6390	9610			
162	244	10500	15700	9670	14500	7	117	176	7090	10700	6390	9610			
140	210	10400	15600	9580	14400	8	107	160	7090	10700	6390	9610			
118	178	10200	15400	9480	14200	9	96.5	145	7090	10700	6390	9610			
99.1	149	10100	15200	9370	14100	10	81.5	122	7090	10700	6390	9610			
83.1	125	10000	15000	9240	13900	11	68.8	103	7090	10700	6390	9610			
69.8	105	9860	14800	9110	13700	12	59.1	88.8	7090	10700	6390	9610			
59.5	89.4	9710	14600	8970	13500	13	51.5	77.5	7090	10700	6390	9610			
51.3	77.1	9550	14400	8810	13200	14	45.5	68.4	7090	10700	6390	9610			
44.7	67.2	9380	14100	8650	13000	15	40.6	61.1	7090	10600	6380	9590			
39.3	59.0	9210	13800	8490	12800	16	36.6	55.0	7070	10600	6370	9570			
34.8	52.3	9020	13600	8310	12500	17	33.2	50.0	7050	10600	6350	9550			
31.0	46.6	8830	13300	8130	12200	18	30.4	45.7	7040	10600	6340	9530			
		8630	13000	7940	11900	19	28.0	42.1	7020	10600	6330	9510			
		8430	12700	7750	11600	20	25.9	39.0	7010	10500	6310	9490			
		8000	12000	7350	11000	22	22.6	33.9	6980	10500	6280	9440			
		7560	11400	6930	10400	24	19.9	30.0	6950	10400	6250	9400			
		7110	10700	6510	9780	26	17.8	26.8	6920	10400	6220	9360			
		6660	10000	6080	9140	28	16.2	24.3	6890	10400	6200	9310			
		6200	9320	5650	8490	30	14.8	22.2	6860	10300	6170	9270			
		5740	8630	5220	7850	32	13.6	20.4	6830	10300	6140	9220			
		5300	7960	4810	7220	34	12.6	18.9	6800	10200	6110	9180			
		4860	7310	4400	6610	36	11.7	17.6	6770	10200	6080	9140			
		4440	6670	4010	6020	38	11.0	16.5	6740	10100	6050	9090			
		4030	6050	3620	5440	40	10.3	15.5	6710	10100	6020	9050			
		3650	5490	3290	4940	42	9.74	14.6	6680	10000	5990	9010			
		3330	5000	2990	4500	44	9.22	13.9	6640	9990	5960	8960			
		3040	4570	2740	4120	46	8.76	13.2	6610	9940	5930	8920			
		2800	4200	2520	3780	48	8.34	12.5	6580	9900	5910	8880			
		2580	3870	2320	3480	50	7.96	12.0	6550	9850	5880	8830			
Properties															
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r				
322	484	10800	16200	9980	15000	3.45	9.25	14.6	235	14.4	221				
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	7.68		257		238					
259	389	8670	13000	8030	12000	Moment of Inertia, in. ⁴									
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y				
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	301	9.59	18100	6170	15900	5550				
89.9	135	2600	3910	2390	3580	r_y , in.									
Available Strength in Flexure about Y-Y Axis, kip-ft						1.12		4.90		4.83					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y									
18.9	28.5	3560	5360	3250	4880	5.59		1.71		1.69					

^c Shape is slender for compression with $F_y = 70 \text{ ksi}$.
^f Shape exceeds compact limit for flexure with $F_y = 70 \text{ ksi}$.
^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70 \text{ ksi}$; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Note: Heavy line indicates L_c/r equal to or greater than 200.



Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces


$F_y = 70$ ksi
 $F_u = 90$ ksi

W-Shapes

W14x						Shape	W14x					
730 ^h		665 ^h		605 ^h		lb/ft	730 ^h		665 ^h		605 ^h	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
9010	13500	8220	12300	7460	11200	0	5800	8720	5170	7770	4610	6930
8800	13200	8010	12000	7270	10900	6	5800	8720	5170	7770	4610	6930
8720	13100	7940	11900	7210	10800	7	5800	8720	5170	7770	4610	6930
8630	13000	7860	11800	7130	10700	8	5800	8720	5170	7770	4610	6930
8540	12800	7770	11700	7040	10600	9	5800	8720	5170	7770	4610	6930
8430	12700	7670	11500	6950	10400	10	5800	8720	5170	7770	4610	6930
8310	12500	7560	11400	6850	10300	11	5800	8720	5170	7770	4610	6930
8180	12300	7440	11200	6730	10100	12	5800	8720	5170	7770	4610	6930
8050	12100	7310	11000	6620	9940	13	5800	8720	5170	7770	4610	6930
7900	11900	7180	10800	6490	9750	14	5800	8720	5170	7770	4610	6920
7750	11600	7030	10600	6360	9550	15	5780	8690	5150	7740	4590	6900
7590	11400	6880	10300	6220	9350	16	5770	8670	5140	7720	4580	6880
7430	11200	6730	10100	6070	9130	17	5750	8650	5120	7700	4560	6860
7250	10900	6570	9870	5920	8900	18	5740	8630	5110	7680	4550	6840
7080	10600	6400	9620	5770	8670	19	5730	8610	5100	7660	4540	6820
6890	10400	6230	9370	5610	8430	20	5710	8580	5080	7640	4520	6800
6520	9790	5880	8840	5290	7950	22	5680	8540	5050	7600	4500	6760
6130	9210	5520	8300	4950	7440	24	5650	8500	5030	7550	4470	6720
5730	8610	5150	7740	4610	6930	26	5620	8450	5000	7510	4440	6680
5330	8010	4780	7190	4270	6420	28	5590	8410	4970	7470	4410	6640
4930	7410	4410	6630	3930	5910	30	5560	8360	4940	7430	4390	6590
4540	6820	4050	6090	3600	5410	32	5540	8320	4910	7380	4360	6550
4150	6240	3700	5560	3280	4920	34	5510	8280	4880	7340	4330	6510
3780	5680	3360	5050	2970	4460	36	5480	8230	4860	7300	4310	6470
3420	5140	3020	4550	2660	4000	38	5450	8190	4830	7260	4280	6430
3090	4640	2730	4100	2400	3610	40	5420	8140	4800	7210	4250	6390
2800	4210	2480	3720	2180	3280	42	5390	8100	4770	7170	4220	6350
2550	3830	2260	3390	1990	2990	44	5360	8060	4740	7130	4200	6310
2330	3510	2060	3100	1820	2730	46	5330	8010	4720	7090	4170	6270
2140	3220	1900	2850	1670	2510	48	5300	7970	4690	7040	4140	6230
1970	2970	1750	2630	1540	2310	50	5270	7920	4660	7000	4120	6190

Properties											
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
9010	13500	8220	12300	7460	11200	14.0	197	13.8	181	13.6	166
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	215		196		178	
7260	10900	6620	9920	6010	9010	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
1930	2890	1710	2570	1520	2280	14300	4720	12400	4170	10800	3680
Available Strength in Shear, kips						r_y , in.					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	4.69		4.62		4.55	
1930	2890	1710	2570	1520	2280	r_x/r_y					
1930	2890	1710	2570	1520	2280	1.74		1.73		1.71	

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;">  W14 </div> <div style="text-align: center;"> Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes </div> <div style="text-align: right;"> $F_y = 70$ ksi $F_u = 90$ ksi </div> </div>													
W14x						Shape	W14x						
550 ^h		500 ^h		455 ^h		lb/ft	550 ^h		500 ^h		455 ^h		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
6790	10200	6160	9260	5620	8440	0	4120	6200	3670	5510	3270	4910	
6610	9940	6000	9010	5460	8210	6	4120	6200	3670	5510	3270	4910	
6550	9850	5940	8930	5410	8130	7	4120	6200	3670	5510	3270	4910	
6480	9740	5870	8830	5350	8040	8	4120	6200	3670	5510	3270	4910	
6400	9620	5800	8710	5280	7930	9	4120	6200	3670	5510	3270	4910	
6310	9490	5720	8590	5200	7820	10	4120	6200	3670	5510	3270	4910	
6220	9340	5630	8460	5120	7690	11	4120	6200	3670	5510	3270	4910	
6110	9190	5530	8310	5030	7560	12	4120	6200	3670	5510	3270	4910	
6000	9020	5430	8160	4930	7410	13	4120	6200	3670	5510	3270	4910	
5880	8840	5320	7990	4830	7260	14	4110	6180	3660	5500	3260	4900	
5760	8660	5200	7820	4730	7100	15	4100	6160	3640	5480	3250	4880	
5630	8460	5080	7640	4610	6930	16	4090	6140	3630	5460	3230	4860	
5500	8260	4960	7450	4500	6760	17	4070	6120	3620	5440	3220	4840	
5360	8050	4830	7260	4380	6580	18	4060	6100	3610	5420	3210	4820	
5220	7840	4700	7060	4260	6400	19	4050	6080	3590	5400	3200	4800	
5070	7620	4560	6860	4130	6210	20	4030	6060	3580	5380	3180	4790	
4770	7160	4280	6440	3870	5820	22	4010	6020	3560	5340	3160	4750	
4460	6700	4000	6010	3610	5420	24	3980	5980	3530	5310	3130	4710	
4140	6230	3710	5570	3340	5020	26	3950	5940	3500	5270	3110	4670	
3830	5750	3420	5140	3080	4620	28	3930	5900	3480	5230	3090	4640	
3520	5290	3130	4710	2810	4230	30	3900	5860	3450	5190	3060	4600	
3210	4830	2860	4290	2560	3840	32	3880	5820	3430	5150	3040	4560	
2920	4380	2590	3890	2310	3470	34	3850	5780	3400	5110	3010	4530	
2630	3950	2320	3490	2070	3110	36	3820	5740	3380	5070	2990	4490	
2360	3550	2090	3130	1860	2790	38	3800	5700	3350	5040	2960	4450	
2130	3200	1880	2830	1680	2520	40	3770	5660	3330	5000	2940	4410	
1930	2900	1710	2570	1520	2290	42	3740	5620	3300	4960	2910	4380	
1760	2650	1560	2340	1390	2080	44	3720	5580	3270	4920	2890	4340	
1610	2420	1420	2140	1270	1910	46	3690	5550	3250	4880	2860	4300	
1480	2220	1310	1960	1160	1750	48	3660	5510	3220	4840	2840	4270	
1360	2050	1200	1810	1070	1610	50	3640	5470	3200	4810	2810	4230	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
6790	10200	6160	9260	5620	8440	13.4	153	13.2	140	13.1	128		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	162		147		134			
5470	8200	4960	7440	4520	6780	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
1350	2020	1200	1800	1070	1610	9430	3250	8210	2880	7190	2560		
Available Strength in Shear, kips						r_y , in.							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	4.49		4.43		4.38			
1350	2020	1200	1800	1070	1610	r_x/r_y							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.70		1.69		1.67			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$								
2040	3060	1820	2740	1630	2460								

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.



Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces


$F_y = 70$ ksi
 $F_u = 90$ ksi

W-Shapes

W14x						Shape	W14x					
426 ^h		398 ^h		370 ^h		lb/ft	426 ^h		398 ^h		370 ^h	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
5240	7870	4900	7370	4570	6870	0	3040	4560	2800	4210	2570	3860
5090	7660	4770	7160	4440	6670	6	3040	4560	2800	4210	2570	3860
5040	7580	4720	7090	4390	6600	7	3040	4560	2800	4210	2570	3860
4980	7490	4660	7010	4340	6520	8	3040	4560	2800	4210	2570	3860
4920	7390	4600	6910	4280	6430	9	3040	4560	2800	4210	2570	3860
4850	7280	4530	6810	4210	6330	10	3040	4560	2800	4210	2570	3860
4770	7160	4460	6700	4140	6230	11	3040	4560	2800	4210	2570	3860
4680	7040	4370	6580	4070	6110	12	3040	4560	2800	4210	2570	3860
4590	6900	4290	6450	3990	5990	13	3030	4560	2800	4200	2570	3860
4490	6760	4200	6310	3900	5860	14	3020	4540	2780	4180	2560	3840
4390	6600	4100	6170	3810	5720	15	3010	4520	2770	4170	2540	3820
4290	6450	4000	6020	3710	5580	16	3000	4510	2760	4150	2530	3810
4180	6280	3900	5860	3620	5440	17	2990	4490	2750	4130	2520	3790
4070	6110	3790	5700	3520	5280	18	2970	4470	2740	4110	2510	3770
3950	5940	3680	5540	3410	5130	19	2960	4450	2720	4100	2500	3750
3830	5760	3570	5370	3310	4970	20	2950	4430	2710	4080	2490	3740
3590	5390	3340	5020	3090	4640	22	2930	4400	2690	4040	2460	3700
3340	5020	3110	4670	2870	4310	24	2900	4360	2670	4010	2440	3670
3090	4640	2870	4310	2650	3980	26	2880	4320	2640	3970	2420	3630
2840	4260	2630	3960	2420	3640	28	2850	4290	2620	3930	2390	3600
2590	3890	2400	3610	2210	3320	30	2830	4250	2590	3900	2370	3560
2350	3530	2180	3270	2000	3000	32	2800	4210	2570	3860	2350	3530
2120	3190	1960	2950	1790	2700	34	2780	4180	2550	3830	2320	3490
1900	2850	1750	2630	1600	2410	36	2750	4140	2520	3790	2300	3460
1700	2560	1570	2360	1440	2160	38	2730	4100	2500	3750	2280	3420
1540	2310	1420	2130	1300	1950	40	2710	4070	2470	3720	2250	3390
1390	2090	1290	1930	1180	1770	42	2680	4030	2450	3680	2230	3350
1270	1910	1170	1760	1070	1610	44	2660	3990	2430	3650	2210	3320
1160	1750	1070	1610	980	1470	46	2630	3960	2400	3610	2180	3280
1070	1600	985	1480	900	1350	48	2610	3920	2380	3580	2160	3250
983	1480	907	1360	830	1250	50	2580	3880	2350	3540	2140	3210


Properties											
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
5240	7880	4900	7370	4570	6870	13.0	120	12.9	113	12.7	106
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	125		117		109	
4220	6330	3950	5920	3680	5520	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
984	1480	907	1360	832	1250	6600	2360	6000	2170	5440	1990
Available Strength in Shear, kips						r_y , in.					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	4.34		4.31		4.27	
984	1480	907	1360	832	1250	r_x/r_y					
984	1480	907	1360	832	1250	1.67		1.66		1.66	

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.


<div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;">  <p>W14</p> </div> <div style="text-align: center;"> <p>Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces</p> </div> <div style="text-align: right;"> <p>$F_y = 70$ ksi $F_u = 90$ ksi</p> </div> </div> <p style="text-align: center;">W-Shapes</p>													
W14x						Shape	W14x						
342 ^h		311 ^h		283 ^h		lb/ft	342 ^h		311 ^h		283 ^h		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
4230	6360	3830	5760	3490	5250	0	2350	3530	2110	3170	1890	2850	
4110	6180	3720	5590	3390	5090	6	2350	3530	2110	3170	1890	2850	
4070	6110	3680	5530	3350	5030	7	2350	3530	2110	3170	1890	2850	
4020	6040	3630	5460	3310	4970	8	2350	3530	2110	3170	1890	2850	
3960	5950	3580	5380	3260	4900	9	2350	3530	2110	3170	1890	2850	
3900	5860	3520	5300	3210	4820	10	2350	3530	2110	3170	1890	2850	
3830	5760	3460	5200	3150	4740	11	2350	3530	2110	3170	1890	2850	
3760	5650	3400	5110	3090	4640	12	2350	3530	2110	3170	1890	2850	
3690	5540	3330	5000	3030	4550	13	2340	3520	2100	3160	1890	2840	
3610	5420	3250	4890	2960	4440	14	2330	3500	2090	3140	1880	2820	
3520	5290	3170	4770	2890	4340	15	2320	3490	2080	3120	1860	2800	
3430	5160	3090	4650	2810	4220	16	2310	3470	2070	3110	1850	2790	
3340	5020	3010	4520	2730	4110	17	2300	3450	2060	3090	1840	2770	
3250	4880	2920	4390	2650	3990	18	2290	3440	2040	3070	1830	2750	
3150	4730	2830	4260	2570	3860	19	2270	3420	2030	3060	1820	2740	
3050	4580	2740	4120	2490	3740	20	2260	3400	2020	3040	1810	2720	
2850	4280	2560	3840	2320	3480	22	2240	3370	2000	3010	1790	2690	
2640	3970	2370	3560	2140	3220	24	2220	3330	1980	2970	1770	2650	
2430	3660	2180	3270	1970	2960	26	2190	3300	1960	2940	1740	2620	
2230	3350	1990	2990	1800	2700	28	2170	3260	1930	2900	1720	2590	
2020	3040	1810	2710	1630	2450	30	2150	3230	1910	2870	1700	2550	
1830	2750	1630	2450	1470	2200	32	2130	3200	1890	2840	1680	2520	
1640	2460	1460	2190	1310	1970	34	2100	3160	1870	2800	1650	2490	
1460	2200	1300	1950	1170	1750	36	2080	3130	1840	2770	1630	2450	
1310	1970	1170	1750	1050	1570	38	2060	3090	1820	2740	1610	2420	
1180	1780	1050	1580	945	1420	40	2030	3060	1800	2700	1590	2390	
1070	1610	954	1430	857	1290	42	2010	3020	1780	2670	1570	2350	
979	1470	869	1310	781	1170	44	1990	2990	1750	2630	1540	2320	
896	1350	795	1200	715	1070	46	1970	2960	1730	2600	1520	2290	
823	1240	730	1100	656	986	48	1940	2920	1710	2570	1500	2250	
758	1140	673	1010	605	909	50	1920	2890	1690	2530	1480	2220	

Properties											
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r
4230	6360	3830	5760	3490	5250	12.7	98.7	12.5	89.9	12.4	82.1
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²					
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	101		91.4		83.3	
3410	5110	3080	4630	2810	4220	Moment of Inertia, in. ⁴					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y
755	1130	675	1010	603	905	4900	1810	4330	1610	3840	1440
Available Strength in Shear, kips						r_y , in.					
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	4.24		4.20		4.17	
755	1130	675	1010	603	905	r_x/r_y					
755	1130	675	1010	603	905	1.65		1.64		1.63	

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W14x						Shape	W14x					
257		233		211		lb/ft	257		233		211	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Effective Length, L_e , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
3170	4760	2870	4320	2600	3910	0	1700	2560	1520	2290	1360	2050
3070	4620	2780	4180	2520	3780	6	1700	2560	1520	2290	1360	2050
3040	4570	2750	4130	2490	3740	7	1700	2560	1520	2290	1360	2050
3000	4510	2710	4080	2450	3690	8	1700	2560	1520	2290	1360	2050
2950	4440	2670	4020	2420	3630	9	1700	2560	1520	2290	1360	2050
2910	4370	2630	3950	2380	3570	10	1700	2560	1520	2290	1360	2050
2850	4290	2580	3880	2330	3510	11	1700	2560	1520	2290	1360	2050
2800	4210	2530	3800	2290	3440	12	1700	2560	1520	2290	1360	2050
2740	4120	2480	3720	2240	3360	13	1690	2550	1510	2280	1350	2030
2680	4020	2420	3630	2180	3280	14	1680	2530	1500	2260	1340	2020
2610	3920	2360	3540	2130	3200	15	1670	2510	1490	2240	1330	2000
2540	3820	2290	3450	2070	3110	16	1660	2500	1480	2230	1320	1990
2470	3710	2230	3350	2010	3020	17	1650	2480	1470	2210	1310	1970
2390	3600	2160	3250	1950	2930	18	1640	2460	1460	2200	1300	1950
2320	3490	2090	3140	1880	2830	19	1630	2450	1450	2180	1290	1940
2240	3370	2020	3040	1820	2740	20	1620	2430	1440	2160	1280	1920
2090	3130	1880	2820	1690	2540	22	1600	2400	1420	2130	1260	1890
1930	2900	1730	2600	1560	2340	24	1570	2360	1400	2100	1240	1860
1770	2660	1590	2390	1420	2140	26	1550	2330	1370	2070	1220	1830
1610	2420	1440	2170	1290	1940	28	1530	2300	1350	2030	1190	1790
1460	2190	1300	1960	1170	1750	30	1510	2270	1330	2000	1170	1760
1310	1970	1170	1760	1040	1570	32	1490	2230	1310	1970	1150	1730
1160	1750	1040	1560	927	1390	34	1460	2200	1290	1940	1130	1700
1040	1560	927	1390	827	1240	36	1440	2170	1270	1900	1110	1670
932	1400	832	1250	742	1120	38	1420	2130	1250	1870	1090	1640
841	1260	751	1130	670	1010	40	1400	2100	1220	1840	1070	1600
763	1150	681	1020	608	913	42	1380	2070	1200	1810	1050	1570
695	1040	621	933	554	832	44	1350	2040	1180	1770	1020	1540
636	956	568	854	507	761	46	1330	2000	1160	1740	1000	1510
584	878	522	784	465	699	48	1310	1970	1140	1710	982	1480
538	809	481	723	429	644	50	1290	1940	1120	1680	960	1440
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
3170	4760	2870	4320	2600	3910	12.3	75.1	12.2	68.4	12.1	62.6	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	75.6		68.5		62.0		
2550	3830	2310	3470	2090	3140	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3400	1290	3010	1150	2660	1030	
542	813	479	719	431	646	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						4.13		4.10		4.07		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
859	1290	772	1160	692	1040	1.62		1.62		1.61		

Note: Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes													
W14x						Shape	W14x						
193		176		159		lb/ft	193		176		159		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
2380	3580	2170	3260	1960	2940	0	1240	1860	1120	1680	1000	1510	
2310	3460	2100	3160	1890	2850	6	1240	1860	1120	1680	1000	1510	
2280	3420	2080	3120	1870	2810	7	1240	1860	1120	1680	1000	1510	
2250	3380	2050	3080	1850	2770	8	1240	1860	1120	1680	1000	1510	
2210	3330	2020	3030	1820	2730	9	1240	1860	1120	1680	1000	1510	
2180	3270	1980	2980	1790	2680	10	1240	1860	1120	1680	1000	1510	
2140	3210	1940	2920	1750	2630	11	1240	1860	1120	1680	1000	1510	
2090	3140	1900	2860	1710	2580	12	1240	1860	1120	1680	1000	1510	
2050	3070	1860	2800	1680	2520	13	1230	1850	1110	1660	992	1490	
2000	3000	1820	2730	1630	2460	14	1220	1830	1100	1650	981	1470	
1940	2920	1770	2660	1590	2390	15	1210	1820	1090	1630	971	1460	
1890	2840	1720	2580	1550	2320	16	1200	1800	1080	1620	961	1440	
1840	2760	1670	2510	1500	2250	17	1190	1790	1070	1600	950	1430	
1780	2670	1620	2430	1450	2180	18	1180	1770	1060	1590	940	1410	
1720	2590	1560	2350	1400	2110	19	1170	1750	1040	1570	930	1400	
1660	2500	1510	2270	1350	2040	20	1160	1740	1030	1550	920	1380	
1540	2320	1400	2100	1250	1880	22	1140	1710	1010	1520	899	1350	
1420	2130	1280	1930	1150	1730	24	1110	1670	993	1490	878	1320	
1300	1950	1170	1760	1050	1580	26	1090	1640	972	1460	858	1290	
1180	1770	1060	1600	951	1430	28	1070	1610	951	1430	837	1260	
1060	1590	955	1440	854	1280	30	1050	1580	930	1400	817	1230	
949	1430	853	1280	762	1140	32	1030	1550	909	1370	796	1200	
841	1260	756	1140	675	1010	34	1010	1520	889	1340	775	1170	
750	1130	674	1010	602	905	36	987	1480	868	1300	755	1130	
673	1010	605	909	540	812	38	966	1450	847	1270	734	1100	
608	914	546	821	487	733	40	945	1420	826	1240	714	1070	
551	829	495	744	442	665	42	924	1390	805	1210	693	1040	
502	755	451	678	403	605	44	902	1360	785	1180	672	1010	
460	691	413	621	369	554	46	881	1320	764	1150	652	980	
422	634	379	570	339	509	48	860	1290	743	1120	631	949	
389	585	350	525	312	469	50	839	1260	722	1090	607	912	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
2380	3580	2170	3260	1960	2940	12.1	57.6	12.0	53.4	11.9	49.0		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	56.8		51.8		46.7			
1920	2880	1750	2620	1580	2360	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
386	579	353	530	313	469	2400	931	2140	838	1900	748		
Available Strength in Shear, kips						r_y , in.							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	4.05		4.02		4.00			
386	579	353	530	313	469	r_x/r_y							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.60		1.60		1.60			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$								
629	945	569	856	510	767								

Note: Confirm ASTM A913 material availability before specifying.




Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70$ ksi
 $F_u = 90$ ksi


W-Shapes

W14x						Shape	W14x					
145		132		120		lb/ft	145		132		120 ^f	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1790	2690	1630	2440	1480	2220	0	908	1370	817	1230	739	1110
1730	2600	1570	2350	1420	2140	6	908	1370	817	1230	739	1110
1710	2570	1550	2320	1410	2110	7	908	1370	817	1230	739	1110
1690	2530	1520	2290	1380	2080	8	908	1370	817	1230	739	1110
1660	2490	1490	2250	1360	2040	9	908	1370	817	1230	739	1110
1630	2450	1470	2200	1330	2000	10	908	1370	817	1230	739	1110
1600	2400	1430	2150	1300	1960	11	908	1370	817	1230	739	1110
1570	2350	1400	2100	1270	1910	12	907	1360	810	1220	732	1100
1530	2300	1360	2050	1240	1860	13	897	1350	799	1200	722	1090
1490	2240	1330	1990	1200	1810	14	887	1330	789	1190	712	1070
1450	2180	1290	1930	1170	1750	15	877	1320	779	1170	702	1060
1410	2120	1250	1870	1130	1700	16	867	1300	769	1160	693	1040
1370	2060	1200	1810	1090	1640	17	857	1290	759	1140	683	1030
1320	1990	1160	1740	1050	1580	18	846	1270	749	1130	673	1010
1280	1920	1120	1680	1010	1520	19	836	1260	739	1110	663	996
1230	1850	1070	1610	971	1460	20	826	1240	729	1100	653	981
1140	1710	982	1480	888	1340	22	806	1210	709	1060	633	952
1050	1570	892	1340	806	1210	24	786	1180	688	1030	613	922
954	1430	804	1210	726	1090	26	766	1150	668	1000	593	892
863	1300	718	1080	648	973	28	745	1120	648	974	574	862
775	1160	636	956	573	861	30	725	1090	628	944	554	832
689	1040	559	840	503	756	32	705	1060	608	913	534	803
611	918	495	744	446	670	34	685	1030	587	883	514	773
545	819	442	664	398	598	36	665	999	567	853	494	743
489	735	397	596	357	536	38	644	969	547	822	474	713
441	663	358	538	322	484	40	624	938	527	792	450	677
400	602	325	488	292	439	42	604	908	504	758	424	638
365	548	296	445	266	400	44	584	878	478	718	402	604
334	501	271	407	244	366	46	562	845	454	682	381	573
306	461	249	374	224	336	48	535	804	432	650	363	545
282	424	229	344	206	310	50	511	768	413	620	346	520
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
1790	2690	1630	2440	1480	2220	11.9	45.7	11.2	41.6	11.3	39.0	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	42.7		38.8		35.3		
1440	2160	1310	1960	1190	1790	Moment of Inertia, in. ⁴						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y	
282	423	265	398	240	359	1710	677	1530	548	1380	495	
Available Strength in Shear, kips						r_y , in.						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.98		3.76		3.74		
282	423	265	398	240	359	r_x/r_y						
Available Strength in Flexure about Y-Y Axis, kip-ft						1.59		1.67		1.67		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$							
465	698	395	593	355	534							


^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes														$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W14x						Shape	W14x								
109		99		90		lb/ft	109 ^f		99 ^f		90 ^f				
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$			
Available Compressive Strength, kips							Available Flexural Strength, kip-ft								
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD			
1340	2020	1220	1830	1110	1670	0	656	986	576	866	510	766			
1290	1940	1170	1760	1070	1610	6	656	986	576	866	510	766			
1270	1910	1160	1740	1050	1580	7	656	986	576	866	510	766			
1250	1880	1140	1710	1040	1560	8	656	986	576	866	510	766			
1230	1850	1120	1680	1020	1530	9	656	986	576	866	510	766			
1210	1810	1100	1650	997	1500	10	656	986	576	866	510	766			
1180	1770	1070	1610	975	1470	11	656	986	576	866	510	766			
1150	1730	1050	1570	951	1430	12	656	986	576	866	510	766			
1120	1690	1020	1530	926	1390	13	653	981	576	866	510	766			
1090	1640	989	1490	899	1350	14	643	966	576	866	510	766			
1060	1590	959	1440	872	1310	15	633	952	568	853	510	766			
1020	1540	927	1390	843	1270	16	624	938	559	839	504	757			
988	1480	895	1350	814	1220	17	614	923	549	825	495	743			
952	1430	862	1300	784	1180	18	604	909	540	812	486	730			
915	1380	829	1250	753	1130	19	595	894	531	798	477	716			
878	1320	795	1190	722	1090	20	585	880	521	784	467	703			
803	1210	726	1090	660	991	22	566	851	503	756	449	675			
729	1100	658	989	597	898	24	547	822	484	728	431	648			
655	985	591	889	536	806	26	527	793	466	700	413	621			
585	879	527	792	478	718	28	508	764	447	672	395	594			
516	776	465	698	421	632	30	489	735	428	644	377	567			
454	682	408	614	370	556	32	470	706	410	616	359	540			
402	604	362	544	328	492	34	450	677	391	588	336	505			
359	539	323	485	292	439	36	431	648	367	551	310	467			
322	484	290	435	262	394	38	406	611	342	513	289	434			
290	437	261	393	237	356	40	381	573	320	481	270	406			
263	396	237	356	215	323	42	359	539	301	452	253	381			
240	361	216	325	196	294	44	339	510	284	427	239	359			
220	330	198	297	179	269	46	321	483	269	404	226	339			
202	303	181	273	164	247	48	306	459	255	384	214	322			
186	279	167	251	151	228	50	291	438	243	365	204	306			
Properties															
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r				
1340	2020	1220	1830	1110	1670	12.7	36.8	14.1	34.8	15.3	33.0				
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	32.0		29.1		26.5					
1080	1620	982	1470	894	1340	Moment of Inertia, in. ⁴									
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y				
210	315	193	289	172	259	1240	447	1110	402	999	362				
Available Strength in Shear, kips						r_y , in.									
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	3.73		3.71		3.70					
313	471	272	409	236	355	r_x/r_y									
						1.67		1.66		1.66					


^f Shape exceeds compact limit for flexure with $F_y = 70 \text{ ksi}$.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W14x						Shape	W14x					
82		74		68		lb/ft	82		74		68	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1010	1510	914	1370	838	1260	0	486	730	440	662	402	604
923	1390	838	1260	768	1150	6	486	730	440	662	402	604
895	1340	813	1220	744	1120	7	486	730	440	662	402	604
863	1300	784	1180	717	1080	8	479	720	434	652	395	594
828	1250	753	1130	688	1030	9	469	705	424	637	386	579
792	1190	719	1080	657	988	10	459	689	414	622	376	565
753	1130	684	1030	624	938	11	448	674	404	607	366	550
712	1070	647	973	590	887	12	438	658	394	592	356	535
671	1010	609	916	555	835	13	427	642	384	576	347	521
629	945	571	859	520	782	14	417	627	373	561	337	506
587	882	533	801	485	728	15	407	611	363	546	327	491
545	819	495	744	449	675	16	396	595	353	531	317	477
503	756	457	687	415	623	17	386	580	343	516	307	462
463	696	420	632	381	572	18	375	564	333	500	298	448
423	637	385	578	348	523	19	365	549	323	485	288	433
385	579	350	526	316	475	20	355	533	313	470	278	418
318	478	289	435	261	392	22	334	502	292	440	259	389
267	402	243	365	219	330	24	313	470	271	408	233	351
228	343	207	311	187	281	26	289	434	244	367	210	315
197	295	179	268	161	242	28	263	396	222	334	190	286
171	257	156	234	140	211	30	242	364	204	306	174	262
150	226	137	205	123	185	32	224	337	188	283	161	242
133	200	121	182	109	164	34	209	313	175	263	149	224
119	179	108	162	97.5	147	36	195	293	164	246	139	209
107	160	96.9	146	87.5	131	38	183	276	154	231	131	196
96.3	145	87.5	131	79.0	119	40	173	260	145	218	123	185
						42	164	246	137	206	116	175
						44	156	234	130	195	110	166
						46	148	223	124	186	105	157
						48	141	212	118	177	99.9	150
						50	135	203	113	169	95.4	143
Available Strength in Tensile Yielding, kips						Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft						
1010	1510	914	1370	838	1260	L_p	L_r	L_p	L_r	L_p	L_r	
						7.40	25.2	7.40	23.8	7.34	22.7	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	24.0		21.8		20.0		
810	1220	736	1100	675	1010	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	881	148	795	134	722	121	
204	306	179	268	163	244	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						2.48		2.48		2.46		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
156	235	141	213	129	194	2.44		2.44		2.44		


Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes														$F_y = 70$ ksi $F_u = 90$ ksi	
W14x						Shape	W14x								
61 ^c		53 ^c		48 ^c		lb/ft	61 ^f		53		48				
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$			
Available Compressive Strength, kips							Available Flexural Strength, kip-ft								
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD			
750	1130	652	979	580	871	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	356	535	304	457	274	412		
687	1030	566	851	508	764		6	356	535	302	453	271	407		
665	1000	538	808	485	728		7	356	535	292	439	262	393		
641	964	506	761	456	686		8	350	526	282	424	252	379		
615	924	473	711	426	640		9	341	512	272	409	243	366		
587	882	438	659	395	593		10	332	498	263	395	234	352		
557	838	403	606	362	545		11	322	485	253	380	225	338		
527	792	368	553	330	496		12	313	471	243	366	215	324		
495	745	333	500	299	449		13	304	457	233	351	206	310		
464	697	299	449	268	402		14	295	443	224	336	197	296		
432	649	266	400	238	358		15	286	430	214	322	187	282		
400	601	234	352	210	315		16	277	416	204	307	178	268		
369	555	208	312	186	279		17	267	402	194	292	167	251		
339	509	185	278	166	249		18	258	388	182	273	153	231		
309	465	166	250	149	224		19	249	374	168	253	142	213		
280	421	150	226	134	202		20	240	361	157	236	132	198		
232	348	124	186	111	167		22	219	329	138	207	116	174		
195	293	104	157	93.2	140		24	194	291	123	185	103	155		
166	249	88.8	133	79.4	119		26	173	261	111	167	92.7	139		
143	215	76.6	115	68.5	103		28	157	236	101	153	84.3	127		
125	187	66.7	100	59.7	89.7		30	143	215	93.3	140	77.4	116		
110	165	58.6	88.1				32	132	198	86.4	130	71.5	107		
97.0	146						34	122	184	80.4	121	66.5	99.9		
86.5	130						36	114	171	75.3	113	62.1	93.4		
77.7	117						38	107	160	70.8	106	58.3	87.6		
70.1	105						40	100	151	66.8	100	55.0	82.6		
							42	94.6	142	63.2	95.0	52.0	78.1		
							44	89.5	135	60.0	90.2	49.3	74.1		
							46	85.0	128	57.1	85.9	46.9	70.5		
							48	81.0	122	54.5	82.0	44.8	67.3		
							50	77.3	116	52.2	78.4	42.8	64.3		
Available Strength in Tensile Yielding, kips							Limiting Unbraced Lengths, ft								
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		L_p	L_r	L_p	L_r	L_p	L_r			
750	1130	654	983	591	888	7.33	21.6	5.73	17.4	5.70	16.7				
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	17.9		15.6		14.1					
604	906	527	790	476	714	Moment of Inertia, in. ⁴									
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y				
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	640	107	541	57.7	484	51.4				
146	219	144	216	131	197	r_y , in.									
Available Strength in Flexure about Y-Y Axis, kip-ft						2.45		1.92		1.91					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y									
114	172	76.8	116	68.5	103	2.44		3.07		3.06					


^c Shape is slender for compression with $F_y = 70$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes														$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W14x						Shape	W14x								
43 ^c		38 ^c		34 ^c		lb/ft	43		38		34				
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$			
Available Compressive Strength, kips							Available Flexural Strength, kip-ft								
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD			
507	763	441	663	385	579	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	243	365	215	323	191	287		
444	667	363	545	315	474		6	240	361	202	303	178	268		
423	635	338	508	293	441		7	231	348	192	289	169	254		
400	601	312	469	270	406		8	223	335	182	274	160	241		
375	564	284	427	246	370		9	214	322	173	260	151	227		
349	525	254	382	221	333		10	205	309	163	245	142	214		
321	482	223	336	196	294		11	197	296	154	231	134	201		
292	438	194	292	169	254		12	188	283	144	216	125	187		
263	395	166	250	145	217		13	179	270	134	202	113	171		
235	354	143	215	125	187		14	171	256	120	180	100	151		
209	314	125	188	109	163		15	162	243	108	162	89.9	135		
184	276	110	165	95.4	143		16	153	230	97.4	146	81.2	122		
163	244	97.2	146	84.5	127		17	140	210	88.9	134	73.9	111		
145	218	86.7	130	75.4	113		18	128	192	81.8	123	67.7	102		
130	196	77.8	117	67.7	102		19	118	177	75.6	114	62.5	93.9		
117	177	70.2	106	61.1	91.8		20	109	164	70.3	106	57.9	87.1		
97.1	146	58.0	87.2	50.5	75.9		22	95.5	144	61.6	92.6	50.6	76.0		
81.6	123	48.8	73.3	42.4	63.8		24	84.6	127	54.8	82.4	44.8	67.4		
69.5	104						26	76.0	114	49.4	74.2	40.2	60.5		
59.9	90.1						28	68.9	104	44.9	67.5	36.5	54.9		
52.2	78.5						30	63.1	94.8	41.2	62.0	33.4	50.2		
							32	58.2	87.4	38.1	57.3	30.8	46.3		
							34	54.0	81.1	35.4	53.2	28.6	43.0		
							36	50.4	75.7	33.1	49.8	26.7	40.1		
							38	47.2	70.9	31.1	46.7	25.0	37.6		
							40	44.4	66.8	29.3	44.0	23.5	35.4		
							42	42.0	63.1	27.7	41.7	22.2	33.4		
							44	39.8	59.8	26.3	39.5	21.1	31.7		
							46	37.8	56.8	25.0	37.6	20.0	30.1		
							48	36.0	54.2	23.9	35.9	19.1	28.7		
							50	34.4	51.7	22.8	34.3	18.2	27.4		
Available Strength in Tensile Yielding, kips							Limiting Unbraced Lengths, ft								
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		L_p	L_r	L_p	L_r	L_p	L_r			
528	794	469	706	419	630		5.64	16.0	4.63	13.1	4.57	12.7			
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips							Area, in. ²								
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		12.6		11.2		10.0				
425	638	378	567	338	506		Moment of Inertia, in. ⁴								
Available Strength in Shear, kips							I_x	I_y	I_x	I_y	I_x	I_y			
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		428	45.2	385	26.7	340	23.3			
117	175	122	184	112	168		r_y , in.								
Available Strength in Flexure about Y-Y Axis, kip-ft							1.89		1.55		1.53				
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		r_x/r_y								
60.4	90.8	42.3	63.5	37.0	55.7		3.08		3.79		3.81				


^c Shape is slender for compression with $F_y = 70 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70$ ksi $F_u = 90$ ksi	
W14x						Shape	W14x						
30 ^c		26 ^c		22 ^c		lb/ft	30 ^f		26 ^v		22 ^v		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
334	503	283	426	230	346		0	160	241	140	211	116	174
271	408	191	288	151	227	6	153	229	115	172	92.2	139	
252	378	166	250	130	196	7	145	217	105	158	84.0	126	
231	347	141	212	109	164	8	136	205	95.9	144	75.8	114	
209	314	116	174	90.1	135	9	128	193	86.5	130	65.4	98.2	
187	282	93.6	141	73.3	110	10	120	181	72.5	109	54.4	81.7	
166	250	77.4	116	60.6	91.0	11	112	169	61.9	93.1	46.2	69.4	
142	214	65.0	97.7	50.9	76.5	12	104	157	53.9	81.0	39.9	60.0	
121	182	55.4	83.3	43.4	65.2	13	91.7	138	47.5	71.5	35.0	52.7	
105	157	47.8	71.8	37.4	56.2	14	80.9	122	42.5	63.8	31.1	46.8	
91.1	137	41.6	62.5	32.6	48.9	15	72.1	108	38.3	57.6	28.0	42.0	
80.1	120	36.6	55.0	28.6	43.0	16	64.9	97.5	34.9	52.4	25.3	38.1	
71.0	107	32.4	48.7	25.4	38.1	17	58.9	88.5	32.0	48.1	23.1	34.8	
63.3	95.1	28.9	43.4			18	53.8	80.9	29.5	44.4	21.3	32.0	
56.8	85.4					19	49.5	74.4	27.4	41.2	19.7	29.6	
51.3	77.1					20	45.8	68.8	25.6	38.5	18.3	27.5	
42.4	63.7					22	39.7	59.7	22.6	34.0	16.1	24.1	
35.6	53.5					24	35.1	52.7	20.2	30.4	14.3	21.5	
						26	31.3	47.1	18.3	27.5	12.9	19.4	
						28	28.3	42.6	16.7	25.1	11.7	17.6	
						30	25.9	38.9	15.4	23.2	10.8	16.2	
						32	23.8	35.7	14.3	21.5	9.94	14.9	
						34	22.0	33.1	13.3	20.0	9.25	13.9	
						36	20.5	30.8	12.5	18.8	8.64	13.0	
						38	19.2	28.8	11.7	17.6	8.12	12.2	
						40	18.0	27.1	11.1	16.7	7.65	11.5	
						42	17.0	25.5	10.5	15.8	7.24	10.9	
						44	16.1	24.2	9.98	15.0	6.87	10.3	
						46	15.3	22.9	9.51	14.3	6.54	9.82	
						48	14.5	21.8	9.08	13.6	6.23	9.37	
						50	13.9	20.8	8.69	13.1	5.96	8.96	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
371	558	322	484	272	409	5.06	12.2	3.22	9.02	3.10	8.60		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	8.85		7.69		6.49			
299	448	260	389	219	329	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	291	19.6	245	8.91	199	7.00		
104	156	89.1	134	76.9	116	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.49		1.08		1.04			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
30.0	45.1	19.4	29.1	15.3	23.0	3.85		5.23		5.33			


^c Shape is slender for compression with $F_y = 70$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W12 ^x						Shape	W12 ^x					
336 ^h		305 ^h		279 ^h		lb/ft	336 ^h		305 ^h		279 ^h	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
4150	6230	3750	5640	3430	5160	0	2110	3170	1880	2820	1680	2530
3970	5960	3590	5390	3280	4930	6	2110	3170	1880	2820	1680	2530
3900	5870	3530	5300	3220	4840	7	2110	3170	1880	2820	1680	2530
3830	5760	3460	5200	3160	4750	8	2110	3170	1880	2820	1680	2530
3750	5640	3390	5090	3090	4650	9	2110	3170	1880	2820	1680	2530
3670	5510	3310	4970	3020	4540	10	2110	3170	1880	2820	1680	2530
3570	5370	3220	4840	2940	4410	11	2100	3160	1870	2810	1670	2510
3480	5220	3130	4700	2850	4280	12	2090	3140	1860	2790	1660	2500
3370	5070	3030	4560	2760	4150	13	2080	3130	1850	2780	1650	2490
3260	4900	2930	4400	2670	4010	14	2070	3110	1840	2770	1640	2470
3150	4730	2830	4250	2570	3860	15	2060	3100	1830	2750	1640	2460
3030	4550	2720	4080	2470	3710	16	2050	3080	1820	2740	1630	2450
2910	4370	2610	3920	2360	3550	17	2040	3070	1810	2720	1620	2430
2790	4190	2490	3750	2260	3400	18	2030	3060	1800	2710	1610	2420
2660	4010	2380	3580	2150	3240	19	2020	3040	1790	2700	1600	2400
2540	3820	2270	3410	2050	3080	20	2010	3030	1780	2680	1590	2390
2290	3450	2040	3060	1840	2760	22	2000	3000	1770	2650	1570	2360
2050	3080	1820	2730	1630	2450	24	1980	2970	1750	2630	1550	2340
1810	2720	1600	2410	1440	2160	26	1960	2940	1730	2600	1540	2310
1590	2380	1390	2090	1250	1870	28	1940	2910	1710	2570	1520	2280
1380	2080	1210	1820	1090	1630	30	1920	2880	1690	2540	1500	2260
1210	1820	1070	1600	954	1430	32	1900	2860	1670	2520	1480	2230
1080	1620	945	1420	845	1270	34	1880	2830	1650	2490	1460	2200
959	1440	843	1270	754	1130	36	1860	2800	1640	2460	1450	2170
861	1290	757	1140	676	1020	38	1840	2770	1620	2430	1430	2150
777	1170	683	1030	610	917	40	1820	2740	1600	2400	1410	2120
705	1060	619	931	554	832	42	1800	2710	1580	2380	1390	2090
642	965	564	848	504	758	44	1790	2680	1560	2350	1370	2070
587	883	516	776	462	694	46	1770	2660	1540	2320	1360	2040
539	811	474	713	424	637	48	1750	2630	1520	2290	1340	2010
497	747	437	657	391	587	50	1730	2600	1510	2260	1320	1980
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
4150	6230	3750	5640	3430	5160	10.4	107	10.2	97.6	10.1	89.9	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	98.9		89.5		81.9		
3340	5010	3020	4530	2760	4150	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	4060	1190	3550	1050	3110	937	
837	1260	744	1120	681	1020	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						3.47		3.42		3.38		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
957	1440	852	1280	768	1160	1.85		1.84		1.82		


^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

<div style="display: flex; justify-content: space-between; align-items: center;">  <div style="text-align: center;"> Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces </div> <div style="text-align: right;"> $F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$ </div> </div>													
W-Shapes													
W12 \times						Shape		W12 \times					
252 ^h		230 ^h		210		lb/ft		252 ^h		230 ^h		210	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips								Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_e , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending		ASD	LRFD	ASD	LRFD	ASD	LRFD
3110	4670	2840	4270	2590	3890			0	1500	2250	1350	2030	1220
2960	4450	2700	4060	2470	3710	6	1500	2250	1350	2030	1220	1830	
2910	4380	2660	3990	2420	3640	7	1500	2250	1350	2030	1220	1830	
2850	4290	2600	3910	2370	3570	8	1500	2250	1350	2030	1220	1830	
2790	4190	2540	3820	2320	3480	9	1500	2250	1350	2030	1220	1830	
2720	4090	2480	3730	2260	3390	10	1490	2250	1350	2020	1210	1820	
2650	3980	2410	3620	2190	3300	11	1490	2230	1340	2010	1210	1810	
2570	3860	2340	3510	2130	3200	12	1480	2220	1330	2000	1200	1800	
2480	3730	2260	3400	2050	3090	13	1470	2210	1320	1990	1190	1790	
2400	3600	2180	3280	1980	2980	14	1460	2190	1310	1970	1180	1770	
2310	3470	2100	3150	1900	2860	15	1450	2180	1300	1960	1170	1760	
2210	3330	2010	3020	1820	2740	16	1440	2170	1300	1950	1160	1750	
2120	3190	1920	2890	1740	2620	17	1430	2150	1290	1930	1150	1730	
2020	3040	1840	2760	1660	2500	18	1420	2140	1280	1920	1150	1720	
1930	2900	1750	2620	1580	2370	19	1420	2130	1270	1910	1140	1710	
1830	2750	1660	2490	1500	2250	20	1410	2110	1260	1890	1130	1700	
1640	2460	1480	2220	1330	2010	22	1390	2090	1240	1870	1110	1670	
1450	2180	1310	1970	1180	1770	24	1370	2060	1230	1840	1090	1650	
1270	1910	1140	1720	1030	1540	26	1350	2030	1210	1820	1080	1620	
1100	1650	988	1480	885	1330	28	1340	2010	1190	1790	1060	1590	
959	1440	860	1290	771	1160	30	1320	1980	1170	1760	1040	1570	
843	1270	756	1140	678	1020	32	1300	1960	1160	1740	1030	1540	
746	1120	670	1010	600	902	34	1280	1930	1140	1710	1010	1520	
666	1000	597	898	535	805	36	1270	1900	1120	1690	992	1490	
598	898	536	806	481	722	38	1250	1880	1110	1660	975	1470	
539	811	484	727	434	652	40	1230	1850	1090	1640	958	1440	
489	735	439	660	393	591	42	1210	1820	1070	1610	941	1410	
446	670	400	601	358	539	44	1200	1800	1050	1580	924	1390	
408	613	366	550	328	493	46	1180	1770	1040	1560	907	1360	
374	563	336	505	301	453	48	1160	1740	1020	1530	890	1340	
345	519	310	465	278	417	50	1140	1720	1000	1510	873	1310	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
3110	4670	2840	4270	2590	3890	9.97	81.7	9.88	75.0	9.79	68.7		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	74.1		67.7		61.8			
2500	3750	2280	3430	2090	3130	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
604	906	545	818	486	729	2720	828	2420	742	2140	664		
Available Strength in Shear, kips						r_y , in.							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	3.34		3.31		3.28			
604	906	545	818	486	729	r_x/r_y							
685	1030	618	929	555	835	1.81		1.80		1.80			

^h Flange thickness is greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes													
W12x						Shape	W12x						
190		170		152		lb/ft	190		170		152		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
2350	3530	2100	3150	1870	2820	0	1090	1630	961	1440	849	1280	
2230	3360	1990	2990	1780	2670	6	1090	1630	961	1440	849	1280	
2190	3290	1950	2940	1750	2620	7	1090	1630	961	1440	849	1280	
2150	3230	1910	2880	1710	2570	8	1090	1630	961	1440	849	1280	
2100	3150	1870	2810	1670	2500	9	1090	1630	961	1440	849	1280	
2040	3070	1820	2730	1620	2440	10	1080	1630	957	1440	845	1270	
1980	2980	1760	2650	1570	2360	11	1080	1620	949	1430	837	1260	
1920	2890	1710	2570	1520	2290	12	1070	1600	941	1410	829	1250	
1850	2790	1650	2480	1470	2200	13	1060	1590	933	1400	820	1230	
1790	2680	1590	2380	1410	2120	14	1050	1580	924	1390	812	1220	
1710	2580	1520	2290	1350	2030	15	1040	1570	916	1380	804	1210	
1640	2470	1460	2190	1290	1940	16	1030	1550	908	1360	796	1200	
1570	2360	1390	2090	1230	1850	17	1030	1540	900	1350	788	1180	
1490	2240	1320	1990	1170	1760	18	1020	1530	892	1340	780	1170	
1420	2130	1250	1890	1110	1670	19	1010	1520	883	1330	772	1160	
1340	2020	1190	1780	1050	1580	20	1000	1500	875	1320	763	1150	
1190	1800	1050	1580	929	1400	22	983	1480	859	1290	747	1120	
1050	1580	924	1390	813	1220	24	967	1450	842	1270	731	1100	
913	1370	800	1200	702	1060	26	950	1430	826	1240	715	1070	
788	1180	690	1040	606	910	28	933	1400	809	1220	698	1050	
686	1030	601	904	528	793	30	916	1380	793	1190	682	1030	
603	906	528	794	464	697	32	900	1350	776	1170	666	1000	
534	803	468	704	411	617	34	883	1330	760	1140	649	976	
476	716	418	628	366	551	36	866	1300	743	1120	633	952	
428	643	375	563	329	494	38	849	1280	727	1090	617	927	
386	580	338	508	297	446	40	833	1250	710	1070	601	903	
350	526	307	461	269	405	42	816	1230	694	1040	584	878	
319	479	280	420	245	369	44	799	1200	677	1020	568	854	
292	439	256	384	224	337	46	783	1180	661	993	552	829	
268	403	235	353	206	310	48	766	1150	644	969	535	805	
247	371	216	325	190	285	50	749	1130	628	944	519	780	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
2350	3530	2100	3150	1870	2820	9.70	62.7	9.61	56.5	9.52	51.0		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	56.0		50.0		44.7			
1890	2840	1690	2530	1510	2260	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
427	641	376	564	334	501	1890	589	1650	517	1430	454		
Available Strength in Shear, kips						r_y , in.							
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	3.25		3.22		3.19			
500	751	440	662	388	583	r_x/r_y							
						1.79		1.78		1.77			

Note: Confirm ASTM A913 material availability before specifying.

<div style="display: flex; justify-content: space-between; align-items: center;">  <div style="text-align: center;"> Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces </div> <div style="text-align: right;"> $F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$ </div> </div>													
W-Shapes													
W12x						Shape		W12x					
136		120		106		lb/ft		136		120		106	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips								Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending		ASD	LRFD	ASD	LRFD	ASD	LRFD
1670	2510	1480	2220	1310	1970			0	748	1120	650	977	573
1590	2380	1400	2100	1240	1860	6	748	1120	650	977	573	861	
1560	2340	1370	2060	1210	1820	7	748	1120	650	977	573	861	
1520	2290	1340	2010	1190	1780	8	748	1120	650	977	573	861	
1480	2230	1310	1960	1160	1740	9	748	1120	650	977	573	861	
1440	2170	1270	1910	1120	1690	10	743	1120	645	969	567	853	
1400	2100	1230	1850	1090	1630	11	735	1100	637	957	560	841	
1350	2030	1190	1790	1050	1580	12	727	1090	629	945	552	829	
1300	1960	1140	1720	1010	1520	13	719	1080	621	933	544	818	
1250	1880	1100	1650	970	1460	14	711	1070	613	921	536	806	
1200	1800	1050	1580	928	1390	15	703	1060	605	910	528	794	
1150	1720	1000	1510	885	1330	16	695	1040	597	898	521	782	
1090	1640	955	1440	842	1270	17	687	1030	589	886	513	771	
1040	1560	906	1360	798	1200	18	679	1020	582	874	505	759	
982	1480	857	1290	754	1130	19	671	1010	574	862	497	747	
927	1390	808	1210	711	1070	20	662	996	566	850	489	736	
819	1230	712	1070	625	940	22	646	972	550	827	474	712	
715	1070	620	932	544	817	24	630	947	534	803	458	689	
615	925	532	800	466	700	26	614	923	519	779	443	666	
530	797	459	690	402	604	28	598	899	503	756	427	642	
462	695	400	601	350	526	30	582	875	487	732	412	619	
406	610	352	528	308	462	32	566	851	471	709	396	595	
360	541	311	468	272	410	34	550	826	456	685	381	572	
321	482	278	417	243	365	36	534	802	440	661	365	549	
288	433	249	375	218	328	38	518	778	424	638	347	522	
260	391	225	338	197	296	40	502	754	408	614	328	493	
236	354	204	307	179	268	42	485	730	391	587	311	467	
215	323	186	279	163	245	44	469	705	371	558	295	444	
197	295	170	256	149	224	46	453	680	354	532	281	423	
181	271	156	235	137	205	48	433	650	338	508	268	404	
166	250	144	216	126	189	50	414	623	324	487	257	386	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
1670	2510	1480	2220	1310	1970	9.43	45.8	9.34	41.3	9.28	37.3		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	39.9		35.2		31.2			
1350	2020	1190	1780	1050	1580								
Available Strength in Shear, kips						Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
296	445	260	391	220	330	1240	398	1070	345	933	301		
Available Strength in Flexure about Y-Y Axis, kip-ft						r_y , in.							
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	3.16		3.13		3.11			
342	515	298	448	262	394								
						r_x/r_y							
						1.77		1.76		1.76			

Note: Confirm ASTM A913 material availability before specifying.




Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70$ ksi
 $F_u = 90$ ksi


W-Shapes

W12x						Shape	W12x					
96		87		79		lb/ft	96		87		79 ^f	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
1180	1780	1070	1610	972	1460	0	513	772	461	693	410	616
1120	1680	1010	1520	919	1380	6	513	772	461	693	410	616
1100	1650	994	1490	900	1350	7	513	772	461	693	410	616
1070	1610	971	1460	879	1320	8	513	772	461	693	410	616
1040	1570	945	1420	855	1290	9	513	772	461	693	410	616
1010	1520	918	1380	830	1250	10	508	763	455	684	409	615
981	1470	888	1330	803	1210	11	500	751	447	672	402	604
946	1420	857	1290	774	1160	12	492	740	440	661	395	593
911	1370	824	1240	744	1120	13	485	729	432	650	387	582
873	1310	790	1190	713	1070	14	477	717	425	639	380	571
835	1260	755	1130	681	1020	15	470	706	418	628	373	560
796	1200	719	1080	648	974	16	462	694	410	616	366	549
757	1140	683	1030	615	925	17	454	683	403	605	358	538
717	1080	646	972	582	875	18	447	672	395	594	351	527
677	1020	610	917	549	825	19	439	660	388	583	344	517
637	958	574	863	516	775	20	432	649	380	572	336	506
560	842	503	757	452	679	22	417	626	365	549	322	484
486	730	436	655	390	587	24	401	603	351	527	307	462
416	625	373	560	333	501	26	386	580	336	504	293	440
358	539	321	483	287	432	28	371	558	321	482	278	418
312	469	280	421	250	376	30	356	535	306	460	264	396
274	413	246	370	220	331	32	341	512	291	437	244	366
243	365	218	327	195	293	34	325	489	271	408	226	340
217	326	194	292	174	261	36	306	461	253	381	211	317
195	293	174	262	156	234	38	288	433	238	357	198	297
176	264	157	237	141	212	40	272	408	224	337	186	280
159	239	143	215	128	192	42	257	386	212	318	176	264
145	218	130	196	116	175	44	244	367	201	302	167	250
133	200	119	179	106	160	46	232	349	191	287	158	238
122	183	109	164	97.8	147	48	222	333	182	274	151	227
112	169	101	151	90.1	135	50	212	319	174	262	144	217
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
1180	1780	1070	1610	972	1460	9.22	34.7	9.16	32.3	9.92	30.3	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	28.2		25.6		23.2		
952	1430	864	1300	783	1170	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	833	270	740	241	662	216	
196	293	180	270	163	245	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						3.09		3.07		3.05		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
236	354	211	317	186	279	1.76		1.75		1.75		


^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
 Note: Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes														$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W12x						Shape	W12x								
72		65		58		lb/ft	72 ^f		65 ^f		58 ^f				
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$			
Available Compressive Strength, kips							Available Flexural Strength, kip-ft								
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD			
884	1330	801	1200	713	1070	0	363	546	317	476	301	452			
835	1260	755	1140	655	984	6	363	546	317	476	301	452			
818	1230	740	1110	635	955	7	363	546	317	476	301	452			
799	1200	722	1090	613	922	8	363	546	317	476	298	448			
777	1170	702	1060	590	886	9	363	546	317	476	291	437			
754	1130	681	1020	564	848	10	363	546	317	476	284	427			
729	1100	658	990	537	807	11	363	546	317	476	277	416			
703	1060	634	953	509	765	12	357	536	317	476	270	405			
675	1020	609	916	480	721	13	350	525	311	468	263	395			
647	972	583	877	450	677	14	342	515	305	458	255	384			
618	928	557	836	421	633	15	335	504	298	448	248	373			
588	884	529	796	391	588	16	328	493	291	437	241	362			
558	838	502	754	362	545	17	321	483	284	427	234	352			
528	793	474	713	334	502	18	314	472	278	417	227	341			
497	747	447	671	306	460	19	307	462	271	407	220	330			
467	702	419	630	279	420	20	300	451	264	397	213	320			
409	614	366	550	231	347	22	286	430	251	377	198	298			
353	530	316	474	194	292	24	272	409	237	356	181	272			
301	453	269	404	165	249	26	258	387	224	336	162	244			
260	390	232	349	143	214	28	244	366	207	312	148	222			
226	340	202	304	124	187	30	225	338	189	284	135	203			
199	299	178	267	109	164	32	207	311	173	260	125	188			
176	265	157	236	96.7	145	34	192	288	160	241	116	174			
157	236	140	211	86.3	130	36	179	268	149	224	108	163			
141	212	126	189	77.4	116	38	167	251	139	209	102	153			
127	191	114	171	69.9	105	40	157	236	130	196	95.7	144			
115	173	103	155			42	148	223	123	185	90.5	136			
105	158	93.9	141			44	140	211	116	175	85.8	129			
96.2	145	85.9	129			46	133	200	110	166	81.6	123			
88.3	133	78.9	119			48	127	191	105	158	77.8	117			
81.4	122	72.7	109			50	121	182	100	150	74.3	112			
Properties															
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r				
884	1330	801	1200	713	1070	11.0	28.8	12.2	27.3	7.60	23.1				
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	21.1		19.1		17.0					
712	1070	645	967	574	861	Moment of Inertia, in. ⁴									
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y				
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	597	195	533	174	475	107				
148	222	132	198	123	184	r_y , in.									
Available Strength in Flexure about Y-Y Axis, kip-ft						3.04		3.02		2.51					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y									
163	244	140	210	113	170	1.75		1.75		2.10					


^f Shape exceeds compact limit for flexure with $F_y = 70 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70$ ksi $F_u = 90$ ksi	
W12x						Shape	W12x						
53		50		45		lb/ft	53 ^f		50		45		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
654	983	612	920	549	825	0	265	398	251	377	224	337	
600	902	533	801	478	718	6	265	398	250	376	223	335	
581	874	507	762	454	683	7	265	398	243	365	216	324	
561	843	479	720	428	644	8	265	398	235	353	209	314	
539	809	448	674	401	603	9	261	393	228	342	202	303	
515	773	417	627	373	560	10	254	382	220	331	195	292	
489	735	385	578	344	516	11	248	372	213	320	187	282	
463	696	352	529	314	472	12	241	362	205	308	180	271	
436	655	320	481	285	429	13	234	352	198	297	173	260	
409	614	288	434	257	386	14	227	342	190	286	166	250	
381	573	258	388	230	345	15	220	331	183	275	159	239	
354	532	229	344	203	305	16	214	321	175	263	152	228	
327	492	203	304	180	270	17	207	311	168	252	145	218	
301	452	181	272	160	241	18	200	301	160	241	136	204	
275	414	162	244	144	216	19	193	291	150	226	126	189	
250	376	146	220	130	195	20	187	280	140	211	117	176	
207	311	121	182	107	161	22	173	260	124	186	103	155	
174	261	102	153	90.3	136	24	153	230	111	167	92.0	138	
148	223	86.6	130	76.9	116	26	137	206	101	151	83.1	125	
128	192	74.7	112	66.3	99.7	28	124	187	91.9	138	75.8	114	
111	167	65.0	97.8	57.8	86.8	30	114	171	84.6	127	69.7	105	
97.8	147	57.2	85.9	50.8	76.3	32	105	157	78.5	118	64.5	97.0	
86.6	130					34	97.2	146	73.2	110	60.1	90.3	
77.3	116					36	90.6	136	68.6	103	56.2	84.5	
69.4	104					38	84.9	128	64.5	97.0	52.9	79.4	
62.6	94.1					40	79.8	120	60.9	91.6	49.9	75.0	
						42	75.4	113	57.7	86.8	47.2	71.0	
						44	71.4	107	54.9	82.5	44.8	67.4	
						46	67.9	102	52.3	78.6	42.7	64.2	
						48	64.7	97.2	49.9	75.1	40.7	61.2	
						50	61.7	92.8	47.8	71.8	39.0	58.6	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
654	983	612	920	549	825	8.51	22.0	5.85	18.4	5.82	17.5		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	15.6		14.6		13.1			
527	790	493	739	442	663	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	425	95.8	391	56.3	348	50.0		
117	175	126	190	113	170	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.48		1.96		1.95			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
97.5	147	74.4	112	66.4	99.8	2.11		2.64		2.64			

^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70$ ksi $F_u = 90$ ksi	
W12x						Shape	W12x						
40 ^c		35 ^c		30 ^c		lb/ft	40 ^f		35		30		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
482	724	415	624	343	516		0	199	299	179	269	151	226
424	637	340	511	280	420	6	198	297	168	252	140	211	
404	608	317	476	260	391	7	191	287	160	241	133	201	
382	574	290	436	239	359	8	184	277	152	229	126	190	
357	537	261	392	217	326	9	178	267	145	217	120	180	
331	498	232	349	195	292	10	171	257	137	206	113	169	
305	459	204	306	170	256	11	164	247	129	194	106	159	
279	419	176	265	147	221	12	158	237	121	183	98.7	148	
253	380	151	227	125	189	13	151	227	114	171	89.9	135	
228	342	130	196	108	163	14	144	217	103	154	79.8	120	
203	305	113	170	94.2	142	15	138	207	92.6	139	71.6	108	
180	270	99.6	150	82.8	124	16	131	197	84.3	127	64.8	97.4	
159	239	88.2	133	73.3	110	17	123	185	77.2	116	59.1	88.9	
142	213	78.7	118	65.4	98.3	18	113	170	71.3	107	54.4	81.7	
127	191	70.6	106	58.7	88.3	19	104	157	66.1	99.4	50.3	75.5	
115	173	63.7	95.8	53.0	79.7	20	97.0	146	61.7	92.7	46.7	70.2	
95.0	143	52.7	79.2	43.8	65.8	22	85.0	128	54.4	81.7	40.9	61.5	
79.8	120	44.3	66.5	36.8	55.3	24	75.6	114	48.6	73.1	36.4	54.7	
68.0	102					26	68.0	102	44.0	66.1	32.8	49.3	
58.6	88.1					28	61.9	93.0	40.2	60.4	29.8	44.8	
51.1	76.8					30	56.8	85.3	37.0	55.6	27.3	41.1	
44.9	67.5					32	52.4	78.8	34.3	51.5	25.3	38.0	
						34	48.7	73.3	31.9	48.0	23.5	35.3	
						36	45.6	68.5	29.9	44.9	21.9	33.0	
						38	42.8	64.3	28.1	42.3	20.6	31.0	
						40	40.3	60.6	26.6	39.9	19.4	29.2	
						42	38.1	57.3	25.2	37.8	18.4	27.6	
						44	36.2	54.3	23.9	35.9	17.4	26.2	
						46	34.4	51.7	22.8	34.2	16.6	24.9	
						48	32.8	49.3	21.7	32.7	15.8	23.8	
						50	31.4	47.1	20.8	31.3	15.1	22.7	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
490	737	432	649	368	554	5.82	16.7	4.60	13.3	4.54	12.6		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	11.7		10.3		8.79			
395	592	348	521	297	445	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	307	44.1	285	24.5	238	20.3		
98.3	147	105	158	89.5	134	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.94		1.54		1.52			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
58.6	88.1	40.2	60.4	33.4	50.2	2.64		3.41		3.43			

^c Shape is slender for compression with $F_y = 70$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70$ ksi $F_u = 90$ ksi	
W12 \times						Shape	W12 \times						
26 ^c		22 ^c		19 ^c		lb/ft	26 ^{f,v}		22		19 ^v		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD	
291	437	246	370	204	307		0	127	191	102	154	86.3	130
236	355	130	195	106	159		6	121	181	73.7	111	59.9	90.0
219	329	99.3	149	80.2	120		7	114	172	65.4	98.3	52.4	78.8
201	302	76.0	114	61.4	92.3		8	108	162	54.6	82.1	41.9	63.0
182	274	60.0	90.3	48.5	72.9		9	102	153	45.3	68.1	34.5	51.9
164	246	48.6	73.1	39.3	59.0		10	95.3	143	38.6	58.0	29.2	43.9
145	218	40.2	60.4	32.5	48.8		11	89.0	134	33.5	50.4	25.2	37.9
126	190	33.8	50.8	27.3	41.0		12	82.7	124	29.6	44.5	22.1	33.3
108	162	28.8	43.3	23.2	34.9		13	72.8	109	26.5	39.8	19.7	29.6
92.9	140	24.8	37.3				14	64.4	96.8	24.0	36.0	17.7	26.7
80.9	122						15	57.5	86.5	21.9	32.9	16.1	24.2
71.1	107						16	51.9	78.0	20.1	30.3	14.8	22.2
63.0	94.7						17	47.2	70.9	18.6	28.0	13.6	20.5
56.2	84.5						18	43.2	64.9	17.4	26.1	12.7	19.0
50.4	75.8						19	39.8	59.9	16.2	24.4	11.8	17.8
45.5	68.4						20	36.9	55.5	15.3	23.0	11.1	16.7
37.6	56.5						22	32.1	48.3	13.6	20.5	9.86	14.8
31.6	47.5						24	28.4	42.8	12.3	18.5	8.88	13.3
							26	25.5	38.3	11.3	16.9	8.08	12.2
						28	23.1	34.7	10.4	15.6	7.42	11.2	
						30	21.1	31.8	9.60	14.4	6.86	10.3	
						32	19.5	29.3	8.95	13.4	6.39	9.60	
						34	18.0	27.1	8.38	12.6	5.97	8.97	
						36	16.8	25.3	7.88	11.8	5.61	8.43	
						38	15.8	23.7	7.44	11.2	5.29	7.95	
						40	14.8	22.3	7.04	10.6	5.00	7.52	
						42	14.0	21.0	6.69	10.1	4.75	7.14	
						44	13.3	19.9	6.37	9.58	4.52	6.79	
						46	12.6	18.9	6.08	9.14	4.31	6.48	
						48	12.0	18.0	5.82	8.74	4.12	6.19	
						50	11.5	17.2	5.58	8.38	3.95	5.93	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
321	482	272	408	233	351	5.00	12.2	2.53	7.40	2.45	7.05		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	7.65		6.48		5.57			
258	387	219	328	188	282	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	204	17.3	156	4.66	130	3.76		
70.6	106	89.5	134	72.1	108	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.51		0.848		0.822			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
27.5	41.4	12.8	19.2	10.4	15.6	3.42		5.79		5.86			


^c Shape is slender for compression with $F_y = 70$ ksi.

^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.


^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.

Notes: Heavy line indicates L_c/r equal to or greater than 200.


Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W12-W10						W-Shapes							
W12x				W10x		Shape	W12x				W10x		
16 ^c		14 ^c		112		lb/ft	16 ^v		14 ^{f,v}		112		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
166	250	141	212	1380	2070	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	70.2	106	58.7	88.2	513	772
80.0	120	65.6	98.6	1280	1930		6	46.0	69.2	38.8	58.4	513	772
60.0	90.1	50.2	75.5	1250	1870		7	38.0	57.2	31.0	46.6	513	772
45.9	69.0	38.5	57.8	1210	1820		8	30.1	45.3	24.4	36.7	513	772
36.3	54.5	30.4	45.7	1170	1760		9	24.7	37.1	19.9	29.9	508	764
29.4	44.2	24.6	37.0	1120	1690		10	20.7	31.1	16.7	25.0	503	756
24.3	36.5	20.3	30.6	1080	1620		11	17.8	26.7	14.2	21.4	497	747
20.4	30.7	17.1	25.7	1030	1540		12	15.5	23.3	12.4	18.6	492	739
				975	1470		13	13.8	20.7	10.9	16.4	487	731
				922	1390		14	12.3	18.5	9.76	14.7	481	723
				869	1310		15	11.2	16.8	8.80	13.2	476	715
				815	1230		16	10.2	15.3	8.01	12.0	470	707
				762	1150		17	9.37	14.1	7.35	11.0	465	699
				709	1070		18	8.67	13.0	6.78	10.2	460	691
				657	988		19	8.07	12.1	6.30	9.46	454	683
				607	912		20	7.55	11.3	5.87	8.83	449	675
				510	766		22	6.68	10.0	5.18	7.79	438	659
				428	644		24	6.00	9.02	4.64	6.97	427	642
				365	548		26	5.45	8.18	4.20	6.31	417	626
				315	473		28	4.99	7.50	3.83	5.76	406	610
				274	412		30	4.60	6.92	3.53	5.31	395	594
				241	362		32	4.27	6.42	3.27	4.92	384	578
				213	321		34	3.99	6.00	3.05	4.59	374	561
				190	286		36	3.74	5.62	2.86	4.30	363	545
				171	257		38	3.52	5.30	2.69	4.04	352	529
				154	232		40	3.33	5.01	2.54	3.82	341	513
				140	210		42	3.16	4.75	2.41	3.61	331	497
				127	191		44	3.00	4.51	2.29	3.43	320	481
							46	2.86	4.30	2.18	3.27	309	464
							48	2.74	4.11	2.08	3.12	296	445
							50	2.62	3.94	1.99	2.99	284	426
Properties						Limiting Unbraced Lengths, ft							
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
197	297	174	262	1380	2070	2.31	6.64	2.61	6.41	8.00	46.2		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	4.71		4.16		32.9			
159	238	140	211	1110	1670	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	103	2.82	88.6	2.36	716	236		
66.4	99.8	57.0	85.7	241	361	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						0.773		0.753		2.68			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
7.88	11.8	6.32	9.49	242	363	6.04		6.14		1.74			


^c Shape is slender for compression with $F_y = 70 \text{ ksi}$.
^f Shape exceeds compact limit for flexure with $F_y = 70 \text{ ksi}$.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70 \text{ ksi}$; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W10x						Shape	W10x						
100		88		77		lb/ft	100		88		77		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
1230	1850	1090	1640	951	1430	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	454	683	395	593	341	512
1140	1710	1010	1520	880	1320		6	454	683	395	593	341	512
1110	1670	982	1480	855	1290		7	454	683	395	593	341	512
1070	1610	951	1430	828	1240		8	454	682	394	592	340	511
1040	1560	917	1380	797	1200		9	448	674	389	584	335	503
996	1500	881	1320	765	1150		10	443	666	383	576	329	495
953	1430	842	1270	731	1100		11	438	658	378	568	324	487
908	1360	802	1210	695	1040		12	432	650	373	561	319	480
861	1290	760	1140	658	989		13	427	642	368	553	314	472
814	1220	718	1080	621	933		14	422	634	362	545	309	464
766	1150	675	1010	583	876		15	416	626	357	537	304	456
718	1080	632	949	544	818		16	411	618	352	529	298	449
670	1010	589	885	507	762		17	406	610	347	521	293	441
622	935	546	821	469	706		18	400	602	342	513	288	433
576	865	505	759	433	651		19	395	594	336	505	283	425
530	797	465	698	398	598		20	390	586	331	498	278	418
444	667	388	583	331	497		22	379	570	321	482	267	402
373	560	326	490	278	418		24	368	554	310	466	257	387
318	478	278	417	237	356		26	358	538	300	450	247	371
274	412	239	360	204	307		28	347	522	289	435	237	356
239	359	209	313	178	267		30	337	506	279	419	226	340
210	315	183	276	156	235		32	326	490	268	403	216	325
186	279	162	244	139	208		34	315	474	258	387	204	307
166	249	145	218	124	186		36	305	458	247	371	192	288
149	224	130	195	111	167		38	294	442	235	354	181	272
134	202	117	176	100	150		40	283	426	223	335	171	257
122	183	106	160	90.8	136		42	272	409	212	318	162	244
111	167						44	259	390	202	303	155	232
							46	248	372	192	289	147	222
							48	237	356	184	277	141	212
							50	227	341	176	265	135	203
Available Strength in Tensile Yielding, kips							Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		L_p	L_r	L_p	L_r	L_p	L_r	
1230	1850	1090	1640	951	1430		7.91	41.8	7.85	37.2	7.76	33.1	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips							Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		29.3		26.0		22.7		
989	1480	878	1320	766	1150		Moment of Inertia, in. ⁴						
Available Strength in Shear, kips							I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		623	207	534	179	455	154	
211	317	183	274	157	236		r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft							2.65		2.63		2.60		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		r_x/r_y						
213	320	185	279	160	241		1.74		1.73		1.73		


Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70$ ksi $F_u = 90$ ksi	
W10x						Shape	W10x						
68		60		54		lb/ft	68		60		54 ^f		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
834	1250	742	1120	662	995	0	298	448	261	392	230	345	
771	1160	685	1030	611	918	6	298	448	261	392	230	345	
749	1130	665	1000	593	892	7	298	448	261	392	230	345	
725	1090	643	967	573	862	8	297	446	259	389	230	345	
698	1050	619	931	552	830	9	292	438	254	382	226	340	
670	1010	594	892	529	795	10	286	431	249	374	221	333	
639	961	566	851	504	758	11	281	423	244	367	216	325	
608	914	538	809	479	720	12	276	415	239	359	212	318	
575	865	509	765	453	681	13	271	408	234	352	207	311	
542	815	479	720	426	641	14	266	400	229	345	202	304	
509	765	449	675	399	600	15	261	393	224	337	197	296	
475	714	419	630	372	560	16	256	385	219	330	192	289	
442	664	389	585	346	520	17	251	377	214	322	188	282	
409	615	360	541	320	480	18	246	370	210	315	183	275	
377	567	331	498	294	442	19	241	362	205	307	178	267	
346	521	304	457	269	405	20	236	355	200	300	173	260	
288	433	252	379	223	336	22	226	339	190	285	163	246	
242	364	212	318	188	282	24	216	324	180	270	154	231	
206	310	181	271	160	240	26	206	309	170	255	143	215	
178	267	156	234	138	207	28	195	294	159	239	130	196	
155	233	136	204	120	180	30	185	279	146	220	120	180	
136	205	119	179	106	159	32	172	259	136	204	111	167	
121	181	106	159	93.5	141	34	161	242	127	190	103	155	
108	162	94.2	142	83.4	125	36	151	227	119	178	96.7	145	
96.5	145	84.5	127	74.8	112	38	142	214	112	168	91.0	137	
87.1	131	76.3	115	67.6	102	40	134	202	105	159	85.8	129	
79.0	119	69.2	104	61.3	92.1	42	128	192	100	150	81.3	122	
						44	121	182	95.0	143	77.2	116	
						46	116	174	90.5	136	73.5	110	
						48	111	166	86.5	130	70.2	105	
						50	106	159	82.8	124	67.1	101	
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
834	1250	742	1120	662	995	L_p	L_r	L_p	L_r	L_p	L_r		
						7.73	30.1	7.67	27.4	8.23	25.5		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	19.9		17.7		15.8			
672	1010	597	896	533	800	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
137	205	120	180	105	157	394	134	341	116	303	103		
Available Strength in Shear, kips						r_y , in.							
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	2.59		2.57		2.56			
140	211	122	184	107	161	r_x/r_y							
						1.71		1.71		1.71			


^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

<div style="display: flex; justify-content: space-between; align-items: center;">  <div style="text-align: center;"> Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces </div> <div style="text-align: right;"> $F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$ </div> </div>													
W-Shapes													
W10x						Shape		W10x					
49		45		39		lb/ft		49 ^f		45		39	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips								Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending		ASD	LRFD	ASD	LRFD	ASD	LRFD
604	907	557	838	482	724			0	204	306	192	288	163
556	836	489	735	421	633	6	204	306	192	288	163	245	
540	811	466	701	401	603	7	204	306	187	281	158	238	
521	784	441	663	379	570	8	204	306	182	273	154	231	
502	754	415	624	355	534	9	204	306	177	266	149	224	
480	722	387	582	331	497	10	200	300	172	258	144	217	
458	688	359	539	306	460	11	195	293	167	251	139	209	
434	653	330	495	281	422	12	190	286	162	243	135	202	
410	617	301	452	255	384	13	186	279	157	236	130	195	
386	580	273	410	231	347	14	181	272	152	228	125	188	
361	543	245	369	207	311	15	176	265	147	221	120	181	
336	505	219	329	184	276	16	172	258	142	213	116	174	
312	469	194	292	163	245	17	167	251	137	206	111	167	
288	433	173	260	145	218	18	162	244	132	198	106	159	
265	398	155	234	130	196	19	158	237	127	191	100	151	
242	364	140	211	118	177	20	153	230	122	183	93.9	141	
200	301	116	174	97.2	146	22	144	216	109	164	83.0	125	
168	253	97.4	146	81.7	123	24	134	202	98.1	147	74.4	112	
143	216	83.0	125	69.6	105	26	122	183	89.2	134	67.4	101	
124	186	71.5	108	60.0	90.2	28	111	166	81.9	123	61.7	92.8	
108	162	62.3	93.7	52.3	78.6	30	102	153	75.7	114	56.9	85.5	
94.7	142	54.8	82.3	46.0	69.1	32	93.9	141	70.3	106	52.8	79.4	
83.9	126					34	87.3	131	65.8	98.8	49.3	74.0	
74.8	112					36	81.6	123	61.7	92.8	46.2	69.4	
67.2	101					38	76.7	115	58.2	87.5	43.5	65.4	
60.6	91.1					40	72.3	109	55.0	82.7	41.1	61.7	
55.0	82.6					42	68.4	103	52.2	78.5	38.9	58.5	
						44	64.9	97.5	49.7	74.7	37.0	55.6	
						46	61.7	92.8	47.4	71.2	35.3	53.0	
						48	58.9	88.5	45.3	68.1	33.7	50.7	
						50	56.3	84.6	43.4	65.2	32.3	48.5	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
604	907	557	838	482	725	9.16	24.2	6.00	20.4	5.91	18.7		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	14.4		13.3		11.5			
486	729	449	673	388	582	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
95.2	143	99.0	148	87.5	131	272	93.4	248	53.4	209	45.0		
Available Strength in Flexure about Y-Y Axis, kip-ft						r_y , in.							
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	2.54		2.01		1.98			
93.8	141	70.9	107	60.1	90.3	r_x/r_y							
						1.71		2.15		2.16			


^f Shape exceeds compact limit for flexure with $F_y = 70 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
W10 _x						Shape	W10 _x					
33		30		26 ^c		lb/ft	33 ^f		30		26	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips						Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
407	612	371	557	311	468	0	130	195	128	192	109	164
353	531	279	420	239	360	6	130	195	117	176	99.1	149
336	505	252	379	216	324	7	130	195	111	167	93.8	141
317	476	224	337	192	288	8	126	189	106	159	88.6	133
296	445	196	295	167	251	9	121	182	99.8	150	83.3	125
275	413	169	254	144	216	10	117	176	94.1	141	78.0	117
253	381	143	215	121	182	11	113	169	88.4	133	72.7	109
232	348	120	181	102	153	12	108	162	82.7	124	66.9	101
210	316	102	154	86.9	131	13	104	156	75.8	114	59.4	89.3
189	284	88.4	133	75.0	113	14	99.3	149	68.4	103	53.3	80.1
169	253	77.0	116	65.3	98.1	15	94.9	143	62.2	93.5	48.3	72.7
149	224	67.7	102	57.4	86.3	16	90.5	136	57.1	85.8	44.2	66.4
132	198	59.9	90.1	50.8	76.4	17	86.0	129	52.8	79.3	40.7	61.2
118	177	53.5	80.3	45.3	68.2	18	79.4	119	49.0	73.7	37.7	56.7
106	159	48.0	72.1	40.7	61.2	19	73.6	111	45.8	68.9	35.1	52.8
95.4	143	43.3	65.1	36.7	55.2	20	68.5	103	43.0	64.6	32.9	49.5
78.8	118	35.8	53.8	30.4	45.6	22	60.2	90.5	38.3	57.6	29.2	43.9
66.2	99.5					24	53.7	80.8	34.6	51.9	26.2	39.4
56.4	84.8					26	48.5	72.9	31.5	47.3	23.8	35.8
48.7	73.1					28	44.2	66.5	28.9	43.5	21.9	32.9
42.4	63.7					30	40.6	61.1	26.8	40.3	20.2	30.3
37.3	56.0					32	37.6	56.5	24.9	37.5	18.8	28.2
						34	35.0	52.6	23.3	35.1	17.5	26.3
						36	32.8	49.2	21.9	32.9	16.4	24.7
						38	30.8	46.3	20.7	31.1	15.5	23.3
						40	29.0	43.7	19.6	29.4	14.7	22.0
						42	27.5	41.3	18.6	27.9	13.9	20.9
						44	26.1	39.2	17.7	26.6	13.2	19.9
						46	24.9	37.4	16.9	25.4	12.6	18.9
						48	23.7	35.6	16.1	24.3	12.0	18.1
						50	22.7	34.1	15.5	23.2	11.5	17.3
Properties												
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r	
407	612	371	557	319	479	7.06	17.1	4.09	12.6	4.06	11.9	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	9.71		8.84		7.61		
328	492	298	448	257	385	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	171	36.6	170	16.7	144	14.1	
79.0	119	88.2	132	75.0	112	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						1.94		1.37		1.36		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
45.9	69.0	30.9	46.4	26.2	39.4	2.16		3.20		3.20		


^c Shape is slender for compression with $F_y = 70$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70$ ksi $F_u = 90$ ksi	
W10x						Shape	W10x						
22 ^c		19 ^c		17 ^c		lb/ft	22 ^f		19		17		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
260	391	226	339	197	297	0	90.1	135	75.4	113	65.3	98.2	
199	300	118	177	99.5	150	6	81.1	122	56.1	84.4	47.0	70.7	
181	272	91.4	137	75.9	114	7	76.4	115	50.4	75.8	41.8	62.8	
160	240	70.0	105	58.1	87.3	8	71.6	108	44.0	66.2	34.9	52.5	
139	208	55.3	83.1	45.9	69.0	9	66.8	100	36.8	55.3	29.0	43.6	
118	178	44.8	67.3	37.2	55.9	10	62.1	93.3	31.5	47.4	24.7	37.2	
99.0	149	37.0	55.7	30.7	46.2	11	57.3	86.1	27.5	41.4	21.5	32.3	
83.2	125	31.1	46.8	25.8	38.8	12	50.1	75.3	24.4	36.7	19.0	28.5	
70.9	107	26.5	39.9	22.0	33.1	13	44.2	66.5	21.9	33.0	17.0	25.5	
61.1	91.9	22.9	34.4	19.0	28.5	14	39.5	59.3	19.9	30.0	15.4	23.1	
53.3	80.0					15	35.6	53.5	18.3	27.4	14.0	21.1	
46.8	70.4					16	32.4	48.7	16.8	25.3	12.9	19.4	
41.5	62.3					17	29.7	44.7	15.6	23.5	12.0	18.0	
37.0	55.6					18	27.4	41.2	14.6	21.9	11.1	16.7	
33.2	49.9					19	25.5	38.3	13.7	20.6	10.4	15.7	
30.0	45.0					20	23.8	35.7	12.9	19.4	9.81	14.7	
24.8	37.2					22	21.0	31.5	11.5	17.4	8.76	13.2	
						24	18.8	28.2	10.5	15.7	7.92	11.9	
						26	17.0	25.5	9.57	14.4	7.23	10.9	
						28	15.5	23.3	8.82	13.3	6.66	10.0	
						30	14.3	21.5	8.19	12.3	6.17	9.27	
						32	13.2	19.9	7.64	11.5	5.75	8.64	
						34	12.3	18.5	7.16	10.8	5.39	8.09	
						36	11.6	17.4	6.74	10.1	5.06	7.61	
						38	10.9	16.3	6.36	9.56	4.78	7.19	
						40	10.3	15.4	6.03	9.06	4.53	6.81	
						42	9.73	14.6	5.73	8.61	4.30	6.46	
						44	9.24	13.9	5.46	8.21	4.10	6.16	
						46	8.80	13.2	5.21	7.84	3.91	5.88	
						48	8.41	12.6	4.99	7.50	3.74	5.62	
						50	8.05	12.1	4.78	7.19	3.58	5.39	
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
272	409	236	354	209	314	4.12	11.1	2.61	7.79	2.52	7.41		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	6.49		5.62		4.99			
219	329	190	285	168	253	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	118	11.4	96.3	4.29	81.9	3.56		
68.5	103	71.4	107	67.9	102	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.33		0.874		0.845			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
21.1	31.7	11.7	17.6	9.78	14.7	3.21		4.74		4.79			

^c Shape is slender for compression with $F_y = 70$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes															
W10x						W8x		Shape		W10x				W8x	
15 ^c		12 ^c		67		lb/ft		15		12 ^{f,v}		67			
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Available Compressive Strength, kips						Available Flexural Strength, kip-ft									
ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
171	257	129	193	826	1240	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	55.9	84.0	41.7	62.6	245	368		
82.3	124	62.7	94.3	734	1100		6	38.7	58.1	29.3	44.0	245	368		
61.6	92.6	46.5	69.8	703	1060		7	33.9	50.9	24.3	36.5	243	365		
47.2	70.9	35.6	53.5	669	1010		8	27.1	40.8	19.2	28.9	239	359		
37.3	56.0	28.1	42.3	633	952		9	22.4	33.7	15.7	23.7	236	354		
30.2	45.4	22.8	34.2	595	894		10	19.0	28.6	13.2	19.9	232	349		
25.0	37.5	18.8	28.3	555	835		11	16.5	24.7	11.4	17.1	229	344		
21.0	31.5	15.8	23.8	515	774		12	14.5	21.8	9.92	14.9	225	338		
17.9	26.9	13.5	20.3	474	713		13	12.9	19.4	8.79	13.2	222	333		
				434	653		14	11.6	17.5	7.88	11.8	218	328		
				395	593		15	10.6	15.9	7.13	10.7	215	323		
				357	536		16	9.73	14.6	6.51	9.79	211	318		
				320	481		17	9.00	13.5	5.99	9.00	208	312		
				285	429		18	8.36	12.6	5.54	8.33	204	307		
				256	385		19	7.81	11.7	5.16	7.76	201	302		
				231	347		20	7.33	11.0	4.83	7.25	197	297		
				191	287		22	6.54	9.82	4.27	6.43	191	286		
				160	241		24	5.90	8.86	3.84	5.77	184	276		
				137	205		26	5.37	8.08	3.48	5.24	177	266		
				118	177		28	4.94	7.42	3.19	4.80	170	255		
				103	154		30	4.57	6.87	2.94	4.43	163	245		
				90.3	136		32	4.26	6.40	2.73	4.11	156	234		
				79.9	120		34	3.98	5.98	2.55	3.84	149	224		
							36	3.74	5.62	2.39	3.60	141	211		
							38	3.53	5.31	2.26	3.39	133	200		
							40	3.34	5.02	2.13	3.20	126	190		
							42	3.17	4.77	2.02	3.04	120	180		
							44	3.02	4.54	1.92	2.89	114	172		
							46	2.88	4.33	1.83	2.75	109	164		
							48	2.76	4.14	1.75	2.63	105	157		
							50	2.64	3.97	1.68	2.52	100	151		
Properties															
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r				
185	278	148	223	826	1240	2.42	7.03	2.92	6.65	6.33	34.4				
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²									
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	4.41		3.54		19.7					
149	223	119	179	665	997	Moment of Inertia, in. ⁴									
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y				
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	68.9	2.89	53.8	2.18	272	88.6				
64.3	96.5	47.2	70.9	144	215	r_y , in.									
Available Strength in Flexure about Y-Y Axis, kip-ft						0.810		0.785		2.12					
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y									
8.03	12.1	5.62	8.45	114	172	4.88		4.97		1.75					

^c Shape is slender for compression with $F_y = 70$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(a) with $F_y = 70$ ksi; therefore $\phi_v = 0.90$ and $\Omega_v = 1.67$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W8x						Shape	W8x						
58		48		40		lb/ft	58		48		40		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
717	1080	591	888	490	737	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	209	314	171	257	139	209
636	955	523	786	432	649		6	209	314	171	257	139	209
608	915	500	752	412	620		7	206	310	169	253	136	205
579	870	475	714	391	588		8	203	305	165	248	133	200
547	822	448	674	368	553		9	200	300	162	243	130	195
513	771	420	632	344	517		10	196	295	159	238	126	190
478	719	391	588	319	480		11	193	290	155	233	123	185
443	666	362	544	294	443		12	189	285	152	228	120	180
407	612	332	499	270	405		13	186	279	148	223	117	176
372	560	303	456	245	368		14	182	274	145	218	114	171
338	508	275	413	221	332		15	179	269	142	213	110	166
305	458	247	371	198	298		16	176	264	138	208	107	161
272	409	220	331	176	264		17	172	259	135	203	104	156
243	365	197	295	157	236		18	169	254	132	198	101	151
218	328	176	265	141	212		19	165	249	128	193	97.5	147
197	296	159	239	127	191		20	162	243	125	188	94.3	142
163	244	132	198	105	158		22	155	233	118	178	87.9	132
137	205	111	166	88.2	133		24	148	223	112	168	79.7	120
116	175	94.2	142	75.2	113		26	141	213	105	158	72.7	109
100	151	81.2	122	64.8	97.4		28	135	202	96.6	145	66.8	100
87.5	131	70.7	106	56.5	84.9		30	128	192	89.6	135	61.8	92.9
76.9	116	62.2	93.5	49.6	74.6		32	119	180	83.6	126	57.6	86.5
68.1	102	55.1	82.8	44.0	66.1		34	112	168	78.3	118	53.9	81.0
							36	106	159	73.7	111	50.6	76.1
							38	99.7	150	69.6	105	47.8	71.8
							40	94.6	142	65.9	99.1	45.2	67.9
							42	89.9	135	62.7	94.2	42.9	64.5
							44	85.7	129	59.7	89.7	40.9	61.4
							46	81.8	123	57.0	85.7	39.0	58.6
							48	78.3	118	54.5	82.0	37.3	56.0
							50	75.1	113	52.3	78.6	35.7	53.7
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
717	1080	591	888	490	737	L_p	L_r	L_p	L_r	L_p	L_r		
						6.27	30.2	6.21	25.8	6.09	22.3		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	17.1		14.1		11.7			
577	866	476	714	395	592	Moment of Inertia, in. ⁴							
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y		
125	187	95.2	143	83.2	125	228	75.1	184	60.9	146	49.1		
Available Strength in Shear, kips						r_y , in.							
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	2.10		2.08		2.04			
97.5	146	80.0	120	64.6	97.1	r_x/r_y							
						1.74		1.74		1.73			

Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A913 material availability before specifying.




Table 6-B (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces

$F_y = 70$ ksi
 $F_u = 90$ ksi


W-Shapes

W8x						Shape	W8x						
35		31		28		lb/ft	35 ^f		31 ^f		28		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
432	649	383	575	346	520	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	120	180	102	153	95.0	143
380	570	336	505	283	425		6	120	180	102	153	91.3	137
362	545	321	482	263	395		7	118	178	102	153	88.1	132
343	516	304	456	241	363		8	115	173	100	151	84.9	128
323	486	286	429	219	330		9	112	168	97.3	146	81.7	123
302	454	267	401	197	296		10	109	164	94.3	142	78.5	118
280	421	247	372	175	263		11	106	159	91.3	137	75.4	113
258	388	227	342	154	231		12	103	154	88.3	133	72.2	108
236	355	208	312	134	201		13	99.5	150	85.3	128	69.0	104
214	322	189	283	115	173		14	96.4	145	82.3	124	65.8	98.9
193	290	170	255	100	151		15	93.3	140	79.3	119	62.6	94.1
173	260	152	228	88.3	133		16	90.1	135	76.3	115	59.4	89.3
153	230	135	202	78.2	118		17	87.0	131	73.3	110	55.0	82.6
137	206	120	180	69.8	105		18	83.9	126	70.3	106	51.2	76.9
123	184	108	162	62.6	94.1		19	80.8	121	67.3	101	47.9	71.9
111	166	97.2	146	56.5	84.9		20	77.6	117	62.9	94.6	45.0	67.6
91.5	138	80.3	121	46.7	70.2		22	69.5	105	55.7	83.7	40.1	60.3
76.9	116	67.5	101	39.2	59.0		24	62.6	94.1	49.9	75.0	36.3	54.5
65.5	98.5	57.5	86.5	33.4	50.2		26	56.9	85.5	45.3	68.1	33.1	49.8
56.5	84.9	49.6	74.5				28	52.2	78.5	41.4	62.3	30.5	45.8
49.2	74.0	43.2	64.9				30	48.2	72.5	38.2	57.4	28.2	42.4
43.3	65.0	38.0	57.1				32	44.8	67.4	35.5	53.3	26.3	39.5
							34	41.9	63.0	33.1	49.8	24.6	37.0
							36	39.3	59.1	31.0	46.7	23.1	34.8
							38	37.1	55.7	29.2	43.9	21.8	32.8
							40	35.1	52.7	27.6	41.5	20.7	31.1
							42	33.3	50.0	26.2	39.3	19.6	29.5
							44	31.7	47.6	24.9	37.4	18.7	28.1
							46	30.2	45.4	23.7	35.7	17.8	26.8
							48	28.9	43.4	22.7	34.1	17.1	25.7
							50	27.6	41.5	21.7	32.6	16.4	24.6
Available Strength in Tensile Yielding, kips							Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
432	649	383	575	346	520	L_p	L_r	L_p	L_r	L_p	L_r		
						6.48	20.4	7.53	19.0	4.84	16.0		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	10.3		9.13		8.25			
348	521	308	462	278	418	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	127	42.6	110	37.1	98.0	21.7		
70.5	106	63.8	95.8	64.3	96.5	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						2.03		2.02		1.62			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
55.4	83.2	46.2	69.4	35.3	53.0	1.73		1.72		2.13			


^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
											$F_y = 70$ ksi	
											$F_u = 90$ ksi	
W8 _x						Shape	W8 _x					
24		21		18		lb/ft	24 ^f		21		18 ^f	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	ASD	LRFD	ASD	LRFD	ASD	LRFD
297	446	258	388	220	331		0	79.8	120	71.3	107	59.0
242	363	185	278	155	233	6	77.1	116	63.6	95.6	52.0	78.2
225	338	164	246	137	206	7	74.1	111	60.1	90.4	48.9	73.5
206	310	143	214	118	178	8	71.1	107	56.7	85.2	45.7	68.7
187	281	122	183	100	151	9	68.1	102	53.3	80.1	42.6	64.0
168	253	102	153	83.1	125	10	65.1	97.9	49.9	74.9	39.4	59.3
149	224	84.4	127	68.6	103	11	62.1	93.4	46.4	69.8	35.7	53.7
131	197	70.9	107	57.7	86.7	12	59.1	88.9	42.2	63.4	31.4	47.1
113	170	60.4	90.8	49.2	73.9	13	56.1	84.4	37.8	56.8	27.9	42.0
97.7	147	52.1	78.3	42.4	63.7	14	53.1	79.9	34.2	51.4	25.2	37.8
85.1	128	45.4	68.2	36.9	55.5	15	49.6	74.5	31.2	46.9	22.9	34.4
74.8	112	39.9	59.9	32.4	48.8	16	45.4	68.2	28.7	43.2	21.0	31.5
66.3	99.6	35.3	53.1	28.7	43.2	17	41.9	63.0	26.6	40.0	19.4	29.1
59.1	88.9	31.5	47.4	25.6	38.5	18	38.9	58.4	24.8	37.3	18.0	27.1
53.1	79.8	28.3	42.5	23.0	34.6	19	36.3	54.5	23.2	34.9	16.8	25.3
47.9	72.0	25.5	38.4	20.8	31.2	20	34.0	51.1	21.8	32.8	15.8	23.7
39.6	59.5					22	30.3	45.5	19.5	29.3	14.0	21.1
33.3	50.0					24	27.2	41.0	17.6	26.5	12.6	19.0
28.3	42.6					26	24.8	37.3	16.1	24.2	11.5	17.3
						28	22.8	34.2	14.8	22.3	10.6	15.9
						30	21.1	31.6	13.7	20.6	9.79	14.7
						32	19.6	29.4	12.8	19.2	9.11	13.7
						34	18.3	27.5	12.0	18.0	8.52	12.8
						36	17.2	25.8	11.3	17.0	8.00	12.0
						38	16.2	24.4	10.6	16.0	7.55	11.3
						40	15.3	23.1	10.1	15.2	7.14	10.7
						42	14.6	21.9	9.58	14.4	6.78	10.2
						44	13.9	20.8	9.12	13.7	6.45	9.69
						46	13.2	19.9	8.71	13.1	6.15	9.25
						48	12.6	19.0	8.33	12.5	5.88	8.84
						50	12.1	18.2	7.98	12.0	5.64	8.47
Available Strength in Tensile Yielding, kips						Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft						
297	446	258	388	220	331	L_p	L_r	L_p	L_r	L_p	L_r	
239	358	208	312	178	266	5.11	14.7	3.76	11.6	3.79	10.7	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	7.08		6.16		5.26		
Available Strength in Shear, kips						Moment of Inertia, in. ⁴						
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	I_x	I_y	I_x	I_y	I_x	I_y	
54.4	81.6	58.0	86.9	52.4	78.6	82.7	18.3	75.3	9.77	61.9	7.97	
Available Strength in Flexure about Y-Y Axis, kip-ft						r_y , in.						
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	1.61		1.26		1.23		
29.4	44.3	19.9	29.9	16.1	24.2	r_x/r_y						
						2.12		2.77		2.79		


^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												
						$F_y = 70$ ksi $F_u = 90$ ksi						
W8 _x						Shape	W8 _x					
15		13		10 ^c		lb/ft	15		13 ^f		10 ^f	
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Compressive Strength, kips							Available Flexural Strength, kip-ft					
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD
186	280	161	242	115	172	0	47.5	71.4	39.7	59.7	29.2	43.9
93.2	140	76.3	115	58.6	88.1	6	35.7	53.7	28.8	43.3	21.7	32.6
72.6	109	58.1	87.4	44.6	67.0	7	32.3	48.5	25.7	38.6	19.0	28.5
55.6	83.5	44.5	66.9	34.1	51.3	8	28.7	43.2	21.7	32.6	15.1	22.7
43.9	66.0	35.2	52.9	27.0	40.5	9	24.1	36.2	18.1	27.2	12.5	18.7
35.6	53.5	28.5	42.8	21.9	32.8	10	20.7	31.2	15.5	23.3	10.5	15.8
29.4	44.2	23.5	35.4	18.1	27.1	11	18.2	27.3	13.5	20.3	9.11	13.7
24.7	37.1	19.8	29.7	15.2	22.8	12	16.2	24.3	12.0	18.0	8.00	12.0
21.0	31.6	16.9	25.3	12.9	19.4	13	14.6	21.9	10.7	16.1	7.12	10.7
18.1	27.3	14.5	21.8	11.1	16.8	14	13.3	20.0	9.75	14.6	6.41	9.64
						15	12.2	18.3	8.92	13.4	5.83	8.76
						16	11.3	16.9	8.23	12.4	5.35	8.03
						17	10.5	15.7	7.63	11.5	4.93	7.42
						18	9.79	14.7	7.12	10.7	4.58	6.89
						19	9.19	13.8	6.67	10.0	4.28	6.43
						20	8.67	13.0	6.28	9.44	4.01	6.03
						22	7.78	11.7	5.63	8.46	3.57	5.36
						24	7.06	10.6	5.10	7.66	3.22	4.83
						26	6.47	9.72	4.66	7.00	2.93	4.40
						28	5.97	8.97	4.29	6.45	2.69	4.04
						30	5.54	8.33	3.98	5.99	2.49	3.74
						32	5.17	7.78	3.72	5.58	2.31	3.48
						34	4.85	7.29	3.48	5.23	2.16	3.25
						36	4.57	6.87	3.28	4.92	2.03	3.06
						38	4.32	6.49	3.09	4.65	1.92	2.88
						40	4.09	6.15	2.93	4.41	1.81	2.73
						42	3.89	5.85	2.79	4.19	1.72	2.59
						44	3.71	5.57	2.65	3.99	1.64	2.46
						46	3.54	5.32	2.53	3.81	1.56	2.35
						48	3.39	5.10	2.42	3.64	1.49	2.25
						50	3.25	4.89	2.32	3.49	1.43	2.15
Available Strength in Tensile Yielding, kips						Properties						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft						
186	280	161	242	124	186	L_p	L_r	L_p	L_r	L_p	L_r	
						2.62	7.98	2.56	7.46	3.17	6.98	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²						
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	4.44		3.84		2.96		
150	225	130	194	99.9	150	Moment of Inertia, in. ⁴						
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y	
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	48.0	3.41	39.6	2.73	30.8	2.09	
55.6	83.5	51.5	77.2	37.6	56.3	r_y , in.						
Available Strength in Flexure about Y-Y Axis, kip-ft						0.876		0.843		0.841		
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y						
9.33	14.0	7.48	11.2	5.32	8.00	3.76		3.81		3.83		


^c Shape is slender for compression with $F_y = 70$ ksi.
^f Shape exceeds compact limit for flexure with $F_y = 70$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W6x						Shape	W6x						
25		20		15 ^c		lb/ft	25		20 ^f		15 ^f		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
308	462	246	370	185	278	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	66.0	99.2	51.6	77.5	33.6	50.4
245	368	194	292	144	217		6	63.2	95.0	49.6	74.5	33.6	50.4
225	338	178	268	132	198		7	61.3	92.1	47.7	71.7	33.4	50.2
205	307	162	243	119	178		8	59.3	89.2	45.8	68.9	31.8	47.8
184	276	145	218	105	158		9	57.4	86.3	44.0	66.1	30.1	45.3
163	244	128	192	92.1	138		10	55.5	83.4	42.1	63.3	28.5	42.9
142	214	111	167	79.5	119		11	53.6	80.5	40.2	60.5	26.9	40.4
123	185	95.7	144	67.5	101		12	51.6	77.6	38.4	57.7	25.3	38.0
105	157	81.6	123	57.5	86.5		13	49.7	74.7	36.5	54.9	23.6	35.4
90.3	136	70.3	106	49.6	74.6		14	47.8	71.8	34.6	52.1	21.2	31.9
78.7	118	61.3	92.1	43.2	64.9		15	45.8	68.9	32.8	49.3	19.3	29
69.1	104	53.9	80.9	38.0	57.1		16	43.9	66.0	30.2	45.4	17.6	26.5
61.2	92.1	47.7	71.7	33.6	50.6		17	42.0	63.1	28.0	42.1	16.3	24.5
54.6	82.1	42.5	64.0	30.0	45.1		18	39.7	59.7	26.1	39.3	15.1	22.7
49.0	73.7	38.2	57.4	26.9	40.5		19	37.4	56.2	24.5	36.8	14.1	21.2
44.3	66.5	34.5	51.8	24.3	36.5		20	35.3	53.0	23.1	34.7	13.2	19.9
36.6	55.0	28.5	42.8	20.1	30.2		22	31.7	47.6	20.6	31.0	11.7	17.7
30.7	46.2	23.9	36.0	16.9	25.4		24	28.8	43.3	18.7	28.1	10.6	15.9
							26	26.4	39.7	17.1	25.7	9.62	14.5
							28	24.4	36.7	15.8	23.7	8.83	13.3
							30	22.7	34.1	14.6	22.0	8.17	12.3
							32	21.2	31.8	13.6	20.5	7.59	11.4
							34	19.9	29.9	12.8	19.2	7.10	10.7
							36	18.7	28.1	12.0	18.1	6.67	10.0
							38	17.7	26.6	11.4	17.1	6.29	9.45
							40	16.8	25.2	10.8	16.2	5.95	8.94
							42	15.9	24.0	10.2	15.4	5.64	8.48
							44	15.2	22.8	9.73	14.6	5.37	8.07
							46	14.5	21.8	9.30	14.0	5.12	7.70
							48	13.9	20.9	8.89	13.4	4.90	7.36
							50	13.3	20.0	8.53	12.8	4.69	7.05
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
308	462	246	370	186	279	L_p	L_r	L_p	L_r	L_p	L_r		
						4.54	17.6	4.91	15.0	6.90	12.9		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	7.34		5.87		4.43			
248	372	198	297	150	224	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	53.4	17.1	41.4	13.3	29.1	9.32		
57.2	85.7	45.1	67.7	38.6	57.9	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						1.52		1.50		1.45			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
29.9	44.9	23.0	34.5	13.9	20.9	1.78		1.77		1.77			


^c Shape is slender for compression with $F_y = 70 \text{ ksi}$.
^f Shape exceeds compact limit for flexure with $F_y = 70 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W6x						Shape	W6x						
16		12		9		lb/ft	16		12		9 ^f		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
199	299	149	224	112	169	Effective Length, L_c , ft, with respect to least radius of gyration, r_y , or unbraced length, L_b , ft, for X-X axis bending	0	40.9	61.4	29.0	43.6	20.8	31.3
113	169	79.3	119	58.8	88.3		6	34.4	51.7	22.9	34.5	16.5	24.8
91.8	138	63.2	94.9	46.5	69.9		7	32.3	48.6	21.1	31.7	14.9	22.4
72.3	109	48.8	73.3	35.8	53.8		8	30.3	45.5	19.2	28.9	13.1	19.6
57.1	85.8	38.6	57.9	28.3	42.5		9	28.2	42.4	17.1	25.7	10.9	16.4
46.3	69.5	31.2	46.9	22.9	34.4		10	26.1	39.3	14.8	22.3	9.36	14.1
38.2	57.5	25.8	38.8	18.9	28.5		11	23.8	35.7	13.1	19.7	8.17	12.3
32.1	48.3	21.7	32.6	15.9	23.9		12	21.4	32.2	11.7	17.6	7.25	10.9
27.4	41.1	18.5	27.8	13.6	20.4		13	19.5	29.4	10.6	15.9	6.52	9.80
23.6	35.5	15.9	23.9	11.7	17.6		14	17.9	27.0	9.70	14.6	5.92	8.90
20.6	30.9	13.9	20.9	10.2	15.3		15	16.6	24.9	8.94	13.4	5.42	8.15
18.1	27.2						16	15.4	23.2	8.29	12.5	5.01	7.52
							17	14.5	21.7	7.73	11.6	4.65	6.98
							18	13.6	20.4	7.24	10.9	4.34	6.52
							19	12.8	19.2	6.82	10.2	4.07	6.12
							20	12.1	18.2	6.44	9.68	3.83	5.76
							22	10.9	16.5	5.80	8.71	3.43	5.16
							24	9.99	15.0	5.28	7.93	3.11	4.68
							26	9.19	13.8	4.84	7.28	2.85	4.28
							28	8.50	12.8	4.48	6.73	2.63	3.95
							30	7.92	11.9	4.16	6.26	2.44	3.66
							32	7.41	11.1	3.89	5.85	2.27	3.42
							34	6.96	10.5	3.65	5.49	2.13	3.20
							36	6.57	9.87	3.44	5.17	2.00	3.01
							38	6.21	9.34	3.25	4.89	1.89	2.85
							40	5.90	8.86	3.09	4.64	1.79	2.70
							42	5.61	8.43	2.94	4.41	1.71	2.56
							44	5.35	8.04	2.80	4.21	1.62	2.44
							46	5.12	7.69	2.67	4.02	1.55	2.33
							48	4.90	7.36	2.56	3.85	1.48	2.23
							50	4.70	7.07	2.46	3.69	1.42	2.14
Available Strength in Tensile Yielding, kips						Properties							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	Limiting Unbraced Lengths, ft							
199	299	149	224	112	169	L_p	L_r	L_p	L_r	L_p	L_r		
						2.89	10.6	2.74	8.71	3.28	7.80		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	4.74		3.55		2.68			
160	240	120	180	90.5	136	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	32.1	4.43	22.1	2.99	16.4	2.20		
45.7	68.6	38.8	58.2	28.1	42.1	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						0.967		0.918		0.905			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
11.8	17.8	8.10	12.2	5.64	8.47	2.69		2.71		2.73			

^f Shape exceeds compact limit for flexure with $F_y = 70 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces W-Shapes												$F_y = 70 \text{ ksi}$ $F_u = 90 \text{ ksi}$	
W6x		W5x				Shape	W6x		W5x				
8.5		19		16		lb/ft	8.5 ^f		19		16		
P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	Design	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Compressive Strength, kips							Available Flexural Strength, kip-ft						
ASD	LRFD	ASD	LRFD	ASD	LRFD		ASD	LRFD	ASD	LRFD	ASD	LRFD	
106	159	233	350	197	297	0	18.6	28.0	40.5	60.9	33.6	50.6	
54.1	81.2	169	253	141	212	6	14.9	22.5	37.9	57.0	31.0	46.6	
42.4	63.8	150	225	125	188	7	13.4	20.2	36.7	55.2	29.9	44.9	
32.6	48.9	131	197	109	164	8	11.5	17.3	35.5	53.3	28.7	43.1	
25.7	38.7	112	169	93.1	140	9	9.63	14.5	34.3	51.5	27.5	41.4	
20.8	31.3	94.8	142	78.0	117	10	8.23	12.4	33.1	49.7	26.3	39.6	
17.2	25.9	78.6	118	64.5	97.0	11	7.18	10.8	31.9	47.9	25.2	37.8	
14.5	21.7	66.0	99.2	54.2	81.5	12	6.36	9.56	30.7	46.1	24.0	36.1	
12.3	18.5	56.3	84.6	46.2	69.4	13	5.71	8.58	29.5	44.3	22.8	34.3	
10.6	16.0	48.5	72.9	39.8	59.9	14	5.18	7.78	28.3	42.5	21.7	32.6	
		42.3	63.5	34.7	52.1	15	4.74	7.12	27.1	40.7	20.3	30.6	
		37.1	55.8	30.5	45.8	16	4.37	6.56	25.9	38.9	18.9	28.4	
		32.9	49.5	27.0	40.6	17	4.05	6.09	24.6	36.9	17.7	26.5	
		29.3	44.1	24.1	36.2	18	3.78	5.68	23.1	34.7	16.6	24.9	
		26.3	39.6	21.6	32.5	19	3.54	5.32	21.8	32.7	15.6	23.5	
		23.8	35.7	19.5	29.3	20	3.33	5.01	20.6	31.0	14.8	22.2	
						22	2.98	4.49	18.6	28.0	13.3	20.0	
						24	2.70	4.06	17.0	25.6	12.1	18.3	
						26	2.47	3.71	15.6	23.5	11.2	16.8	
						28	2.28	3.42	14.5	21.8	10.3	15.5	
						30	2.11	3.17	13.5	20.3	9.61	14.4	
						32	1.97	2.96	12.6	19.0	8.99	13.5	
						34	1.85	2.77	11.9	17.8	8.44	12.7	
						36	1.74	2.61	11.2	16.8	7.96	12.0	
						38	1.64	2.46	10.6	15.9	7.53	11.3	
						40	1.55	2.34	10.0	15.1	7.14	10.7	
						42	1.48	2.22	9.56	14.4	6.80	10.2	
						44	1.41	2.11	9.12	13.7	6.48	9.74	
						46	1.34	2.02	8.72	13.1	6.19	9.31	
						48	1.28	1.93	8.35	12.5	5.93	8.92	
						50	1.23	1.85	8.01	12.0	5.69	8.55	
Properties													
Available Strength in Tensile Yielding, kips						Limiting Unbraced Lengths, ft							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	L_p	L_r	L_p	L_r	L_p	L_r		
106	159	233	350	197	297	3.59	7.62	3.82	16.8	3.76	14.7		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips						Area, in. ²							
P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	2.52		5.56		4.71			
85.1	128	188	281	159	238	Moment of Inertia, in. ⁴							
Available Strength in Shear, kips						I_x	I_y	I_x	I_y	I_x	I_y		
V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	14.9	1.99	26.3	9.13	21.4	7.51		
27.8	41.6	38.9	58.4	33.7	50.5	r_y , in.							
Available Strength in Flexure about Y-Y Axis, kip-ft						0.890		1.28		1.26			
M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	r_x/r_y							
4.89	7.35	19.3	29.0	16.0	24.0	2.73		1.70		1.69			

^f Shape exceeds compact limit for flexure with $F_y = 70 \text{ ksi}$.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A913 material availability before specifying.

 W4		Table 6-B (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces		$F_y = 70$ ksi $F_u = 90$ ksi			
		W-Shapes					
W4_x 13		Shape lb/ft	W4_x 13				
P_n/Ω_c		Design	M_{nx}/Ω_b		$\phi_b M_{nx}$		
Available Compressive Strength, kips			Available Flexural Strength, kip-ft				
ASD		Effective Length, L_c, ft, with respect to least radius of gyration, r_y, or unbraced length, L_b, ft, for X-X axis bending	ASD		LRFD		
161	241		0	21.9	33.0		
94.4	142		6	19.6	29.4		
78.0	117		7	18.8	28.3		
62.5	93.9		8	18.0	27.1		
49.4	74.2		9	17.2	25.9		
40.0	60.1		10	16.5	24.7		
33.0	49.7		11	15.7	23.6		
27.8	41.7		12	14.9	22.4		
23.7	35.6		13	14.1	21.2		
20.4	30.7		14	13.3	20.0		
17.8	26.7		15	12.4	18.6		
15.6	23.5		16	11.6	17.4		
			17	10.8	16.3		
			18	10.2	15.3		
			19	9.64	14.5		
			20	9.14	13.7		
			22	8.28	12.4		
			24	7.57	11.4		
			26	6.97	10.5		
		28	6.46	9.72			
		30	6.03	9.06			
		32	5.64	8.48			
		34	5.31	7.98			
		36	5.01	7.53			
		38	4.74	7.13			
		40	4.50	6.77			
		42	4.29	6.44			
		44	4.09	6.15			
		46	3.91	5.88			
		48	3.75	5.63			
		50	3.59	5.40			
Properties							
Available Strength in Tensile Yielding, kips			Limiting Unbraced Lengths, ft				
P_n/Ω_t		$\phi_t P_n$	L_p		L_r		
161	241		2.99	14.0			
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips			Area, in.²				
P_n/Ω_t		$\phi_t P_n$	3.83				
129	194		Moment of Inertia, in.⁴				
Available Strength in Shear, kips			I_x		I_y		
V_n/Ω_v		$\phi_v V_n$	11.3	3.86			
32.6	48.9		r_y, in.				
Available Strength in Flexure about Y-Y Axis, kip-ft			1.00				
M_{ny}/Ω_b		$\phi_b M_{ny}$	r_x/r_y				
10.2	15.3		1.72				
Notes: Heavy line indicates L_c/r equal to or greater than 200. Confirm ASTM A913 material availability before specifying.							



HSS24-HSS20

Table 6-C
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS24x12x						HSS20x12x				
	$\frac{3}{4}$ ^a		$\frac{5}{8}$ ^{a,c}		$\frac{1}{2}$ ^{a,c}		$\frac{3}{4}$		$\frac{5}{8}$ ^a		
t_{des} , in.	0.750		0.625		0.500		0.750		0.625		
lb/ft	171		144		117		151		127		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	1510	2260	1240	1870	909	1370	1330	1990	1120	1680
	1	1510	2260	1240	1870	908	1370	1330	1990	1120	1680
	2	1500	2260	1240	1870	908	1360	1320	1990	1120	1680
	3	1500	2250	1240	1860	906	1360	1320	1990	1120	1680
	4	1500	2250	1240	1860	904	1360	1320	1980	1110	1670
	5	1490	2240	1230	1850	902	1360	1310	1970	1110	1660
	6	1480	2230	1230	1850	898	1350	1310	1960	1100	1660
	7	1470	2220	1220	1840	895	1340	1300	1950	1100	1650
	8	1470	2200	1220	1830	890	1340	1290	1940	1090	1640
	9	1450	2190	1210	1820	886	1330	1280	1920	1080	1620
	10	1440	2170	1200	1810	880	1320	1270	1910	1070	1610
	11	1430	2150	1190	1800	875	1310	1260	1890	1060	1600
	12	1420	2130	1190	1780	868	1300	1240	1870	1050	1580
	13	1400	2110	1180	1770	861	1290	1230	1850	1040	1560
	14	1390	2080	1170	1750	854	1280	1220	1830	1030	1550
	15	1370	2060	1150	1730	846	1270	1200	1800	1020	1530
	16	1350	2030	1140	1710	838	1260	1180	1780	1000	1510
	17	1330	2000	1130	1690	829	1250	1170	1750	987	1480
	18	1310	1970	1110	1670	820	1230	1150	1730	973	1460
	19	1290	1940	1090	1640	810	1220	1130	1700	957	1440
	20	1270	1910	1070	1610	800	1200	1110	1670	941	1410
	22	1230	1840	1040	1560	779	1170	1070	1610	907	1360
	24	1180	1770	998	1500	756	1140	1030	1540	872	1310
	26	1130	1700	957	1440	733	1100	982	1480	835	1250
	28	1080	1620	915	1380	708	1060	936	1410	796	1200
	30	1030	1540	872	1310	682	1020	889	1340	757	1140
	32	973	1460	828	1240	655	984	842	1270	717	1080
	34	920	1380	783	1180	628	943	794	1190	677	1020
	36	867	1300	739	1110	600	901	746	1120	637	958
	38	814	1220	694	1040	570	857	699	1050	598	898
	40	761	1140	651	978	535	804	652	980	558	839
42	710	1070	607	913	500	752	606	911	520	781	
44	660	992	565	850	466	700	562	844	482	725	
46	611	918	524	788	433	651	518	779	446	670	
48	563	846	484	728	401	602	476	715	410	616	
50	519	780	446	671	369	555	439	659	378	568	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	50.3		42.4		34.4		44.3		37.4		
r_y , in.	4.97		5.02		5.07		4.87		4.92		
r_x/r_y	1.71		1.71		1.71		1.49		1.49		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
 Notes: Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS20

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS20x12x						HSS20x8x				
	$\frac{1}{2}^{a,c}$		$\frac{3}{8}^{a,b,c}$		$\frac{5}{16}^{a,b,c}$		$\frac{5}{8}^a$		$\frac{1}{2}^{a,c}$		
t_{des} , in.	0.500		0.375		0.313		0.625		0.500		
lb/ft	103		78.5		65.9		110		89.7		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	878	1320	587	883	449	674	970	1460	758	1140
	1	877	1320	587	883	449	674	969	1460	757	1140
	2	876	1320	587	882	448	674	966	1450	756	1140
	3	875	1320	586	880	448	673	962	1450	753	1130
	4	873	1310	584	878	447	672	955	1440	749	1130
	5	870	1310	583	876	446	670	947	1420	744	1120
	6	867	1300	580	872	444	668	937	1410	739	1110
	7	863	1300	578	869	443	666	926	1390	732	1100
	8	859	1290	575	864	441	663	913	1370	724	1090
	9	854	1280	572	860	439	660	898	1350	715	1070
	10	848	1270	568	854	437	657	882	1330	705	1060
	11	842	1270	564	848	434	653	864	1300	695	1040
	12	835	1260	560	842	432	649	845	1270	683	1030
	13	828	1240	556	835	429	645	825	1240	671	1010
	14	821	1230	551	828	426	640	804	1210	658	989
	15	812	1220	545	820	423	635	782	1180	642	964
	16	804	1210	540	811	418	629	760	1140	623	937
	17	795	1190	534	802	414	622	736	1110	605	909
	18	785	1180	528	793	409	615	712	1070	585	880
	19	775	1170	521	784	404	608	687	1030	566	850
	20	765	1150	515	774	399	600	662	995	546	820
	22	741	1110	501	752	388	584	611	918	505	758
	24	712	1070	486	730	377	566	560	841	463	696
	26	682	1030	470	706	365	548	509	764	422	635
	28	652	979	453	681	352	529	459	689	382	574
	30	620	932	436	656	339	510	411	617	343	516
	32	588	884	419	629	326	490	364	547	306	459
	34	556	836	401	602	312	469	322	485	271	407
	36	524	787	382	575	298	448	288	432	241	363
	38	492	739	364	547	284	427	258	388	217	326
	40	460	692	345	519	270	406	233	350	196	294
42	429	645	327	491	256	385	211	318	177	267	
44	399	599	308	463	242	364	193	289	162	243	
46	369	555	286	429	228	343	176	265	148	222	
48	340	511	264	396	214	322	162	243	136	204	
50	314	471	243	365	201	301	149	224	125	188	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	30.4		23.1		19.4		32.4		26.4		
r_y , in.	4.97		5.02		5.05		3.32		3.37		
r_x/r_y	1.48		1.48		1.48		2.07		2.06		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.
^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
 Notes: Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS20

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS20x8x				HSS20x4x						
	$\frac{3}{8}^{a,c}$		$\frac{5}{16}^{a,b,c}$		$\frac{1}{2}^{a,c}$		$\frac{3}{8}^{a,c}$		$\frac{5}{16}^{a,b,c}$		
t_{des} , in.	0.375		0.313		0.500		0.375		0.313		
lb/ft	68.3		57.4		76.1		58.1		48.9		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	498	748	380	571	638	959	408	613	305	459
	1	497	747	380	571	636	956	407	611	304	457
	2	496	746	379	570	631	948	404	607	302	454
	3	495	743	378	568	622	935	399	599	299	449
	4	492	740	376	565	610	917	392	589	294	441
	5	489	735	374	562	595	894	383	576	287	432
	6	486	730	371	558	577	867	373	560	280	421
	7	481	724	368	553	556	836	361	542	271	408
	8	477	716	364	547	525	789	348	522	262	393
	9	471	708	360	541	492	740	333	500	251	377
	10	465	699	356	535	458	688	317	477	240	361
	11	459	689	351	527	422	635	301	452	228	343
	12	452	679	346	519	387	581	284	426	216	324
	13	444	667	340	511	352	528	266	400	203	305
	14	436	655	334	502	317	477	248	373	190	285
	15	428	643	328	492	284	427	230	345	177	266
	16	419	629	321	482	252	378	206	309	164	246
	17	409	615	314	472	223	335	183	275	150	226
	18	400	601	307	461	199	299	163	245	138	208
	19	390	586	299	450	178	268	146	220	126	189
	20	380	571	292	439	161	242	132	198	114	171
	22	359	539	276	415	133	200	109	164	94.0	141
	24	337	506	260	390	112	168	91.7	138	79.0	119
	26	314	473	243	365	95.3	143	78.1	117	67.3	101
	28	292	439	226	340			67.4	101	58.0	87.2
	30	269	404	209	315						
	32	241	362	193	290						
	34	214	321	176	265						
	36	190	286	161	242						
	38	171	257	146	220						
40	154	232	132	198							
42	140	210	120	180							
44	127	192	109	164							
46	117	175	99.8	150							
48	107	161	91.7	138							
50	98.7	148	84.5	127							
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	20.1		16.9		22.4		17.1		14.4		
r_y , in.	3.43		3.46		1.66		1.72		1.74		
r_x/r_y	2.04		2.04		3.80		3.72		3.70		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS20-HSS18

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS20x4x				HSS18x6x						
	$\frac{1}{4}^{a,b,c}$		$\frac{5}{8}$	$\frac{1}{2}^a$	$\frac{3}{8}^{a,c}$		$\frac{5}{16}^{a,c}$				
t_{des} , in.	0.250		0.625	0.500		0.375		0.313			
lb/ft	39.4		93.3	76.1		58.1		48.9			
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	212	319	820	1230	671	1010	444	667	338	508
	1	212	318	819	1230	670	1010	443	666	337	507
	2	210	316	815	1220	666	1000	442	664	336	505
	3	208	312	808	1210	661	993	439	660	334	502
	4	205	307	798	1200	653	982	436	655	332	498
	5	200	301	785	1180	643	967	431	648	328	493
	6	195	293	771	1160	632	950	425	639	324	487
	7	189	285	753	1130	618	929	419	629	319	480
	8	183	275	734	1100	603	907	411	618	314	472
	9	176	264	713	1070	586	881	403	606	308	463
	10	168	253	689	1040	568	854	394	592	301	453
	11	160	241	665	999	549	825	384	578	294	442
	12	152	229	639	960	528	794	374	562	286	430
	13	144	216	611	919	507	762	363	546	278	418
	14	135	203	583	877	485	728	351	528	270	406
	15	126	189	555	834	462	694	339	510	261	392
	16	117	176	525	790	439	659	327	491	252	378
	17	108	163	496	746	415	624	314	472	242	364
	18	100	150	467	702	392	589	301	452	233	350
	19	92.6	139	438	658	369	554	288	432	223	335
	20	86.1	129	409	615	346	519	271	407	213	320
	22	75.0	113	353	531	301	452	237	356	193	290
24	65.9	99.0	300	452	258	387	204	307	173	260	
26	56.1	84.3	256	385	220	330	174	262	150	226	
28	48.4	72.7	221	332	189	285	150	226	130	195	
30			192	289	165	248	131	197	113	170	
32			169	254	145	218	115	173	99.2	149	
34			150	225	128	193	102	153	87.9	132	
36			134	201	115	172	91.0	137	78.4	118	
38			120	180	103	155	81.6	123	70.4	106	
40			108	163	92.8	139	73.7	111	63.5	95.4	
42					84.2	127	66.8	100	57.6	86.6	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	11.6		27.4		22.4		17.1		14.4		
r_y , in.	1.77		2.46		2.52		2.57		2.60		
r_x/r_y	3.67		2.43		2.40		2.38		2.37		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS18-HSS16

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS18x6x				HSS16x12x						
	$\frac{1}{4}^{a,b,c}$		$\frac{3}{4}$	$\frac{5}{8}$	$\frac{1}{2}^a$		$\frac{3}{8}^{a,b,c}$				
t_{des} , in.	0.250		0.750	0.625	0.500		0.375				
lb/ft	39.4		130	110	89.7		68.3				
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	240	360	1150	1720	970	1460	790	1190	567	853
	1	239	360	1150	1720	970	1460	790	1190	567	853
	2	239	359	1140	1720	968	1460	789	1190	567	852
	3	237	357	1140	1720	966	1450	787	1180	566	850
	4	235	354	1140	1710	963	1450	785	1180	564	848
	5	233	350	1130	1700	959	1440	782	1170	562	845
	6	230	346	1130	1690	954	1430	778	1170	560	842
	7	227	341	1120	1680	948	1430	773	1160	558	838
	8	223	335	1110	1670	942	1420	768	1150	555	834
	9	219	329	1100	1660	935	1400	762	1150	551	828
	10	214	322	1090	1640	927	1390	756	1140	547	823
	11	209	315	1080	1630	918	1380	749	1130	543	817
	12	204	307	1070	1610	908	1360	741	1110	539	810
	13	199	298	1060	1590	898	1350	733	1100	534	803
	14	193	289	1050	1570	887	1330	724	1090	529	795
	15	186	280	1030	1550	875	1310	714	1070	523	787
	16	180	271	1020	1530	863	1300	705	1060	518	778
	17	174	261	1000	1500	850	1280	694	1040	512	769
	18	167	251	985	1480	836	1260	683	1030	505	759
	19	160	241	968	1450	822	1240	672	1010	498	749
	20	153	231	950	1430	807	1210	660	993	492	739
	22	140	210	913	1370	777	1170	636	956	477	717
	24	126	189	874	1310	745	1120	610	917	461	693
	26	112	169	834	1250	711	1070	583	877	445	669
	28	100	151	793	1190	677	1020	556	835	427	641
	30	90.5	136	751	1130	642	965	527	793	406	610
	32	81.8	123	708	1060	606	911	499	750	384	577
	34	72.4	109	666	1000	571	858	470	707	362	545
	36	64.6	97.1	623	937	535	804	441	663	341	512
	38	58.0	87.2	581	874	500	752	413	621	319	480
40	52.3	78.7	540	812	466	700	385	579	298	448	
42	47.5	71.4	500	751	432	649	358	538	278	417	
44			461	693	399	600	331	498	257	387	
46			423	635	367	551	305	459	238	358	
48			388	583	337	506	280	421	219	329	
50			358	538	310	467	258	388	201	303	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	11.6		38.3		32.4		26.4		20.1		
r_y , in.	2.63		4.73		4.79		4.84		4.90		
r_x/r_y	2.36		1.25		1.25		1.25		1.24		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS16

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape		HSS16x12x				HSS16x8x					
		$\frac{5}{16}^{a,b,c}$		$\frac{5}{8}$	$\frac{1}{2}^a$	$\frac{3}{8}^{a,c}$		$\frac{5}{16}^{a,c}$			
t_{des} , in.		0.313		0.625	0.500		0.375		0.313		
lb/ft		57.4		93.3	76.1		58.1		48.9		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	438	658	820	1230	671	1010	478	718	369	555
	1	438	658	820	1230	670	1010	477	717	369	554
	2	437	657	817	1230	668	1000	476	716	368	553
	3	437	656	813	1220	665	999	475	713	367	551
	4	436	655	807	1210	660	993	472	710	365	549
	5	435	653	800	1200	655	984	469	705	363	545
	6	433	651	791	1190	648	974	465	699	360	541
	7	432	649	781	1170	640	961	461	693	357	536
	8	430	646	770	1160	630	948	456	685	353	530
	9	428	643	757	1140	620	932	450	677	349	524
	10	425	639	743	1120	609	915	444	667	344	517
	11	423	636	727	1090	597	897	437	657	339	509
	12	420	631	711	1070	583	877	430	646	333	501
	13	417	627	693	1040	570	856	422	634	327	492
	14	414	622	675	1010	555	834	414	622	321	483
	15	410	617	656	985	540	811	405	609	315	473
	16	406	610	636	955	524	787	396	595	308	463
	17	401	603	615	924	507	762	386	581	301	452
	18	396	595	594	893	490	737	376	566	293	441
	19	391	588	572	860	473	711	366	550	286	429
	20	386	580	551	828	456	685	353	530	278	417
	22	374	563	506	761	420	631	326	490	261	393
	24	363	545	462	694	384	578	299	450	245	368
	26	350	526	418	629	349	524	273	410	228	342
	28	337	506	375	564	314	472	246	370	210	316
	30	323	486	334	503	281	422	221	332	189	284
	32	309	465	295	443	249	374	197	296	169	254
	34	295	444	261	393	220	331	174	262	149	225
	36	281	422	233	350	196	295	155	234	133	200
	38	267	401	209	314	176	265	140	210	120	180
	40	252	379	189	284	159	239	126	189	108	162
42	236	354	171	257	144	217	114	172	97.9	147	
44	219	329	156	235	132	198	104	156	89.2	134	
46	202	304	143	215	120	181	95.2	143	81.6	123	
48	186	280	131	197	111	166	87.5	131	75.0	113	
50	171	258	121	182	102	153	80.6	121	69.1	104	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
Properties											
Area, in. ²		16.9		27.4		22.4		17.1		14.4	
r_y , in.		4.93		3.25		3.30		3.36		3.39	
r_x/r_y		1.24		1.73		1.72		1.71		1.71	

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.
^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
 Notes: Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS16

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS16x8x		HSS16x4x								
	1/4 ^{a,b,c}		5/8		1/2 ^a		3/8 ^{a,c}		5/16 ^{a,c}		
t_{des} , in.	0.250		0.625		0.500		0.375		0.313		
lb/ft	39.4		76.3		62.5		47.9		40.4		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	267	401	671	1010	551	828	388	583	294	442
	1	266	400	668	1000	549	825	387	581	294	441
	2	266	400	660	991	542	815	384	577	291	438
	3	265	398	646	971	532	799	379	569	288	432
	4	264	396	627	943	517	778	371	558	282	425
	5	262	394	604	908	500	751	362	545	276	415
	6	260	391	577	868	478	719	352	529	268	403
	7	258	387	547	822	455	683	339	510	260	390
	8	255	383	514	772	429	644	326	490	250	375
	9	252	379	479	719	401	603	311	467	239	359
	10	249	374	442	665	372	560	292	439	228	342
	11	245	368	405	609	343	516	270	406	215	324
	12	241	362	368	553	314	471	248	373	203	305
	13	237	356	332	499	284	427	226	340	190	285
	14	232	349	296	446	256	384	205	308	177	266
	15	228	342	263	395	228	343	184	277	160	240
	16	223	335	231	347	202	303	164	247	143	215
	17	218	327	205	307	179	269	145	219	127	191
	18	213	319	182	274	159	240	130	195	113	170
	19	207	311	164	246	143	215	116	175	102	153
	20	202	303	148	222	129	194	105	158	91.9	138
	22	190	286	122	184	107	160	86.8	131	75.9	114
	24	178	268	103	154	89.7	135	73.0	110	63.8	95.9
	26	166	250	87.4	131	76.4	115	62.2	93.5	54.4	81.7
	28	154	232					53.6	80.6	46.9	70.4
	30	142	213								
	32	130	195								
	34	118	178								
	36	108	162								
	38	97.5	147								
	40	88.0	132								
42	79.8	120									
44	72.7	109									
46	66.5	100									
48	61.1	91.8									
50	56.3	84.6									
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	11.6		22.4		18.4		14.1		11.9		
r_y , in.	3.41		1.59		1.64		1.69		1.72		
r_x/r_y	1.71		3.17		3.12		3.08		3.05		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS16

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS16x4x				HSS14x10x						
	$\frac{1}{4}^{a,b,c}$		$\frac{3}{16}^{a,b,c}$		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}^{a,c}$		
t_{des} , in.	0.250		0.188		0.625		0.500		0.375		
lb/ft	32.6		24.7		93.3		76.1		58.1		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	206	310	132	198	820	1230	671	1010	509	765
	1	206	309	132	198	820	1230	670	1010	508	764
	2	204	307	131	196	818	1230	669	1010	508	763
	3	202	304	129	194	815	1230	667	1000	506	761
	4	199	298	127	191	812	1220	664	997	504	758
	5	194	292	124	187	807	1210	660	992	502	755
	6	189	284	121	182	801	1200	655	985	499	750
	7	183	275	117	176	794	1190	649	976	496	745
	8	177	265	113	170	786	1180	643	967	492	739
	9	169	255	109	164	777	1170	636	956	486	731
	10	162	243	104	157	767	1150	628	944	481	722
	11	154	231	99.1	149	757	1140	620	931	474	713
	12	145	218	93.9	141	745	1120	610	917	467	703
	13	137	205	88.6	133	733	1100	600	902	460	691
	14	128	192	83.1	125	720	1080	590	887	452	680
	15	119	179	77.7	117	706	1060	579	870	444	667
	16	110	165	72.2	109	691	1040	567	852	435	654
	17	101	152	66.7	100	676	1020	555	834	426	641
	18	92.8	139	61.5	92.4	661	993	542	815	417	627
	19	84.9	128	56.9	85.6	645	969	529	796	407	612
	20	76.6	115	52.9	79.5	628	944	516	776	398	597
	22	63.3	95.2	46.0	69.2	594	892	489	734	377	567
	24	53.2	80.0	40.5	60.9	558	839	460	691	356	535
	26	45.3	68.2	35.7	53.6	522	785	431	647	334	502
	28	39.1	58.8	30.8	46.2	486	730	401	603	312	469
	30					450	676	372	559	290	435
	32					414	622	343	516	268	403
	34					379	570	315	473	246	370
	36					345	519	287	431	226	339
	38					312	469	260	391	205	309
40					282	423	235	353	186	279	
42					256	384	213	320	168	253	
44					233	350	194	292	153	231	
46					213	320	178	267	140	211	
48					196	294	163	245	129	194	
50					180	271	150	226	119	179	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	9.59		7.29		27.4		22.4		17.1		
r_y , in.	1.75		1.78		3.97		4.01		4.08		
r_y/r_x	3.03		3.00		1.30		1.30		1.29		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS14

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS14x10x				HSS14x6x						
	$\frac{5}{16}^{a,b,c}$		$\frac{1}{4}^{a,b,c}$		$\frac{5}{8}$	$\frac{1}{2}$	$\frac{3}{8}^{a,c}$				
t_{des} , in.	0.313		0.250		0.625		0.500		0.375		
lb/ft	48.9		39.4		76.3		62.5		47.9		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	399	599	284	427	671	1010	551	828	419	630
	1	398	599	284	427	669	1010	550	827	418	629
	2	398	598	284	427	666	1000	547	822	417	626
	3	397	596	283	426	660	992	542	815	414	622
	4	395	594	283	425	651	979	536	805	410	616
	5	394	591	282	423	641	963	527	793	405	609
	6	391	588	280	421	628	944	517	778	398	597
	7	389	584	279	419	614	922	506	760	389	585
	8	386	580	277	417	597	898	493	741	379	570
	9	382	575	275	414	579	870	478	719	369	554
	10	379	569	273	411	559	841	463	696	357	537
	11	375	563	271	407	539	809	446	671	345	518
	12	370	557	268	403	517	776	429	644	332	499
	13	366	550	266	399	494	742	411	617	318	478
	14	361	542	263	395	470	707	392	589	304	457
	15	355	534	260	390	446	670	372	560	290	436
	16	350	526	256	385	422	634	353	530	275	414
	17	344	517	253	380	397	597	333	501	260	391
	18	338	508	249	374	373	560	314	471	246	369
	19	332	498	244	367	349	524	294	442	231	347
	20	325	489	240	360	325	488	275	413	216	325
	22	311	468	230	346	279	419	237	357	188	283
	24	297	446	220	330	236	354	202	303	161	242
	26	282	424	209	314	201	302	172	258	137	206
	28	264	397	198	298	173	260	148	223	118	178
	30	245	369	187	281	151	227	129	194	103	155
	32	227	341	176	264	133	199	114	171	90.5	136
	34	209	314	164	247	117	177	101	151	80.2	121
	36	191	288	153	230	105	157	89.7	135	71.5	108
	38	175	262	142	213	94.0	141	80.5	121	64.2	96.5
40	158	237	129	194	84.9	128	72.6	109	58.0	87.1	
42	143	215	117	176							
44	131	196	107	160							
46	119	179	97.6	147							
48	110	165	89.6	135							
50	101	152	82.6	124							
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	14.4		11.6		22.4		18.4		14.1		
r_y , in.	4.10		4.13		2.41		2.46		2.51		
r_x/r_y	1.30		1.29		1.97		1.96		1.95		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS14

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS14x6x						HSS14x4x				
	^{5/16} a,c		^{1/4} a,c		^{3/16} a,b,c		^{5/8}		^{1/2}		
t_{des} , in.	0.313		0.250		0.188		0.625		0.500		
lb/ft	40.4		32.6		24.7		67.8		55.7		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	324	487	232	349	153	229	596	895	491	738
	1	323	486	232	349	152	229	593	892	489	735
	2	322	484	231	348	152	228	586	880	483	726
	3	320	481	230	345	151	227	573	862	474	712
	4	317	477	228	343	150	225	556	836	460	692
	5	314	472	225	339	148	223	535	805	444	668
	6	309	465	222	334	146	220	511	768	425	639
	7	304	458	219	329	144	216	483	726	403	606
	8	299	449	215	323	141	213	453	681	380	571
	9	292	440	211	317	139	208	422	634	355	533
	10	286	429	206	309	136	204	389	584	329	494
	11	278	418	201	302	132	199	355	534	302	454
	12	270	406	195	293	129	193	322	484	276	414
	13	262	393	189	285	125	188	289	435	249	375
	14	253	380	183	276	121	182	258	388	224	336
	15	244	366	177	266	117	176	228	342	199	299
	16	234	352	170	256	113	170	200	301	175	264
	17	222	334	164	246	108	163	177	266	155	234
	18	210	316	157	236	104	156	158	238	139	208
	19	198	297	150	225	99.7	150	142	213	124	187
	20	185	279	143	215	95.2	143	128	192	112	169
	22	162	243	129	194	86.2	130	106	159	92.8	140
24	139	209	115	172	77.4	116	88.9	134	78.0	117	
26	119	178	97.8	147	68.7	103	75.7	114	66.5	99.9	
28	102	154	84.3	127	61.3	92.1					
30	89.0	134	73.5	110	55.1	82.8					
32	78.3	118	64.6	97.0	49.8	74.9					
34	69.3	104	57.2	86.0	44.5	66.9					
36	61.8	92.9	51.0	76.7	39.7	59.7					
38	55.5	83.4	45.8	68.8	35.6	53.5					
40	50.1	75.3	41.3	62.1	32.1	48.3					
42	45.4	68.3	37.5	56.3	29.2	43.8					
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	11.9		9.59		7.29		19.9		16.4		
r_y , in.	2.54		2.57		2.60		1.57		1.62		
r_x/r_y	1.94		1.93		1.92		2.83		2.79		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS14-HSS12

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS14x4x								HSS12x10x		
	$\frac{3}{8}^{a,c}$		$\frac{5}{16}^{a,c}$		$\frac{1}{4}^{a,c}$		$\frac{3}{16}^{a,b,c}$		$\frac{1}{2}$		
t_{des} , in.	0.375		0.313		0.250		0.188		0.500		
lb/ft	42.8		36.1		29.2		22.2		69.3		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	374	562	285	428	202	304	130	196	611	918
	1	373	560	284	427	202	303	130	195	610	917
	2	370	556	282	424	200	301	129	194	609	916
	3	364	548	278	418	198	297	127	191	607	912
	4	355	534	273	410	194	292	125	188	604	908
	5	344	517	267	401	190	285	122	184	601	903
	6	330	496	259	389	185	278	119	179	596	896
	7	314	472	250	376	179	269	115	174	591	888
	8	297	447	240	361	172	259	111	167	585	879
	9	279	419	229	345	165	248	107	160	578	869
	10	260	390	218	327	157	236	102	153	571	858
	11	240	361	205	309	149	223	96.8	146	563	846
	12	220	331	189	284	140	210	91.5	138	554	833
	13	201	302	173	260	131	197	86.1	129	545	819
	14	182	273	157	236	122	184	80.6	121	535	804
	15	163	245	141	212	113	170	75.1	113	524	788
	16	145	218	126	190	104	157	69.6	105	513	772
	17	128	193	112	168	92.9	140	64.0	96.2	502	755
	18	115	172	99.9	150	82.8	124	58.9	88.5	490	737
	19	103	155	89.6	135	74.3	112	54.4	81.7	478	719
	20	92.8	139	80.9	122	67.1	101	50.4	75.7	466	700
	22	76.7	115	66.8	100	55.4	83.3	43.6	65.6	440	661
	24	64.4	96.9	56.2	84.4	46.6	70.0	36.7	55.2	413	621
	26	54.9	82.5	47.9	71.9	39.7	59.7	31.3	47.0	386	580
	28	47.3	71.2	41.3	62.0	34.2	51.4	27.0	40.5	359	539
	30									332	499
	32									305	458
	34									279	419
	36									254	381
	38									229	344
40									207	311	
42									187	282	
44									171	257	
46									156	235	
48									143	216	
50									132	199	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	12.6		10.6		8.59		6.54		20.4		
r_y , in.	1.68		1.71		1.73		1.76		3.94		
r_y/r_x	2.74		2.73		2.71		2.69		1.15		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS12

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS12x10x						HSS12x8x				
	$\frac{3}{8}$ ^a		$\frac{5}{16}$ ^{a,b,c}		$\frac{1}{4}$ ^{a,b,c}		$\frac{5}{8}$		$\frac{1}{2}$		
t_{des} , in.	0.375		0.313		0.250		0.625		0.500		
lb/ft	53.0		44.6		36.0		76.3		62.5		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	467	702	386	580	279	419	671	1010	551	828
	1	467	702	386	580	279	419	670	1010	550	827
	2	466	700	385	579	278	419	668	1000	549	825
	3	464	698	384	578	278	418	664	998	546	820
	4	462	695	383	575	277	416	659	991	542	814
	5	459	691	381	573	276	415	653	981	537	807
	6	456	686	379	569	275	413	645	970	531	798
	7	452	680	376	565	273	411	636	957	524	787
	8	448	673	373	561	271	408	626	941	516	775
	9	443	666	370	555	269	405	615	924	507	762
	10	437	657	366	550	267	402	603	906	497	747
	11	431	648	362	544	265	398	589	886	486	731
	12	425	639	357	537	262	394	575	864	475	714
	13	418	628	352	528	259	390	560	842	463	696
	14	411	617	345	519	256	385	544	818	450	677
	15	403	605	339	509	253	381	527	793	437	657
	16	395	593	332	499	250	376	510	767	423	636
	17	386	580	325	489	246	370	493	740	409	615
	18	377	567	318	478	242	364	475	713	395	593
	19	368	554	310	466	237	357	456	686	380	571
	20	359	540	303	455	232	349	438	658	365	549
	22	340	511	287	431	222	334	400	601	335	503
	24	320	481	270	406	212	318	363	545	305	458
	26	299	450	253	380	201	302	326	490	275	413
	28	279	419	236	355	189	285	290	436	246	370
	30	258	388	219	329	178	268	256	385	218	328
	32	238	358	202	304	164	247	225	338	192	289
	34	218	328	185	279	151	227	199	300	170	256
	36	199	299	169	254	138	208	178	267	152	228
	38	180	271	154	231	126	189	160	240	136	205
	40	163	245	139	209	113	170	144	217	123	185
42	148	222	126	189	103	155	131	196	111	168	
44	135	202	115	172	93.7	141	119	179	102	153	
46	123	185	105	158	85.8	129	109	164	92.9	140	
48	113	170	96.4	145	78.8	118	100	150	85.4	128	
50	104	157	88.8	134	72.6	109	92.2	139	78.7	118	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	15.6		13.1		10.6		22.4		18.4		
r_y , in.	4.00		4.03		4.05		3.14		3.20		
r_x/r_y	1.15		1.15		1.15		1.38		1.37		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.
^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
 Notes: Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS12

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS12x8x								HSS12x6x		
	$\frac{3}{8}$ ^a		$\frac{5}{16}$ ^{a,c}		$\frac{1}{4}$ ^{a,b,c}		$\frac{3}{16}$ ^{a,b,c}		$\frac{5}{8}$		
t_{des} , in.	0.375		0.313		0.250		0.188		0.625		
lb/ft	47.9		40.4		32.6		24.7		67.8		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	422	634	350	526	257	386	165	247	596	895
	1	422	634	350	526	257	386	164	247	595	894
	2	420	632	349	525	256	385	164	247	591	889
	3	418	629	348	523	255	383	164	246	586	881
	4	415	624	346	520	254	381	163	245	578	869
	5	412	619	343	516	252	379	162	244	569	855
	6	407	612	340	511	250	375	161	242	557	837
	7	402	604	337	506	247	372	160	240	544	817
	8	396	595	333	500	244	367	158	238	528	794
	9	389	585	328	493	241	363	157	236	512	769
	10	382	574	323	486	238	357	155	233	494	742
	11	374	562	316	476	234	352	153	230	475	714
	12	366	550	309	465	230	345	151	227	455	684
	13	357	536	302	454	225	339	149	223	434	652
	14	347	522	294	442	221	332	146	220	413	620
	15	337	507	286	430	216	325	144	216	391	587
	16	327	492	277	417	211	317	141	212	369	554
	17	316	476	269	404	205	309	138	207	347	521
	18	306	459	259	390	200	301	135	203	325	488
	19	295	443	250	376	194	292	132	198	303	455
	20	283	426	241	362	189	283	128	192	281	423
	22	261	392	222	333	177	265	120	180	240	361
	24	238	357	203	305	164	247	112	168	203	304
	26	215	323	184	276	150	225	104	156	173	259
	28	193	290	165	249	135	203	95.7	144	149	224
	30	172	259	148	222	121	182	87.6	132	130	195
	32	152	228	131	196	107	161	79.6	120	114	171
	34	134	202	116	174	94.9	143	72.2	108	101	152
	36	120	180	103	155	84.6	127	65.5	98.4	90.0	135
	38	108	162	92.5	139	75.9	114	58.8	88.4	80.8	121
	40	97.2	146	83.5	126	68.5	103	53.1	79.7		
42	88.1	132	75.8	114	62.2	93.4	48.1	72.3			
44	80.3	121	69.0	104	56.6	85.1	43.8	65.9			
46	73.5	110	63.2	94.9	51.8	77.9	40.1	60.3			
48	67.5	101	58.0	87.2	47.6	71.5	36.8	55.4			
50	62.2	93.5	53.5	80.3	43.9	65.9	34.0	51.0			
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	14.1		11.9		9.59		7.29		19.9		
r_y , in.	3.25		3.28		3.31		3.34		2.37		
r_x/r_y	1.37		1.37		1.37		1.36		1.74		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS12

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS12x6x										
	1/2		3/8 ^a		5/16 ^{a, c}		1/4 ^{a, c}		3/16 ^{a, b, c}		
t_{des} , in.	0.500		0.375		0.313		0.250		0.188		
lb/ft	55.7		42.8		36.1		29.2		22.2		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	491	738	377	567	311	468	227	341	151	226
	1	490	737	377	566	311	467	227	341	150	226
	2	487	733	375	563	310	465	226	339	150	225
	3	483	726	371	558	308	462	224	337	149	224
	4	477	717	367	552	305	458	222	334	148	222
	5	469	706	361	543	301	453	220	330	146	219
	6	460	692	355	533	297	446	217	326	144	216
	7	450	676	347	521	292	438	213	320	142	213
	8	438	658	338	508	285	429	209	314	139	209
	9	424	638	328	494	277	417	205	308	136	205
	10	410	617	318	478	269	404	200	300	133	200
	11	395	594	307	461	259	390	194	292	130	195
	12	379	570	295	443	249	375	189	284	126	189
	13	362	545	282	425	239	360	183	275	122	183
	14	345	519	270	405	229	344	177	265	118	177
	15	328	492	257	386	218	328	170	256	114	171
	16	310	466	243	366	207	311	163	245	110	165
	17	292	439	230	346	196	294	156	235	105	158
	18	274	412	217	326	185	278	149	225	101	151
	19	257	386	203	306	174	261	142	213	96.2	145
	20	239	360	190	286	163	244	133	200	91.6	138
	22	206	309	165	248	141	212	116	174	82.5	124
24	174	262	140	211	121	182	99.6	150	73.5	111	
26	148	223	120	180	103	155	84.9	128	64.9	97.5	
28	128	192	103	155	88.9	134	73.2	110	57.1	85.8	
30	111	167	89.9	135	77.5	116	63.8	95.8	49.7	74.7	
32	97.9	147	79.0	119	68.1	102	56.0	84.2	43.7	65.7	
34	86.7	130	70.0	105	60.3	90.6	49.6	74.6	38.7	58.2	
36	77.4	116	62.4	93.8	53.8	80.8	44.3	66.6	34.5	51.9	
38	69.4	104	56.0	84.2	48.3	72.6	39.7	59.7	31.0	46.6	
40	62.7	94.2	50.6	76.0	43.6	65.5	35.9	53.9	28.0	42.0	
42							32.5	48.9	25.4	38.1	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	16.4		12.6		10.6		8.59		6.54		
r_y , in.	2.42		2.48		2.51		2.53		2.56		
r_x/r_y	1.73		1.71		1.71		1.71		1.71		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS12

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS12x4x										
	5/8		1/2		3/8 ^a		5/16 ^{a,c}		1/4 ^{a,c}		
t_{des} , in.	0.625		0.500		0.375		0.313		0.250		
lb/ft	59.3		48.9		37.7		31.8		25.8		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	521	783	431	648	332	499	274	413	197	296
	1	519	780	429	645	331	498	274	411	196	295
	2	512	769	424	637	327	492	271	408	195	293
	3	501	753	415	624	321	483	268	402	192	289
	4	486	730	404	607	313	470	262	394	189	284
	5	467	702	389	585	302	454	256	385	184	277
	6	445	669	372	559	290	435	246	369	179	269
	7	420	632	352	530	276	414	234	352	173	260
	8	394	591	331	498	260	391	222	333	166	249
	9	365	549	309	464	244	367	208	313	158	238
	10	336	505	286	429	227	341	194	292	150	226
	11	307	461	262	394	209	315	180	270	142	214
	12	277	417	238	358	192	288	165	248	133	200
	13	248	373	215	323	174	262	150	226	124	186
	14	221	332	193	289	157	236	136	205	112	169
	15	194	291	171	257	141	211	122	184	101	152
	16	170	256	150	226	125	187	109	164	90.4	136
	17	151	227	133	200	110	166	96.7	145	80.2	120
	18	135	202	119	178	98.5	148	86.2	130	71.5	107
	19	121	182	107	160	88.4	133	77.4	116	64.2	96.5
	20	109	164	96.2	145	79.8	120	69.8	105	57.9	87.0
	22	90.2	136	79.5	119	66.0	99.1	57.7	86.7	47.9	71.9
	24	75.8	114	66.8	100	55.4	83.3	48.5	72.9	40.2	60.4
	26			56.9	85.6	47.2	71.0	41.3	62.1	34.3	51.5
	28							35.6	53.6	29.5	44.4
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	17.4		14.4		11.1		9.37		7.59		
r_y , in.	1.55		1.60		1.66		1.69		1.71		
r_x/r_y	2.48		2.45		2.41		2.39		2.39		


^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.

 HSS12		Table 6-C (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS						A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi				
		HSS12x4x		HSS12x3½x		HSS12x3x						
Shape		3/16 ^{a, b, c}		3/8 ^a		5/16 ^{a, c}		5/16 ^{a, c}		¼ ^{a, c}		
t_{des} , in.		0.188		0.375		0.313		0.313		0.250		
lb/ft		19.6		36.4		30.8		29.7		24.1		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	128	192	320	481	265	399	256	385	182	274	
	1	127	192	319	479	264	397	255	383	181	272	
	2	126	190	314	472	261	393	251	377	179	269	
	3	125	188	306	460	257	386	245	368	175	262	
	4	123	184	296	444	250	376	236	354	169	254	
	5	120	180	283	425	240	361	222	334	162	244	
	6	117	175	268	402	228	342	206	310	154	231	
	7	113	170	251	377	214	321	189	285	145	218	
	8	109	163	233	349	199	298	171	258	135	203	
	9	104	156	214	321	183	275	153	230	124	187	
	10	99.0	149	194	292	167	250	135	203	112	168	
	11	93.9	141	175	263	150	226	117	176	97.5	147	
	12	88.5	133	156	234	134	202	101	151	84.1	126	
	13	83.0	125	137	207	119	179	85.8	129	71.7	108	
	14	77.4	116	120	180	104	157	74.0	111	61.9	93.0	
	15	71.8	108	104	157	90.8	137	64.4	96.9	53.9	81.0	
	16	66.2	99.6	91.7	138	79.8	120	56.6	85.1	47.4	71.2	
	17	60.6	91.2	81.3	122	70.7	106	50.2	75.4	42.0	63.1	
	18	55.6	83.6	72.5	109	63.1	94.8	44.8	67.3	37.4	56.2	
	19	50.6	76.0	65.0	97.8	56.6	85.1	40.2	60.4	33.6	50.5	
	20	45.7	68.6	58.7	88.2	51.1	76.8	36.2	54.5	30.3	45.6	
	22	37.7	56.7	48.5	72.9	42.2	63.5					
	24	31.7	47.7	40.8	61.3	35.5	53.3					
	26	27.0	40.6									
	28	23.3	35.0									
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties												
Area, in. ²		5.78		10.7		9.06		8.75		7.09		
r_y , in.		1.74		1.45		1.47		1.26		1.28		
r_x/r_y		2.37		2.71		2.70		3.08		3.06		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS12-HSS10

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS12x3x		HSS12x2x				HSS10x8x					
	$\frac{3}{16}^{a,b,c}$		$\frac{5}{16}^{a,c}$		$\frac{1}{4}^{a,c}$		$\frac{3}{16}^{a,b,c}$					
t_{des} , in.	0.188		0.313		0.250		0.188					
lb/ft	18.4		27.6		22.4		17.1					
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD				
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$				
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	117	175	237	356	167	251	105	158	596	895	
	1	116	175	234	352	165	248	104	157	595	895	
	2	115	172	226	340	160	241	101	152	593	892	
	3	112	169	210	316	152	228	96.7	145	590	887	
	4	109	164	188	283	141	212	90.5	136	585	880	
	5	105	157	163	245	128	193	83.0	125	579	871	
	6	99.8	150	136	205	114	171	74.6	112	572	860	
	7	94.3	142	111	166	94.5	142	65.8	98.8	564	848	
	8	88.3	133	86.9	131	75.3	113	56.7	85.2	555	834	
	9	82.0	123	68.7	103	59.5	89.4	48.0	72.1	544	818	
	10	75.4	113	55.6	83.6	48.2	72.4	39.4	59.2	533	801	
	11	68.7	103	46.0	69.1	39.8	59.9	32.5	48.9	520	782	
	12	62.0	93.2	38.6	58.0	33.5	50.3	27.3	41.1	507	762	
	13	55.3	83.1	32.9	49.5	28.5	42.9	23.3	35.0	493	741	
	14	49.4	74.3					20.1	30.2	479	719	
	15	43.1	64.7							463	696	
	16	37.9	56.9							448	673	
	17	33.5	50.4							431	648	
	18	29.9	45.0							415	624	
	19	26.8	40.3							398	598	
	20	24.2	36.4							381	573	
	22										347	521
	24										313	471
	26										280	421
	28										248	373
	30										218	327
	32										191	287
	34										169	255
	36										151	227
	38										136	204
40										122	184	
42										111	167	
44										101	152	
46										92.5	139	
48										85.0	128	
50										78.3	118	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	
	162	243	243	365	197	297	151	226	596	896		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	
	132	198	198	297	161	241	123	184	485	728		
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	
	75.2	113	124	187	101	152	75.2	113	182	274		
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	
	16.5	24.8	11.9	17.9	11.2	16.9	9.70	14.6	138	207		
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	
	46.5	69.9	65.1	97.9	53.4	80.3	41.0	61.7	164	247		
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	
	10.8	16.3	13.0	19.5	9.74	14.6	6.47	9.73	141	212		
Properties												
Area, in. ²	5.41		8.12		6.59		5.03		19.9			
r_y , in.	1.31		0.810		0.837		0.866		3.07			
r_x/r_y	3.03		4.57		4.47		4.38		1.19			

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.




HSS10

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS10x8x										
	1/2		3/8		5/16 ^a		1/4 ^{a, b, c}		3/16 ^{a, b, c}		
t_{des} , in.	0.500		0.375		0.313		0.250		0.188		
lb/ft	55.7		42.8		36.1		29.2		22.2		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	491	738	377	567	317	477	249	374	161	242
	1	490	737	377	566	317	477	249	374	161	242
	2	489	735	376	565	316	475	248	373	161	242
	3	486	731	374	562	314	473	247	372	160	241
	4	483	725	371	558	312	469	246	369	160	240
	5	478	718	367	552	309	465	244	367	159	239
	6	472	710	363	546	306	460	242	363	158	237
	7	466	700	358	539	302	454	239	359	156	235
	8	458	689	353	530	297	447	236	355	155	233
	9	450	676	347	521	292	439	233	350	153	230
	10	441	662	340	511	287	431	229	344	151	227
	11	431	647	332	499	281	422	225	339	149	224
	12	420	632	324	488	274	412	221	332	147	221
	13	409	615	316	475	267	402	216	325	145	217
	14	397	597	307	462	260	391	211	318	142	214
	15	385	579	298	448	253	380	205	308	140	210
	16	372	560	288	434	245	368	199	299	137	205
	17	359	540	279	419	237	356	192	289	134	201
	18	346	520	269	404	228	343	186	279	131	196
	19	332	499	258	388	220	331	179	269	127	191
	20	319	479	248	373	211	318	172	259	123	185
	22	291	437	227	341	194	292	158	238	115	173
	24	263	396	206	310	177	266	144	217	107	160
	26	236	355	186	279	160	240	131	196	98.4	148
	28	210	316	166	249	143	215	117	176	90.1	135
	30	185	278	147	221	127	191	104	157	80.7	121
	32	163	245	129	194	112	168	91.9	138	71.3	107
	34	144	217	114	172	99.2	149	81.4	122	63.1	94.9
	36	129	193	102	153	88.5	133	72.6	109	56.3	84.7
	38	115	173	91.5	138	79.4	119	65.2	98.0	50.6	76.0
	40	104	157	82.6	124	71.7	108	58.8	88.4	45.6	68.6
42	94.5	142	74.9	113	65.0	97.7	53.4	80.2	41.4	62.2	
44	86.1	129	68.3	103	59.3	89.1	48.6	73.1	37.7	56.7	
46	78.8	118	62.5	93.9	54.2	81.5	44.5	66.9	34.5	51.8	
48	72.3	109	57.4	86.2	49.8	74.8	40.9	61.4	31.7	47.6	
50	66.7	100	52.9	79.5	45.9	69.0	37.6	56.6	29.2	43.9	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	16.4		12.6		10.6		8.59		6.54		
r_y , in.	3.12		3.17		3.22		3.24		3.27		
r_x/r_y	1.19		1.19		1.18		1.19		1.18		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.
^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
 Notes: Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.

 HSS10		Table 6-C (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS										A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi	
		HSS10x6x											
Shape		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}^a$		$\frac{1}{4}^{a,c}$			
t_{des} , in.		0.625		0.500		0.375		0.313		0.250			
lb/ft		59.3		48.9		37.7		31.8		25.8			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	521	783	431	648	332	499	281	422	219	329		
	1	520	781	430	647	332	499	280	421	219	329		
	2	517	777	428	643	330	496	279	419	218	328		
	3	512	769	424	637	327	492	276	415	216	325		
	4	505	759	418	629	323	485	273	410	214	322		
	5	496	746	411	618	318	478	269	404	212	318		
	6	486	730	403	606	312	468	264	396	209	314		
	7	473	711	393	591	305	458	258	387	205	308		
	8	460	691	382	575	296	446	251	377	201	302		
	9	445	668	370	557	288	432	244	366	196	295		
	10	428	644	357	537	278	418	236	354	191	287		
	11	411	618	344	517	268	403	227	342	185	278		
	12	393	591	329	495	257	386	218	328	178	267		
	13	374	563	314	472	246	370	209	314	171	256		
	14	355	534	299	449	234	352	199	300	163	245		
	15	335	504	283	425	223	334	190	285	155	233		
	16	316	475	267	401	211	316	180	270	147	221		
	17	296	445	251	377	199	298	170	255	139	209		
	18	276	415	235	353	186	280	160	240	131	197		
	19	257	386	219	329	175	262	150	225	123	185		
20	238	358	204	306	163	245	140	210	115	173			
22	202	304	174	262	140	211	121	182	99.9	150			
24	170	255	147	220	119	179	103	154	85.3	128			
26	145	217	125	188	101	152	87.6	132	72.7	109			
28	125	187	108	162	87.3	131	75.5	113	62.7	94.2			
30	109	163	93.8	141	76.0	114	65.8	98.8	54.6	82.0			
32	95.5	143	82.4	124	66.8	100	57.8	86.9	48.0	72.1			
34	84.6	127	73.0	110	59.2	89.0	51.2	77.0	42.5	63.9			
36	75.4	113	65.1	97.9	52.8	79.3	45.7	68.6	37.9	57.0			
38	67.7	102	58.5	87.9	47.4	71.2	41.0	61.6	34.0	51.1			
40					42.8	64.3	37.0	55.6	30.7	46.1			
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		
Properties													
Area, in. ²		17.4		14.4		11.1		9.37		7.59			
r_y , in.		2.32		2.37		2.43		2.46		2.49			
r_x/r_y		1.50		1.50		1.49		1.48		1.48			

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS10

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS10x6x				HSS10x5x						
	$\frac{3}{16}^{a,b,c}$		$\frac{3}{8}$	$\frac{5}{16}^a$	$\frac{1}{4}^{a,c}$		$\frac{3}{16}^{a,c}$				
t_{des} , in.	0.188		0.375		0.313		0.250		0.188		
lb/ft	19.6		35.1		29.7		24.1		18.4		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	147	221	308	463	262	394	204	307	136	204
	1	147	221	308	462	261	393	204	306	136	204
	2	146	220	305	459	259	390	203	305	135	203
	3	145	218	301	453	256	385	201	302	134	201
	4	144	216	296	445	252	378	198	298	132	199
	5	142	214	289	435	246	370	195	293	130	195
	6	140	211	282	423	240	360	191	286	127	191
	7	138	207	272	409	232	349	186	279	124	187
	8	135	203	262	394	224	336	181	272	121	182
	9	132	199	251	378	214	322	175	262	117	176
	10	129	194	239	360	204	307	167	251	113	170
	11	125	188	227	341	194	292	159	238	109	164
	12	122	183	214	322	183	275	150	225	105	157
	13	118	177	201	302	172	259	141	212	100	150
	14	113	171	188	282	161	242	132	199	95.2	143
	15	109	164	175	262	150	225	123	185	90.3	136
	16	105	158	161	243	139	209	115	172	85.3	128
	17	100	151	148	223	128	192	106	159	80.3	121
	18	95.7	144	136	204	117	176	97.2	146	75.2	113
	19	91.1	137	124	186	107	161	88.9	134	69.5	105
20	86.5	130	112	168	96.9	146	80.8	121	63.5	95.4	
22	77.1	116	92.4	139	80.1	120	66.8	100	52.4	78.8	
24	66.0	99.2	77.7	117	67.3	101	56.1	84.4	44.1	66.2	
26	56.2	84.5	66.2	99.5	57.3	86.2	47.8	71.9	37.5	56.4	
28	48.5	72.9	57.1	85.8	49.4	74.3	41.2	62.0	32.4	48.7	
30	42.2	63.5	49.7	74.7	43.1	64.7	35.9	54.0	28.2	42.4	
32	37.1	55.8	43.7	65.7	37.8	56.9	31.6	47.4	24.8	37.3	
34	32.9	49.4	38.7	58.2	33.5	50.4	28.0	42.0	22.0	33.0	
36	29.3	44.1									
38	26.3	39.6									
40	23.8	35.7									
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	173	260	308	464	262	394	212	319	162	243	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	141	211	251	377	213	320	173	259	132	198	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	63.7	95.8	120	180	102	153	83.1	125	63.7	95.8	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	36.7	55.2	52.0	78.2	45.8	68.8	38.2	57.4	30.0	45.0	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
	45.8	68.9	80.6	121	69.1	104	56.6	85.1	43.7	65.6	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
	25.0	37.6	49.7	74.6	40.9	61.5	29.7	44.6	19.8	29.8	
Properties											
Area, in. ²	5.78		10.3		8.75		7.09		5.41		
r_y , in.	2.51		2.04		2.06		2.09		2.12		
r_x/r_y	1.48		1.73		1.72		1.72		1.71		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.


^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.

 HSS10		Table 6-C (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS										A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi	
		HSS10x4x											
Shape		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}^a$		$\frac{1}{4}^{a,c}$			
t_{des} , in.		0.625		0.500		0.375		0.313		0.250			
lb/ft		50.8		42.1		32.6		27.6		22.4			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	446	670	371	558	287	431	243	365	189	284		
	1	444	667	370	556	286	429	242	364	189	284		
	2	438	659	365	549	282	424	239	360	187	281		
	3	428	644	357	537	277	416	235	353	184	277		
	4	415	624	347	522	269	405	229	344	181	272		
	5	399	599	334	502	260	390	221	332	176	265		
	6	379	570	319	479	249	374	212	318	171	257		
	7	358	538	302	454	236	355	202	303	164	247		
	8	335	503	283	426	223	335	190	286	156	234		
	9	310	466	264	397	208	313	178	268	146	220		
	10	285	428	244	366	193	290	166	249	136	205		
	11	259	389	223	335	178	267	153	230	126	190		
	12	233	351	202	304	162	244	140	211	116	174		
	13	209	314	182	274	147	221	127	192	106	159		
	14	185	278	162	244	132	198	115	173	95.8	144		
	15	162	243	144	216	118	177	103	155	86.1	129		
	16	142	214	126	190	104	156	91.2	137	76.7	115		
	17	126	189	112	168	91.9	138	80.8	121	68.0	102		
	18	112	169	99.7	150	82.0	123	72.1	108	60.6	91.1		
	19	101	152	89.5	135	73.6	111	64.7	97.2	54.4	81.8		
	20	91.0	137	80.8	121	66.4	99.8	58.4	87.8	49.1	73.8		
	22	75.2	113	66.8	100	54.9	82.5	48.3	72.5	40.6	61.0		
	24	63.2	95.0	56.1	84.3	46.1	69.3	40.5	60.9	34.1	51.3		
	26			47.8	71.8	39.3	59.1	34.5	51.9	29.1	43.7		
	28									25.1	37.7		
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		
Properties													
Area, in. ²		14.9		12.4		9.58		8.12		6.59			
r_y , in.		1.53		1.58		1.63		1.66		1.69			
r_x/r_y		2.12		2.09		2.08		2.07		2.05			

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS10

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS10x4x		HSS10x3½x								
	¾ ^{a,c}		½		⅜		5/16 ^a		¼ ^{a,c}		
t_{des} , in.	0.188		0.500		0.375		0.313		0.250		
lb/ft	17.1		40.3		31.3		26.5		21.6		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	125	187	356	535	275	414	234	351	182	273
	1	124	187	354	533	274	412	233	350	181	272
	2	123	185	348	524	270	406	229	344	179	269
	3	122	183	339	509	263	395	224	336	176	264
	4	119	179	326	490	254	381	216	324	171	257
	5	117	175	310	465	242	364	206	310	166	249
	6	113	170	291	438	229	344	195	293	159	239
	7	109	164	271	407	214	322	183	275	150	225
	8	105	158	249	374	198	298	170	255	140	210
	9	100	151	226	340	182	273	156	234	129	193
	10	95.2	143	203	306	165	247	142	213	117	176
	11	90.0	135	181	272	148	222	128	192	106	159
	12	84.5	127	159	239	131	197	114	171	95.0	143
	13	79.0	119	138	207	115	173	100	151	84.2	127
	14	73.3	110	119	179	100	151	87.4	131	74.0	111
	15	67.6	102	104	156	87.3	131	76.2	114	64.4	96.8
	16	60.6	91.0	91.1	137	76.7	115	67.0	101	56.6	85.1
	17	53.7	80.8	80.7	121	67.9	102	59.3	89.1	50.2	75.4
	18	47.9	72.1	72.0	108	60.6	91.1	52.9	79.5	44.7	67.2
	19	43.0	64.7	64.6	97.1	54.4	81.8	47.5	71.4	40.2	60.4
	20	38.8	58.4	58.3	87.6	49.1	73.8	42.8	64.4	36.2	54.5
	22	32.1	48.2	48.2	72.4	40.6	61.0	35.4	53.2	29.9	45.0
	24	27.0	40.5					29.8	44.7	25.2	37.8
	26	23.0	34.5								
	28	19.8	29.8								
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	5.03		11.9		9.20		7.81		6.34		
r_y , in.	1.72		1.37		1.43		1.45		1.48		
r_x/r_y	2.04		2.36		2.33		2.32		2.30		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.

 HSS10		Table 6-C (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS								A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi		
		HSS10x3½x				HSS10x3x						
Shape		¾ ^{a,c}		¾		5/16 ^a		¼ ^{a,c}		¾ ^{a,c}		
t_{des} , in.		0.188		0.375		0.313		0.250		0.188		
lb/ft		16.4		30.0		25.5		20.7		15.8		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	119	179	264	397	224	337	174	262	113	171	
	1	118	178	262	395	223	335	173	261	113	170	
	2	117	176	257	386	218	328	171	257	111	168	
	3	115	173	248	372	211	317	167	250	109	164	
	4	113	169	236	354	201	302	161	242	106	159	
	5	109	164	221	332	189	284	154	231	101	152	
	6	105	158	204	307	175	263	144	217	96.4	145	
	7	101	151	186	279	160	241	132	199	90.8	136	
	8	95.5	143	167	251	145	217	120	180	84.8	127	
	9	90.0	135	148	222	129	194	107	162	78.3	118	
	10	84.3	127	129	194	113	170	94.9	143	71.7	108	
	11	78.3	118	111	166	97.9	147	82.8	124	65.0	97.6	
	12	72.3	109	93.7	141	83.5	125	71.2	107	56.9	85.5	
	13	66.1	99.4	79.8	120	71.1	107	60.7	91.2	48.6	73.1	
	14	58.6	88.1	68.8	103	61.3	92.2	52.3	78.6	41.9	63.0	
	15	51.2	76.9	60.0	90.1	53.4	80.3	45.6	68.5	36.5	54.9	
	16	45.0	67.6	52.7	79.2	47.0	70.6	40.1	60.2	32.1	48.3	
	17	39.9	59.9	46.7	70.2	41.6	62.5	35.5	53.3	28.4	42.8	
	18	35.6	53.4	41.6	62.6	37.1	55.8	31.6	47.6	25.4	38.1	
	19	31.9	48.0	37.4	56.2	33.3	50.0	28.4	42.7	22.8	34.2	
	20	28.8	43.3	33.7	50.7	30.1	45.2	25.6	38.5	20.6	30.9	
	22	23.8	35.8									
	24	20.0	30.1									
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties												
Area, in. ²		4.84		8.83		7.49		6.09		4.66		
r_y , in.		1.51		1.21		1.24		1.27		1.30		
r_x/r_y		2.28		2.68		2.65		2.62		2.59		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS10-HSS9

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS10x2x								HSS9x7x		
	3/8		5/16 ^a		1/4 ^{a,c}		3/16 ^{a,c}		5/8		
t_{des} , in.	0.375		0.313		0.250		0.188		0.625		
lb/ft	27.5		23.3		19.0		14.5		59.3		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	242	364	206	309	159	239	102	153	521	783
	1	238	357	202	304	157	237	101	152	520	782
	2	226	339	193	290	152	229	98.1	147	518	778
	3	207	311	178	267	144	216	93.3	140	514	773
	4	183	275	158	238	131	197	87.0	131	509	765
	5	156	235	137	206	114	172	79.4	119	502	754
	6	129	194	114	172	96.5	145	71.0	107	494	742
	7	103	154	92.4	139	79.1	119	62.0	93.2	484	728
	8	79.4	119	72.2	109	62.8	94.4	51.3	77.1	474	712
	9	62.7	94.2	57.1	85.8	49.6	74.6	40.6	61.0	462	694
	10	50.8	76.3	46.2	69.5	40.2	60.4	32.9	49.4	449	675
	11	42.0	63.1	38.2	57.4	33.2	49.9	27.2	40.9	435	654
	12	35.3	53.0	32.1	48.3	27.9	42.0	22.8	34.3	420	632
	13			27.4	41.1	23.8	35.7	19.5	29.2	405	609
	14							16.8	25.2	389	585
	15									373	560
	16									356	535
	17									339	509
	18									322	483
	19									304	458
	20									287	432
	22									254	381
	24									221	332
	26									190	286
28									164	246	
30									143	215	
32									125	189	
34									111	167	
36									99.2	149	
38									89.0	134	
40									80.3	121	
42									72.9	109	
44									66.4	99.8	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	8.08		6.87		5.59		4.28		17.4		
r_y , in.	0.776		0.803		0.830		0.858		2.66		
r_x/r_y	3.93		3.86		3.80		3.73		1.22		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS9

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS9x7x										
	1/2		3/8		5/16		1/4 ^a		3/16 ^{a, b, c}		
t_{des} , in.	0.500		0.375		0.313		0.250		0.188		
lb/ft	48.9		37.7		31.8		25.8		19.6		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	431	648	332	499	281	422	227	342	155	234
	1	431	647	332	499	280	421	227	341	155	233
	2	429	644	331	497	279	419	226	340	155	233
	3	426	640	328	493	277	417	225	338	154	232
	4	421	633	325	489	275	413	223	334	153	230
	5	416	625	321	483	271	408	220	331	152	229
	6	409	615	316	475	267	402	217	326	150	226
	7	402	604	311	467	263	395	213	320	148	223
	8	393	591	304	458	257	387	209	314	146	219
	9	384	577	297	447	252	378	204	307	143	215
	10	374	561	290	435	245	369	199	299	141	211
	11	362	545	281	423	238	358	194	291	137	207
	12	351	527	273	410	231	348	188	283	134	202
	13	338	509	264	396	224	336	182	274	131	196
	14	326	489	254	382	216	324	176	264	127	191
	15	312	469	244	367	207	312	169	254	123	185
	16	299	449	234	352	199	299	162	244	119	179
	17	285	428	224	336	190	286	155	234	115	173
	18	271	407	213	320	182	273	148	223	111	167
	19	257	386	203	304	173	260	141	212	107	160
	20	243	365	192	289	164	246	134	202	102	154
	22	215	324	171	257	146	220	120	181	92.8	139
	24	189	284	151	227	129	195	107	160	82.4	124
	26	163	245	131	198	113	170	93.4	140	72.5	109
28	141	212	113	170	97.8	147	80.9	122	62.9	94.6	
30	123	184	98.8	148	85.2	128	70.5	106	54.8	82.4	
32	108	162	86.8	130	74.9	113	62.0	93.1	48.2	72.4	
34	95.5	144	76.9	116	66.3	99.7	54.9	82.5	42.7	64.2	
36	85.2	128	68.6	103	59.2	88.9	49.0	73.6	38.1	57.2	
38	76.4	115	61.6	92.5	53.1	79.8	43.9	66.0	34.2	51.4	
40	69.0	104	55.6	83.5	47.9	72.0	39.7	59.6	30.8	46.4	
42	62.6	94.1	50.4	75.7	43.5	65.3	36.0	54.1	28.0	42.0	
44	57.0	85.7	45.9	69.0	39.6	59.5	32.8	49.3	25.5	38.3	
46			42.0	63.1	36.2	54.5	30.0	45.1	23.3	35.1	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	14.4		11.1		9.37		7.59		5.78		
r_y , in.	2.71		2.77		2.80		2.83		2.86		
r_x/r_y	1.22		1.22		1.21		1.21		1.21		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS9

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS9x5x										
	5/8		1/2		3/8		5/16		1/4 ^a		
t_{des} , in.	0.625		0.500		0.375		0.313		0.250		
lb/ft	50.8		42.1		32.6		27.6		22.4		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	446	670	371	558	287	431	243	365	197	297
	1	445	669	370	556	286	430	242	364	197	296
	2	441	663	367	552	284	427	241	362	195	294
	3	435	653	362	544	280	421	238	357	193	290
	4	426	640	355	534	275	414	233	351	190	285
	5	415	624	347	521	269	404	228	343	186	279
	6	402	604	336	506	261	393	222	334	181	271
	7	387	582	325	488	253	380	215	323	175	263
	8	371	557	312	468	243	365	207	311	169	253
	9	353	531	297	447	233	350	198	298	162	243
	10	334	502	282	424	222	333	189	284	154	232
	11	315	473	266	401	210	315	179	269	147	220
	12	294	442	250	376	198	297	169	254	139	208
	13	274	412	234	351	185	279	159	238	130	196
	14	253	381	217	326	173	260	148	223	122	183
	15	233	350	200	301	161	241	138	207	114	171
	16	213	320	184	277	148	223	127	191	105	158
	17	194	291	168	253	136	205	117	176	97.0	146
	18	175	263	153	230	124	187	107	161	89.0	134
	19	157	236	138	207	113	170	97.5	147	81.3	122
	20	142	213	124	187	102	153	88.2	133	73.7	111
	22	117	176	103	154	84.3	127	72.9	110	60.9	91.5
	24	98.5	148	86.3	130	70.8	106	61.2	92.0	51.2	76.9
	26	83.9	126	73.6	111	60.4	90.7	52.2	78.4	43.6	65.5
	28	72.4	109	63.4	95.3	52.0	78.2	45.0	67.6	37.6	56.5
	30	63.0	94.8	55.2	83.0	45.3	68.1	39.2	58.9	32.7	49.2
	32			48.6	73.0	39.8	59.9	34.4	51.8	28.8	43.3
	34							30.5	45.9	25.5	38.3
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
	Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
Properties											
Area, in. ²	14.9		12.4		9.58		8.12		6.59		
r_y , in.	1.91		1.96		2.02		2.04		2.07		
r_x/r_y	1.60		1.59		1.58		1.58		1.58		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS9

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS9x5x				HSS9x3x						
	$\frac{3}{16}^{a,c}$		$\frac{1}{2}$	$\frac{3}{8}$	$\frac{5}{16}$	$\frac{1}{4}^a$					
t_{des} , in.	0.188		0.500	0.375	0.313		0.250				
lb/ft	17.1		35.2	27.5	23.3		19.0				
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	134	201	311	468	242	364	206	309	167	252
	1	133	200	309	464	240	361	204	307	166	250
	2	133	199	302	453	235	353	200	301	163	245
	3	131	197	290	436	227	340	193	290	158	237
	4	130	195	274	412	215	323	184	277	151	226
	5	128	192	255	384	202	303	173	260	142	213
	6	125	188	234	351	186	279	160	241	132	198
	7	122	183	211	317	169	254	146	220	121	182
	8	119	178	187	281	152	228	132	198	109	165
	9	115	173	163	246	134	201	117	176	97.8	147
	10	111	166	140	211	116	175	103	154	86.2	130
	11	106	160	119	178	99.9	150	88.6	133	75.0	113
	12	102	153	99.7	150	84.3	127	75.3	113	64.3	96.7
	13	97.2	146	84.9	128	71.9	108	64.2	96.5	54.8	82.4
	14	92.3	139	73.2	110	62.0	93.1	55.4	83.2	47.3	71.0
	15	87.3	131	63.8	95.9	54.0	81.1	48.2	72.5	41.2	61.9
	16	81.7	123	56.1	84.3	47.4	71.3	42.4	63.7	36.2	54.4
	17	75.5	114	49.7	74.7	42.0	63.2	37.5	56.4	32.1	48.2
	18	69.5	104	44.3	66.6	37.5	56.3	33.5	50.3	28.6	43.0
	19	63.6	95.6	39.8	59.8	33.6	50.6	30.1	45.2	25.7	38.6
20	57.9	87.0			30.4	45.6	27.1	40.8	23.2	34.8	
22	47.8	71.9									
24	40.2	60.4									
26	34.3	51.5									
28	29.5	44.4									
30	25.7	38.7									
32	22.6	34.0									
34	20.0	30.1									
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	5.03		10.4		8.08		6.87		5.59		
r_y , in.	2.10		1.15		1.20		1.23		1.26		
r_x/r_y	1.57		2.48		2.45		2.42		2.40		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS9-HSS8

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS9x3x				HSS8x6x						
	$\frac{3}{16}^{a,c}$		$\frac{5}{8}$	$\frac{1}{2}$	$\frac{3}{8}$		$\frac{5}{16}$				
t_{des} , in.	0.188		0.625	0.500	0.375		0.313				
lb/ft	14.5		50.8	42.1	32.6		27.6				
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	111	167	446	670	371	558	287	431	243	365
	1	111	166	445	669	371	557	286	430	243	365
	2	109	164	442	665	368	554	285	428	241	363
	3	107	160	438	658	365	548	282	424	239	359
	4	103	155	432	649	360	541	278	418	236	355
	5	98.8	149	424	637	353	531	274	411	232	349
	6	93.8	141	414	622	346	519	268	403	228	342
	7	88.2	133	403	606	337	506	261	393	222	334
	8	82.1	123	391	587	327	491	254	382	216	325
	9	75.6	114	377	567	316	475	246	370	209	315
	10	68.1	102	362	545	304	457	237	357	202	304
	11	59.6	89.6	347	521	292	439	228	343	195	292
	12	51.5	77.4	331	497	279	419	218	328	186	280
	13	44.0	66.1	314	472	265	399	208	313	178	268
	14	37.9	57.0	297	446	251	378	198	298	169	255
	15	33.0	49.7	279	420	237	357	187	282	161	241
	16	29.0	43.6	262	394	223	335	177	266	152	228
	17	25.7	38.7	245	368	209	314	166	250	143	214
	18	22.9	34.5	227	342	195	293	155	234	134	201
	19	20.6	31.0	211	316	181	272	145	218	125	188
20	18.6	27.9	194	292	167	252	135	202	116	175	
22			163	245	141	213	115	173	99.6	150	
24			137	205	119	179	96.7	145	84.1	126	
26			116	175	101	152	82.4	124	71.6	108	
28			100	151	87.3	131	71.0	107	61.8	92.8	
30			87.5	131	76.1	114	61.9	93.0	53.8	80.9	
32			76.9	116	66.9	100	54.4	81.7	47.3	71.1	
34			68.1	102	59.2	89.0	48.2	72.4	41.9	62.9	
36			60.8	91.3	52.8	79.4	43.0	64.6	37.4	56.1	
38					47.4	71.3	38.6	58.0	33.5	50.4	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	4.28		14.9		12.4		9.58		8.12		
r_y , in.	1.29		2.25		2.30		2.36		2.39		
r_x/r_y	2.37		1.26		1.25		1.25		1.25		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS8

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS8x6x				HSS8x4x						
	$\frac{1}{4}$ ^a		$\frac{3}{16}$ ^{a,b,c}		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		
t_{des} , in.	0.250		0.188		0.625		0.500		0.375		
lb/ft	22.4		17.1		42.3		35.2		27.5		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	197	297	142	214	371	558	311	468	242	364
	1	197	296	142	213	370	555	310	466	241	362
	2	196	294	141	212	364	548	306	460	238	358
	3	194	292	140	211	356	535	299	450	233	350
	4	192	288	139	209	344	517	290	436	227	340
	5	189	284	137	206	330	496	279	419	218	328
	6	185	278	135	203	313	470	265	399	209	314
	7	181	272	132	199	294	442	251	377	198	297
	8	176	264	130	195	274	412	234	352	186	279
	9	171	256	127	190	253	380	217	327	173	261
	10	165	248	123	185	231	347	200	300	160	241
	11	159	239	119	180	209	314	182	273	147	221
	12	152	229	116	174	188	282	164	247	134	201
	13	146	219	111	167	167	250	147	221	121	181
	14	139	208	107	160	147	220	130	196	108	162
	15	132	198	101	153	128	192	114	172	95.9	144
	16	125	187	96.1	144	112	169	101	151	84.3	127
	17	117	176	90.7	136	99.4	149	89.1	134	74.7	112
	18	110	166	85.3	128	88.7	133	79.5	119	66.6	100
	19	103	155	79.9	120	79.6	120	71.3	107	59.8	89.9
20	96.1	144	74.7	112	71.8	108	64.4	96.7	54.0	81.1	
22	82.6	124	64.4	96.8	59.4	89.2	53.2	79.9	44.6	67.0	
24	69.9	105	54.7	82.2	49.9	75.0	44.7	67.2	37.5	56.3	
26	59.6	89.6	46.6	70.1					31.9	48.0	
28	51.4	77.2	40.2	60.4							
30	44.8	67.3	35.0	52.6							
32	39.3	59.1	30.8	46.3							
34	34.8	52.4	27.3	41.0							
36	31.1	46.7	24.3	36.5							
38	27.9	41.9	21.8	32.8							
40	25.2	37.8	19.7	29.6							
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	6.59		5.03		12.4		10.4		8.08		
r_y , in.	2.42		2.45		1.49		1.54		1.60		
r_x/r_y	1.25		1.24		1.76		1.75		1.73		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.


^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.

 HSS8		Table 6-C (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS						A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi				
		HSS8x4x						HSS8x3x				
Shape		$\frac{5}{16}$		$\frac{1}{4}$ ^a		$\frac{3}{16}$ ^{a, c}		$\frac{1}{2}$		$\frac{3}{8}$		
t_{des} , in.		0.313		0.250		0.188		0.500		0.375		
lb/ft		23.3		19.0		14.5		31.8		24.9		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	206	309	167	252	120	180	280	421	219	330	
	1	205	308	167	251	119	179	278	418	218	327	
	2	202	304	165	248	118	178	271	408	213	320	
	3	198	298	162	243	117	175	261	392	205	309	
	4	193	290	157	236	114	172	246	370	195	293	
	5	186	280	152	228	111	167	229	344	182	274	
	6	178	268	146	219	108	162	209	315	168	252	
	7	169	254	138	208	104	156	188	283	152	229	
	8	159	239	131	196	99.2	149	167	251	136	205	
	9	149	223	122	184	94.3	142	145	219	120	181	
	10	138	207	114	171	88.2	133	125	187	104	157	
	11	127	190	105	158	81.6	123	105	158	89.3	134	
	12	115	173	95.9	144	74.9	113	88.2	133	75.2	113	
	13	104	157	87.1	131	68.2	103	75.1	113	64.1	96.4	
	14	93.7	141	78.4	118	61.7	92.7	64.8	97.4	55.3	83.1	
	15	83.4	125	70.1	105	55.4	83.2	56.4	84.8	48.2	72.4	
	16	73.5	110	62.1	93.3	49.3	74.0	49.6	74.5	42.3	63.6	
	17	65.1	97.9	55.0	82.6	43.6	65.6	43.9	66.0	37.5	56.3	
	18	58.1	87.3	49.0	73.7	38.9	58.5	39.2	58.9	33.4	50.3	
	19	52.1	78.4	44.0	66.1	34.9	52.5			30.0	45.1	
	20	47.0	70.7	39.7	59.7	31.5	47.4					
	22	38.9	58.4	32.8	49.3	26.1	39.2					
	24	32.7	49.1	27.6	41.5	21.9	32.9					
	26	27.8	41.8	23.5	35.3	18.7	28.0					
	28					16.1	24.2					
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties												
Area, in. ²		6.87		5.59		4.28		9.36		7.33		
r_y , in.		1.62		1.65		1.68		1.14		1.19		
r_x/r_y		1.73		1.72		1.71		2.24		2.22		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS8

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS8x3x						HSS8x2x				
	$\frac{5}{16}$		$\frac{1}{4}$ ^a		$\frac{3}{16}$ ^{a, c}		$\frac{3}{8}$		$\frac{5}{16}$		
t_{des} , in.	0.313		0.250		0.188		0.375		0.313		
lb/ft	21.2		17.3		13.3		22.4		19.1		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	187	281	152	229	108	163	197	296	168	253
	1	186	279	151	228	108	162	194	291	165	249
	2	182	273	148	223	106	160	183	276	157	237
	3	175	263	143	216	104	156	168	252	145	218
	4	167	251	137	206	100	150	148	222	129	193
	5	157	235	129	194	95.6	144	126	189	111	166
	6	145	218	120	180	90.5	136	103	155	92.1	138
	7	132	199	110	165	84.7	127	81.8	123	74.1	111
	8	119	179	99.0	149	76.9	116	63.0	94.6	57.6	86.6
	9	105	158	88.3	133	68.8	103	49.8	74.8	45.5	68.5
	10	92.1	138	77.7	117	60.8	91.4	40.3	60.6	36.9	55.4
	11	79.4	119	67.4	101	53.0	79.7	33.3	50.1	30.5	45.8
	12	67.3	101	57.6	86.6	45.6	68.6	28.0	42.1	25.6	38.5
	13	57.4	86.2	49.1	73.8	38.9	58.4			21.8	32.8
	14	49.5	74.3	42.4	63.7	33.5	50.3				
	15	43.1	64.8	36.9	55.5	29.2	43.9				
	16	37.9	56.9	32.4	48.7	25.6	38.5				
	17	33.5	50.4	28.7	43.2	22.7	34.1				
	18	29.9	45.0	25.6	38.5	20.3	30.5				
	19	26.9	40.4	23.0	34.6	18.2	27.3				
20	24.2	36.4	20.8	31.2	16.4	24.7					
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	6.24		5.09		3.90		6.58		5.62		
r_y , in.	1.22		1.25		1.27		0.766		0.793		
r_x/r_y	2.20		2.18		2.17		3.22		3.17		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS8-HSS7

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS8x2x				HSS7x5x						
	1/4 ^a		3/16 ^{a,c}		1/2		3/8		5/16		
t_{des} , in.	0.250		0.188		0.500		0.375		0.313		
lb/ft	15.6		12.0		35.2		27.5		23.3		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	137	207	97.2	146	311	468	242	364	206	309
	1	135	203	96.2	145	310	467	241	363	205	308
	2	129	194	93.1	140	308	463	239	360	203	306
	3	119	179	88.2	133	303	456	236	355	201	302
	4	107	161	81.7	123	297	446	231	348	197	296
	5	92.8	140	73.2	110	289	435	226	339	192	289
	6	78.1	117	62.3	93.7	280	421	219	329	187	281
	7	63.7	95.7	51.5	77.4	270	405	211	317	180	271
	8	50.2	75.5	41.3	62.1	258	388	203	305	173	260
	9	39.7	59.6	32.6	49.0	245	369	193	291	165	249
	10	32.1	48.3	26.4	39.7	232	349	183	276	157	236
	11	26.6	39.9	21.8	32.8	218	328	173	260	149	223
	12	22.3	33.5	18.4	27.6	204	306	162	244	140	210
	13	19.0	28.6	15.6	23.5	189	284	152	228	131	196
	14			13.5	20.3	175	263	141	211	122	183
	15					160	241	130	195	112	169
	16					146	220	119	179	103	155
	17					133	200	109	163	94.7	142
	18					120	180	98.6	148	86.2	129
	19					107	161	88.8	134	77.9	117
	20					96.9	146	80.2	121	70.3	106
	22					80.1	120	66.3	99.6	58.1	87.3
	24					67.3	101	55.7	83.7	48.8	73.4
	26					57.4	86.2	47.4	71.3	41.6	62.5
	28					49.5	74.3	40.9	61.5	35.9	53.9
	30					43.1	64.8	35.6	53.6	31.2	46.9
	32							31.3	47.1	27.5	41.3
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	4.59		3.53		10.4		8.08		6.87		
r_y , in.	0.819		0.847		1.89		1.95		1.98		
r_x/r_y	3.13		3.07		1.31		1.30		1.30		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS7

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS7x5x				HSS7x4x						
	$\frac{1}{4}$		$\frac{3}{16}^{a,c}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		
t_{des} , in.	0.250		0.188		0.500		0.375		0.313		
lb/ft	19.0		14.5		31.8		24.9		21.2		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	167	252	127	192	280	421	219	330	187	281
	1	167	251	127	191	279	419	219	328	186	280
	2	166	249	126	190	275	414	216	324	184	276
	3	163	246	125	188	269	404	211	317	180	271
	4	161	241	123	185	261	392	205	308	175	263
	5	157	236	120	181	250	376	197	296	169	253
	6	152	229	117	176	238	357	188	283	161	242
	7	147	221	113	170	224	337	178	268	153	230
	8	142	213	109	164	209	315	167	251	144	216
	9	136	204	104	157	194	291	155	233	134	201
	10	129	194	99.5	150	178	267	143	215	124	186
	11	122	184	94.4	142	161	243	131	197	114	171
	12	115	173	89.0	134	145	219	119	178	103	155
	13	108	162	83.6	126	130	195	107	160	93.2	140
	14	100	151	78.0	117	115	172	95.0	143	83.4	125
	15	93.1	140	72.5	109	100	151	83.8	126	74.1	111
	16	85.9	129	67.1	101	88.2	133	73.7	111	65.1	97.9
	17	78.8	118	61.7	92.7	78.1	117	65.3	98.1	57.7	86.7
	18	71.9	108	56.5	84.9	69.7	105	58.2	87.5	51.5	77.3
	19	65.3	98.2	51.4	77.3	62.5	94.0	52.2	78.5	46.2	69.4
	20	58.9	88.6	46.5	69.9	56.4	84.8	47.1	70.9	41.7	62.7
	22	48.7	73.2	38.4	57.7	46.6	70.1	39.0	58.6	34.5	51.8
	24	40.9	61.5	32.3	48.5	39.2	58.9	32.7	49.2	28.9	43.5
	26	34.9	52.4	27.5	41.3			27.9	41.9	24.7	37.1
	28	30.1	45.2	23.7	35.6						
	30	26.2	39.4	20.7	31.0						
	32	23.0	34.6	18.2	27.3						
	34			16.1	24.2						
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
	Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
Properties											
Area, in. ²	5.59		4.28		9.36		7.33		6.24		
r_y , in.	2.01		2.04		1.52		1.57		1.60		
r_x/r_y	1.30		1.29		1.57		1.56		1.55		


^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.

 HSS7		Table 6-C (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS										A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi	
		HSS7x4x				HSS7x3x							
Shape		$\frac{1}{4}$		$\frac{3}{16}^{a,c}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$			
t_{des} , in.		0.250		0.188		0.500		0.375		0.313			
lb/ft		17.3		13.3		28.4		22.4		19.1			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	152	229	116	174	250	376	197	296	168	253		
	1	152	228	116	174	248	373	196	294	167	251		
	2	150	225	115	172	242	364	191	287	163	246		
	3	147	221	113	170	232	349	184	277	158	237		
	4	143	215	110	165	219	329	175	262	150	225		
	5	138	207	106	160	203	305	163	245	140	211		
	6	132	199	102	153	185	278	150	226	129	194		
	7	125	189	96.8	146	166	249	136	204	118	177		
	8	118	178	91.4	137	146	220	121	182	105	158		
	9	111	166	85.7	129	127	191	107	160	93.1	140		
	10	103	154	79.7	120	108	163	92.5	139	81.0	122		
	11	94.3	142	73.5	111	90.5	136	78.9	119	69.5	104		
	12	86.1	129	67.4	101	76.0	114	66.4	99.8	58.7	88.2		
	13	78.0	117	61.2	92.0	64.8	97.3	56.6	85.1	50.0	75.1		
	14	70.1	105	55.2	83.0	55.8	83.9	48.8	73.3	43.1	64.8		
	15	62.5	93.9	49.4	74.3	48.6	73.1	42.5	63.9	37.5	56.4		
	16	55.1	82.9	43.8	65.9	42.8	64.3	37.4	56.1	33.0	49.6		
	17	48.8	73.4	38.8	58.3	37.9	56.9	33.1	49.7	29.2	43.9		
	18	43.6	65.5	34.6	52.0	33.8	50.8	29.5	44.4	26.1	39.2		
	19	39.1	58.8	31.1	46.7			26.5	39.8	23.4	35.2		
	20	35.3	53.0	28.0	42.2					21.1	31.7		
	22	29.2	43.8	23.2	34.8								
	24	24.5	36.8	19.5	29.3								
	26	20.9	31.4	16.6	24.9								
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		
Properties													
Area, in. ²		5.09		3.90		8.36		6.58		5.62			
r_y , in.		1.63		1.66		1.12		1.18		1.20			
r_x/r_y		1.55		1.54		2.01		1.97		1.98			

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS7-HSS6

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS7x3x				HSS7x2x				HSS6x5x		
	1/4		3/16 ^{a,c}		1/4		3/16 ^{a,c}		1/2		
t_{des} , in.	0.250		0.188		0.250		0.188		0.500		
lb/ft	15.6		12.0		13.9		10.7		31.8		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	137	207	105	158	122	184	93.6	141	280	421
	1	136	205	104	157	121	181	92.6	139	279	420
	2	134	201	103	155	115	173	88.8	134	277	416
	3	129	194	99.6	150	106	159	82.5	124	273	410
	4	123	185	95.0	143	94.8	143	74.3	112	267	401
	5	115	174	89.5	135	82.1	123	64.9	97.6	259	390
	6	107	161	83.2	125	68.9	104	55.1	82.8	251	377
	7	97.7	147	76.4	115	56.0	84.2	45.4	68.2	241	362
	8	88.0	132	69.1	104	44.0	66.1	36.2	54.5	230	346
	9	78.2	118	61.8	92.8	34.8	52.2	28.6	43.0	218	328
	10	68.5	103	54.5	81.8	28.1	42.3	23.2	34.9	206	310
	11	59.2	89.0	47.4	71.2	23.3	35.0	19.2	28.8	193	290
	12	50.3	75.7	40.6	61.1	19.5	29.4	16.1	24.2	180	270
	13	42.9	64.5	34.6	52.0	16.7	25.0	13.7	20.6	167	250
	14	37.0	55.6	29.8	44.9			11.8	17.8	153	230
	15	32.2	48.4	26.0	39.1					140	211
	16	28.3	42.6	22.9	34.3					127	192
	17	25.1	37.7	20.2	30.4					115	173
	18	22.4	33.6	18.1	27.1					103	155
	19	20.1	30.2	16.2	24.4					92.6	139
	20	18.1	27.2	14.6	22.0					83.6	126
	22									69.1	104
24									58.1	87.3	
26									49.5	74.3	
28									42.7	64.1	
30									37.2	55.8	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	4.59		3.53		4.09		3.15		9.36		
r_y , in.	1.23		1.26		0.812		0.840		1.85		
r_y/r_x	1.96		1.94		2.78		2.74		1.16		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Confirm ASTM A1085 material availability before specifying.



HSS6

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS6x5x								HSS6x4x		
	3/8		5/16		1/4		3/16 ^a		1/2		
t_{des} , in.	0.375		0.313		0.250		0.188		0.500		
lb/ft	24.9		21.2		17.3		13.3		28.4		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	219	330	187	281	152	229	117	175	250	376
	1	219	329	186	280	152	228	116	175	249	374
	2	217	326	185	278	151	227	116	174	246	369
	3	214	321	182	274	149	224	114	171	240	360
	4	210	315	179	269	146	219	112	168	232	349
	5	204	307	174	262	142	214	109	164	222	334
	6	198	297	169	254	138	208	106	160	211	317
	7	191	286	163	245	133	201	103	154	198	298
	8	182	274	156	235	128	193	98.7	148	185	278
	9	174	261	149	224	122	184	94.3	142	170	256
	10	164	247	141	212	116	175	89.7	135	156	234
	11	155	233	133	200	110	165	84.9	128	141	212
	12	145	218	125	188	103	155	79.9	120	126	190
	13	135	203	116	175	96.3	145	74.8	112	112	169
	14	125	187	108	162	89.5	135	69.7	105	98.8	149
	15	115	172	99.6	150	82.8	124	64.6	97.1	86.1	129
	16	105	158	91.3	137	76.1	114	59.5	89.5	75.7	114
	17	95.3	143	83.2	125	69.6	105	54.6	82.0	67.0	101
	18	86.1	129	75.5	113	63.3	95.1	49.8	74.8	59.8	89.9
	19	77.3	116	67.9	102	57.1	85.8	45.1	67.8	53.7	80.7
	20	69.8	105	61.3	92.1	51.5	77.5	40.7	61.2	48.4	72.8
	22	57.7	86.7	50.6	76.1	42.6	64.0	33.6	50.6	40.0	60.2
	24	48.5	72.8	42.6	64.0	35.8	53.8	28.3	42.5	33.6	50.6
	26	41.3	62.1	36.3	54.5	30.5	45.8	24.1	36.2		
	28	35.6	53.5	31.3	47.0	26.3	39.5	20.8	31.2		
	30	31.0	46.6	27.2	40.9	22.9	34.4	18.1	27.2		
	32			23.9	36.0	20.1	30.3	15.9	23.9		
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	7.33		6.24		5.09		3.90		8.36		
r_y , in.	1.91		1.94		1.97		2.00		1.49		
r_x/r_y	1.16		1.15		1.15		1.15		1.38		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS6

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS6x4x								HSS6x3x		
	3/8		5/16		1/4		3/16 ^a		1/2		
t_{des} , in.	0.375		0.313		0.250		0.188		0.500		
lb/ft	22.4		19.1		15.6		12.0		25.0		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	197	296	168	253	137	207	106	159	220	331
	1	196	295	168	252	137	206	105	158	218	328
	2	194	291	165	249	135	203	104	156	213	320
	3	189	285	162	243	132	199	102	153	204	306
	4	183	276	157	236	129	193	99.2	149	192	288
	5	176	265	151	227	124	186	95.7	144	177	266
	6	168	252	144	217	119	178	91.6	138	161	242
	7	158	238	136	205	112	169	87.0	131	144	216
	8	148	223	128	192	106	159	82.0	123	126	190
	9	138	207	119	179	98.5	148	76.7	115	109	164
	10	126	190	110	165	91.1	137	71.1	107	92.3	139
	11	115	173	100	151	83.5	126	65.4	98.3	76.8	115
	12	104	156	91.0	137	76.0	114	59.7	89.8	64.6	97.0
	13	93.0	140	81.7	123	68.6	103	54.1	81.3	55.0	82.7
	14	82.5	124	72.8	109	61.4	92.2	48.6	73.1	47.4	71.3
	15	72.4	109	64.3	96.6	54.5	81.9	43.3	65.1	41.3	62.1
	16	63.6	95.6	56.5	84.9	47.9	72.0	38.2	57.5	36.3	54.6
	17	56.4	84.7	50.0	75.2	42.4	63.8	33.9	50.9	32.2	48.3
	18	50.3	75.6	44.6	67.1	37.9	56.9	30.2	45.4	28.7	43.1
	19	45.1	67.8	40.1	60.2	34.0	51.1	27.1	40.8		
	20	40.7	61.2	36.1	54.3	30.7	46.1	24.5	36.8		
	22	33.7	50.6	29.9	44.9	25.3	38.1	20.2	30.4		
	24	28.3	42.5	25.1	37.7	21.3	32.0	17.0	25.5		
	26			21.4	32.1	18.1	27.3	14.5	21.8		
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	6.58		5.62		4.59		3.53		7.36		
r_y , in.	1.54		1.57		1.60		1.63		1.10		
r_x/r_y	1.38		1.38		1.37		1.37		1.76		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS6

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS6x3x								HSS6x2x		
	3/8		5/16		1/4		3/16 ^a		3/8		
t_{des} , in.	0.375		0.313		0.250		0.188		0.375		
lb/ft	19.8		17.0		13.9		10.7		17.3		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	175	262	149	225	122	184	94.3	142	152	229
	1	173	260	148	223	122	183	93.7	141	149	224
	2	169	254	145	218	119	179	91.8	138	141	212
	3	163	245	140	210	115	173	88.7	133	128	193
	4	154	231	132	199	109	164	84.5	127	113	169
	5	144	216	124	186	102	154	79.5	119	95.1	143
	6	132	198	114	171	94.5	142	73.7	111	77.4	116
	7	119	179	103	155	86.1	129	67.4	101	60.6	91.1
	8	106	159	92.1	138	77.3	116	60.8	91.5	46.5	69.9
	9	92.6	139	81.0	122	68.4	103	54.2	81.4	36.7	55.2
	10	79.8	120	70.1	105	59.7	89.7	47.6	71.5	29.7	44.7
	11	67.7	102	59.8	89.9	51.3	77.1	41.2	61.9	24.6	37.0
	12	56.9	85.5	50.4	75.7	43.4	65.2	35.1	52.8	20.7	31.0
	13	48.5	72.8	42.9	64.5	37.0	55.6	29.9	45.0		
	14	41.8	62.8	37.0	55.6	31.9	47.9	25.8	38.8		
	15	36.4	54.7	32.2	48.4	27.8	41.8	22.5	33.8		
	16	32.0	48.1	28.3	42.6	24.4	36.7	19.7	29.7		
	17	28.3	42.6	25.1	37.7	21.6	32.5	17.5	26.3		
	18	25.3	38.0	22.4	33.6	19.3	29.0	15.6	23.5		
	19	22.7	34.1	20.1	30.2	17.3	26.0	14.0	21.0		
	20					15.6	23.5	12.6	19.0		
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	5.83		4.99		4.09		3.15		5.08		
r_y , in.	1.16		1.18		1.21		1.24		0.749		
r_x/r_y	1.74		1.75		1.73		1.72		2.50		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS6-HSS5

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS6x2x						HSS5x4x				
	5/16		1/4		3/16 ^a		1/2		3/8		
t_{des} , in.	0.313		0.250		0.188		0.500		0.375		
lb/ft	14.8		12.2		9.42		25.0		19.8		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	131	196	107	162	83.2	125	220	331	175	262
	1	128	193	106	159	82.0	123	219	330	174	261
	2	122	183	101	151	78.3	118	216	325	171	257
	3	111	168	92.8	139	72.5	109	211	317	167	252
	4	98.6	148	82.7	124	65.1	97.9	203	306	162	243
	5	84.2	127	71.4	107	56.7	85.3	194	292	155	233
	6	69.4	104	59.6	89.6	47.9	72.1	184	277	147	222
	7	55.3	83.1	48.2	72.4	39.3	59.1	172	259	139	209
	8	42.7	64.2	37.7	56.6	31.2	46.8	160	240	129	194
	9	33.7	50.7	29.8	44.7	24.6	37.0	147	221	119	180
	10	27.3	41.1	24.1	36.2	19.9	30.0	134	201	109	164
	11	22.6	34.0	19.9	29.9	16.5	24.8	120	181	99.1	149
	12	19.0	28.5	16.7	25.2	13.8	20.8	107	161	89.0	134
	13			14.3	21.4	11.8	17.7	94.5	142	79.2	119
	14							82.4	124	69.8	105
	15							71.8	108	60.9	91.5
	16							63.1	94.8	53.5	80.4
	17							55.9	84.0	47.4	71.2
	18							49.9	74.9	42.3	63.5
	19							44.7	67.2	37.9	57.0
	20							40.4	60.7	34.2	51.4
	22							33.4	50.2	28.3	42.5
	24							28.0	42.1	23.8	35.7
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	4.36		3.59		2.78		7.36		5.83		
r_y , in.	0.775		0.802		0.829		1.45		1.50		
r_x/r_y	2.48		2.44		2.41		1.19		1.20		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS5

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS5x4x						HSS5x3x				
	5/16		1/4		3/16		1/2		3/8		
t_{des} , in.	0.313		0.250		0.188		0.500		0.375		
lb/ft	17.0		13.9		10.7		21.6		17.3		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	149	225	122	184	94.3	142	190	286	152	229
	1	149	224	122	183	93.9	141	189	284	151	227
	2	147	221	120	181	92.8	139	184	276	147	221
	3	143	216	118	177	90.8	137	176	264	141	212
	4	139	209	114	172	88.2	133	165	248	133	200
	5	134	201	110	165	85.0	128	152	228	124	186
	6	127	191	105	158	81.2	122	138	207	113	170
	7	120	180	99.1	149	76.9	116	122	184	102	153
	8	112	168	92.8	140	72.2	109	107	161	89.7	135
	9	104	156	86.3	130	67.3	101	91.7	138	78.0	117
	10	95.3	143	79.4	119	62.2	93.5	77.2	116	66.7	100
	11	86.7	130	72.5	109	57.0	85.6	64.0	96.2	56.0	84.1
	12	78.2	117	65.7	98.7	51.8	77.8	53.8	80.8	47.0	70.7
	13	69.9	105	58.9	88.6	46.7	70.1	45.8	68.9	40.1	60.2
	14	61.9	93.0	52.4	78.8	41.7	62.7	39.5	59.4	34.5	51.9
	15	54.2	81.4	46.2	69.4	36.9	55.5	34.4	51.7	30.1	45.2
	16	47.6	71.6	40.6	61.0	32.5	48.8	30.2	45.5	26.4	39.8
	17	42.2	63.4	35.9	54.0	28.8	43.2	26.8	40.3	23.4	35.2
	18	37.6	56.6	32.1	48.2	25.7	38.6	23.9	35.9	20.9	31.4
	19	33.8	50.8	28.8	43.3	23.0	34.6				
	20	30.5	45.8	26.0	39.0	20.8	31.2				
	22	25.2	37.9	21.5	32.3	17.2	25.8				
	24	21.2	31.8	18.0	27.1	14.4	21.7				
	26			15.4	23.1	12.3	18.5				
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	4.99		4.09		3.15		6.36		5.08		
r_y , in.	1.53		1.56		1.59		1.08		1.13		
r_x/r_y	1.19		1.19		1.19		1.51		1.50		

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS5

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS5x3x						HSS5x2½x				
	5/16		¼		3/16		¼		3/16		
t_{des} , in.	0.313		0.250		0.188		0.250		0.188		
lb/ft	14.8		12.2		9.42		11.4		8.78		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	131	196	107	162	83.2	125	100	150	77.5	117
	1	130	195	107	160	82.6	124	98.9	149	76.8	115
	2	127	190	104	157	80.9	122	95.8	144	74.5	112
	3	122	183	101	151	78.0	117	90.8	136	70.8	106
	4	115	173	95.4	143	74.2	112	84.2	127	66.0	99.1
	5	107	161	89.3	134	69.5	105	76.5	115	60.2	90.5
	6	98.5	148	82.2	124	64.2	96.6	68.0	102	53.9	81.0
	7	89.0	134	74.7	112	58.5	87.9	59.1	88.9	47.2	71.0
	8	79.1	119	66.8	100	52.5	79.0	50.4	75.7	40.6	61.0
	9	69.3	104	58.9	88.5	46.5	69.9	42.0	63.1	34.2	51.3
	10	59.7	89.7	51.1	76.8	40.5	60.9	34.2	51.5	28.1	42.3
	11	50.6	76.1	43.7	65.7	34.9	52.4	28.3	42.5	23.2	34.9
	12	42.5	63.9	36.9	55.4	29.5	44.3	23.8	35.7	19.5	29.4
	13	36.2	54.5	31.4	47.2	25.1	37.8	20.3	30.4	16.6	25.0
	14	31.2	47.0	27.1	40.7	21.7	32.6	17.5	26.3	14.4	21.6
	15	27.2	40.9	23.6	35.4	18.9	28.4	15.2	22.9	12.5	18.8
	16	23.9	36.0	20.7	31.2	16.6	24.9	13.4	20.1	11.0	16.5
	17	21.2	31.8	18.4	27.6	14.7	22.1			9.73	14.6
	18	18.9	28.4	16.4	24.6	13.1	19.7				
	19	17.0	25.5	14.7	22.1	11.8	17.7				
	20					10.6	16.0				
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	4.36		3.59		2.78		3.34		2.59		
r_y , in.	1.16		1.19		1.21		0.991		1.02		
r_x/r_y	1.50		1.49		1.50		1.74		1.73		

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS5-HSS4

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS5x2x								HSS4x3x		
	3/8		5/16		1/4		3/16		3/8		
t_{des} , in.	0.375		0.313		0.250		0.188		0.375		
lb/ft	14.7		12.7		10.5		8.15		14.7		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	130	195	112	168	92.5	139	71.9	108	130	195
	1	127	191	110	165	91.0	137	70.7	106	128	193
	2	120	180	104	157	86.5	130	67.5	101	125	188
	3	109	164	95.1	143	79.5	119	62.3	93.7	120	180
	4	95.1	143	83.8	126	70.6	106	55.8	83.9	113	169
	5	79.9	120	71.2	107	60.7	91.2	48.4	72.7	104	156
	6	64.5	97.0	58.3	87.6	50.4	75.8	40.7	61.1	94.2	142
	7	50.1	75.3	46.1	69.2	40.5	60.8	33.1	49.8	84.0	126
	8	38.4	57.7	35.4	53.2	31.5	47.3	26.1	39.2	73.5	111
	9	30.3	45.6	28.0	42.1	24.9	37.4	20.6	31.0	63.2	95.1
	10	24.5	36.9	22.7	34.1	20.1	30.3	16.7	25.1	53.4	80.3
	11	20.3	30.5	18.7	28.2	16.6	25.0	13.8	20.7	44.4	66.7
	12	17.0	25.6	15.7	23.7	14.0	21.0	11.6	17.4	37.3	56.0
	13					11.9	17.9	9.87	14.8	31.8	47.8
	14									27.4	41.2
	15									23.9	35.9
	16									21.0	31.5
	17									18.6	27.9
18									16.6	24.9	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	4.33		3.74		3.09		2.40		4.33		
r_y , in.	0.737		0.762		0.790		0.816		1.09		
r_x/r_y	2.13		2.13		2.10		2.08		1.27		

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS4

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS4x3x						HSS4x2½x				
	5/16		¼		3/16		3/8		5/16		
t_{des} , in.	0.313		0.250		0.188		0.375		0.313		
lb/ft	12.7		10.5		8.15		13.4		11.6		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	112	168	92.5	139	71.9	108	118	178	102	154
	1	111	167	91.8	138	71.3	107	117	176	101	152
	2	108	163	89.6	135	69.7	105	112	169	97.6	147
	3	104	156	86.1	129	67.1	101	105	159	91.9	138
	4	97.9	147	81.4	122	63.7	95.7	96.5	145	84.6	127
	5	90.8	136	75.8	114	59.5	89.4	86.1	129	75.9	114
	6	82.8	124	69.5	104	54.7	82.3	74.8	112	66.6	100
	7	74.2	112	62.6	94.1	49.6	74.6	63.4	95.3	57.0	85.6
	8	65.4	98.4	55.6	83.5	44.3	66.6	52.4	78.8	47.6	71.6
	9	56.7	85.3	48.5	73.0	38.9	58.5	42.2	63.4	38.8	58.3
	10	48.4	72.7	41.7	62.7	33.7	50.7	34.1	51.3	31.4	47.2
	11	40.5	60.8	35.3	53.0	28.8	43.3	28.2	42.4	26.0	39.0
	12	34.0	51.1	29.6	44.5	24.2	36.4	23.7	35.6	21.8	32.8
	13	29.0	43.6	25.2	37.9	20.6	31.0	20.2	30.4	18.6	27.9
	14	25.0	37.6	21.8	32.7	17.8	26.7	17.4	26.2	16.0	24.1
	15	21.8	32.7	19.0	28.5	15.5	23.3	15.2	22.8	14.0	21.0
	16	19.1	28.8	16.7	25.0	13.6	20.5				
	17	16.9	25.5	14.8	22.2	12.1	18.1				
	18	15.1	22.7	13.2	19.8	10.8	16.2				
19			11.8	17.8	9.66	14.5					
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	3.74		3.09		2.40		3.95		3.42		
r_y , in.	1.12		1.15		1.18		0.910		0.938		
r_x/r_y	1.26		1.26		1.25		1.46		1.46		

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS4

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS4x2½x				HSS4x2x						
	¼		⅜		⅝		¾				
t_{des} , in.	0.250		0.188		0.375		0.313		0.250		
lb/ft	9.66		7.51		12.2		10.6		8.81		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	85.0	128	66.2	99.4	107	161	93.1	140	77.5	117
	1	84.1	126	65.5	98.4	105	158	91.4	137	76.2	115
	2	81.3	122	63.4	95.3	98.8	148	86.3	130	72.2	109
	3	76.8	115	60.1	90.3	89.1	134	78.5	118	66.1	99.4
	4	71.0	107	55.8	83.8	77.2	116	68.7	103	58.4	87.8
	5	64.1	96.4	50.7	76.2	64.2	96.5	57.9	87.0	49.8	74.9
	6	56.6	85.1	45.1	67.7	51.3	77.1	46.9	70.6	41.0	61.6
	7	48.9	73.5	39.2	58.9	39.2	58.9	36.7	55.1	32.6	48.9
	8	41.3	62.1	33.4	50.2	30.0	45.1	28.1	42.2	25.1	37.7
	9	34.1	51.2	27.9	41.9	23.7	35.6	22.2	33.3	19.8	29.8
	10	27.7	41.6	22.7	34.2	19.2	28.9	18.0	27.0	16.1	24.2
	11	22.9	34.4	18.8	28.3	15.9	23.9	14.9	22.3	13.3	20.0
	12	19.2	28.9	15.8	23.7			12.5	18.8	11.2	16.8
	13	16.4	24.6	13.5	20.2						
	14	14.1	21.2	11.6	17.4						
	15	12.3	18.5	10.1	15.2						
	16	10.8	16.2	8.89	13.4						
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	2.84		2.21		3.58		3.11		2.59		
r_y , in.	0.966		0.993		0.717		0.744		0.771		
r_x/r_y	1.45		1.45		1.77		1.76		1.75		

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS4-HSS3½

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS4x2x		HSS3½x2½x								
	3/16		3/8		5/16		¼		3/16		
t_{des} , in.	0.188		0.375		0.313		0.250		0.188		
lb/ft	6.87		12.2		10.6		8.81		6.87		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	60.5	90.9	107	161	93.1	140	77.5	117	60.5	90.9
	1	59.5	89.4	106	159	92.0	138	76.6	115	59.8	89.9
	2	56.6	85.1	102	153	88.6	133	74.0	111	57.9	87.0
	3	52.1	78.4	95.1	143	83.3	125	69.8	105	54.8	82.3
	4	46.5	69.8	86.7	130	76.3	115	64.3	96.6	50.7	76.2
	5	40.0	60.2	76.9	116	68.2	103	57.9	87.0	45.9	69.0
	6	33.4	50.2	66.5	99.9	59.5	89.4	50.9	76.4	40.7	61.1
	7	27.0	40.5	56.0	84.1	50.6	76.1	43.7	65.6	35.2	52.9
	8	21.0	31.6	45.9	68.9	42.0	63.1	36.6	55.1	29.9	44.9
	9	16.6	25.0	36.6	55.0	33.9	51.0	30.0	45.1	24.8	37.2
	10	13.5	20.2	29.7	44.6	27.5	41.3	24.3	36.5	20.1	30.2
	11	11.1	16.7	24.5	36.8	22.7	34.1	20.1	30.2	16.6	25.0
	12	9.35	14.0	20.6	31.0	19.1	28.7	16.9	25.4	14.0	21.0
	13	7.96	12.0	17.6	26.4	16.3	24.4	14.4	21.6	11.9	17.9
	14			15.1	22.7	14.0	21.1	12.4	18.6	10.3	15.4
	15					12.2	18.4	10.8	16.2	8.94	13.4
	16									7.86	11.8
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	2.02		3.58		3.11		2.59		2.02		
r_y , in.	0.799		0.891		0.920		0.948		0.977		
r_x/r_y	1.74		1.31		1.30		1.31		1.30		

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.




HSS3½-HSS3

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS3½x2x				HSS3½x1½x				HSS3x2½x		
	¼		⅜		¼		⅜		⅝		
t_{des} , in.	0.250		0.188		0.250		0.188		0.313		
lb/ft	7.96		6.23		7.11		5.59		9.51		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	70.1	105	55.1	82.8	62.6	94.0	49.4	74.2	83.8	126
	1	68.8	103	54.2	81.4	60.5	91.0	47.9	72.0	82.7	124
	2	65.1	97.9	51.4	77.3	54.8	82.3	43.7	65.7	79.6	120
	3	59.5	89.4	47.2	71.0	46.4	69.7	37.5	56.4	74.5	112
	4	52.3	78.7	41.9	63.0	36.7	55.2	30.3	45.5	68.0	102
	5	44.4	66.8	35.9	54.0	27.2	40.9	23.0	34.6	60.5	90.9
	6	36.3	54.6	29.7	44.7	19.1	28.8	16.5	24.8	52.4	78.7
	7	28.7	43.1	23.8	35.8	14.1	21.1	12.1	18.2	44.2	66.5
	8	22.0	33.1	18.4	27.7	10.8	16.2	9.27	13.9	36.4	54.6
	9	17.4	26.2	14.6	21.9	8.51	12.8	7.33	11.0	29.1	43.7
	10	14.1	21.2	11.8	17.7					23.6	35.4
	11	11.7	17.5	9.76	14.7					19.5	29.3
	12	9.80	14.7	8.20	12.3					16.4	24.6
	13			6.99	10.5					13.9	21.0
	14									12.0	18.1
15											
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	2.34		1.84		2.09		1.65		2.80		
r_y , in.	0.760		0.784		0.562		0.587		0.898		
r_x/r_y	1.57		1.56		2.01		1.99		1.16		

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.

 HSS3		Table 6-C (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS										A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi	
		HSS3x2½x				HSS3x2x							
Shape		¼		⅜		⅝		¾		⅞			
t_{des} , in.		0.250		0.188		0.313		0.250		0.188			
lb/ft		7.96		6.23		8.45		7.11		5.59			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	70.1	105	55.1	82.8	74.6	112	62.6	94.0	49.4	74.2		
	1	69.2	104	54.5	81.9	73.0	110	61.4	92.3	48.5	72.9		
	2	66.7	100	52.6	79.1	68.6	103	58.0	87.1	46.0	69.2		
	3	62.7	94.3	49.7	74.6	61.9	93.0	52.7	79.2	42.1	63.3		
	4	57.6	86.6	45.8	68.9	53.6	80.5	46.1	69.3	37.2	55.9		
	5	51.6	77.5	41.3	62.1	44.5	66.9	38.8	58.3	31.7	47.7		
	6	45.1	67.7	36.4	54.7	35.4	53.3	31.4	47.2	26.1	39.2		
	7	38.4	57.8	31.3	47.1	27.0	40.6	24.5	36.8	20.7	31.2		
	8	32.0	48.1	26.4	39.6	20.7	31.1	18.8	28.2	16.0	24.0		
	9	25.9	38.9	21.7	32.6	16.4	24.6	14.8	22.3	12.6	19.0		
	10	21.0	31.5	17.6	26.4	13.2	19.9	12.0	18.1	10.2	15.4		
	11	17.3	26.1	14.5	21.8	11.0	16.5	9.93	14.9	8.46	12.7		
	12	14.6	21.9	12.2	18.3			8.34	12.5	7.11	10.7		
	13	12.4	18.7	10.4	15.6								
	14	10.7	16.1	8.96	13.5								
	15	9.33	14.0	7.80	11.7								
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		
Properties													
Area, in. ²		2.34		1.84		2.49		2.09		1.65			
r_y , in.		0.927		0.956		0.714		0.742		0.771			
r_x/r_y		1.15		1.15		1.39		1.39		1.37			

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS3-HSS2½

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS3x1½x				HSS3x1x		HSS2½x2x				
	¼		⅜		⅜		¼		⅜		
t_{des} , in.	0.250		0.188		0.188		0.250		0.188		
lb/ft	6.26		4.96		4.32		6.26		4.96		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	55.1	82.8	43.7	65.7	38.0	57.1	55.1	82.8	43.7	65.7
	1	53.2	80.0	42.4	63.7	35.3	53.0	54.0	81.1	42.9	64.5
	2	48.0	72.1	38.5	57.9	28.1	42.3	50.8	76.4	40.6	61.0
	3	40.4	60.7	32.9	49.5	19.3	29.0	46.0	69.1	37.0	55.6
	4	31.7	47.6	26.4	39.7	11.6	17.4	39.9	60.0	32.5	48.8
	5	23.2	34.9	19.9	29.9	7.42	11.1	33.3	50.0	27.4	41.2
	6	16.3	24.4	14.1	21.3	5.15	7.74	26.7	40.1	22.4	33.6
	7	11.9	18.0	10.4	15.6			20.5	30.8	17.6	26.4
	8	9.14	13.7	7.96	12.0			15.7	23.6	13.5	20.2
	9	7.22	10.9	6.29	9.45			12.4	18.6	10.6	16.0
	10							10.0	15.1	8.62	13.0
	11							8.30	12.5	7.12	10.7
	12							6.97	10.5	5.98	9.00
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	1.84		1.46		1.27		1.84		1.46		
r_y , in.	0.552		0.578		0.374		0.723		0.752		
r_x/r_y	1.76		1.75		2.51		1.20		1.19		

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.



HSS2½-HSS2

Table 6-C (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS2½x1½x				HSS2½x1x		HSS2¼x2x		HSS2x1½x		
	¼		⅜		⅜		⅜		⅜		
t_{des} , in.	0.250		0.188		0.188		0.188		0.188		
lb/ft	5.41		4.32		3.68		4.64		3.68		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	47.6	71.5	38.0	57.1	32.3	48.6	41.0	61.6	32.3	48.6
	1	45.9	69.0	36.8	55.3	29.9	45.0	40.2	60.5	31.2	46.9
	2	41.2	61.9	33.3	50.1	23.7	35.7	38.0	57.1	28.1	42.3
	3	34.3	51.6	28.3	42.5	16.1	24.2	34.5	51.8	23.6	35.5
	4	26.6	40.0	22.5	33.8	9.59	14.4	30.1	45.3	18.5	27.8
	5	19.2	28.8	16.7	25.1	6.14	9.23	25.3	38.1	13.5	20.3
	6	13.3	20.1	11.8	17.7	4.26	6.41	20.5	30.8	9.44	14.2
	7	9.80	14.7	8.67	13.0			15.9	24.0	6.93	10.4
	8	7.51	11.3	6.64	9.97			12.2	18.3	5.31	7.98
	9			5.24	7.88			9.64	14.5	4.19	6.30
	10							7.81	11.7		
	11							6.45	9.70		
	12							5.42	8.15		
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	1.59		1.27		1.08		1.37		1.08		
r_y , in.	0.538		0.566		0.369		0.739		0.549		
r_x/r_y	1.52		1.51		2.14		1.10		1.26		

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.
 Confirm ASTM A1085 material availability before specifying.

Shape		HSS2x1x	
		$\frac{3}{16}$	
t_{des} , in.		0.188	
lb/ft		3.04	
Design		ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	26.8	40.3
	1	24.7	37.1
	2	19.3	29.0
	3	12.8	19.2
	4	7.49	11.3
	5	4.79	7.21
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$
Properties			
Area, in. ²		0.896	
r_y , in.		0.358	
r_x/r_y		1.77	
Notes: Heavy line indicates L_c/r equal to or greater than 200. Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis. Confirm ASTM A1085 material availability before specifying.			




HSS24-HSS20

Table 6-D
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS24x12x						HSS20x12x				
	$\frac{3}{4}$ ^a		$\frac{5}{8}$ ^{a,c}		$\frac{1}{2}$ ^{a,c}		$\frac{3}{4}$		$\frac{5}{8}$ ^a		
t_{des} , in.	0.698		0.581		0.465		0.698		0.581		
lb/ft	171		144		117		151		127		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	1410	2120	1120	1690	819	1230	1240	1870	1050	1570
	1	1410	2120	1120	1690	819	1230	1240	1870	1050	1570
	2	1410	2120	1120	1690	818	1230	1240	1860	1050	1570
	3	1400	2110	1120	1680	817	1230	1240	1860	1040	1570
	4	1400	2110	1120	1680	815	1220	1230	1850	1040	1560
	5	1400	2100	1110	1670	812	1220	1230	1850	1040	1560
	6	1390	2090	1110	1670	810	1220	1220	1840	1030	1550
	7	1380	2080	1110	1660	806	1210	1220	1830	1030	1540
	8	1370	2060	1100	1650	803	1210	1210	1820	1020	1530
	9	1360	2050	1090	1640	798	1200	1200	1800	1010	1520
	10	1350	2030	1090	1630	793	1190	1190	1790	1000	1510
	11	1340	2010	1080	1620	788	1180	1180	1770	994	1490
	12	1330	1990	1070	1610	783	1180	1170	1750	985	1480
	13	1310	1970	1060	1600	776	1170	1150	1730	974	1460
	14	1300	1950	1050	1580	770	1160	1140	1710	963	1450
	15	1280	1930	1040	1570	763	1150	1120	1690	951	1430
	16	1260	1900	1030	1550	755	1140	1110	1670	938	1410
	17	1250	1870	1020	1540	748	1120	1090	1640	925	1390
	18	1230	1850	1010	1520	739	1110	1080	1620	911	1370
	19	1210	1820	998	1500	731	1100	1060	1590	896	1350
	20	1190	1790	985	1480	722	1080	1040	1560	881	1320
	22	1150	1730	958	1440	703	1060	1000	1510	850	1280
	24	1100	1660	930	1400	683	1030	963	1450	816	1230
	26	1060	1590	895	1350	661	994	922	1390	782	1180
	28	1010	1520	856	1290	639	960	879	1320	746	1120
	30	962	1450	815	1230	616	926	835	1250	710	1070
	32	913	1370	774	1160	592	890	790	1190	672	1010
	34	863	1300	733	1100	568	853	745	1120	635	955
	36	813	1220	691	1040	543	816	701	1050	598	898
	38	764	1150	650	977	517	778	656	986	561	843
	40	715	1070	609	916	492	740	612	921	524	788
42	667	1000	569	855	467	701	570	856	488	734	
44	620	932	530	796	436	656	528	793	453	681	
46	574	863	492	739	405	609	488	733	419	630	
48	529	795	454	682	375	564	448	673	385	579	
50	488	733	418	629	346	520	413	620	355	534	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	47.1		39.6		32.1		41.5		35.0		
r_y , in.	4.98		5.03		5.08		4.88		4.93		
r_x/r_y	1.72		1.71		1.71		1.49		1.49		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
 Note: Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

 HSS20		Table 6-D (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS						A500 Gr. C $F_y = 50$ ksi $F_u = 62$ ksi			
		HSS20x12x			HSS20x8x						
Shape		$\frac{1}{2}^{a,c}$	$\frac{3}{8}^{a,b,c}$	$\frac{5}{16}^{a,b,c}$	$\frac{5}{8}^a$	$\frac{1}{2}^{a,c}$					
t_{des} , in.		0.465	0.349	0.291	0.581	0.465					
lb/ft		103	78.5	65.9	110	89.7					
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	792	1190	529	795	396	595	907	1360	681	1020
	1	791	1190	529	795	396	595	906	1360	680	1020
	2	791	1190	528	794	396	595	904	1360	679	1020
	3	789	1190	527	793	395	594	900	1350	677	1020
	4	787	1180	526	791	394	593	894	1340	673	1010
	5	785	1180	525	788	393	591	886	1330	669	1010
	6	782	1180	523	786	392	590	877	1320	664	998
	7	779	1170	520	782	391	588	866	1300	658	989
	8	775	1160	518	778	390	585	854	1280	651	979
	9	770	1160	515	774	388	583	840	1260	643	967
	10	765	1150	512	769	386	580	825	1240	635	954
	11	760	1140	508	764	384	577	809	1220	625	940
	12	754	1130	505	758	381	573	792	1190	615	925
	13	748	1120	500	752	379	570	773	1160	605	909
	14	741	1110	496	746	376	566	754	1130	593	892
	15	734	1100	491	739	373	561	734	1100	581	874
	16	726	1090	486	731	370	557	712	1070	569	855
	17	718	1080	481	723	367	552	691	1040	555	835
	18	710	1070	476	715	364	547	668	1000	542	814
	19	701	1050	470	706	360	542	645	970	528	793
	20	692	1040	464	697	357	536	622	935	511	767
	22	672	1010	451	679	349	524	575	864	473	711
	24	651	979	438	658	340	512	527	792	435	653
	26	630	946	424	637	330	496	479	720	396	596
	28	607	912	409	615	319	479	433	651	359	540
	30	579	870	394	592	307	462	388	583	323	485
	32	550	826	378	569	295	444	345	518	288	433
	34	520	781	362	545	283	425	305	459	255	384
	36	490	736	346	520	270	406	272	409	228	342
	38	460	692	330	495	258	387	244	367	204	307
	40	431	647	313	470	245	368	221	331	184	277
42	402	604	297	446	232	349	200	301	167	251	
44	374	562	280	421	220	330	182	274	152	229	
46	346	520	264	396	207	312	167	251	139	210	
48	319	480	247	372	195	293	153	230	128	192	
50	294	442	228	343	183	275	141	212	118	177	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
Properties											
Area, in. ²		28.3	21.5	18.1	30.3	24.6					
r_y , in.		4.99	5.04	5.07	3.34	3.39					
r_x/r_y		1.48	1.48	1.48	2.06	2.05					

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Note: Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS20

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS20x8x				HSS20x4x						
	$\frac{3}{8}^{a,c}$		$\frac{5}{16}^{a,b,c}$		$\frac{1}{2}^{a,c}$		$\frac{3}{8}^{a,c}$		$\frac{5}{16}^{a,b,c}$		
t_{des} , in.	0.349		0.291		0.465		0.349		0.291		
lb/ft	68.3		57.4		76.1		58.1		48.9		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	445	669	339	510	570	857	364	547	271	407
	1	445	668	339	510	569	855	363	546	270	406
	2	444	667	339	509	564	848	361	542	268	403
	3	442	665	337	507	557	836	356	536	265	398
	4	440	662	336	505	546	821	350	526	261	392
	5	438	658	334	502	533	801	343	515	255	383
	6	434	653	332	498	517	778	334	501	248	373
	7	431	647	329	494	499	751	323	486	241	362
	8	426	641	325	489	479	721	311	468	233	350
	9	422	634	322	484	458	688	299	449	223	336
	10	416	626	318	478	431	648	285	428	214	321
	11	411	617	314	471	398	599	270	406	203	305
	12	404	608	309	464	366	550	255	384	192	289
	13	398	598	304	457	333	501	240	360	181	272
	14	390	587	298	449	301	453	224	337	170	255
	15	383	576	293	440	270	406	208	312	158	238
	16	375	564	287	431	241	361	192	288	147	221
	17	367	552	281	422	213	320	173	260	135	203
	18	358	539	274	413	190	286	154	232	124	187
	19	350	526	268	403	171	256	138	208	115	173
	20	341	512	261	393	154	231	125	188	107	160
	22	322	484	247	372	127	191	103	155	88.5	133
	24	303	455	233	350	107	161	86.8	130	74.4	112
	26	283	425	218	328	91.1	137	73.9	111	63.4	95.2
	28	263	395	203	305	78.5	118	63.8	95.8	54.6	82.1
	30	243	365	188	283						
	32	223	335	173	260						
	34	200	300	158	238						
	36	178	268	145	218						
	38	160	240	134	201						
40	144	217	123	185							
42	131	197	112	168							
44	119	179	102	153							
46	109	164	93.3	140							
48	100	151	85.6	129							
50	92.4	139	78.9	119							
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	18.7		15.7		20.9		16.0		13.4		
r_y , in.	3.44		3.47		1.68		1.73		1.75		
r_x/r_y	2.04		2.04		3.77		3.71		3.69		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS20-HSS18

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS20x4x				HSS18x6x						
	$\frac{1}{4}^{a,b,c}$		$\frac{5}{8}^a$		$\frac{1}{2}^{a,c}$		$\frac{3}{8}^{a,c}$		$\frac{5}{16}^{a,b,c}$		
t_{des} , in.	0.233		0.581		0.465		0.349		0.291		
lb/ft	39.4		93.3		76.1		58.1		48.9		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	188	283	769	1160	609	915	399	600	301	453
	1	188	283	768	1150	608	914	398	599	301	452
	2	187	281	764	1150	606	911	397	597	300	451
	3	185	277	758	1140	602	905	395	593	298	448
	4	182	273	749	1130	597	897	392	589	296	445
	5	178	267	737	1110	590	887	387	582	293	440
	6	174	261	723	1090	582	875	383	575	289	435
	7	168	253	708	1060	572	860	377	566	285	428
	8	163	245	690	1040	562	844	370	556	280	421
	9	157	235	670	1010	548	823	363	545	275	413
	10	150	225	648	975	531	798	355	533	269	404
	11	143	215	625	940	513	771	346	520	263	395
	12	136	204	601	904	494	742	337	507	256	385
	13	128	193	576	866	474	712	327	492	249	374
	14	120	181	550	827	453	681	317	476	241	363
	15	113	169	523	787	432	650	306	460	233	351
	16	105	158	496	746	411	617	295	444	225	339
	17	97.2	146	469	705	389	585	284	427	217	326
	18	89.8	135	442	664	367	552	272	409	209	313
	19	83.2	125	415	623	346	519	260	391	200	300
	20	77.4	116	388	583	324	487	249	374	191	287
	22	67.6	102	336	505	282	424	223	335	174	261
24	59.6	89.6	286	431	242	364	193	289	156	234	
26	52.8	79.4	244	367	207	310	164	247	139	208	
28	45.6	68.5	210	316	178	268	142	213	122	183	
30			183	276	155	233	124	186	106	159	
32			161	242	136	205	109	163	93.0	140	
34			143	215	121	182	96.2	145	82.4	124	
36			127	191	108	162	85.8	129	73.5	110	
38			114	172	96.7	145	77.0	116	66.0	99.2	
40			103	155	87.3	131	69.5	104	59.6	89.5	
42					79.2	119	63.0	94.7	54.0	81.2	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	10.8		25.7		20.9		16.0		13.4		
r_y , in.	1.78		2.48		2.53		2.58		2.61		
r_x/r_y	3.65		2.42		2.40		2.38		2.37		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS18-HSS16

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS18x6x				HSS16x12x						
	$\frac{1}{4}^{a,b,c}$		$\frac{3}{4}$	$\frac{5}{8}$	$\frac{1}{2}^a$		$\frac{3}{8}^{a,b,c}$				
t_{des} , in.	0.233		0.698	0.581	0.465		0.349				
lb/ft	39.4		130	110	89.7		68.3				
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	214	322	1070	1620	907	1360	737	1110	513	771
	1	214	321	1070	1610	907	1360	736	1110	513	771
	2	213	320	1070	1610	906	1360	735	1110	513	770
	3	212	319	1070	1610	903	1360	734	1100	512	769
	4	210	316	1070	1600	901	1350	731	1100	510	767
	5	208	313	1060	1600	897	1350	728	1090	509	765
	6	206	309	1060	1590	892	1340	725	1090	507	762
	7	203	305	1050	1580	887	1330	721	1080	504	758
	8	199	300	1040	1570	881	1320	716	1080	502	754
	9	196	294	1030	1560	874	1310	710	1070	499	750
	10	191	288	1030	1540	867	1300	704	1060	495	745
	11	187	281	1020	1530	858	1290	698	1050	492	739
	12	182	274	1000	1510	849	1280	691	1040	488	733
	13	177	267	993	1490	840	1260	683	1030	483	727
	14	172	259	981	1470	829	1250	675	1010	479	720
	15	167	250	968	1450	819	1230	666	1000	474	712
	16	161	242	954	1430	807	1210	657	988	469	704
	17	155	233	939	1410	795	1190	647	973	463	696
	18	149	224	924	1390	782	1180	637	958	457	688
	19	143	215	908	1370	769	1160	627	942	451	679
	20	137	206	892	1340	756	1140	616	926	445	669
	22	125	188	858	1290	727	1090	594	892	432	649
	24	113	169	822	1230	697	1050	570	856	418	628
	26	101	151	784	1180	666	1000	545	819	403	606
	28	90.1	135	746	1120	634	953	519	780	388	583
	30	81.3	122	706	1060	601	904	493	741	372	559
	32	73.7	111	667	1000	568	854	467	701	356	535
	34	67.2	101	627	942	535	804	440	661	338	508
	36	60.2	90.4	587	882	502	754	413	621	318	478
	38	54.0	81.2	548	823	469	705	387	582	298	448
	40	48.7	73.2	509	766	437	656	361	542	278	418
42	44.2	66.4	472	709	405	609	335	504	259	389	
44			435	655	375	563	311	467	240	361	
46			400	601	344	518	287	431	222	334	
48			367	552	316	475	263	396	204	307	
50			338	508	291	438	243	365	188	283	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	323	486	1070	1620	907	1360	737	1110	560	842	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	251	377	835	1250	704	1060	572	858	435	652	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	115	173	349	524	299	449	244	367	188	283	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	44.4	66.7	249	374	215	323	177	266	138	207	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
	142	213	482	724	412	619	337	506	233	350	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
	39.0	58.6	394	593	337	506	254	381	169	254	
Properties											
Area, in. ²	10.8		35.9		30.3		24.6		18.7		
r_y , in.	2.63		4.75		4.80		4.86		4.91		
r_x/r_y	2.37		1.25		1.25		1.25		1.25		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS16

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape		HSS16x12x				HSS16x8x					
		$\frac{5}{16}^{a,b,c}$		$\frac{5}{8}$	$\frac{1}{2}^a$	$\frac{3}{8}^{a,c}$		$\frac{5}{16}^{a,c}$			
t_{des} , in.		0.291		0.581	0.465		0.349		0.291		
lb/ft		57.4		93.3	76.1		58.1		48.9		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	385	578	769	1160	626	940	432	650	331	498
	1	385	578	769	1160	625	940	432	650	331	497
	2	384	578	766	1150	623	937	431	648	330	496
	3	384	577	763	1150	620	932	430	646	329	495
	4	383	576	757	1140	616	926	427	643	328	492
	5	382	574	751	1130	611	918	425	638	325	489
	6	381	573	743	1120	605	909	421	633	323	485
	7	380	571	733	1100	597	897	417	627	320	481
	8	378	568	722	1090	589	885	413	621	317	476
	9	376	565	710	1070	579	870	408	613	313	470
	10	374	562	697	1050	569	855	402	605	309	464
	11	372	559	683	1030	557	838	396	596	304	457
	12	370	556	668	1000	545	820	390	586	299	450
	13	367	552	652	979	532	800	383	575	294	442
	14	364	548	634	954	519	780	375	564	289	434
	15	361	543	617	927	505	759	367	552	283	425
	16	358	538	598	899	490	736	359	540	277	416
	17	355	533	579	870	475	714	351	527	270	406
	18	351	528	559	841	459	690	342	514	264	396
	19	348	523	539	811	443	666	333	500	257	386
	20	344	517	519	780	427	642	323	486	250	376
	22	336	505	478	718	394	592	304	457	236	354
	24	327	491	436	656	361	543	281	422	221	332
	26	316	475	395	594	328	493	256	385	205	309
	28	304	457	356	534	296	445	232	348	190	286
	30	292	439	317	477	265	398	208	313	175	263
	32	280	420	280	421	235	353	185	278	158	237
	34	267	401	248	373	208	313	164	247	140	210
	36	254	382	221	333	186	279	146	220	125	188
	38	241	363	199	299	167	250	131	197	112	168
	40	228	343	179	269	150	226	119	178	101	152
42	215	324	163	244	136	205	108	162	91.7	138	
44	203	305	148	223	124	187	98.0	147	83.5	126	
46	189	284	136	204	114	171	89.6	135	76.4	115	
48	174	261	124	187	104	157	82.3	124	70.2	105	
50	160	240	115	172	96.2	145	75.9	114	64.7	97.2	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
Properties											
Area, in. ²		15.7		25.7		20.9		16.0		13.4	
r_y , in.		4.94		3.27		3.32		3.37		3.40	
r_x/r_y		1.24		1.72		1.72		1.71		1.71	

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Note: Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS16

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape		HSS16x8x				HSS16x4x					
		$\frac{1}{4}^{a,b,c}$		$\frac{5}{8}$	$\frac{1}{2}^a$	$\frac{3}{8}^{a,c}$		$\frac{5}{16}^{a,c}$			
t_{des} , in.		0.233		0.581	0.465		0.349		0.291		
lb/ft		39.4		76.3	62.5		47.9		40.4		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	240	360	629	945	515	774	349	524	262	394
	1	239	360	626	941	513	771	348	523	262	393
	2	239	359	618	930	507	762	345	519	260	390
	3	238	358	606	911	497	748	341	512	257	386
	4	237	356	589	885	484	728	334	503	252	379
	5	235	354	567	853	468	703	327	491	246	370
	6	234	351	542	815	448	673	317	477	240	360
	7	232	348	514	773	426	640	307	461	232	349
	8	229	344	483	726	402	604	295	443	223	336
	9	226	340	451	677	376	566	282	423	214	322
	10	223	336	417	626	350	526	268	402	204	307
	11	220	331	382	575	323	485	253	380	193	291
	12	217	326	348	523	295	443	235	354	182	274
	13	213	320	314	472	268	403	215	323	171	257
	14	209	314	281	422	241	363	195	293	159	240
	15	205	308	249	375	216	324	176	264	148	222
	16	201	301	219	329	191	287	157	236	135	203
	17	196	295	194	292	169	254	139	210	120	180
	18	191	288	173	260	151	227	124	187	107	161
	19	186	280	155	234	135	204	112	168	96.1	144
	20	181	273	140	211	122	184	101	151	86.7	130
	22	171	257	116	174	101	152	83.2	125	71.6	108
	24	161	241	97.4	146	84.9	128	69.9	105	60.2	90.5
	26	150	225	83.0	125	72.3	109	59.6	89.6	51.3	77.1
	28	139	209					51.4	77.2	44.2	66.5
	30	128	193								
	32	118	177								
	34	107	161								
	36	98.0	147								
	38	90.0	135								
	40	82.4	124								
42	74.7	112									
44	68.1	102									
46	62.3	93.7									
48	57.2	86.0									
50	52.7	79.3									
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
Properties											
Area, in. ²		10.8		21.0		17.2		13.2		11.1	
r_y , in.		3.42		1.60		1.65		1.71		1.73	
r_x/r_y		1.70		3.16		3.12		3.06		3.05	

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS16

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS16x4x				HSS14x10x						
	$\frac{1}{4}^{a,b,c}$		$\frac{3}{16}^{a,b,c}$		$\frac{5}{8}$		$\frac{1}{2}^a$		$\frac{3}{8}^{a,c}$		
t_{des} , in.	0.233		0.174		0.581		0.465		0.349		
lb/ft	32.6		24.7		93.3		76.1		58.1		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	185	277	117	175	769	1160	626	940	463	695
	1	184	277	116	175	769	1160	625	940	462	695
	2	183	275	115	174	767	1150	624	938	462	694
	3	181	271	114	172	765	1150	622	935	461	692
	4	178	267	112	169	761	1140	619	931	459	690
	5	174	261	110	165	757	1140	616	925	457	687
	6	169	254	107	161	751	1130	611	919	454	683
	7	164	247	104	156	745	1120	606	911	451	678
	8	158	238	100	151	737	1110	600	902	448	673
	9	152	228	96.3	145	729	1100	594	893	444	667
	10	145	218	92.1	138	720	1080	587	882	439	661
	11	138	207	87.6	132	710	1070	579	870	435	653
	12	131	196	83.0	125	699	1050	570	857	430	646
	13	123	185	78.3	118	688	1030	561	843	424	637
	14	115	173	73.5	110	675	1020	551	829	418	629
	15	107	161	68.7	103	663	996	541	813	412	619
	16	99.4	149	63.8	95.9	649	976	530	797	405	609
	17	91.5	137	59.0	88.7	635	954	519	781	399	599
	18	84.1	126	54.4	81.8	620	932	508	763	391	587
	19	77.7	117	50.4	75.8	605	910	496	745	382	574
	20	71.9	108	46.8	70.4	590	886	483	727	372	560
	22	59.9	90.0	40.8	61.4	558	838	458	688	353	531
	24	50.3	75.6	36.0	54.1	525	789	432	649	333	501
	26	42.9	64.4	32.0	48.1	491	738	405	608	313	470
	28	37.0	55.5	28.5	42.9	457	687	377	567	292	440
	30					423	636	350	526	272	409
	32					390	586	323	486	251	378
	34					357	536	297	446	231	348
	36					325	489	271	408	212	318
	38					294	442	247	371	193	290
40					266	399	223	334	175	262	
42					241	362	202	303	158	238	
44					219	330	184	276	144	217	
46					201	302	168	253	132	198	
48					184	277	155	232	121	182	
50					170	255	142	214	112	168	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	8.96		6.76		25.7		20.9		16.0		
r_y , in.	1.76		1.78		3.98		4.04		4.09		
r_x/r_y	3.02		3.01		1.30		1.29		1.29		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS14

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS14x10x				HSS14x6x						
	$\frac{5}{16}^{a,b,c}$		$\frac{1}{4}^{a,b,c}$		$\frac{5}{8}$		$\frac{1}{2}^a$		$\frac{3}{8}^{a,c}$		
t_{des} , in.	0.291		0.233		0.581		0.465		0.349		
lb/ft	48.9		39.4		76.3		62.5		47.9		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	360	541	251	377	629	945	515	774	379	569
	1	360	540	251	377	628	943	514	773	378	569
	2	359	540	250	376	624	938	511	769	377	567
	3	358	538	250	375	619	930	507	762	375	563
	4	357	536	249	374	611	918	501	753	371	558
	5	355	534	248	373	601	904	493	742	367	551
	6	353	531	247	371	590	886	484	728	362	544
	7	351	528	246	370	576	866	474	712	356	535
	8	348	524	244	367	561	843	462	694	349	525
	9	345	519	243	365	544	818	448	674	341	513
	10	342	514	241	362	526	791	434	652	333	501
	11	339	509	239	359	507	762	419	629	324	487
	12	335	503	237	356	486	731	402	605	312	469
	13	331	497	235	352	465	699	386	580	299	450
	14	326	490	232	349	443	666	368	553	286	430
	15	321	483	229	345	421	633	350	527	273	410
	16	316	476	227	341	398	599	332	499	259	390
	17	311	468	224	336	376	564	314	472	246	369
	18	306	460	221	331	353	530	296	444	232	349
	19	300	451	217	327	330	496	278	417	218	328
	20	294	442	214	321	308	463	260	390	205	308
	22	282	424	207	311	265	399	225	338	178	268
	24	269	405	199	299	225	338	192	288	153	230
	26	256	385	189	284	191	288	163	246	130	196
	28	242	364	179	270	165	248	141	212	112	169
	30	229	343	169	254	144	216	123	184	98.0	147
	32	213	319	159	239	126	190	108	162	86.1	129
	34	196	294	149	224	112	168	95.5	144	76.3	115
	36	180	270	139	209	99.9	150	85.2	128	68.1	102
	38	164	246	129	194	89.6	135	76.5	115	61.1	91.8
	40	148	223	119	179	80.9	122	69.0	104	55.1	82.8
42	135	202	110	165					50.0	75.1	
44	123	184	99.8	150							
46	112	169	91.3	137							
48	103	155	83.9	126							
50	95.0	143	77.3	116							
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	13.4		10.8		21.0		17.2		13.2		
r_y , in.	4.12		4.14		2.43		2.48		2.53		
r_x/r_y	1.29		1.29		1.96		1.95		1.94		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Shape		HSS14x6x						HSS14x4x			
		5/16 ^{a,c}		1/4 ^{a,c}		3/16 ^{a,b,c}		5/8		1/2 ^a	
t_{des} , in.		0.291		0.233		0.174		0.581		0.465	
lb/ft		40.4		32.6		24.7		67.8		55.7	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	291	437	209	314	136	205	560	841	458	688
	1	291	437	209	314	136	204	558	838	456	686
	2	289	435	208	313	135	204	551	828	451	678
	3	288	432	207	311	135	202	539	811	442	665
	4	285	429	205	309	134	201	524	787	430	647
	5	282	424	203	305	132	199	505	758	415	624
	6	278	418	200	301	130	196	482	724	398	598
	7	274	412	197	297	128	193	457	686	378	568
	8	269	404	194	291	126	190	429	645	357	536
	9	263	396	190	285	124	186	400	601	334	501
	10	257	386	186	279	121	182	369	555	310	465
	11	250	376	181	272	118	177	338	508	285	429
	12	243	366	176	265	115	173	307	462	261	392
	13	236	355	171	257	112	168	277	416	236	355
	14	228	343	165	249	108	162	248	372	213	320
	15	220	331	160	240	104	157	219	330	190	285
	16	212	318	154	231	101	151	193	290	168	252
	17	203	305	148	222	96.9	146	171	257	149	223
	18	194	292	142	213	93.1	140	152	229	133	199
	19	185	278	136	204	89.1	134	137	205	119	179
	20	174	261	129	195	85.1	128	123	185	107	161
	22	152	228	117	176	77.2	116	102	153	88.7	133
24	131	197	104	157	69.3	104	85.7	129	74.6	112	
26	111	168	92.1	138	61.6	92.6	73.0	110	63.5	95.5	
28	96.1	144	79.4	119	55.0	82.7					
30	83.7	126	69.2	104	49.5	74.5					
32	73.6	111	60.8	91.4	44.8	67.4					
34	65.2	98.0	53.9	80.9	40.8	61.4					
36	58.1	87.4	48.0	72.2	37.1	55.7					
38	52.2	78.4	43.1	64.8	33.3	50.0					
40	47.1	70.8	38.9	58.5	30.0	45.2					
42	42.7	64.2	35.3	53.0	27.2	41.0					
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
Properties											
Area, in. ²		11.1		8.96		6.76		18.7		15.3	
r_y , in.		2.55		2.58		2.61		1.59		1.64	
r_x/r_y		1.94		1.93		1.92		2.81		2.77	

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS14-HSS12

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS14x4x								HSS12x10x		
	$\frac{3}{8}^{a,c}$		$\frac{5}{16}^{a,c}$		$\frac{1}{4}^{a,c}$		$\frac{3}{16}^{a,b,c}$		$\frac{1}{2}$		
t_{des} , in.	0.349		0.291		0.233		0.174		0.465		
lb/ft	42.8		36.1		29.2		22.2		69.3		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	337	506	256	384	181	273	115	173	569	855
	1	336	505	255	383	181	272	115	173	568	854
	2	333	501	253	380	180	270	114	171	567	853
	3	329	494	250	375	177	267	113	169	565	850
	4	322	484	245	368	174	262	111	167	563	846
	5	314	473	239	360	170	256	108	163	559	841
	6	305	458	233	350	166	249	106	159	555	835
	7	294	442	225	338	160	241	102	154	550	827
	8	279	419	216	325	155	232	98.6	148	545	819
	9	262	394	207	311	148	223	94.7	142	539	810
	10	244	367	197	296	141	212	90.4	136	532	799
	11	226	340	186	279	134	201	86.0	129	524	788
	12	208	312	175	263	126	190	81.3	122	516	776
	13	189	285	163	245	119	178	76.6	115	508	763
	14	172	258	148	222	111	166	71.7	108	499	750
	15	154	232	133	200	103	154	66.9	101	489	735
	16	137	207	119	179	94.8	142	62.1	93.3	479	720
	17	122	183	106	159	86.8	130	57.2	86.0	469	704
	18	109	163	94.5	142	78.3	118	52.6	79.1	458	688
	19	97.4	146	84.9	128	70.3	106	48.7	73.1	446	671
	20	87.9	132	76.6	115	63.4	95.4	45.1	67.8	435	654
	22	72.7	109	63.3	95.1	52.4	78.8	39.2	58.9	411	618
	24	61.1	91.8	53.2	79.9	44.1	66.2	34.4	51.7	386	581
	26	52.0	78.2	45.3	68.1	37.5	56.4	29.3	44.1	361	543
	28	44.9	67.4	39.1	58.7	32.4	48.6	25.3	38.0	336	505
	30									311	467
	32									286	430
	34									262	393
	36									238	358
	38									215	324
40									194	292	
42									176	265	
44									161	241	
46									147	221	
48									135	203	
50									124	187	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	11.8		9.92		8.03		6.06		19.0		
r_y , in.	1.69		1.72		1.74		1.77		3.96		
r_x/r_y	2.74		2.72		2.71		2.68		1.15		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS12

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS12x10x						HSS12x8x				
	$\frac{3}{8}$ ^a		$\frac{5}{16}$ ^{a,b,c}		$\frac{1}{4}$ ^{a,b,c}		$\frac{5}{8}$		$\frac{1}{2}$		
t_{des} , in.	0.349		0.291		0.233		0.581		0.465		
lb/ft	53.0		44.6		36.0		76.3		62.5		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	437	657	350	526	247	372	629	945	515	774
	1	437	657	350	526	247	371	628	944	514	773
	2	436	655	349	525	247	371	626	941	513	771
	3	435	653	348	524	246	370	623	936	510	767
	4	433	650	347	522	246	369	618	929	507	761
	5	430	646	345	519	245	368	612	920	502	754
	6	427	642	343	516	244	366	605	910	496	746
	7	423	636	341	513	242	364	597	897	490	736
	8	419	630	338	508	241	362	588	883	482	725
	9	415	623	335	504	239	359	577	868	474	713
	10	409	615	332	499	237	357	566	850	465	699
	11	404	607	328	493	235	353	553	832	455	684
	12	398	598	324	487	233	350	540	812	445	668
	13	391	588	320	481	231	346	526	791	433	651
	14	384	578	315	474	228	343	511	769	422	634
	15	377	567	310	466	225	338	496	745	409	615
	16	370	556	305	459	222	334	480	721	396	596
	17	362	544	300	451	219	329	464	697	383	576
	18	354	531	294	442	216	325	447	672	370	556
	19	345	519	288	434	213	320	430	646	356	535
	20	336	506	282	424	209	314	412	620	342	514
	22	318	479	267	402	202	303	377	567	314	472
	24	300	451	252	379	193	290	343	515	286	430
	26	281	422	236	355	183	275	308	463	258	388
	28	262	393	220	331	173	260	275	413	231	347
	30	242	364	204	307	163	245	243	366	205	309
	32	224	336	189	284	153	229	214	321	181	272
	34	205	308	173	260	142	214	189	285	160	241
	36	187	281	158	238	130	195	169	254	143	215
	38	170	255	144	216	118	178	152	228	128	193
	40	153	230	130	195	107	161	137	206	116	174
42	139	209	118	177	97.0	146	124	186	105	158	
44	127	190	107	161	88.4	133	113	170	95.6	144	
46	116	174	98.2	148	80.9	122	103	155	87.4	131	
48	106	160	90.2	136	74.3	112	95.0	143	80.3	121	
50	98.0	147	83.1	125	68.5	103	87.6	132	74.0	111	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	437	657	365	549	296	446	629	945	515	774	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	339	509	284	425	230	345	488	732	400	600	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	138	207	116	174	94.6	142	215	323	177	266	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	112	169	95.5	143	77.9	117	131	196	110	166	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
	152	229	116	175	84.4	127	205	308	170	255	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
	123	185	94.7	142	69.9	105	154	232	128	193	
Properties											
Area, in. ²	14.6		12.2		9.90		21.0		17.2		
r_y , in.	4.01		4.04		4.07		3.16		3.21		
r_x/r_y	1.15		1.15		1.15		1.37		1.37		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Note: Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS12

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS12x8x								HSS12x6x		
	$\frac{3}{8}$ ^a		$\frac{5}{16}$ ^{a,c}		$\frac{1}{4}$ ^{a,b,c}		$\frac{3}{16}$ ^{a,b,c}		$\frac{5}{8}$		
t_{des} , in.	0.349		0.291		0.233		0.174		0.581		
lb/ft	47.9		40.4		32.6		24.7		67.8		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	395	594	317	477	233	350	143	215	560	841
	1	395	593	317	476	233	350	143	215	559	840
	2	394	592	316	475	232	349	143	215	556	835
	3	392	589	315	473	231	348	143	214	551	828
	4	389	585	313	471	230	346	142	213	544	817
	5	386	580	311	467	228	343	141	212	535	804
	6	381	573	308	463	227	340	140	211	524	787
	7	377	566	305	459	224	337	139	209	512	769
	8	371	558	301	453	222	333	138	208	498	748
	9	365	548	297	447	219	329	137	205	482	725
	10	358	538	293	440	216	324	135	203	466	700
	11	351	527	288	433	212	319	134	201	448	673
	12	343	515	283	425	209	313	132	198	429	645
	13	335	503	277	417	205	308	130	195	410	616
	14	326	490	272	408	200	301	128	192	390	586
	15	317	476	265	399	196	295	126	189	370	556
	16	307	462	259	389	191	288	123	185	349	525
	17	297	447	251	377	187	281	121	182	329	494
	18	287	432	242	364	182	273	118	178	308	463
	19	277	416	234	352	177	265	116	174	288	433
	20	267	401	225	338	171	258	113	170	268	403
	22	245	369	208	312	161	241	107	161	229	345
	24	224	337	190	285	150	225	101	151	194	291
	26	203	305	172	259	138	208	93.4	140	165	248
	28	183	274	155	233	127	191	86.2	129	142	214
	30	163	245	138	208	114	171	79.0	119	124	186
	32	144	216	122	184	101	151	71.9	108	109	164
	34	127	192	108	163	89.2	134	65.2	98.0	96.4	145
	36	114	171	96.8	145	79.5	120	59.4	89.3	86.0	129
	38	102	153	86.8	131	71.4	107	54.4	81.8	77.2	116
	40	92.1	138	78.4	118	64.4	96.8	49.5	74.4		
42	83.5	126	71.1	107	58.4	87.8	44.9	67.5			
44	76.1	114	64.8	97.4	53.2	80.0	40.9	61.5			
46	69.6	105	59.3	89.1	48.7	73.2	37.4	56.2			
48	63.9	96.1	54.4	81.8	44.7	67.2	34.4	51.7			
50	58.9	88.6	50.2	75.4	41.2	62.0	31.7	47.6			
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	13.2		11.1		8.96		6.76		18.7		
r_y , in.	3.27		3.29		3.32		3.35		2.39		
r_x/r_y	1.37		1.37		1.36		1.36		1.73		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS12

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape		HSS12x6x									
		1/2		3/8 ^a		5/16 ^{a, c}		1/4 ^{a, c}		3/16 ^{a, b, c}	
t_{des} , in.		0.465		0.349		0.291		0.233		0.174	
lb/ft		55.7		42.8		36.1		29.2		22.2	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	458	688	353	531	282	423	205	308	134	202
	1	457	687	353	530	281	423	205	308	134	202
	2	455	684	351	527	280	421	204	307	134	201
	3	451	678	348	523	278	419	203	305	133	200
	4	445	669	344	517	276	415	201	302	132	198
	5	438	659	339	509	273	410	199	299	130	196
	6	430	646	332	500	269	404	196	294	128	193
	7	420	631	325	489	264	397	193	290	126	190
	8	409	615	317	476	259	390	189	284	124	186
	9	397	597	308	463	253	381	185	278	121	183
	10	384	577	298	448	247	372	181	272	119	178
	11	370	556	288	432	240	361	176	264	116	174
	12	355	534	277	416	233	351	171	257	112	169
	13	340	511	265	399	224	337	166	249	109	164
	14	324	487	253	381	215	323	160	240	105	159
	15	308	462	241	362	205	307	154	232	102	153
	16	291	438	229	344	194	292	148	223	98.0	147
	17	275	413	216	325	184	276	142	214	94.1	141
	18	258	388	204	306	174	261	136	204	90.1	135
	19	242	364	191	288	163	245	130	195	86.1	129
	20	226	339	179	269	153	230	123	185	82.1	123
	22	195	293	155	233	133	200	109	164	74.0	111
24	165	248	133	199	114	172	93.9	141	66.1	99.3	
26	141	211	113	170	97.3	146	80.0	120	58.4	87.8	
28	121	182	97.4	146	83.9	126	69.0	104	52.0	78.1	
30	106	159	84.9	128	73.1	110	60.1	90.3	46.4	69.8	
32	92.9	140	74.6	112	64.2	96.5	52.8	79.4	40.8	61.3	
34	82.2	124	66.1	99.3	56.9	85.5	46.8	70.3	36.1	54.3	
36	73.4	110	58.9	88.6	50.7	76.3	41.7	62.7	32.2	48.5	
38	65.8	99.0	52.9	79.5	45.5	68.4	37.4	56.3	28.9	43.5	
40	59.4	89.3	47.7	71.7	41.1	61.8	33.8	50.8	26.1	39.2	
42					37.3	56.0	30.7	46.1	23.7	35.6	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
Properties											
Area, in. ²		15.3		11.8		9.92		8.03		6.06	
r_y , in.		2.44		2.49		2.52		2.54		2.57	
r_x/r_y		1.73		1.72		1.71		1.71		1.70	

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS12

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS12x4x										
	5/8		1/2		3/8 ^a		5/16 ^{a,c}		1/4 ^{a,c}		
t_{des} , in.	0.581		0.465		0.349		0.291		0.233		
lb/ft	59.3		48.9		37.7		31.8		25.8		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	491	738	404	607	311	468	247	371	177	266
	1	489	735	403	605	310	466	246	370	177	266
	2	483	725	398	598	307	461	244	367	175	263
	3	472	710	390	586	301	452	241	362	173	260
	4	459	689	379	570	293	441	236	355	170	255
	5	441	663	366	550	283	426	231	347	166	249
	6	421	633	350	526	272	409	224	336	161	242
	7	398	599	332	499	259	389	216	324	156	234
	8	374	561	313	470	245	368	207	311	150	225
	9	347	522	292	439	229	345	195	293	143	215
	10	320	481	271	407	213	321	182	274	136	204
	11	293	440	249	374	197	296	169	254	129	193
	12	265	399	227	341	181	272	155	233	121	182
	13	239	359	205	308	165	247	142	213	113	170
	14	213	319	184	277	149	223	128	193	105	158
	15	188	282	164	246	133	200	116	174	95.4	143
	16	165	248	144	217	118	178	103	155	85.5	128
	17	146	219	128	192	105	157	91.4	137	75.9	114
	18	130	196	114	172	93.4	140	81.6	123	67.7	102
	19	117	176	102	154	83.9	126	73.2	110	60.7	91.3
	20	105	159	92.5	139	75.7	114	66.1	99.3	54.8	82.4
	22	87.2	131	76.4	115	62.6	94.0	54.6	82.1	45.3	68.1
	24	73.3	110	64.2	96.5	52.6	79.0	45.9	69.0	38.1	57.2
	26	62.4	93.8	54.7	82.2	44.8	67.3	39.1	58.8	32.4	48.7
	28							33.7	50.7	28.0	42.0
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	16.4		13.5		10.4		8.76		7.10		
r_y , in.	1.57		1.62		1.67		1.70		1.72		
r_x/r_y	2.46		2.44		2.41		2.39		2.38		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS12

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS12x4x		HSS12x3½x				HSS12x3x				
	¾ ^{a,b,c}		¾ ^a		5/16 ^{a,c}		5/16 ^{a,c}		¼ ^{a,c}		
t_{des} , in.	0.174		0.349		0.291		0.291		0.233		
lb/ft	19.6		36.4		30.8		29.7		24.1		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	114	171	299	450	238	358	229	345	163	245
	1	113	170	298	448	237	357	228	343	162	244
	2	112	169	294	441	235	353	225	338	160	241
	3	111	167	286	430	230	346	220	330	157	235
	4	109	164	277	416	225	338	212	319	152	228
	5	107	160	265	398	218	327	203	305	146	219
	6	104	156	251	377	209	314	193	289	138	208
	7	100	151	235	353	199	300	178	267	130	196
	8	96.7	145	218	328	186	280	161	242	122	183
	9	92.6	139	201	302	172	258	144	217	113	169
	10	88.3	133	183	275	157	235	127	191	103	155
	11	83.7	126	165	248	142	213	111	167	92.3	139
	12	79.0	119	147	221	127	191	95.5	144	79.8	120
	13	74.2	112	130	195	112	169	81.4	122	68.1	102
	14	69.3	104	114	171	98.7	148	70.2	105	58.8	88.3
	15	64.4	96.8	98.9	149	86.0	129	61.1	91.9	51.2	76.9
	16	59.5	89.4	86.9	131	75.6	114	53.7	80.8	45.0	67.6
	17	54.6	82.0	77.0	116	66.9	101	47.6	71.5	39.8	59.9
	18	50.1	75.3	68.7	103	59.7	89.7	42.5	63.8	35.5	53.4
	19	46.1	69.4	61.6	92.6	53.6	80.5	38.1	57.3	31.9	47.9
20	42.7	64.1	55.6	83.6	48.4	72.7	34.4	51.7	28.8	43.3	
22	35.5	53.3	46.0	69.1	40.0	60.1					
24	29.8	44.8	38.6	58.1	33.6	50.5					
26	25.4	38.2									
28	21.9	32.9									
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	5.37		10.0		8.46		8.17		6.63		
r_y , in.	1.75		1.46		1.48		1.27		1.29		
r_x/r_y	2.36		2.70		2.69		3.07		3.05		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS12-HSS10

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS12x3x		HSS12x2x				HSS10x8x				
	$\frac{3}{16}^{a,b,c}$		$\frac{5}{16}^{a,c}$		$\frac{1}{4}^{a,c}$		$\frac{3}{16}^{a,b,c}$				
t_{des} , in.	0.174		0.291		0.233		0.174				
lb/ft	18.4		27.6		22.4		17.1				
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD			
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$			
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	103	155	212	319	149	224	92.6	139	560	841
	1	103	154	210	315	148	222	91.8	138	559	841
	2	101	152	203	305	143	215	89.2	134	557	838
	3	99.2	149	192	288	136	205	85.2	128	554	833
	4	96.3	145	177	266	127	191	79.8	120	550	827
	5	92.7	139	154	231	115	174	73.3	110	545	819
	6	88.4	133	129	194	103	155	66.1	99.3	538	809
	7	83.6	126	106	159	89.5	135	58.4	87.8	530	797
	8	78.4	118	83.2	125	71.9	108	50.6	76.0	522	784
	9	72.9	110	65.8	98.8	56.8	85.3	43.0	64.6	512	770
	10	67.2	101	53.3	80.1	46.0	69.1	36.9	55.4	501	754
	11	61.4	92.3	44.0	66.2	38.0	57.1	30.6	46.0	490	736
	12	55.5	83.5	37.0	55.6	31.9	48.0	25.7	38.7	478	718
	13	49.7	74.7	31.5	47.4	27.2	40.9	21.9	33.0	465	698
	14	44.6	67.0			23.5	35.3	18.9	28.4	451	678
	15	40.2	60.4							437	657
	16	35.7	53.6							422	635
	17	31.6	47.5							407	612
	18	28.2	42.4							392	589
	19	25.3	38.0							376	565
	20	22.8	34.3							360	541
	22	18.9	28.4							328	493
	24									297	446
	26									266	399
	28									236	354
	30									207	311
	32									182	274
	34									161	242
	36									144	216
	38									129	194
	40									116	175
42									106	159	
44									96.3	145	
46									88.1	132	
48									80.9	122	
50									74.5	112	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	5.02		7.59		6.17		4.67		18.7		
r_y , in.	1.32		0.820		0.845		0.872		3.09		
r_x/r_y	3.02		4.52		4.44		4.36		1.19		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS10

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS10x8x										
	1/2		3/8		5/16 ^a		1/4 ^{a, b, c}		3/16 ^{a, b, c}		
t_{des} , in.	0.465		0.349		0.291		0.233		0.174		
lb/ft	55.7		42.8		36.1		29.2		22.2		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	458	688	353	531	297	446	227	341	141	212
	1	458	688	353	530	297	446	227	340	141	211
	2	456	686	352	529	296	445	226	340	140	211
	3	454	682	350	526	294	442	225	338	140	210
	4	450	677	347	522	292	439	224	336	139	209
	5	446	670	344	517	290	435	222	334	139	208
	6	441	663	340	512	286	430	220	331	138	207
	7	435	653	336	505	283	425	218	327	137	205
	8	428	643	331	497	278	418	215	323	135	203
	9	420	631	325	488	274	411	212	319	134	201
	10	412	619	319	479	268	403	209	314	132	199
	11	403	605	312	469	263	395	205	309	131	196
	12	393	590	304	457	257	386	201	303	129	193
	13	382	575	297	446	250	376	197	297	127	190
	14	372	558	288	434	243	366	193	290	124	187
	15	360	541	280	421	236	355	188	283	122	184
	16	349	524	271	407	229	344	184	276	120	180
	17	336	506	262	394	221	333	179	269	117	176
	18	324	487	253	380	214	321	174	261	115	172
	19	312	468	243	365	206	309	168	252	112	168
	20	299	449	234	351	198	297	161	243	109	164
	22	273	411	214	322	182	273	148	223	103	155
	24	248	372	195	293	165	249	135	204	96.3	145
	26	223	334	176	264	149	225	123	184	88.8	134
	28	198	298	157	236	134	201	110	165	81.4	122
	30	175	263	139	209	119	179	98.0	147	74.1	111
	32	154	231	122	184	105	158	86.5	130	66.5	99.9
	34	136	205	108	163	92.9	140	76.6	115	58.9	88.5
	36	121	183	96.7	145	82.8	125	68.3	103	52.5	78.9
	38	109	164	86.8	130	74.3	112	61.3	92.1	47.1	70.8
40	98.4	148	78.3	118	67.1	101	55.3	83.2	42.5	63.9	
42	89.3	134	71.1	107	60.9	91.5	50.2	75.4	38.6	58.0	
44	81.3	122	64.7	97.3	55.5	83.3	45.7	68.7	35.2	52.8	
46	74.4	112	59.2	89.0	50.7	76.3	41.8	62.9	32.2	48.3	
48	68.3	103	54.4	81.8	46.6	70.0	38.4	57.8	29.5	44.4	
50	63.0	94.7	50.1	75.4	42.9	64.5	35.4	53.2	27.2	40.9	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	15.3		11.8		9.92		8.03		6.06		
r_y , in.	3.14		3.19		3.22		3.25		3.28		
r_x/r_y	1.19		1.19		1.19		1.18		1.18		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Note: Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS10

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS10x6x										
	5/8		1/2		3/8		5/16 ^a		1/4 ^{a,c}		
t_{des} , in.	0.581		0.465		0.349		0.291		0.233		
lb/ft	59.3		48.9		37.7		31.8		25.8		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	491	738	404	607	311	468	262	394	199	299
	1	490	737	403	606	311	467	262	394	199	298
	2	487	732	401	603	309	465	260	391	198	297
	3	483	725	398	598	306	461	258	388	196	295
	4	476	716	392	590	303	455	255	383	195	292
	5	468	703	386	580	298	448	251	378	192	289
	6	458	689	378	568	292	439	246	370	189	285
	7	447	672	369	555	286	429	241	362	186	280
	8	434	653	359	540	278	418	235	353	182	274
	9	420	632	348	523	270	406	228	343	178	268
	10	405	609	336	505	261	392	221	332	174	261
	11	389	585	323	486	251	378	213	320	169	254
	12	372	560	310	466	241	363	205	307	163	246
	13	355	533	296	445	231	347	196	294	158	237
	14	337	506	282	423	220	331	187	281	152	229
	15	319	479	267	401	209	314	178	267	145	218
	16	300	451	252	379	198	298	169	253	138	207
	17	282	423	237	357	187	281	159	239	130	196
	18	263	396	222	334	176	264	150	225	123	184
	19	245	369	208	312	164	247	141	211	115	173
20	228	342	193	291	153	231	132	198	108	162	
22	194	291	166	249	132	199	114	171	93.4	140	
24	163	245	140	210	112	169	96.8	146	79.8	120	
26	139	208	119	179	95.6	144	82.5	124	68.0	102	
28	120	180	103	154	82.4	124	71.2	107	58.6	88.1	
30	104	157	89.4	134	71.8	108	62.0	93.2	51.1	76.7	
32	91.5	138	78.6	118	63.1	94.9	54.5	81.9	44.9	67.4	
34	81.1	122	69.6	105	55.9	84.0	48.3	72.5	39.7	59.7	
36	72.3	109	62.1	93.3	49.9	75.0	43.0	64.7	35.5	53.3	
38	64.9	97.6	55.7	83.8	44.8	67.3	38.6	58.1	31.8	47.8	
40					40.4	60.7	34.9	52.4	28.7	43.2	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	16.4		13.5		10.4		8.76		7.10		
r_y , in.	2.34		2.39		2.44		2.47		2.49		
r_x/r_y	1.50		1.49		1.49		1.48		1.48		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS10

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape		HSS10x6x				HSS10x5x					
		$\frac{3}{16}^{a,b,c}$		$\frac{3}{8}$	$\frac{5}{16}^a$	$\frac{1}{4}^{a,c}$		$\frac{3}{16}^{a,c}$			
t_{des} , in.		0.174		0.349	0.291		0.233		0.174		
lb/ft		19.6		35.1	29.7		24.1		18.4		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	132	198	290	435	245	368	185	278	121	183
	1	132	198	289	434	244	367	184	277	121	182
	2	131	197	287	431	242	364	183	276	121	181
	3	130	196	283	425	239	360	182	273	120	180
	4	129	194	278	418	235	353	179	270	118	177
	5	128	192	272	409	230	346	176	265	116	175
	6	126	189	265	398	224	337	173	260	114	171
	7	124	186	256	385	217	326	169	253	111	167
	8	121	182	247	371	209	314	164	246	108	163
	9	119	178	236	355	200	301	159	239	105	158
	10	116	174	225	339	191	288	153	230	102	153
	11	113	169	214	321	182	273	147	221	97.8	147
	12	109	164	202	303	172	258	141	212	93.8	141
	13	106	159	190	285	161	243	133	199	89.7	135
	14	102	153	177	266	151	227	124	187	85.5	128
	15	98.3	148	165	248	141	212	116	174	81.1	122
	16	94.4	142	152	229	130	196	108	162	76.7	115
	17	90.4	136	140	211	120	181	99.6	150	72.2	109
	18	86.3	130	129	193	110	166	91.6	138	67.8	102
	19	82.2	124	117	176	101	151	83.8	126	63.4	95.2
	20	78.1	117	106	159	91.4	137	76.3	115	59.0	88.6
	22	69.8	105	87.6	132	75.5	113	63.1	94.8	49.1	73.8
24	61.7	92.8	73.6	111	63.4	95.3	53.0	79.6	41.3	62.0	
26	52.7	79.1	62.7	94.3	54.1	81.2	45.1	67.9	35.2	52.9	
28	45.4	68.2	54.1	81.3	46.6	70.1	38.9	58.5	30.3	45.6	
30	39.6	59.4	47.1	70.8	40.6	61.0	33.9	51.0	26.4	39.7	
32	34.8	52.2	41.4	62.3	35.7	53.6	29.8	44.8	23.2	34.9	
34	30.8	46.3	36.7	55.2	31.6	47.5	26.4	39.7	20.6	30.9	
36	27.5	41.3									
38	24.7	37.0									
40	22.2	33.4									
42	20.2	30.3									
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		161	242	290	435	245	368	199	298	150	226
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		125	187	225	337	190	285	154	231	117	175
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		59.3	89.1	112	169	95.5	143	77.9	117	59.3	89.1
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		34.3	51.5	49.5	74.4	43.2	64.9	36.0	54.1	28.0	42.1
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
		39.7	59.7	75.8	114	64.9	97.5	53.1	79.9	40.7	61.1
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
		22.4	33.7	46.7	70.1	36.8	55.3	26.9	40.5	17.7	26.6
Properties											
Area, in. ²		5.37		9.67		8.17		6.63		5.02	
r_y , in.		2.52		2.05		2.07		2.10		2.13	
r_x/r_y		1.48		1.72		1.72		1.71		1.70	

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS10

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS10x4x										
	5/8		1/2		3/8		5/16 ^a		1/4 ^{a,c}		
t_{des} , in.	0.581		0.465		0.349		0.291		0.233		
lb/ft	50.8		42.1		32.6		27.6		22.4		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	419	630	347	522	269	404	227	342	171	257
	1	417	627	346	520	268	402	226	340	171	256
	2	412	619	342	513	264	397	224	336	169	254
	3	403	605	335	503	259	390	220	330	167	251
	4	390	587	325	488	252	379	214	322	164	246
	5	375	564	313	470	244	366	207	311	159	240
	6	357	537	299	449	233	351	198	298	155	232
	7	337	507	283	426	222	333	189	284	149	224
	8	315	474	266	400	209	314	178	268	143	215
	9	293	440	248	373	196	294	167	252	136	205
	10	269	404	229	344	182	273	156	234	128	193
	11	245	368	210	315	167	251	144	216	119	179
	12	221	332	191	287	153	230	132	198	109	164
	13	198	298	172	258	139	208	120	180	99.8	150
	14	176	264	154	231	125	187	108	163	90.5	136
	15	154	232	136	205	111	167	97.2	146	81.4	122
	16	135	203	120	180	98.4	148	86.3	130	72.7	109
	17	120	180	106	159	87.1	131	76.5	115	64.4	96.8
	18	107	161	94.5	142	77.7	117	68.2	102	57.4	86.3
	19	96.0	144	84.8	127	69.8	105	61.2	92.0	51.6	77.5
	20	86.6	130	76.5	115	63.0	94.6	55.2	83.0	46.5	69.9
	22	71.6	108	63.2	95.1	52.0	78.2	45.7	68.6	38.5	57.8
	24	60.2	90.4	53.1	79.9	43.7	65.7	38.4	57.7	32.3	48.6
	26			45.3	68.1	37.3	56.0	32.7	49.1	27.5	41.4
	28									23.7	35.7
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	14.0		11.6		8.97		7.59		6.17		
r_y , in.	1.54		1.59		1.64		1.67		1.70		
r_x/r_y	2.12		2.10		2.08		2.06		2.05		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS10

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS10x4x				HSS10x3½x						
	¾ ^{a,c}		½ ^{a,b,c}		½		¾		5/16 ^a		
t_{des} , in.	0.174		0.116		0.465		0.349		0.291		
lb/ft	17.1		11.6		40.3		31.3		26.5		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	111	167	60.9	91.5	332	499	258	388	219	328
	1	111	166	60.7	91.2	331	497	257	386	217	327
	2	110	165	60.2	90.5	325	489	253	380	214	322
	3	108	163	59.5	89.4	316	476	247	371	209	314
	4	106	160	58.4	87.7	305	458	238	358	202	304
	5	104	156	57.0	85.7	290	436	227	342	193	290
	6	101	152	55.4	83.3	273	411	215	323	183	275
	7	97.4	146	53.6	80.5	254	382	201	302	172	258
	8	93.5	141	51.5	77.4	234	352	186	280	159	239
	9	89.4	134	49.3	74.1	214	321	171	257	146	220
	10	84.9	128	46.9	70.5	193	290	155	233	133	200
	11	80.3	121	44.4	66.8	172	258	140	210	120	181
	12	75.5	113	41.9	62.9	152	228	124	187	107	161
	13	70.5	106	39.3	59.0	132	199	109	164	94.9	143
	14	65.5	98.5	36.6	55.1	114	172	95.2	143	82.9	125
	15	60.5	91.0	34.0	51.1	99.5	150	82.9	125	72.2	108
	16	55.6	83.5	31.4	47.2	87.4	131	72.9	110	63.4	95.4
	17	49.9	75.0	28.8	43.3	77.5	116	64.6	97.0	56.2	84.5
	18	44.5	66.9	26.4	39.7	69.1	104	57.6	86.5	50.1	75.3
	19	39.9	60.0	24.4	36.6	62.0	93.2	51.7	77.7	45.0	67.6
	20	36.1	54.2	22.5	33.9	56.0	84.1	46.6	70.1	40.6	61.0
	22	29.8	44.8	19.5	29.3	46.3	69.5	38.5	57.9	33.6	50.4
	24	25.0	37.6	17.1	25.6			32.4	48.7	28.2	42.4
	26	21.3	32.1	14.9	22.5						
	28	18.4	27.6	12.9	19.4						
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	4.67		3.16		11.1		8.62		7.30		
r_y , in.	1.72		1.75		1.39		1.44		1.46		
r_x/r_y	2.05		2.03		2.35		2.32		2.32		


^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

 HSS10		Table 6-D (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS						A500 Gr. C $F_y = 50$ ksi $F_u = 62$ ksi			
		HSS10x3½x			HSS10x3x						
Shape		¼ ^{a,c}	¾ ^{a,c}	⅝ ^{a,b,c}	⅜	⅝ ^a					
t_{des} , in.		0.233	0.174	0.116	0.349	0.291					
lb/ft		21.6	16.4	11.1	30.0	25.5					
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	164	246	106	159	57.3	86.1	248	372	210	315
	1	163	245	106	159	57.1	85.8	246	370	208	313
	2	161	243	104	157	56.5	85.0	241	362	204	307
	3	159	238	103	154	55.6	83.6	232	349	198	297
	4	155	232	100	151	54.3	81.6	221	332	188	283
	5	150	225	97.2	146	52.7	79.3	207	312	177	267
	6	144	216	93.6	141	50.9	76.4	192	288	165	248
	7	137	206	89.6	135	48.7	73.2	175	263	151	227
	8	130	195	85.1	128	46.4	69.7	157	237	136	205
	9	121	182	80.3	121	43.9	65.9	140	210	122	183
	10	110	166	75.2	113	41.2	61.9	122	183	107	161
	11	100	150	69.9	105	38.5	57.8	105	158	92.9	140
	12	89.7	135	64.6	97.0	35.7	53.6	89.2	134	79.4	119
	13	79.7	120	59.2	88.9	32.9	49.4	76.0	114	67.7	102
	14	70.1	105	53.8	80.8	30.1	45.3	65.6	98.5	58.3	87.7
	15	61.1	91.8	47.6	71.5	27.3	41.1	57.1	85.8	50.8	76.4
	16	53.7	80.7	41.8	62.9	24.9	37.4	50.2	75.4	44.7	67.1
	17	47.5	71.5	37.1	55.7	22.7	34.1	44.5	66.8	39.6	59.5
	18	42.4	63.7	33.1	49.7	20.9	31.4	39.7	59.6	35.3	53.0
	19	38.1	57.2	29.7	44.6	19.2	28.9	35.6	53.5	31.7	47.6
	20	34.4	51.6	26.8	40.2	17.8	26.8	32.1	48.3	28.6	43.0
	22	28.4	42.7	22.1	33.3	15.4	23.1				
	24	23.9	35.9	18.6	27.9	13.1	19.6				
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
Properties											
Area, in. ²		5.93	4.50	3.04	8.27	7.01					
r_y , in.		1.49	1.51	1.54	1.22	1.25					
r_x/r_y		2.29	2.28	2.27	2.67	2.64					

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

 HSS10		Table 6-D (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS						A500 Gr. C $F_y = 50$ ksi $F_u = 62$ ksi			
		HSS10x3x			HSS10x2x						
Shape		$\frac{1}{4}^a$, c	$\frac{3}{16}^a$, c	$\frac{1}{8}^a, b, c$	$\frac{3}{8}$	$\frac{5}{16}^a$					
t_{des} , in.		0.233	0.174	0.116	0.349	0.291					
lb/ft		20.7	15.8	10.7	27.5	23.3					
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	157	236	100	151	54.0	81.1	227	341	193	289
	1	156	235	100	150	53.7	80.8	223	335	189	285
	2	154	231	98.7	148	53.1	79.7	212	319	181	271
	3	150	226	96.5	145	51.9	78.0	195	293	167	251
	4	145	218	93.5	141	50.4	75.7	173	260	149	224
	5	139	209	89.8	135	48.4	72.8	148	223	129	194
	6	132	198	85.4	128	46.2	69.4	123	185	108	163
	7	124	186	80.5	121	43.7	65.6	98.7	148	88.0	132
	8	113	170	75.2	113	40.9	61.5	76.6	115	69.1	104
	9	101	152	69.6	105	38.0	57.2	60.5	90.9	54.6	82.1
	10	89.8	135	63.8	95.8	35.1	52.7	49.0	73.7	44.3	66.5
	11	78.4	118	57.8	86.9	32.0	48.1	40.5	60.9	36.6	55.0
	12	67.6	102	51.9	78.0	29.0	43.6	34.0	51.1	30.7	46.2
	13	57.7	86.7	45.1	67.8	26.0	39.1	29.0	43.6	26.2	39.4
	14	49.7	74.8	38.9	58.4	23.3	35.1				
	15	43.3	65.1	33.9	50.9	21.1	31.7				
	16	38.1	57.2	29.8	44.7	19.2	28.8				
	17	33.7	50.7	26.4	39.6	17.5	26.4				
	18	30.1	45.2	23.5	35.4	16.1	24.2				
	19	27.0	40.6	21.1	31.7	14.8	22.3				
	20	24.4	36.6	19.1	28.6	13.5	20.3				
	22					11.2	16.8				
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
Properties											
Area, in. ²		5.70	4.32	2.93	7.58	6.43					
r_y , in.		1.28	1.30	1.33	0.787	0.812					
r_x/r_y		2.61	2.60	2.57	3.91	3.84					

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS10-HSS9

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS10x2x						HSS9x7x				
	$\frac{1}{4}^a, c$		$\frac{3}{16}^a, c$		$\frac{1}{8}^a, b, c$		$\frac{5}{8}$		$\frac{1}{2}$		
t_{des} , in.	0.233		0.174		0.116		0.581		0.465		
lb/ft	19.0		14.5		9.86		59.3		48.9		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	143	215	90.3	136	47.1	70.8	491	738	404	607
	1	142	213	89.4	134	46.7	70.1	490	737	404	607
	2	137	206	86.8	131	45.4	68.2	488	734	402	604
	3	130	195	82.7	124	43.4	65.2	485	728	399	600
	4	120	181	77.2	116	40.7	61.1	480	721	395	594
	5	108	162	70.6	106	37.5	56.3	473	711	390	586
	6	91.4	137	63.3	95.1	33.9	50.9	466	700	384	577
	7	75.3	113	55.5	83.4	30.1	45.2	457	687	377	567
	8	60.0	90.2	47.6	71.5	26.2	39.4	447	672	369	555
	9	47.4	71.3	38.3	57.5	22.4	33.7	436	655	360	542
	10	38.4	57.7	31.0	46.6	19.3	29.0	424	637	351	527
	11	31.7	47.7	25.6	38.5	16.9	25.4	411	618	341	512
	12	26.7	40.1	21.5	32.4	14.9	22.4	398	598	330	496
	13	22.7	34.2	18.4	27.6	13.2	19.9	383	576	318	478
	14			15.8	23.8	11.4	17.1	368	554	306	461
	15							353	531	294	442
	16							337	507	282	423
	17							321	483	269	404
	18							305	459	256	384
	19							289	435	243	365
	20							273	411	230	345
	22							242	363	204	307
	24							211	317	179	269
	26							182	273	155	234
28							157	236	134	201	
30							137	205	117	175	
32							120	180	103	154	
34							106	160	90.8	137	
36							94.9	143	81.0	122	
38							85.1	128	72.7	109	
40							76.8	115	65.6	98.7	
42							69.7	105	59.5	89.5	
44							63.5	95.5	54.2	81.5	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	157	236	119	179	80.8	122	491	738	404	608	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	122	183	92.5	139	62.8	94.2	381	572	314	471	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	77.9	117	59.3	89.1	25.5	38.3	152	228	127	191	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	10.9	16.4	9.25	13.9	6.88	10.3	110	165	93.6	141	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
	35.9	54.0	27.7	41.6	17.6	26.4	121	181	101	152	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
	8.34	12.5	5.54	8.32	2.93	4.41	101	152	84.8	128	
Properties											
Area, in. ²	5.24		3.98		2.70		16.4		13.5		
r_y , in.	0.838		0.864		0.890		2.68		2.73		
r_x/r_y	3.78		3.72		3.65		1.22		1.22		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS9

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS9x7x								HSS9x5x		
	3/8		5/16 ^a		1/4 ^{a, b, c}		3/16 ^{a, b, c}		5/8		
t_{des} , in.	0.349		0.291		0.233		0.174		0.581		
lb/ft	37.7		31.8		25.8		19.6		50.8		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	311	468	262	394	209	313	137	205	419	630
	1	311	467	262	394	208	313	136	205	418	628
	2	310	465	261	392	208	312	136	205	414	623
	3	308	462	259	389	207	310	136	204	409	614
	4	305	458	257	386	205	308	135	202	400	602
	5	301	452	254	381	203	305	134	201	390	587
	6	296	446	250	376	201	302	132	199	378	568
	7	291	438	246	369	198	297	131	197	364	548
	8	285	429	241	362	195	293	129	194	349	525
	9	279	419	235	354	191	287	128	192	333	500
	10	272	408	230	345	187	280	125	189	315	473
	11	264	397	223	335	182	273	123	185	297	446
	12	256	385	216	325	176	265	121	182	278	418
	13	247	372	209	315	170	256	118	177	259	389
	14	238	358	202	304	165	247	115	172	239	360
	15	229	344	194	292	158	238	111	167	220	331
	16	220	330	186	280	152	229	108	162	202	303
	17	210	316	178	268	146	219	104	156	184	276
	18	200	301	170	256	139	209	100	151	166	250
	19	190	286	162	244	133	199	96.5	145	149	224
	20	181	271	154	231	126	190	92.7	139	135	202
	22	161	242	138	207	113	170	84.8	128	111	167
	24	142	214	122	183	100	151	77.0	116	93.5	141
	26	124	186	106	160	88.0	132	67.8	102	79.7	120
	28	107	161	92.1	138	76.2	115	58.9	88.5	68.7	103
	30	93.2	140	80.2	121	66.4	99.8	51.3	77.1	59.9	90.0
32	81.9	123	70.5	106	58.4	87.7	45.1	67.8	52.6	79.1	
34	72.6	109	62.5	93.9	51.7	77.7	39.9	60.0			
36	64.7	97.3	55.7	83.7	46.1	69.3	35.6	53.5			
38	58.1	87.3	50.0	75.1	41.4	62.2	32.0	48.1			
40	52.4	78.8	45.1	67.8	37.4	56.2	28.9	43.4			
42	47.6	71.5	40.9	61.5	33.9	50.9	26.2	39.3			
44	43.3	65.1	37.3	56.1	30.9	46.4	23.8	35.8			
46	39.6	59.6	34.1	51.3	28.2	42.5	21.8	32.8			
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	10.4		8.76		7.10		5.37		14.0		
r_y , in.	2.78		2.81		2.84		2.87		1.92		
r_x/r_y	1.22		1.21		1.21		1.21		1.60		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS9

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape		HSS9x5x										
		1/2		3/8		5/16 ^a		1/4 ^{a,c}		3/16 ^{a,c}		
t_{des} , in.		0.465		0.349		0.291		0.233		0.174		
lb/ft		42.1		32.6		27.6		22.4		17.1		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	347	522	269	404	227	342	181	272	120	180	
	1	346	521	268	403	227	341	180	271	120	180	
	2	344	516	266	400	225	338	179	270	119	179	
	3	339	509	262	394	222	334	178	267	118	177	
	4	333	500	258	387	218	328	175	263	116	175	
	5	325	488	252	379	213	321	172	259	114	172	
	6	315	473	245	368	208	312	168	253	112	168	
	7	304	457	237	356	201	302	164	246	109	164	
	8	292	439	228	343	194	291	158	238	106	160	
	9	279	419	218	328	186	279	152	228	103	155	
	10	265	398	208	313	177	266	145	218	99.3	149	
	11	250	376	197	296	168	252	138	207	95.5	144	
	12	235	353	186	279	158	238	130	196	91.5	137	
	13	220	330	174	262	149	224	122	184	87.2	131	
	14	204	307	163	245	139	209	115	172	82.9	125	
	15	189	284	151	227	129	194	107	161	78.5	118	
	16	173	261	140	210	120	180	99.1	149	74.0	111	
	17	159	238	128	193	110	166	91.4	137	69.5	104	
	18	144	217	117	176	101	152	84.0	126	64.5	97.0	
	19	130	196	107	160	92.0	138	76.7	115	59.1	88.8	
	20	117	177	96.5	145	83.2	125	69.7	105	53.7	80.8	
	22	97.1	146	79.7	120	68.8	103	57.6	86.5	44.4	66.8	
	24	81.6	123	67.0	101	57.8	86.9	48.4	72.7	37.3	56.1	
	26	69.5	104	57.1	85.8	49.3	74.0	41.2	62.0	31.8	47.8	
	28	59.9	90.1	49.2	74.0	42.5	63.8	35.5	53.4	27.4	41.2	
	30	52.2	78.5	42.9	64.4	37.0	55.6	31.0	46.5	23.9	35.9	
	32	45.9	69.0	37.7	56.6	32.5	48.9	27.2	40.9	21.0	31.6	
	34					28.8	43.3	24.1	36.2	18.6	27.9	
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
	Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
Properties												
Area, in. ²		11.6		8.97		7.59		6.17		4.67		
r_y , in.		1.97		2.03		2.05		2.08		2.10		
r_x/r_y		1.59		1.58		1.58		1.57		1.58		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS9

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape		HSS9x3x									
		1/2		3/8		5/16 ^a		1/4 ^{a,c}		3/16 ^{a,c}	
t_{des} , in.		0.465		0.349		0.291		0.233		0.174	
lb/ft		35.2		27.5		23.3		19.0		14.5	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	292	438	227	341	193	289	153	230	99.1	149
	1	289	435	225	339	191	287	152	229	98.6	148
	2	283	425	221	331	187	282	150	225	97.3	146
	3	272	409	213	320	181	272	146	220	95.0	143
	4	258	388	202	304	173	259	141	212	92.0	138
	5	241	362	190	285	162	244	133	200	88.2	133
	6	221	332	175	263	150	226	124	186	83.7	126
	7	200	301	160	240	138	207	114	171	78.8	118
	8	178	268	143	215	124	187	103	155	73.4	110
	9	156	235	127	191	111	166	92.5	139	67.7	102
	10	135	203	111	166	97.1	146	81.7	123	61.8	92.8
	11	115	173	95.1	143	84.1	126	71.2	107	55.4	83.3
	12	96.6	145	80.4	121	71.7	108	61.3	92.1	47.9	72.0
	13	82.3	124	68.5	103	61.1	91.8	52.2	78.5	40.9	61.5
	14	71.0	107	59.1	88.8	52.7	79.1	45.0	67.6	35.3	53.0
	15	61.9	93.0	51.5	77.4	45.9	68.9	39.2	58.9	30.7	46.2
	16	54.4	81.7	45.2	68.0	40.3	60.6	34.5	51.8	27.0	40.6
	17	48.2	72.4	40.1	60.2	35.7	53.7	30.5	45.9	23.9	36.0
	18	43.0	64.6	35.8	53.7	31.9	47.9	27.2	40.9	21.3	32.1
	19	38.6	57.9	32.1	48.2	28.6	43.0	24.4	36.7	19.2	28.8
	20			29.0	43.5	25.8	38.8	22.1	33.1	17.3	26.0
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		292	438	227	341	193	289	153	230	99.1	149
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		226	340	176	264	149	224	122	183	92.5	139
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		127	191	99.7	150	85.0	128	69.5	104	53.0	79.7
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		26.7	40.2	24.5	36.7	22.3	33.5	19.3	28.9	15.5	23.3
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
		61.4	92.3	49.2	73.9	42.2	63.4	34.9	52.5	26.9	40.5
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
		26.9	40.5	22.0	33.0	18.7	28.1	13.6	20.4	9.02	13.6
Properties											
Area, in. ²		9.74		7.58		6.43		5.24		3.98	
r_y , in.		1.17		1.21		1.24		1.27		1.29	
r_x/r_y		2.46		2.45		2.42		2.39		2.38	

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS8

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS


A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape		HSS8x6x										
		5/8		1/2		3/8		5/16		1/4 ^a		
t_{des} , in.		0.581		0.465		0.349		0.291		0.233		
lb/ft		50.8		42.1		32.6		27.6		22.4		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	419	630	347	522	269	404	227	342	185	278	
	1	418	629	347	521	268	403	227	341	184	277	
	2	416	625	345	518	267	401	226	339	183	276	
	3	412	619	341	513	264	397	224	336	182	273	
	4	406	610	337	506	261	392	221	332	180	270	
	5	398	599	331	497	256	385	217	326	177	266	
	6	389	585	324	487	251	378	213	320	173	260	
	7	379	570	316	474	245	369	208	312	169	254	
	8	368	553	306	461	238	358	202	304	165	248	
	9	355	534	296	446	231	347	196	295	160	240	
	10	342	514	286	429	223	335	189	284	155	232	
	11	327	492	274	412	214	322	182	274	149	224	
	12	312	469	262	394	205	309	175	263	143	215	
	13	297	446	250	375	196	295	167	251	137	205	
	14	281	422	237	356	187	280	159	239	130	196	
	15	265	398	224	336	177	266	151	226	124	186	
	16	248	373	210	316	167	251	142	214	117	176	
	17	232	349	197	297	157	236	134	201	110	166	
	18	216	325	184	277	147	221	126	189	104	156	
	19	200	301	171	258	137	206	117	177	97.0	146	
	20	185	278	159	239	128	192	109	164	90.5	136	
	22	156	234	135	202	109	164	93.8	141	77.9	117	
	24	131	196	113	170	92.1	138	79.2	119	66.0	99.2	
	26	111	167	96.4	145	78.5	118	67.5	101	56.3	84.6	
	28	96.0	144	83.1	125	67.6	102	58.2	87.5	48.5	72.9	
	30	83.7	126	72.4	109	58.9	88.6	50.7	76.2	42.3	63.5	
	32	73.5	111	63.6	95.7	51.8	77.8	44.6	67.0	37.1	55.8	
	34	65.1	97.9	56.4	84.7	45.9	69.0	39.5	59.3	32.9	49.4	
	36	58.1	87.3	50.3	75.6	40.9	61.5	35.2	52.9	29.3	44.1	
	38			45.1	67.8	36.7	55.2	31.6	47.5	26.3	39.6	
	40							28.5	42.9	23.8	35.7	
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
	Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
	Properties											
	Area, in. ²		14.0		11.6		8.97		7.59		6.17	
	r_y , in.		2.27		2.32		2.38		2.40		2.43	
r_x/r_y		1.26		1.25		1.25		1.25		1.25		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

 HSS8		Table 6-D (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $F_u = 62$ ksi	
		HSS8x6x		HSS8x4x									
Shape		$\frac{3}{16}$ ^{a, b, c}		$\frac{5}{8}$	$\frac{1}{2}$	$\frac{3}{8}$	$\frac{5}{16}$						
t_{des} , in.		0.174		0.581	0.465	0.349		0.291					
lb/ft		17.1		42.3	35.2		27.5						
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	128	192	350	526	292	438	227	341	193	289		
	1	128	192	349	524	290	436	226	340	192	288		
	2	127	191	344	517	287	431	223	336	189	285		
	3	126	190	336	505	280	422	219	329	186	279		
	4	125	188	325	489	272	409	213	320	181	272		
	5	124	186	312	469	262	393	205	308	174	262		
	6	122	183	297	446	250	375	196	295	167	251		
	7	119	179	279	420	236	355	186	280	159	238		
	8	117	176	261	392	221	332	175	263	149	225		
	9	114	171	241	362	205	309	163	245	140	210		
	10	111	167	221	332	189	284	151	227	130	195		
	11	108	162	200	301	173	260	139	209	119	179		
	12	104	157	180	271	156	235	126	190	109	164		
	13	101	151	161	241	140	211	114	172	98.5	148		
	14	96.9	146	142	213	125	188	102	154	88.5	133		
	15	92.9	140	124	186	110	165	91.0	137	78.9	119		
	16	88.9	134	109	163	96.6	145	80.1	120	69.7	105		
	17	84.6	127	96.4	145	85.6	129	71.0	107	61.7	92.7		
	18	79.6	120	85.9	129	76.4	115	63.3	95.1	55.0	82.7		
	19	74.6	112	77.1	116	68.5	103	56.8	85.4	49.4	74.2		
20	69.7	105	69.6	105	61.9	93.0	51.3	77.1	44.6	67.0			
22	60.2	90.5	57.5	86.5	51.1	76.8	42.4	63.7	36.8	55.4			
24	51.2	77.0	48.3	72.7	43.0	64.6	35.6	53.5	31.0	46.5			
26	43.6	65.6			36.6	55.0	30.3	45.6	26.4	39.6			
28	37.6	56.6											
30	32.8	49.3											
32	28.8	43.3											
34	25.5	38.4											
36	22.8	34.2											
38	20.4	30.7											
40	18.4	27.7											
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		
Properties													
Area, in. ²		4.67		11.7		9.74		7.58		6.43			
r_y , in.		2.46		1.51		1.56		1.61		1.63			
r_x/r_y		1.24		1.75		1.74		1.73		1.73			

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS8

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS8x4x						HSS8x3x				
	$\frac{1}{4}$ ^a		$\frac{3}{16}$ ^{a,c}		$\frac{1}{8}$ ^{a,b,c}		$\frac{1}{2}$		$\frac{3}{8}$		
t_{des} , in.	0.233		0.174		0.116		0.465		0.349		
lb/ft	19.0		14.5		9.86		31.8		24.9		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	157	236	107	161	59.9	90.0	264	396	206	310
	1	156	235	107	161	59.7	89.7	262	393	204	307
	2	155	232	106	159	59.2	89.0	256	384	200	301
	3	152	228	105	157	58.4	87.7	246	369	193	290
	4	148	222	102	154	57.3	86.0	232	349	183	275
	5	143	214	99.9	150	55.8	83.9	216	325	172	258
	6	137	205	96.8	145	54.1	81.4	198	298	158	238
	7	130	196	93.2	140	52.2	78.5	179	268	144	216
	8	123	185	89.3	134	50.1	75.3	158	238	129	194
	9	115	173	85.0	128	47.8	71.8	138	208	114	171
	10	107	161	80.4	121	45.3	68.1	119	179	99.2	149
	11	98.8	149	75.6	114	42.8	64.3	101	151	85.0	128
	12	90.5	136	70.1	105	40.1	60.3	84.5	127	71.8	108
	13	82.3	124	63.9	96.1	37.4	56.2	72.0	108	61.2	92.0
	14	74.2	112	57.9	87.0	34.7	52.2	62.0	93.3	52.8	79.3
	15	66.4	99.8	52.0	78.1	32.0	48.1	54.1	81.2	46.0	69.1
	16	58.9	88.5	46.3	69.7	29.4	44.1	47.5	71.4	40.4	60.7
	17	52.2	78.4	41.1	61.7	26.7	40.2	42.1	63.2	35.8	53.8
	18	46.5	69.9	36.6	55.0	24.4	36.7	37.5	56.4	31.9	48.0
	19	41.8	62.8	32.9	49.4	22.4	33.7	33.7	50.6	28.6	43.1
	20	37.7	56.6	29.7	44.6	20.6	31.0			25.9	38.9
	22	31.1	46.8	24.5	36.8	17.0	25.6				
	24	26.2	39.3	20.6	31.0	14.3	21.5				
	26	22.3	33.5	17.6	26.4	12.2	18.3				
	28			15.1	22.7	10.5	15.8				
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	5.24		3.98		2.70		8.81		6.88		
r_y , in.	1.66		1.69		1.71		1.15		1.20		
r_x/r_y	1.72		1.70		1.71		2.24		2.21		


^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

 HSS8		Table 6-D (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS								A500 Gr. C $F_y = 50$ ksi $F_u = 62$ ksi	
		HSS8x3x								HSS8x2x	
Shape		$\frac{5}{16}$		$\frac{1}{4}$ ^a		$\frac{3}{16}$ ^{a, c}		$\frac{1}{8}$ ^{a, b, c}		$\frac{3}{8}$	
t_{des} , in.		0.291		0.233		0.174		0.116		0.349	
lb/ft		21.2		17.3		13.3		9.01		22.4	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	175	263	143	215	96.8	146	52.7	79.2	185	278
	1	174	261	142	213	96.4	145	52.4	78.8	182	273
	2	170	256	139	209	95.0	143	51.7	77.7	173	259
	3	165	247	134	202	92.7	139	50.6	76.0	158	238
	4	157	236	128	193	89.6	135	49.0	73.6	140	210
	5	147	221	121	181	85.8	129	47.0	70.6	120	180
	6	136	205	112	168	81.3	122	44.7	67.2	98.8	148
	7	125	187	103	154	76.2	115	42.1	63.3	78.7	118
	8	112	169	92.8	139	70.8	106	39.3	59.1	60.9	91.5
	9	99.7	150	82.7	124	64.6	97.1	36.4	54.7	48.1	72.3
	10	87.3	131	72.8	109	57.2	85.9	33.4	50.2	38.9	58.5
	11	75.5	113	63.2	95.0	49.9	75.1	30.3	45.6	32.2	48.4
	12	64.2	96.4	54.0	81.2	43.1	64.7	27.3	41.0	27.0	40.6
	13	54.7	82.2	46.0	69.2	36.7	55.2	24.3	36.5		
	14	47.1	70.8	39.7	59.7	31.7	47.6	21.7	32.6		
	15	41.1	61.7	34.6	52.0	27.6	41.5	19.5	29.3		
	16	36.1	54.2	30.4	45.7	24.2	36.4	17.2	25.9		
	17	32.0	48.0	26.9	40.5	21.5	32.3	15.2	22.9		
	18	28.5	42.9	24.0	36.1	19.2	28.8	13.6	20.4		
	19	25.6	38.5	21.6	32.4	17.2	25.8	12.2	18.3		
	20	23.1	34.7	19.4	29.2	15.5	23.3	11.0	16.6		
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
Properties											
Area, in. ²		5.85		4.77		3.63		2.46		6.18	
r_y , in.		1.23		1.25		1.28		1.31		0.777	
r_x/r_y		2.19		2.18		2.16		2.14		3.20	

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS8-HSS7

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS8x2x								HSS7x5x		
	5/16		1/4 ^a		3/16 ^{a, c}		1/8 ^{a, b, c}		1/2		
t_{des} , in.	0.291		0.233		0.174		0.116		0.465		
lb/ft	19.1		15.6		12.0		8.16		35.2		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	157	237	129	193	86.3	130	45.8	68.8	292	438
	1	155	233	127	191	85.4	128	45.4	68.2	291	437
	2	148	222	121	182	82.8	124	44.1	66.2	288	433
	3	136	204	112	168	78.6	118	42.0	63.1	284	427
	4	121	182	101	151	72.9	110	39.3	59.0	278	419
	5	105	157	87.6	132	66.2	99.6	36.0	54.1	271	408
	6	87.4	131	74.0	111	58.3	87.7	32.4	48.6	263	395
	7	70.6	106	60.6	91.0	48.3	72.6	28.5	42.9	253	380
	8	55.2	82.9	48.0	72.1	38.9	58.5	24.6	37.0	242	364
	9	43.6	65.5	37.9	57.0	30.8	46.2	20.9	31.3	231	347
	10	35.3	53.1	30.7	46.1	24.9	37.4	17.8	26.8	219	328
	11	29.2	43.9	25.4	38.1	20.6	30.9	14.9	22.3	206	309
	12	24.5	36.9	21.3	32.0	17.3	26.0	12.5	18.8	192	289
	13	20.9	31.4	18.2	27.3	14.7	22.2	10.6	16.0	179	269
	14					12.7	19.1	9.18	13.8	166	249
	15									152	229
	16									139	209
	17									127	190
	18									114	172
	19									103	154
	20									92.7	139
	22									76.6	115
	24									64.4	96.8
	26									54.9	82.5
	28									47.3	71.1
	30									41.2	61.9
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	5.26		4.30		3.28		2.23		9.74		
r_y , in.	0.802		0.827		0.853		0.879		1.91		
r_x/r_y	3.15		3.11		3.06		3.01		1.31		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS7

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS7x5x										
	3/8		5/16		1/4 ^a		3/16 ^{a,c}		1/8 ^{a,b,c}		
t_{des} , in.	0.349		0.291		0.233		0.174		0.116		
lb/ft	27.5		23.3		19.0		14.5		9.86		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	227	341	193	289	157	236	115	173	62.6	94.0
	1	226	340	192	289	156	235	115	172	62.5	93.9
	2	224	337	190	286	155	233	114	171	62.2	93.4
	3	221	333	188	283	153	230	113	170	61.7	92.7
	4	217	327	184	277	151	226	111	167	61.0	91.7
	5	212	319	180	271	147	221	109	164	60.1	90.4
	6	206	309	175	263	143	215	107	161	59.1	88.8
	7	199	299	169	254	138	208	104	156	57.9	87.0
	8	191	287	162	244	133	200	101	152	56.5	85.0
	9	182	274	155	233	127	191	97.3	146	55.0	82.7
	10	173	260	148	222	121	182	92.8	139	53.4	80.2
	11	163	246	140	210	115	173	88.0	132	51.6	77.5
	12	154	231	131	197	108	163	83.1	125	49.7	74.6
	13	143	216	123	185	101	152	78.0	117	47.3	71.0
	14	133	200	114	172	94.6	142	72.9	110	44.8	67.3
	15	123	185	106	159	87.8	132	67.8	102	42.3	63.6
	16	113	170	97.5	146	81.0	122	62.7	94.3	39.8	59.8
	17	104	156	89.3	134	74.4	112	57.8	86.8	37.2	56.0
	18	94.2	142	81.3	122	68.0	102	52.9	79.5	34.7	52.2
	19	85.1	128	73.6	111	61.8	92.9	48.2	72.5	32.3	48.5
	20	76.8	115	66.4	99.9	55.8	83.9	43.6	65.6	29.8	44.7
	22	63.4	95.4	54.9	82.5	46.1	69.3	36.1	54.2	25.0	37.5
	24	53.3	80.1	46.1	69.4	38.7	58.2	30.3	45.6	21.0	31.5
	26	45.4	68.3	39.3	59.1	33.0	49.6	25.8	38.8	17.9	26.8
	28	39.2	58.9	33.9	51.0	28.5	42.8	22.3	33.5	15.4	23.2
	30	34.1	51.3	29.5	44.4	24.8	37.3	19.4	29.2	13.4	20.2
	32	30.0	45.1	26.0	39.0	21.8	32.8	17.0	25.6	11.8	17.7
	34							15.1	22.7	10.4	15.7
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
	Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
Properties											
Area, in. ²	7.58		6.43		5.24		3.98		2.70		
r_y , in.	1.97		1.99		2.02		2.05		2.07		
r_x/r_y	1.30		1.30		1.30		1.29		1.29		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS7

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS7x4x										
	1/2		3/8		5/16		1/4 ^a		3/16 ^{a,c}		
t_{des} , in.	0.465		0.349		0.291		0.233		0.174		
lb/ft	31.8		24.9		21.2		17.3		13.3		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	264	396	206	310	175	263	143	215	104	157
	1	263	395	205	308	174	262	142	214	104	157
	2	259	389	203	304	172	259	141	211	103	155
	3	253	381	198	298	169	254	138	207	102	153
	4	245	369	193	289	164	247	134	202	99.5	150
	5	236	354	185	279	158	238	129	195	96.8	145
	6	224	337	177	266	151	227	124	186	93.6	141
	7	212	318	168	252	144	216	118	177	89.9	135
	8	198	297	157	236	135	203	111	167	85.1	128
	9	183	275	146	220	126	189	104	156	79.8	120
	10	168	253	135	203	117	175	96.6	145	74.2	111
	11	153	230	124	186	107	161	88.9	134	68.4	103
	12	138	207	112	169	97.6	147	81.3	122	62.7	94.2
	13	123	185	101	152	88.2	133	73.7	111	57.0	85.6
	14	109	164	90.1	135	79.0	119	66.3	99.7	51.4	77.2
	15	95.7	144	79.7	120	70.2	106	59.2	89.0	46.0	69.1
	16	84.1	126	70.0	105	61.8	92.9	52.3	78.6	40.8	61.3
	17	74.5	112	62.0	93.2	54.8	82.3	46.3	69.6	36.1	54.3
	18	66.4	99.9	55.3	83.2	48.9	73.4	41.3	62.1	32.2	48.4
	19	59.6	89.6	49.7	74.6	43.8	65.9	37.1	55.8	28.9	43.5
	20	53.8	80.9	44.8	67.4	39.6	59.5	33.5	50.3	26.1	39.2
	22	44.5	66.8	37.0	55.7	32.7	49.2	27.7	41.6	21.6	32.4
	24	37.4	56.2	31.1	46.8	27.5	41.3	23.2	34.9	18.1	27.2
	26			26.5	39.9	23.4	35.2	19.8	29.8	15.4	23.2
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	8.81		6.88		5.85		4.77		3.63		
r_y , in.	1.53		1.58		1.61		1.64		1.66		
r_x/r_y	1.57		1.56		1.55		1.54		1.54		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS7

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS7x4x				HSS7x3x						
	$\frac{1}{8}^{a,b,c}$		$\frac{1}{2}$	$\frac{3}{8}$	$\frac{5}{16}$	$\frac{1}{4}^a$					
t_{des} , in.	0.116		0.465	0.349	0.291		0.233				
lb/ft	9.01		28.4	22.4		19.1		15.6			
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	58.9	88.5	236	355	185	278	157	237	129	193
	1	58.7	88.2	234	352	184	276	156	235	128	192
	2	58.2	87.5	228	343	180	270	153	230	125	188
	3	57.4	86.2	219	330	173	260	148	222	121	182
	4	56.2	84.5	207	311	164	247	140	211	115	173
	5	54.8	82.3	193	290	154	231	132	198	108	163
	6	53.1	79.8	176	265	142	213	122	183	101	151
	7	51.1	76.8	159	238	129	193	111	166	92.0	138
	8	48.9	73.6	140	211	115	173	99.4	149	83.1	125
	9	46.6	70.0	122	184	101	152	88.0	132	73.9	111
	10	44.1	66.3	105	158	88.0	132	76.7	115	64.9	97.6
	11	41.5	62.4	88.3	133	75.3	113	66.0	99.2	56.2	84.5
	12	38.8	58.4	74.2	112	63.4	95.3	55.8	83.9	47.9	72.0
	13	36.1	54.3	63.3	95.1	54.1	81.2	47.6	71.5	40.8	61.4
	14	33.4	50.2	54.5	82.0	46.6	70.0	41.0	61.6	35.2	52.9
	15	30.7	46.1	47.5	71.4	40.6	61.0	35.7	53.7	30.7	46.1
	16	28.0	42.1	41.8	62.8	35.7	53.6	31.4	47.2	27.0	40.5
	17	25.4	38.1	37.0	55.6	31.6	47.5	27.8	41.8	23.9	35.9
	18	22.6	34.0	33.0	49.6	28.2	42.4	24.8	37.3	21.3	32.0
	19	20.3	30.5			25.3	38.0	22.3	33.5	19.1	28.7
	20	18.3	27.6					20.1	30.2	17.3	25.9
	22	15.2	22.8								
	24	12.7	19.1								
	26	10.8	16.3								
	28	9.35	14.1								
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	2.46		7.88		6.18		5.26		4.30		
r_y , in.	1.69		1.14		1.19		1.21		1.24		
r_x/r_y	1.53		1.99		1.97		1.97		1.95		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS7

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi


Shape	HSS7x3x				HSS7x2x						
	$\frac{3}{16}^{a,c}$		$\frac{1}{8}^{a,c}$		$\frac{1}{4}^a$		$\frac{3}{16}^{a,c}$		$\frac{1}{8}^{a,c}$		
t_{des} , in.	0.174		0.116		0.233		0.174		0.116		
lb/ft	12.0		8.16		13.9		10.7		7.31		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	94.0	141	52.0	78.2	115	173	83.5	126	45.1	67.8
	1	93.5	141	51.8	77.8	113	170	82.6	124	44.7	67.1
	2	92.1	138	51.0	76.7	108	162	79.9	120	43.3	65.1
	3	89.8	135	49.8	74.9	99.8	150	75.6	114	41.2	62.0
	4	86.6	130	48.2	72.4	89.4	134	69.3	104	38.4	57.8
	5	82.6	124	46.1	69.3	77.7	117	60.7	91.2	35.1	52.8
	6	77.3	116	43.8	65.8	65.3	98.2	51.6	77.5	31.4	47.2
	7	71.0	107	41.1	61.8	53.3	80.1	42.6	64.0	27.5	41.4
	8	64.2	96.6	38.3	57.5	42.0	63.1	34.1	51.3	23.6	35.5
	9	57.4	86.3	35.3	53.0	33.2	49.9	27.0	40.5	19.6	29.4
	10	50.6	76.0	32.2	48.4	26.9	40.4	21.8	32.8	15.8	23.8
	11	44.0	66.2	29.1	43.7	22.2	33.4	18.0	27.1	13.1	19.7
	12	37.7	56.7	26.0	39.0	18.7	28.1	15.2	22.8	11.0	16.5
	13	32.2	48.3	22.9	34.4	15.9	23.9	12.9	19.4	9.37	14.1
	14	27.7	41.7	19.8	29.7			11.1	16.7	8.08	12.1
	15	24.2	36.3	17.2	25.9						
	16	21.2	31.9	15.1	22.7						
	17	18.8	28.3	13.4	20.1						
	18	16.8	25.2	12.0	18.0						
	19	15.1	22.6	10.7	16.1						
	20	13.6	20.4	9.68	14.6						
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	3.28		2.23		3.84		2.93		2.00		
r_y , in.	1.26		1.29		0.819		0.845		0.871		
r_y/r_x	1.94		1.93		2.77		2.73		2.70		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

 HSS6		Table 6-D (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $F_u = 62$ ksi	
		HSS6x5x											
Shape		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}^a$			
t_{des} , in.		0.465		0.349		0.291		0.233		0.174			
lb/ft		31.8		24.9		21.2		17.3		13.3			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	264	396	206	310	175	263	143	215	109	163		
	1	263	395	205	309	175	263	142	214	108	163		
	2	261	392	204	306	173	260	141	212	108	162		
	3	257	386	201	302	171	257	139	210	106	160		
	4	251	378	197	296	168	252	137	206	104	157		
	5	245	368	192	288	163	246	134	201	102	153		
	6	237	356	186	279	159	238	130	195	98.9	149		
	7	228	342	179	269	153	230	125	188	95.7	144		
	8	218	327	172	258	147	220	120	181	92.0	138		
	9	207	311	163	246	140	210	115	173	88.0	132		
	10	195	293	155	233	133	200	109	164	83.7	126		
	11	183	275	146	219	125	188	103	155	79.3	119		
	12	171	257	137	205	118	177	97.0	146	74.7	112		
	13	159	238	127	191	110	165	90.7	136	70.0	105		
	14	146	220	118	177	102	153	84.4	127	65.2	98.0		
	15	134	201	108	163	93.9	141	78.0	117	60.5	90.9		
	16	122	183	99.2	149	86.2	130	71.8	108	55.8	83.8		
	17	110	166	90.2	136	78.7	118	65.7	98.8	51.2	76.9		
	18	99.3	149	81.6	123	71.4	107	59.8	89.9	46.7	70.2		
	19	89.1	134	73.3	110	64.3	96.7	54.1	81.3	42.4	63.8		
	20	80.4	121	66.2	99.5	58.0	87.2	48.8	73.3	38.3	57.5		
	22	66.4	99.9	54.7	82.2	48.0	72.1	40.3	60.6	31.6	47.5		
	24	55.8	83.9	46.0	69.1	40.3	60.6	33.9	50.9	26.6	39.9		
	26	47.6	71.5	39.2	58.9	34.3	51.6	28.9	43.4	22.6	34.0		
	28	41.0	61.6	33.8	50.8	29.6	44.5	24.9	37.4	19.5	29.3		
	30	35.7	53.7	29.4	44.2	25.8	38.8	21.7	32.6	17.0	25.6		
	32			25.9	38.9	22.7	34.1	19.1	28.7	14.9	22.5		
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
	Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties													
Area, in. ²		8.81		6.88		5.85		4.77		3.63			
r_y , in.		1.87		1.92		1.95		1.98		2.01			
r_x/r_y		1.16		1.16		1.15		1.15		1.15			

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS6

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS6x5x				HSS6x4x						
	$\frac{1}{8}^{a,b,c}$		$\frac{1}{2}$	$\frac{3}{8}$	$\frac{5}{16}$	$\frac{1}{4}$					
t_{des} , in.	0.116		0.465	0.349	0.291	0.233					
lb/ft	9.01		28.4	22.4	19.1	15.6					
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	61.2	92.0	236	355	185	278	157	237	129	193
	1	61.1	91.9	235	353	184	277	157	236	128	193
	2	60.8	91.4	232	348	182	273	155	233	127	190
	3	60.3	90.7	226	340	178	267	152	228	124	187
	4	59.6	89.6	219	329	173	259	147	221	121	181
	5	58.7	88.3	210	315	166	249	142	213	116	175
	6	57.7	86.7	199	300	158	238	135	203	111	167
	7	56.4	84.8	188	282	149	224	128	193	106	159
	8	55.0	82.7	175	263	140	210	120	181	99.3	149
	9	53.5	80.3	161	243	130	195	112	168	92.6	139
	10	51.8	77.8	148	222	119	179	103	155	85.8	129
	11	49.9	75.0	134	201	109	164	94.5	142	78.8	118
	12	47.8	71.9	120	181	98.4	148	85.8	129	71.7	108
	13	45.4	68.2	107	161	88.2	133	77.2	116	64.8	97.4
	14	42.9	64.4	94.3	142	78.4	118	68.9	104	58.1	87.3
	15	40.3	60.6	82.3	124	68.9	104	60.9	91.6	51.6	77.6
	16	37.8	56.8	72.3	109	60.5	91.0	53.5	80.5	45.4	68.3
	17	35.2	52.9	64.0	96.2	53.6	80.6	47.4	71.3	40.3	60.5
	18	32.2	48.4	57.1	85.9	47.8	71.9	42.3	63.6	35.9	54.0
	19	29.3	44.0	51.3	77.1	42.9	64.5	38.0	57.1	32.2	48.4
	20	26.5	39.8	46.3	69.5	38.7	58.2	34.3	51.5	29.1	43.7
	22	21.9	32.9	38.2	57.5	32.0	48.1	28.3	42.6	24.0	36.1
	24	18.4	27.6	32.1	48.3	26.9	40.4	23.8	35.8	20.2	30.4
	26	15.7	23.5					20.3	30.5	17.2	25.9
	28	13.5	20.3								
	30	11.8	17.7								
	32	10.3	15.5								
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	2.46		7.88		6.18		5.26		4.30		
r_y , in.	2.03		1.50		1.55		1.58		1.61		
r_x/r_y	1.15		1.39		1.38		1.37		1.37		


^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

 HSS6		Table 6-D (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $F_u = 62$ ksi	
		HSS6x4x						HSS6x3x					
Shape		$\frac{3}{16}^a$		$\frac{1}{8}^{a, b, c}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$			
t_{des} , in.		0.174		0.116		0.465		0.349		0.291			
lb/ft		12.0		8.16		25.0		19.8		17.0			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	98.2	148	57.9	87.0	208	313	164	247	140	211		
	1	97.8	147	57.7	86.7	206	310	163	245	139	209		
	2	96.7	145	57.2	85.9	201	302	159	239	136	204		
	3	94.8	142	56.3	84.6	193	290	153	230	131	197		
	4	92.2	139	55.1	82.8	182	273	145	218	124	187		
	5	88.9	134	53.6	80.6	169	254	135	203	116	175		
	6	85.1	128	51.8	77.9	154	231	124	187	107	161		
	7	80.9	122	49.8	74.9	138	207	113	169	97.3	146		
	8	76.2	115	47.6	71.5	122	183	100	151	87.1	131		
	9	71.2	107	45.2	67.9	105	158	88.0	132	76.7	115		
	10	66.1	99.3	42.6	64.0	89.9	135	76.0	114	66.6	100		
	11	60.8	91.4	39.9	60.0	75.2	113	64.7	97.2	57.0	85.7		
	12	55.5	83.4	37.2	55.9	63.2	95.0	54.4	81.7	48.0	72.2		
	13	50.3	75.5	34.4	51.7	53.8	80.9	46.3	69.6	40.9	61.5		
	14	45.2	67.9	31.6	47.5	46.4	69.8	39.9	60.0	35.3	53.0		
	15	40.3	60.5	28.3	42.5	40.4	60.8	34.8	52.3	30.7	46.2		
	16	35.5	53.4	25.1	37.7	35.5	53.4	30.6	46.0	27.0	40.6		
	17	31.5	47.3	22.2	33.4	31.5	47.3	27.1	40.7	23.9	36.0		
	18	28.1	42.2	19.8	29.8	28.1	42.2	24.2	36.3	21.4	32.1		
	19	25.2	37.9	17.8	26.7			21.7	32.6	19.2	28.8		
	20	22.7	34.2	16.0	24.1								
	22	18.8	28.2	13.3	19.9								
	24	15.8	23.7	11.1	16.7								
	26	13.5	20.2	9.49	14.3								
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		
Properties													
Area, in. ²		3.28		2.23		6.95		5.48		4.68			
r_y , in.		1.63		1.66		1.12		1.17		1.19			
r_x/r_y		1.37		1.36		1.76		1.74		1.74			

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS6

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS6x3x						HSS6x2x				
	1/4		3/16 ^a		1/8 ^{a,c}		3/8		5/16		
t_{des} , in.	0.233		0.174		0.116		0.349		0.291		
lb/ft	13.9		10.7		7.31		17.3		14.8		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	115	173	87.7	132	51.0	76.6	143	215	123	184
	1	114	172	87.1	131	50.7	76.2	141	211	121	181
	2	112	168	85.4	128	49.9	75.1	133	200	115	172
	3	108	162	82.6	124	48.7	73.2	121	183	105	158
	4	103	154	78.8	118	47.0	70.7	107	161	93.4	140
	5	96.3	145	74.1	111	44.9	67.5	90.7	136	80.1	120
	6	89.1	134	68.8	103	42.5	63.9	74.2	112	66.4	99.7
	7	81.3	122	63.1	94.8	39.8	59.8	58.6	88.0	53.1	79.9
	8	73.1	110	57.0	85.7	36.9	55.4	45.0	67.7	41.2	61.9
	9	64.8	97.4	50.8	76.4	33.8	50.8	35.6	53.5	32.6	48.9
	10	56.7	85.2	44.7	67.2	30.6	46.0	28.8	43.3	26.4	39.6
	11	48.8	73.4	38.8	58.3	27.2	40.9	23.8	35.8	21.8	32.8
	12	41.4	62.3	33.2	49.9	23.4	35.2	20.0	30.1	18.3	27.5
	13	35.3	53.1	28.3	42.5	19.9	29.9			15.6	23.5
	14	30.4	45.7	24.4	36.6	17.2	25.8				
	15	26.5	39.9	21.2	31.9	15.0	22.5				
	16	23.3	35.0	18.7	28.1	13.2	19.8				
	17	20.6	31.0	16.5	24.9	11.7	17.5				
	18	18.4	27.7	14.7	22.2	10.4	15.6				
	19	16.5	24.8	13.2	19.9	9.33	14.0				
	20	14.9	22.4	11.9	18.0	8.42	12.7				
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	3.84		2.93		2.00		4.78		4.10		
r_y , in.	1.22		1.25		1.27		0.760		0.785		
r_x/r_y	1.72		1.71		1.71		2.49		2.46		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS6-HSS5

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi


Shape	HSS6x2x						HSS5x4x				
	1/4		3/16 ^a		1/8 ^{a,c}		1/2		3/8		
t_{des} , in.	0.233		0.174		0.116		0.465		0.349		
lb/ft	12.2		9.42		6.46		25.0		19.8		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	101	152	77.2	116	44.1	66.3	208	313	164	247
	1	99.3	149	76.1	114	43.6	65.6	207	311	163	245
	2	94.6	142	72.7	109	42.3	63.5	204	307	161	242
	3	87.3	131	67.5	101	40.1	60.3	199	299	157	237
	4	78.0	117	60.7	91.2	37.3	56.0	192	289	153	229
	5	67.6	102	53.0	79.7	33.9	50.9	184	276	146	220
	6	56.6	85.1	44.9	67.5	30.1	45.3	174	262	139	209
	7	46.0	69.1	36.9	55.5	26.2	39.3	163	246	131	197
	8	36.1	54.2	29.4	44.2	21.4	32.1	152	228	123	184
	9	28.5	42.8	23.2	34.9	16.9	25.4	139	210	113	170
	10	23.1	34.7	18.8	28.3	13.7	20.6	127	191	104	156
	11	19.1	28.7	15.6	23.4	11.3	17.0	114	172	94.5	142
	12	16.0	24.1	13.1	19.6	9.51	14.3	102	154	85.1	128
	13	13.7	20.5	11.1	16.7	8.10	12.2	90.3	136	76.0	114
	14					6.99	10.5	78.9	119	67.2	101
	15							68.7	103	58.7	88.3
	16							60.4	90.8	51.6	77.6
	17							53.5	80.4	45.7	68.7
	18							47.7	71.7	40.8	61.3
	19							42.8	64.4	36.6	55.0
	20							38.7	58.1	33.0	49.7
	22							31.9	48.0	27.3	41.0
	24							26.8	40.4	22.9	34.5
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	3.37		2.58		1.77		6.95		5.48		
r_y , in.	0.810		0.836		0.861		1.46		1.52		
r_x/r_y	2.43		2.40		2.38		1.20		1.19		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

 HSS5		Table 6-D (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS								A500 Gr. C $F_y = 50$ ksi $F_u = 62$ ksi		
		HSS5x4x										HSS5x3x
Shape		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$		$\frac{1}{8}^{a,b,c}$		$\frac{1}{2}$		
t_{des} , in.		0.291		0.233		0.174		0.116		0.465		
lb/ft		17.0		13.9		10.7		7.31		21.6		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	140	211	115	173	87.7	132	56.4	84.7	180	271	
	1	139	210	114	172	87.4	131	56.2	84.4	179	269	
	2	138	207	113	170	86.3	130	55.6	83.6	174	261	
	3	135	202	111	166	84.5	127	54.7	82.2	166	250	
	4	131	196	107	161	82.1	123	53.5	80.4	156	235	
	5	125	188	103	155	79.2	119	51.9	78.0	144	217	
	6	119	179	98.6	148	75.7	114	50.0	75.2	131	197	
	7	113	169	93.3	140	71.7	108	47.9	72.0	117	175	
	8	105	159	87.5	131	67.4	101	45.6	68.5	102	154	
	9	97.8	147	81.3	122	62.9	94.5	43.1	64.8	87.9	132	
	10	89.9	135	75.0	113	58.1	87.4	40.1	60.3	74.3	112	
	11	81.9	123	68.6	103	53.3	80.2	36.9	55.4	61.7	92.7	
	12	73.9	111	62.2	93.4	48.5	72.9	33.6	50.5	51.8	77.9	
	13	66.2	99.5	55.9	84.0	43.8	65.8	30.4	45.7	44.2	66.4	
	14	58.7	88.2	49.8	74.8	39.2	58.9	27.3	41.0	38.1	57.2	
	15	51.5	77.4	43.9	66.0	34.8	52.3	24.3	36.5	33.2	49.9	
	16	45.3	68.0	38.6	58.0	30.6	46.0	21.4	32.2	29.2	43.8	
	17	40.1	60.3	34.2	51.4	27.1	40.7	19.0	28.5	25.8	38.8	
	18	35.8	53.7	30.5	45.8	24.2	36.3	16.9	25.4	23.0	34.6	
	19	32.1	48.2	27.4	41.1	21.7	32.6	15.2	22.8			
	20	29.0	43.5	24.7	37.1	19.6	29.4	13.7	20.6			
	22	23.9	36.0	20.4	30.7	16.2	24.3	11.3	17.0			
	24	20.1	30.2	17.2	25.8	13.6	20.4	9.51	14.3			
	26			14.6	22.0	11.6	17.4	8.10	12.2			
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties												
Area, in. ²		4.68		3.84		2.93		2.00		6.02		
r_y , in.		1.54		1.57		1.60		1.62		1.09		
r_x/r_y		1.19		1.19		1.19		1.19		1.51		


^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^b Shape exceeds the compact limit for flexure about the Y-Y axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

 HSS5		Table 6-D (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS								A500 Gr. C $F_y = 50$ ksi $F_u = 62$ ksi	
		HSS5x3x									
Shape		$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$		$\frac{3}{16}$		$\frac{1}{8}^{a,c}$	
t_{des} , in.		0.349		0.291		0.233		0.174		0.116	
lb/ft		17.3		14.8		12.2		9.42		6.46	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	143	215	123	184	101	152	77.2	116	49.5	74.4
	1	142	213	122	183	100	151	76.7	115	49.2	74.0
	2	139	208	119	179	97.9	147	75.1	113	48.4	72.8
	3	133	200	115	172	94.4	142	72.5	109	47.1	70.8
	4	126	189	109	163	89.6	135	69.0	104	45.4	68.2
	5	117	176	101	152	83.8	126	64.7	97.3	43.2	65.0
	6	107	161	93.1	140	77.2	116	59.9	90.0	40.7	61.2
	7	96.2	145	84.2	127	70.1	105	54.6	82.1	38.0	57.0
	8	85.2	128	75.0	113	62.7	94.2	49.1	73.8	34.4	51.7
	9	74.2	112	65.8	99.0	55.2	83.0	43.6	65.5	30.7	46.1
	10	63.7	95.7	56.9	85.5	48.0	72.1	38.1	57.2	27.0	40.6
	11	53.6	80.5	48.4	72.7	41.0	61.7	32.8	49.3	23.4	35.2
	12	45.0	67.7	40.7	61.1	34.6	52.0	27.8	41.8	20.0	30.1
	13	38.4	57.7	34.7	52.1	29.5	44.3	23.7	35.6	17.1	25.7
	14	33.1	49.7	29.9	44.9	25.4	38.2	20.5	30.7	14.7	22.1
	15	28.8	43.3	26.0	39.1	22.1	33.3	17.8	26.8	12.8	19.3
	16	25.3	38.1	22.9	34.4	19.5	29.2	15.7	23.5	11.3	16.9
	17	22.4	33.7	20.3	30.5	17.2	25.9	13.9	20.8	9.99	15.0
	18	20.0	30.1	18.1	27.2	15.4	23.1	12.4	18.6	8.91	13.4
	19			16.2	24.4	13.8	20.7	11.1	16.7	8.00	12.0
	20							10.0	15.1	7.22	10.8
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$
Properties											
Area, in. ²		4.78		4.10		3.37		2.58		1.77	
r_y , in.		1.14		1.17		1.19		1.22		1.25	
r_x/r_y		1.51		1.50		1.50		1.49		1.48	

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS5

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS5x2½x						HSS5x2x				
	¼		⅜ ^a		⅝ ^{a,c}		¾		⅝		
t_{des} , in.	0.233		0.174		0.116		0.349		0.291		
lb/ft	11.4		8.78		6.03		14.7		12.7		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	94.0	141	72.2	108	45.9	69.0	122	184	105	158
	1	93.0	140	71.4	107	45.5	68.4	120	181	104	156
	2	90.1	135	69.3	104	44.5	66.9	114	171	98.2	148
	3	85.5	129	65.9	99.0	42.9	64.5	103	155	89.9	135
	4	79.4	119	61.4	92.2	40.7	61.2	90.6	136	79.4	119
	5	72.2	109	56.0	84.2	38.0	57.2	76.5	115	67.8	102
	6	64.3	96.6	50.1	75.3	35.0	52.6	62.2	93.5	55.8	83.9
	7	56.1	84.3	43.9	66.0	30.9	46.5	48.7	73.2	44.3	66.7
	8	47.9	71.9	37.8	56.7	26.8	40.3	37.3	56.1	34.2	51.4
	9	40.0	60.1	31.8	47.8	22.8	34.3	29.5	44.3	27.0	40.6
	10	32.7	49.2	26.2	39.3	19.0	28.5	23.9	35.9	21.9	32.9
	11	27.0	40.6	21.6	32.5	15.7	23.6	19.7	29.7	18.1	27.2
	12	22.7	34.1	18.2	27.3	13.2	19.8	16.6	24.9	15.2	22.9
	13	19.4	29.1	15.5	23.3	11.2	16.9				
	14	16.7	25.1	13.4	20.1	9.69	14.6				
	15	14.5	21.9	11.6	17.5	8.44	12.7				
	16	12.8	19.2	10.2	15.4	7.42	11.1				
17			9.06	13.6	6.57	9.88					
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	3.14		2.41		1.65		4.09		3.52		
r_y , in.	0.999		1.02		1.05		0.748		0.772		
r_x/r_y	1.73		1.74		1.71		2.13		2.11		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS5-HSS4

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C

$F_y = 50$ ksi

$F_u = 62$ ksi

Shape	HSS5x2x						HSS4x3x				
	$\frac{1}{4}$		$\frac{3}{16}$		$\frac{1}{8}^a$		$\frac{3}{8}$		$\frac{5}{16}$		
t_{des} , in.	0.233		0.174		0.116		0.349		0.291		
lb/ft	10.5		8.15		5.61		14.7		12.7		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	87.1	131	67.1	101	42.6	64.0	122	184	105	158
	1	85.7	129	66.0	99.2	42.1	63.3	121	182	105	157
	2	81.5	123	63.0	94.7	40.7	61.2	118	178	102	153
	3	75.1	113	58.3	87.6	38.5	57.9	113	170	97.9	147
	4	66.8	100	52.3	78.6	35.6	53.4	107	161	92.4	139
	5	57.6	86.5	45.5	68.3	32.0	48.1	98.9	149	85.8	129
	6	48.0	72.1	38.3	57.6	27.2	40.9	90.0	135	78.3	118
	7	38.7	58.1	31.3	47.1	22.5	33.8	80.6	121	70.4	106
	8	30.1	45.3	24.7	37.2	18.1	27.2	70.9	107	62.2	93.4
	9	23.8	35.8	19.6	29.4	14.3	21.4	61.3	92.1	54.0	81.2
	10	19.3	29.0	15.8	23.8	11.6	17.4	52.1	78.3	46.2	69.4
	11	15.9	24.0	13.1	19.7	9.55	14.4	43.5	65.3	38.8	58.3
	12	13.4	20.1	11.0	16.5	8.03	12.1	36.5	54.9	32.6	49.0
	13	11.4	17.2	9.37	14.1	6.84	10.3	31.1	46.8	27.8	41.7
	14					5.90	8.86	26.8	40.3	23.9	36.0
	15							23.4	35.1	20.9	31.3
	16							20.5	30.9	18.3	27.5
	17							18.2	27.4	16.2	24.4
	18							16.2	24.4	14.5	21.8
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	2.91		2.24		1.54		4.09		3.52		
r_y , in.	0.797		0.823		0.848		1.11		1.13		
r_x/r_y	2.10		2.07		2.05		1.25		1.26		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS4

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C

$F_y = 50$ ksi

$F_u = 62$ ksi

Shape	HSS4x3x						HSS4x2½x				
	¼		⅜		⅝ ^a		¾		⅞		
t_{des} , in.	0.233		0.174		0.116		0.349		0.291		
lb/ft	10.5		8.15		5.61		13.4		11.6		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	87.1	131	67.1	101	46.1	69.3	112	168	96.7	145
	1	86.4	130	66.6	100	45.8	68.8	111	166	95.6	144
	2	84.4	127	65.1	97.8	44.8	67.3	107	160	92.3	139
	3	81.2	122	62.7	94.3	43.2	65.0	100	151	87.0	131
	4	76.9	116	59.5	89.5	41.1	61.8	91.8	138	80.1	120
	5	71.6	108	55.7	83.7	38.5	57.9	82.2	123	72.1	108
	6	65.7	98.8	51.3	77.1	35.6	53.5	71.7	108	63.4	95.2
	7	59.4	89.2	46.6	70.0	32.4	48.7	61.0	91.7	54.4	81.8
	8	52.8	79.4	41.7	62.6	29.1	43.7	50.7	76.2	45.6	68.6
	9	46.2	69.5	36.7	55.2	25.8	38.7	41.0	61.6	37.3	56.1
	10	39.8	59.9	31.9	47.9	22.5	33.8	33.2	49.9	30.2	45.4
	11	33.8	50.8	27.3	41.0	19.3	29.0	27.4	41.2	25.0	37.6
	12	28.4	42.7	23.0	34.6	16.3	24.6	23.0	34.6	21.0	31.6
	13	24.2	36.3	19.6	29.4	13.9	20.9	19.6	29.5	17.9	26.9
	14	20.9	31.3	16.9	25.4	12.0	18.0	16.9	25.4	15.4	23.2
	15	18.2	27.3	14.7	22.1	10.5	15.7	14.7	22.2	13.4	20.2
	16	16.0	24.0	12.9	19.4	9.19	13.8				
	17	14.1	21.3	11.5	17.2	8.14	12.2				
	18	12.6	19.0	10.2	15.4	7.26	10.9				
	19	11.3	17.0	9.17	13.8	6.52	9.80				
	20					5.88	8.84				
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	2.91		2.24		1.54		3.74		3.23		
r_y , in.	1.16		1.19		1.21		0.922		0.947		
r_x/r_y	1.25		1.25		1.26		1.46		1.46		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS4

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C

$F_y = 50$ ksi

$F_u = 62$ ksi

Shape	HSS4x2½x						HSS4x2x				
	¼		⅜ ^a		⅝ ^a		¾		⅝		
t_{des} , in.	0.233		0.174		0.116		0.349		0.291		
lb/ft	9.66		7.51		5.18		12.2		10.6		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	79.9	120	61.7	92.7	42.5	63.9	101	153	88.0	132
	1	79.1	119	61.0	91.7	42.1	63.3	99.5	150	86.4	130
	2	76.5	115	59.1	88.9	40.9	61.4	93.8	141	81.7	123
	3	72.3	109	56.1	84.3	38.9	58.4	84.9	128	74.5	112
	4	66.9	101	52.1	78.3	36.3	54.5	73.9	111	65.5	98.4
	5	60.5	91.0	47.4	71.2	33.2	49.9	61.9	93.0	55.4	83.3
	6	53.6	80.5	42.2	63.4	29.7	44.7	49.7	74.8	45.2	67.9
	7	46.4	69.7	36.8	55.3	26.1	39.3	38.4	57.7	35.5	53.4
	8	39.2	59.0	31.4	47.2	22.5	33.9	29.4	44.2	27.3	41.0
	9	32.5	48.8	26.2	39.4	19.0	28.6	23.2	34.9	21.5	32.4
	10	26.4	39.7	21.5	32.3	15.7	23.6	18.8	28.3	17.4	26.2
	11	21.8	32.8	17.7	26.7	13.0	19.5	15.5	23.4	14.4	21.7
	12	18.3	27.5	14.9	22.4	10.9	16.4	13.1	19.6	12.1	18.2
	13	15.6	23.5	12.7	19.1	9.30	14.0				
	14	13.5	20.2	10.9	16.5	8.02	12.1				
	15	11.7	17.6	9.54	14.3	6.99	10.5				
	16	10.3	15.5	8.38	12.6	6.14	9.23				
17					5.44	8.18					
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	2.67		2.06		1.42		3.39		2.94		
r_y , in.	0.973		0.999		1.03		0.729		0.754		
r_x/r_y	1.45		1.44		1.43		1.77		1.75		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.




HSS4-HSS3½

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS4x2x						HSS3½x2½x				
	¼		¾ ₁₆		½ ^a		¾ ₈		5/16		
t_{des} , in.	0.233		0.174		0.116		0.349		0.291		
lb/ft	8.81		6.87		4.75		12.2		10.6		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	73.1	110	56.6	85.0	38.9	58.5	101	153	88.0	132
	1	71.8	108	55.7	83.7	38.3	57.6	100	151	87.0	131
	2	68.2	102	53.0	79.7	36.6	55.0	96.4	145	83.8	126
	3	62.5	93.9	48.9	73.5	33.9	51.0	90.4	136	78.9	119
	4	55.3	83.2	43.6	65.5	30.5	45.8	82.6	124	72.4	109
	5	47.3	71.2	37.7	56.6	26.6	39.9	73.5	111	64.9	97.6
	6	39.1	58.8	31.5	47.3	22.5	33.7	63.8	95.9	56.8	85.4
	7	31.2	46.9	25.5	38.3	18.4	27.7	54.0	81.1	48.5	72.9
	8	24.1	36.3	19.9	29.9	14.6	22.0	44.5	66.9	40.4	60.7
	9	19.1	28.7	15.7	23.7	11.5	17.3	35.7	53.7	32.8	49.2
	10	15.5	23.2	12.8	19.2	9.35	14.1	28.9	43.5	26.5	39.9
	11	12.8	19.2	10.5	15.8	7.73	11.6	23.9	35.9	21.9	33.0
	12	10.7	16.1	8.86	13.3	6.49	9.76	20.1	30.2	18.4	27.7
	13			7.55	11.3	5.53	8.31	17.1	25.7	15.7	23.6
	14							14.8	22.2	13.5	20.4
15							12.9	19.3	11.8	17.7	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	2.44		1.89		1.30		3.39		2.94		
r_y , in.	0.779		0.804		0.830		0.904		0.930		
r_x/r_y	1.75		1.73		1.72		1.31		1.31		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

 HSS3 1/2		Table 6-D (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS						A500 Gr. C $F_y = 50$ ksi $F_u = 62$ ksi			
		HSS3 1/2 x 2 1/2 x			HSS3 1/2 x 2 x						
Shape	1/4		3/16		1/8 ^a		1/4		3/16		
t_{des} , in.	0.233		0.174		0.116		0.233		0.174		
lb/ft	8.81		6.87		4.75		7.96		6.23		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	73.1	110	56.6	85.0	38.9	58.5	66.2	99.4	51.2	76.9
	1	72.2	109	56.0	84.1	38.5	57.9	65.0	97.7	50.3	75.7
	2	69.8	105	54.2	81.4	37.3	56.1	61.6	92.6	47.9	72.0
	3	65.9	99.0	51.3	77.1	35.5	53.3	56.3	84.6	44.0	66.2
	4	60.8	91.3	47.5	71.4	33.0	49.6	49.7	74.6	39.1	58.8
	5	54.8	82.3	43.1	64.8	30.1	45.2	42.2	63.5	33.7	50.6
	6	48.3	72.5	38.2	57.5	26.8	40.3	34.7	52.1	28.0	42.1
	7	41.5	62.4	33.2	49.9	23.5	35.3	27.5	41.3	22.5	33.8
	8	34.9	52.5	28.2	42.3	20.1	30.2	21.1	31.8	17.5	26.3
	9	28.7	43.2	23.4	35.2	16.9	25.4	16.7	25.1	13.8	20.8
	10	23.3	35.0	19.1	28.7	13.8	20.8	13.5	20.3	11.2	16.8
	11	19.2	28.9	15.8	23.7	11.4	17.2	11.2	16.8	9.25	13.9
	12	16.2	24.3	13.2	19.9	9.61	14.4	9.40	14.1	7.78	11.7
	13	13.8	20.7	11.3	17.0	8.19	12.3			6.62	9.96
	14	11.9	17.8	9.73	14.6	7.06	10.6				
	15	10.3	15.5	8.47	12.7	6.15	9.25				
	16			7.45	11.2	5.41	8.13				
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	2.44		1.89		1.30		2.21		1.71		
r_y , in.	0.956		0.983		1.01		0.766		0.792		
r_x/r_y	1.31		1.30		1.30		1.57		1.55		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS3½-HSS3

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS3½x2x		HSS3½x1½x				HSS3x2½x				
	⅜ ^a		¼		⅜ ^a		⅜ ^a				
t_{des} , in.	0.116		0.233		0.174		0.116				
lb/ft	4.33		7.11		5.59		3.90				
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	35.6	53.5	59.0	88.6	46.1	69.3	32.0	48.1	79.0	119
	1	35.1	52.7	57.1	85.8	44.8	67.3	31.2	46.8	78.0	117
	2	33.5	50.3	51.8	77.8	40.9	61.5	28.7	43.1	75.1	113
	3	30.9	46.5	44.0	66.2	35.2	53.0	25.0	37.6	70.5	106
	4	27.7	41.6	35.1	52.7	28.6	43.0	20.6	31.0	64.4	96.8
	5	24.0	36.1	26.2	39.3	21.9	32.9	16.1	24.2	57.4	86.3
	6	20.2	30.4	18.5	27.8	15.8	23.7	11.9	17.9	49.9	75.0
	7	16.5	24.8	13.6	20.4	11.6	17.4	8.73	13.1	42.3	63.5
	8	13.0	19.5	10.4	15.6	8.86	13.3	6.69	10.0	34.9	52.5
	9	10.3	15.4	8.22	12.4	7.00	10.5	5.28	7.94	28.0	42.2
	10	8.31	12.5					4.28	6.43	22.7	34.1
	11	6.87	10.3							18.8	28.2
	12	5.77	8.67							15.8	23.7
	13	4.92	7.39							13.4	20.2
	14									11.6	17.4
15									10.1	15.2	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	1.19		1.97		1.54		1.07		2.64		
r_y , in.	0.818		0.569		0.594		0.619		0.908		
r_x/r_y	1.55		2.00		1.97		1.95		1.16		

^a Shape exceeds the compact limit for flexure about the X-X axis for $F_y = 50$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.




HSS3

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS3x2½x						HSS3x2x				
	¼		⅜		½		⅝		¾		
t_{des} , in.	0.233		0.174		0.116		0.291		0.233		
lb/ft	7.96		6.23		4.33		8.45		7.11		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	66.2	99.4	51.2	76.9	35.6	53.5	70.4	106	59.0	88.6
	1	65.4	98.3	50.6	76.1	35.2	53.0	69.0	104	57.9	87.0
	2	63.1	94.8	48.9	73.5	34.1	51.3	64.9	97.6	54.7	82.3
	3	59.4	89.2	46.2	69.5	32.3	48.6	58.8	88.3	49.9	74.9
	4	54.6	82.0	42.7	64.2	30.0	45.1	51.1	76.8	43.8	65.8
	5	49.0	73.6	38.5	57.9	27.2	40.9	42.6	64.1	37.0	55.6
	6	42.9	64.5	34.0	51.1	24.2	36.4	34.2	51.4	30.1	45.3
	7	36.7	55.1	29.4	44.1	21.0	31.6	26.3	39.5	23.6	35.5
	8	30.6	46.0	24.8	37.2	17.9	26.9	20.1	30.3	18.1	27.2
	9	24.9	37.4	20.4	30.7	14.9	22.4	15.9	23.9	14.3	21.5
	10	20.2	30.3	16.6	24.9	12.2	18.3	12.9	19.4	11.6	17.4
	11	16.7	25.0	13.7	20.6	10.1	15.1	10.7	16.0	9.58	14.4
	12	14.0	21.0	11.5	17.3	8.45	12.7	8.95	13.5	8.05	12.1
	13	11.9	17.9	9.79	14.7	7.20	10.8				
	14	10.3	15.5	8.45	12.7	6.21	9.34				
	15	8.96	13.5	7.36	11.1	5.41	8.13				
	16			6.47	9.72	4.76	7.15				
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	2.21		1.71		1.19		2.35		1.97		
r_y , in.	0.935		0.963		0.990		0.725		0.751		
r_x/r_y	1.16		1.15		1.15		1.39		1.38		

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

 HSS3		Table 6-D (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $F_u = 62$ ksi	
		HSS3x2x				HSS3x1½x							
Shape		¾		½		¼		¾		½			
t_{des} , in.		0.174		0.116		0.233		0.174		0.116			
lb/ft		5.59		3.90		6.26		4.96		3.48			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	46.1	69.3	32.0	48.1	52.1	78.3	41.0	61.6	28.6	43.0		
	1	45.3	68.1	31.5	47.4	50.4	75.7	39.8	59.8	27.8	41.8		
	2	43.0	64.6	30.0	45.1	45.5	68.4	36.3	54.5	25.6	38.4		
	3	39.4	59.3	27.7	41.6	38.5	57.8	31.1	46.7	22.2	33.3		
	4	34.9	52.5	24.7	37.1	30.4	45.7	25.0	37.6	18.2	27.4		
	5	29.8	44.9	21.3	32.0	22.4	33.7	19.0	28.5	14.1	21.2		
	6	24.6	37.0	17.8	26.8	15.8	23.7	13.5	20.4	10.3	15.5		
	7	19.7	29.6	14.4	21.7	11.6	17.4	9.95	15.0	7.58	11.4		
	8	15.2	22.8	11.3	17.0	8.87	13.3	7.62	11.5	5.80	8.72		
	9	12.0	18.1	8.91	13.4	7.01	10.5	6.02	9.05	4.58	6.89		
	10	9.73	14.6	7.22	10.9					3.71	5.58		
	11	8.04	12.1	5.97	8.97								
	12	6.76	10.2	5.01	7.54								
	13			4.27	6.42								
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		
Properties													
Area, in. ²		1.54		1.07		1.74		1.37		0.956			
r_y , in.		0.778		0.804		0.559		0.584		0.610			
r_x/r_y		1.38		1.37		1.76		1.75		1.72			

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

 HSS3-HSS2½		Table 6-D (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Rectangular HSS										A500 Gr. C $F_y = 50$ ksi $F_u = 62$ ksi	
		HSS3x1x				HSS2½x2x							
Shape		¾		½		¼		¾		½			
t_{des} , in.		0.174		0.116		0.233		0.174		0.116			
lb/ft		4.32		3.05		6.26		4.96		3.48			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	35.6	53.5	25.1	37.8	52.1	78.3	41.0	61.6	28.6	43.0		
	1	33.1	49.8	23.6	35.4	51.1	76.8	40.3	60.5	28.1	42.3		
	2	26.6	40.0	19.5	29.2	48.1	72.4	38.1	57.3	26.7	40.2		
	3	18.5	27.8	14.1	21.2	43.6	65.6	34.8	52.3	24.5	36.9		
	4	11.2	16.8	8.99	13.5	38.0	57.1	30.6	46.0	21.8	32.7		
	5	7.17	10.8	5.75	8.65	31.8	47.8	25.9	39.0	18.7	28.1		
	6	4.98	7.49	3.99	6.00	25.6	38.5	21.2	31.9	15.5	23.3		
	7					19.8	29.8	16.7	25.1	12.4	18.6		
	8					15.2	22.8	12.8	19.3	9.61	14.4		
	9					12.0	18.0	10.1	15.2	7.59	11.4		
	10					9.71	14.6	8.22	12.3	6.15	9.24		
	11					8.02	12.1	6.79	10.2	5.08	7.64		
	12					6.74	10.1	5.71	8.58	4.27	6.42		
	13									3.64	5.47		
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$		
Properties													
Area, in. ²		1.19		0.840		1.74		1.37		0.956			
r_y , in.		0.380		0.405		0.731		0.758		0.785			
r_x/r_y		2.49		2.44		1.20		1.19		1.19			

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS2½

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS2½x1½x						HSS2½x1x				
	¼		¾		⅝		¾		⅝		
t_{des} , in.	0.233		0.174		0.116		0.174		0.116		
lb/ft	5.41		4.32		3.05		3.68		2.63		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	45.2	67.9	35.6	53.5	25.1	37.8	30.5	45.9	21.7	32.6
	1	43.6	65.6	34.5	51.9	24.4	36.7	28.3	42.6	20.3	30.5
	2	39.3	59.0	31.3	47.1	22.3	33.6	22.6	34.0	16.6	25.0
	3	32.9	49.4	26.7	40.1	19.3	29.0	15.5	23.3	12.0	18.0
	4	25.7	38.6	21.3	32.0	15.7	23.6	9.31	14.0	7.52	11.3
	5	18.7	28.1	15.9	24.0	12.0	18.1	5.96	8.95	4.81	7.23
	6	13.1	19.6	11.3	17.0	8.68	13.0	4.14	6.22	3.34	5.02
	7	9.59	14.4	8.29	12.5	6.38	9.59				
	8	7.34	11.0	6.35	9.54	4.88	7.34				
	9	5.80	8.72	5.02	7.54	3.86	5.80				
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	1.51		1.19		0.840		1.02		0.724		
r_y , in.	0.546		0.572		0.597		0.374		0.399		
r_x/r_y	1.51		1.50		1.49		2.13		2.09		

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.



HSS2¼-HSS2

Table 6-D (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Rectangular HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS2¼x2x				HSS2x1½x				HSS2x1x		
	¾		½		¾		½		¾		
t_{des} , in.	0.174		0.116		0.174		0.116		0.174		
lb/ft	4.64		3.27		3.68		2.63		3.04		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	38.3	57.6	26.9	40.4	30.5	45.9	21.7	32.6	25.3	38.0
	1	37.6	56.5	26.4	39.7	29.5	44.4	21.0	31.6	23.4	35.1
	2	35.5	53.4	25.1	37.7	26.6	40.0	19.1	28.8	18.4	27.7
	3	32.3	48.6	23.0	34.5	22.4	33.7	16.4	24.6	12.4	18.7
	4	28.3	42.6	20.3	30.5	17.6	26.5	13.2	19.8	7.34	11.0
	5	23.9	35.9	17.3	26.0	13.0	19.5	9.94	14.9	4.70	7.06
	6	19.4	29.2	14.3	21.5	9.08	13.6	7.09	10.7	3.26	4.91
	7	15.2	22.9	11.4	17.1	6.67	10.0	5.21	7.82		
	8	11.6	17.5	8.77	13.2	5.11	7.67	3.99	5.99		
	9	9.20	13.8	6.93	10.4	4.03	6.06	3.15	4.73		
	10	7.46	11.2	5.62	8.44						
	11	6.16	9.26	4.64	6.98						
	12	5.18	7.78	3.90	5.86						
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear about X-X Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Shear about Y-Y Axis, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure about X-X Axis, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Available Strength in Flexure about Y-Y Axis, kip-ft	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	M_{ny}/Ω_b	$\phi_b M_{ny}$	
Properties											
Area, in. ²	1.28		0.898		1.02		0.724		0.845		
r_y , in.	0.747		0.774		0.554		0.581		0.365		
r_x/r_y	1.10		1.10		1.26		1.25		1.76		

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.

Shape		HSS2x1x	
		1/8	
t_{des} , in.		0.116	
lb/ft		2.20	
Design		ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	18.2	27.4
	1	17.0	25.5
	2	13.8	20.7
	3	9.76	14.7
	4	6.03	9.07
	5	3.86	5.80
	6	2.68	4.03
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$
		18.2	27.4
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$
		14.1	21.2
Available Strength in Shear about X-X Axis, kips		V_n/Ω_v	$\phi_v V_n$
		6.88	10.3
Available Strength in Shear about Y-Y Axis, kips		V_n/Ω_v	$\phi_v V_n$
		2.72	4.08
Available Strength in Flexure about X-X Axis, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$
		0.913	1.37
Available Strength in Flexure about Y-Y Axis, kip-ft		M_{ny}/Ω_b	$\phi_b M_{ny}$
		0.556	0.836
Properties			
Area, in. ²		0.608	
r_y , in.		0.390	
r_x/r_y		1.74	
Notes: Heavy line indicates L_c/r equal to or greater than 200. Per AISC Specification Section F7.4, lateral-torsional buckling should be considered for bending about the X-X axis.			

Shape		HSS22x22x				HSS20x20x					
		7/8		3/4		7/8		3/4		5/8 ^f	
t_{des} , in.		0.875		0.750		0.875		0.750		0.625	
lb/ft		245		212		221		192		161	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	2160	3240	1870	2800	1950	2920	1690	2530	1420	2130
	1	2160	3240	1870	2800	1950	2920	1690	2530	1420	2130
	2	2150	3240	1860	2800	1940	2920	1680	2530	1420	2130
	3	2150	3240	1860	2800	1940	2920	1680	2530	1420	2130
	4	2150	3230	1860	2800	1940	2920	1680	2530	1420	2130
	5	2150	3230	1860	2790	1940	2910	1680	2520	1410	2120
	6	2140	3220	1860	2790	1930	2910	1680	2520	1410	2120
	7	2140	3220	1850	2780	1930	2900	1670	2510	1410	2120
	8	2140	3210	1850	2780	1920	2890	1670	2510	1400	2110
	9	2130	3200	1840	2770	1920	2880	1660	2500	1400	2100
	10	2120	3190	1840	2760	1910	2870	1660	2490	1400	2100
	11	2120	3180	1830	2760	1910	2860	1650	2480	1390	2090
	12	2110	3170	1830	2750	1900	2850	1640	2470	1380	2080
	13	2100	3160	1820	2740	1890	2840	1640	2460	1380	2070
	14	2100	3150	1810	2730	1880	2830	1630	2450	1370	2060
	15	2090	3140	1810	2720	1870	2810	1620	2440	1370	2050
	16	2080	3120	1800	2700	1860	2800	1610	2420	1360	2040
	17	2070	3110	1790	2690	1850	2780	1600	2410	1350	2030
	18	2060	3090	1780	2680	1840	2760	1590	2400	1340	2020
	19	2050	3080	1770	2660	1830	2750	1580	2380	1330	2010
	20	2040	3060	1760	2650	1810	2730	1570	2360	1330	1990
	22	2010	3020	1740	2620	1790	2690	1550	2330	1310	1960
	24	1980	2980	1720	2580	1760	2640	1530	2290	1290	1930
	26	1960	2940	1690	2550	1730	2600	1500	2250	1270	1900
	28	1930	2890	1670	2510	1700	2550	1470	2210	1240	1870
	30	1890	2850	1640	2470	1660	2500	1440	2170	1220	1830
	32	1860	2800	1610	2420	1630	2440	1410	2120	1190	1790
	34	1830	2740	1580	2380	1590	2390	1380	2080	1170	1750
	36	1790	2690	1550	2330	1550	2330	1350	2030	1140	1710
	38	1750	2630	1520	2280	1510	2270	1310	1970	1110	1670
40	1710	2570	1490	2230	1470	2210	1280	1920	1080	1630	
42	1670	2510	1450	2180	1430	2150	1240	1870	1050	1580	
44	1630	2450	1420	2130	1390	2080	1210	1810	1020	1540	
46	1590	2390	1380	2080	1340	2020	1170	1760	991	1490	
48	1550	2330	1350	2020	1300	1950	1130	1700	960	1440	
50	1510	2260	1310	1970	1260	1890	1090	1650	929	1400	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Properties											
Area, in. ²		72.0		62.3		65.0		56.3		47.4	
$r_x = r_y$, in.		8.56		8.62		7.75		7.81		7.88	
$I_x = I_y$, in. ⁴		5280		4630		3900		3430		2940	

^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.
 Note: Confirm ASTM A1085 material availability before specifying.




HSS20-HSS18

Table 6-E (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape		HSS20x20x		HSS18x18x							
		$\frac{1}{2}t^f$		$\frac{7}{8}$	$\frac{3}{4}$	$\frac{5}{8}$	$\frac{1}{2}t^f$				
t_{des} , in.		0.500		0.875	0.750	0.625		0.500			
lb/ft		131		197	171	144		117			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	1080	1630	1740	2610	1510	2260	1270	1910	1030	1550
	1	1080	1630	1740	2610	1510	2260	1270	1910	1030	1550
	2	1080	1630	1740	2610	1500	2260	1270	1910	1030	1550
	3	1080	1630	1730	2600	1500	2260	1270	1900	1030	1550
	4	1080	1630	1730	2600	1500	2260	1270	1900	1030	1540
	5	1080	1630	1730	2600	1500	2250	1260	1900	1020	1540
	6	1080	1620	1720	2590	1490	2250	1260	1890	1020	1540
	7	1080	1620	1720	2580	1490	2240	1260	1890	1020	1530
	8	1080	1620	1710	2570	1490	2230	1250	1880	1020	1530
	9	1070	1620	1710	2560	1480	2220	1250	1880	1010	1520
	10	1070	1610	1700	2550	1470	2220	1240	1870	1010	1520
	11	1070	1610	1690	2540	1470	2210	1240	1860	1000	1510
	12	1070	1600	1680	2530	1460	2190	1230	1850	1000	1500
	13	1060	1600	1670	2510	1450	2180	1220	1840	994	1490
	14	1060	1590	1660	2500	1440	2170	1220	1830	989	1490
	15	1060	1590	1650	2480	1430	2160	1210	1820	983	1480
	16	1050	1580	1640	2470	1430	2140	1200	1810	976	1470
	17	1050	1580	1630	2450	1420	2130	1190	1790	970	1460
	18	1050	1570	1620	2430	1400	2110	1190	1780	963	1450
	19	1040	1560	1600	2410	1390	2090	1180	1770	955	1440
	20	1040	1560	1590	2390	1380	2080	1170	1750	948	1420
	22	1030	1540	1560	2350	1360	2040	1150	1720	931	1400
	24	1020	1530	1530	2300	1330	2000	1120	1690	914	1370
	26	1000	1510	1500	2250	1300	1960	1100	1650	895	1340
	28	991	1490	1460	2200	1270	1910	1080	1620	875	1310
	30	977	1470	1420	2140	1240	1860	1050	1580	854	1280
	32	963	1450	1390	2080	1210	1820	1020	1540	832	1250
	34	947	1420	1350	2020	1170	1760	994	1490	810	1220
	36	925	1390	1310	1960	1140	1710	965	1450	786	1180
	38	902	1360	1260	1900	1100	1660	935	1410	762	1150
	40	879	1320	1220	1840	1070	1600	905	1360	738	1110
42	855	1290	1180	1770	1030	1550	874	1310	713	1070	
44	831	1250	1130	1710	992	1490	842	1270	688	1030	
46	806	1210	1090	1640	955	1430	811	1220	663	996	
48	781	1170	1050	1570	917	1380	779	1170	637	958	
50	756	1140	1000	1510	879	1320	748	1120	612	920	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		1150	1730	1740	2610	1510	2260	1270	1910	1030	1550
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		936	1400	1410	2120	1230	1840	1030	1550	839	1260
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		332	500	484	728	424	638	362	544	296	446
Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
		580	872	918	1380	803	1210	684	1030	490	736
Properties											
Area, in. ²		38.4		58.0		50.3		42.4		34.4	
$r_x = r_y$, in.		7.92		6.92		6.99		7.05		7.11	
$I_x = I_y$, in. ⁴		2410		2780		2460		2110		1740	

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
^d Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.
 Note: Confirm ASTM A1085 material availability before specifying.

 HSS16		Table 6-E (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Square HSS										A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi	
		HSS16x16x											
Shape		$\frac{7}{8}$		$\frac{3}{4}$		$\frac{5}{8}$		$\frac{1}{2}$ ^f		$\frac{3}{8}$ ^{c,f}			
t_{des} , in.		0.875		0.750		0.625		0.500		0.375			
lb/ft		173		151		127		103		78.5			
Design		ASD		LRFD		ASD		LRFD		ASD		LRFD	
Available Compressive Strength, kips		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$		P_n/Ω_c		$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	1530	2290	1330	1990	1120	1680	910	1370	623	936		
	1	1530	2290	1330	1990	1120	1680	910	1370	623	936		
	2	1530	2290	1320	1990	1120	1680	909	1370	623	936		
	3	1520	2290	1320	1990	1120	1680	908	1360	622	935		
	4	1520	2280	1320	1980	1110	1680	906	1360	621	934		
	5	1520	2280	1320	1980	1110	1670	904	1360	620	932		
	6	1510	2270	1310	1970	1110	1670	901	1350	619	930		
	7	1510	2260	1310	1970	1100	1660	898	1350	618	928		
	8	1500	2250	1300	1960	1100	1650	895	1340	616	926		
	9	1490	2240	1300	1950	1100	1650	891	1340	614	923		
	10	1480	2230	1290	1940	1090	1640	886	1330	612	920		
	11	1480	2220	1280	1930	1080	1630	881	1320	610	917		
	12	1470	2200	1270	1920	1080	1620	876	1320	607	913		
	13	1460	2190	1270	1900	1070	1610	870	1310	605	909		
	14	1440	2170	1260	1890	1060	1600	864	1300	602	905		
	15	1430	2150	1250	1870	1050	1580	857	1290	599	900		
	16	1420	2130	1240	1860	1040	1570	850	1280	596	895		
	17	1410	2110	1220	1840	1040	1560	843	1270	592	890		
	18	1390	2090	1210	1820	1030	1540	835	1250	589	885		
	19	1380	2070	1200	1800	1020	1530	827	1240	585	879		
	20	1360	2050	1190	1790	1000	1510	818	1230	581	873		
	22	1330	2000	1160	1740	982	1480	800	1200	572	860		
	24	1300	1950	1130	1700	958	1440	780	1170	563	846		
	26	1260	1900	1100	1650	932	1400	760	1140	553	831		
	28	1220	1840	1070	1610	905	1360	738	1110	542	815		
	30	1180	1780	1030	1560	877	1320	716	1080	531	798		
	32	1140	1720	1000	1500	848	1270	692	1040	519	781		
	34	1100	1650	964	1450	818	1230	668	1000	507	762		
	36	1060	1590	928	1390	788	1180	644	968	493	741		
	38	1010	1530	891	1340	757	1140	619	930	474	713		
40	971	1460	853	1280	725	1090	594	892	455	685			
42	927	1390	816	1230	694	1040	568	854	436	656			
44	883	1330	778	1170	662	995	543	816	417	627			
46	839	1260	740	1110	631	948	517	778	398	598			
48	796	1200	703	1060	599	901	492	740	379	570			
50	753	1130	666	1000	568	854	467	702	360	541			
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Properties													
Area, in. ²		51.0		44.3		37.4		30.4		23.1			
$r_x = r_y$, in.		6.10		6.18		6.23		6.28		6.35			
$I_x = I_y$, in. ⁴		1900		1690		1450		1200		931			

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.
 Note: Confirm ASTM A1085 material availability before specifying.



HSS16-HSS14

Table 6-E (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A1085 Gr. A

$F_y = 50$ ksi

$F_u = 65$ ksi

Shape		HSS16x16x		HSS14x14x							
		⁵ / ₁₆ ^{c, f}		⁷ / ₈	³ / ₄	⁵ / ₈		¹ / ₂			
t_{des} , in.		0.313		0.875	0.750		0.625		0.500		
lb/ft		65.9		150	130		110		89.7		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	457	687	1320	1980	1150	1720	970	1460	790	1190
	1	457	686	1320	1980	1150	1720	970	1460	790	1190
	2	456	686	1320	1980	1150	1720	969	1460	789	1190
	3	456	686	1310	1970	1140	1720	967	1450	788	1180
	4	456	685	1310	1970	1140	1710	965	1450	786	1180
	5	455	684	1310	1960	1140	1710	961	1440	783	1180
	6	454	683	1300	1950	1130	1700	958	1440	780	1170
	7	453	681	1290	1940	1130	1690	953	1430	777	1170
	8	452	679	1290	1930	1120	1680	948	1420	773	1160
	9	451	677	1280	1920	1110	1670	942	1420	768	1150
	10	449	675	1270	1910	1110	1660	936	1410	763	1150
	11	448	673	1260	1890	1100	1650	929	1400	757	1140
	12	446	671	1250	1880	1090	1630	921	1380	751	1130
	13	444	668	1240	1860	1080	1620	913	1370	745	1120
	14	442	665	1220	1840	1070	1600	904	1360	738	1110
	15	440	662	1210	1820	1060	1590	895	1350	730	1100
	16	438	658	1200	1800	1040	1570	885	1330	722	1090
	17	436	655	1180	1780	1030	1550	875	1310	714	1070
	18	433	651	1170	1750	1020	1530	864	1300	705	1060
	19	430	647	1150	1730	1000	1510	852	1280	696	1050
	20	428	643	1130	1700	990	1490	840	1260	687	1030
	22	422	634	1100	1650	960	1440	816	1230	667	1000
	24	415	624	1060	1590	928	1400	789	1190	645	970
	26	408	614	1020	1540	895	1350	761	1140	623	936
	28	401	603	981	1470	860	1290	732	1100	600	902
	30	393	591	939	1410	825	1240	703	1060	576	866
	32	385	579	896	1350	788	1180	672	1010	551	829
	34	377	566	853	1280	751	1130	641	963	526	791
	36	368	553	809	1220	713	1070	610	916	501	753
	38	359	539	765	1150	675	1020	578	869	476	715
	40	349	525	722	1080	638	959	547	822	450	677
42	339	510	678	1020	601	903	515	775	425	639	
44	329	495	636	956	564	848	485	728	400	601	
46	319	480	594	893	528	794	454	683	375	564	
48	309	464	554	832	493	741	425	638	351	528	
50	298	448	514	773	459	689	396	595	328	493	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Properties											
Area, in. ²		19.4		44.0		38.3		32.4		26.4	
$r_x = r_y$, in.		6.38		5.29		5.36		5.42		5.47	
$I_x = I_y$, in. ⁴		790		1230		1100		952		791	

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.

Note: Confirm ASTM A1085 material availability before specifying.



HSS14–HSS12

Table 6-E (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS14x14x				HSS12x12x						
	$\frac{3}{8}c^f$		$\frac{5}{16}c^f$		$\frac{3}{4}$		$\frac{5}{8}$		$\frac{1}{2}$		
t_{des} , in.	0.375		0.313		0.750		0.625		0.500		
lb/ft	68.3		57.4		110		93.3		76.1		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	595	895	441	663	967	1450	820	1230	671	1010
	1	595	894	441	662	967	1450	820	1230	670	1010
	2	595	894	440	662	965	1450	819	1230	669	1010
	3	594	893	440	661	963	1450	817	1230	668	1000
	4	593	891	439	660	959	1440	814	1220	665	1000
	5	592	889	438	659	955	1440	810	1220	663	996
	6	590	887	437	657	949	1430	806	1210	659	991
	7	588	884	436	655	943	1420	801	1200	655	984
	8	586	881	435	653	936	1410	795	1190	650	977
	9	584	877	433	651	928	1390	788	1180	645	969
	10	581	874	431	648	919	1380	781	1170	639	960
	11	577	868	429	645	909	1370	772	1160	632	951
	12	573	861	427	641	898	1350	764	1150	625	940
	13	568	853	424	638	887	1330	754	1130	618	929
	14	563	845	422	634	875	1320	744	1120	610	917
	15	557	837	419	630	862	1300	733	1100	601	904
	16	551	828	416	625	849	1280	722	1090	592	890
	17	545	819	413	621	834	1250	710	1070	583	876
	18	538	809	410	616	820	1230	698	1050	573	861
	19	531	799	406	611	804	1210	685	1030	563	846
	20	524	788	403	605	788	1180	672	1010	552	830
	22	509	766	395	594	755	1140	645	969	530	797
	24	494	742	387	581	721	1080	616	926	507	762
	26	477	717	378	568	685	1030	586	881	483	726
	28	459	691	369	554	648	974	555	835	459	689
	30	441	663	359	539	611	918	524	788	434	652
	32	423	636	349	524	573	861	493	741	408	614
	34	404	608	338	508	536	805	462	694	383	575
	36	385	579	325	489	499	750	430	647	358	538
	38	366	550	309	465	462	695	400	601	333	500
	40	347	521	293	441	427	642	370	556	309	464
42	328	493	277	417	393	590	341	513	285	429	
44	309	464	262	393	359	539	313	470	262	394	
46	290	437	246	370	328	494	286	430	240	361	
48	272	409	231	347	302	453	263	395	220	331	
50	254	382	216	325	278	418	242	364	203	305	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	602	905	506	761	967	1450	820	1230	671	1010	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
	218	327	171	257	334	503	289	435	238	358	
Properties											
Area, in. ²	20.1		16.9		32.3		27.4		22.4		
$r_x = r_y$, in.	5.53		5.56		4.54		4.60		4.66		
$I_x = I_y$, in. ⁴	615		523		666		580		486		
^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi. ^d Shape exceeds the compact limit for flexure for $F_y = 50$ ksi. Note: Confirm ASTM A1085 material availability before specifying.											



HSS12-HSS10

Table 6-E (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS


A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape		HSS12x12x								HSS10x10x	
		$\frac{3}{8}^f$		$\frac{5}{16}^{c,f}$		$\frac{1}{4}^{c,f}$		$\frac{3}{16}^{c,f}$		$\frac{3}{4}$	
t_{des} , in.		0.375		0.313		0.250		0.188		0.750	
lb/ft		58.1		48.9		39.4		29.8		89.5	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	512	769	419	630	287	431	173	259	787	1180
	1	512	769	419	630	287	431	173	259	787	1180
	2	511	768	418	629	286	430	172	259	785	1180
	3	510	766	418	628	286	430	172	259	782	1180
	4	508	764	417	626	285	429	172	258	778	1170
	5	506	760	416	625	285	428	171	258	773	1160
	6	503	756	414	622	284	426	171	257	766	1150
	7	500	752	412	620	283	425	170	256	759	1140
	8	497	746	410	617	281	423	170	255	750	1130
	9	493	740	408	613	280	421	169	254	740	1110
	10	488	734	406	610	278	418	168	252	730	1100
	11	483	727	403	605	277	416	167	251	718	1080
	12	478	719	400	601	275	413	166	249	706	1060
	13	473	710	396	596	273	410	165	248	692	1040
	14	466	701	393	591	270	406	164	246	678	1020
	15	460	692	388	583	268	403	162	244	664	997
	16	453	681	382	575	266	399	161	242	648	974
	17	446	671	377	566	263	395	159	240	632	950
	18	439	660	370	557	260	391	158	237	615	925
	19	431	648	364	547	257	387	156	235	598	899
	20	423	636	357	537	254	382	155	232	581	873
	22	407	612	344	517	248	373	151	227	545	819
	24	390	585	329	495	241	362	147	221	508	764
	26	371	558	314	472	234	351	143	215	471	708
	28	353	530	299	449	226	340	139	208	434	652
	30	334	502	283	425	218	328	134	202	397	597
	32	315	473	267	401	210	315	130	195	361	543
	34	296	445	251	377	201	302	125	187	327	491
	36	277	416	235	353	191	287	120	180	293	441
	38	258	388	219	329	179	268	115	172	263	395
40	240	360	204	306	166	250	110	165	237	357	
42	222	333	189	284	154	232	104	157	215	324	
44	204	307	174	262	142	214	99	149	196	295	
46	187	281	160	240	131	197	93.7	141	180	270	
48	172	258	147	220	120	180	88.4	133	165	248	
50	158	238	135	203	111	166	83.6	126	152	228	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Properties											
Area, in. ²		17.1		14.4		11.6		8.79		26.3	
$r_x = r_y$, in.		4.71		4.74		4.78		4.81		3.72	
$I_x = I_y$, in. ⁴		380		324		265		203		364	

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.
 Note: Confirm ASTM A1085 material availability before specifying.

Shape		HSS10x10x									
		5/8		1/2		3/8		5/16 ^f		1/4 ^{c,f}	
t_{des} , in.		0.625		0.500		0.375		0.313		0.250	
lb/ft		76.3		62.5		47.9		40.4		32.6	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	671	1010	551	828	422	634	356	535	271	407
	1	670	1010	551	827	422	634	356	535	271	407
	2	669	1010	549	826	421	633	355	534	270	406
	3	666	1000	547	823	420	631	354	532	270	405
	4	663	996	545	819	418	628	352	530	269	404
	5	658	990	541	813	415	624	350	526	268	402
	6	653	982	537	807	412	619	348	523	266	400
	7	647	972	532	800	408	613	345	518	265	398
	8	640	962	526	791	404	607	341	513	263	395
	9	632	950	520	781	399	600	337	507	261	392
	10	623	937	513	771	394	592	333	500	259	389
	11	614	922	505	759	388	584	328	493	256	385
	12	603	907	497	747	382	574	323	485	254	381
	13	593	891	488	734	376	564	318	477	251	377
	14	581	873	479	720	369	554	312	469	248	372
	15	569	855	469	705	361	543	306	459	244	367
	16	556	836	459	690	354	531	299	450	241	362
	17	543	816	448	674	346	519	293	440	237	356
	18	529	795	437	657	337	507	286	429	231	348
	19	515	774	426	640	329	494	279	419	226	339
	20	500	752	414	622	320	481	271	408	220	330
	22	470	707	390	586	302	454	256	385	208	312
	24	440	661	365	549	283	426	241	362	195	294
	26	409	614	340	511	264	397	225	338	183	275
	28	378	567	315	473	245	369	209	314	170	256
	30	347	521	290	435	226	340	193	290	157	237
	32	317	476	265	399	208	312	177	266	145	218
	34	287	432	241	363	190	285	162	244	133	199
	36	259	389	218	328	172	259	147	221	121	182
	38	233	350	196	295	155	233	133	200	109	164
40	210	315	177	266	140	210	120	180	98.6	148	
42	190	286	161	241	127	191	109	163	89.4	134	
44	173	261	146	220	116	174	99.1	149	81.5	122	
46	159	239	134	201	106	159	90.7	136	74.6	112	
48	146	219	123	185	97.2	146	83.3	125	68.5	103	
50	134	202	113	170	89.5	135	76.7	115	63.1	94.8	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Properties											
Area, in. ²		22.4		18.4		14.1		11.9		9.59	
$r_x = r_y$, in.		3.79		3.84		3.90		3.93		3.97	
$I_x = I_y$, in. ⁴		321		271		214		184		151	

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.
 Note: Confirm ASTM A1085 material availability before specifying.

 HSS10-HSS9		Table 6-E (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Square HSS										A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi	
		HSS10x10x		HSS9x9x									
Shape		$\frac{3}{16}^c, f$		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}$			
t_{des} , in.		0.188		0.625		0.500		0.375		0.313			
lb/ft		24.7		67.8		55.7		42.8		36.1			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	166	250	596	895	491	738	377	567	317	477		
	1	166	250	595	895	491	737	377	567	317	477		
	2	166	249	594	892	489	735	376	565	316	475		
	3	166	249	591	888	487	732	374	563	315	473		
	4	165	248	587	882	484	728	372	559	313	471		
	5	164	247	582	875	480	722	369	555	311	467		
	6	164	246	576	866	475	715	366	550	308	463		
	7	163	245	570	856	470	706	362	544	304	458		
	8	162	243	562	844	464	697	357	537	301	452		
	9	161	242	553	831	457	686	352	529	296	445		
	10	159	240	543	817	449	675	346	520	292	438		
	11	158	238	533	801	441	662	340	511	287	431		
	12	157	235	522	784	432	649	333	501	281	422		
	13	155	233	510	766	422	634	326	490	275	414		
	14	153	230	497	748	412	619	319	479	269	404		
	15	151	227	484	728	401	603	311	467	262	394		
	16	149	224	471	707	390	587	303	455	256	384		
	17	147	221	456	686	379	570	294	442	249	374		
	18	145	218	442	664	367	552	286	429	241	363		
	19	143	215	427	642	355	534	277	416	234	352		
	20	140	211	412	619	343	516	267	402	226	340		
	22	136	204	381	573	318	479	249	374	211	317		
	24	130	196	350	527	293	441	230	346	195	293		
	26	125	187	320	480	268	403	211	317	179	269		
	28	119	179	289	435	243	366	192	289	164	246		
	30	113	170	260	391	219	330	174	262	148	223		
	32	107	161	232	348	196	295	156	235	134	201		
	34	101	151	205	309	174	262	139	209	119	179		
	36	92.6	139	183	275	155	234	124	187	106	160		
	38	83.9	126	164	247	139	210	112	168	95.5	144		
	40	75.7	114	148	223	126	189	101	151	86.2	130		
42	68.7	103	135	202	114	172	91.3	137	78.2	117			
44	62.6	94.0	123	184	104	156	83.2	125	71.2	107			
46	57.3	86.0	112	169	95.2	143	76.1	114	65.2	97.9			
48	52.6	79.0	103	155	87.4	131	69.9	105	59.8	89.9			
50	48.5	72.8	94.9	143	80.6	121	64.4	96.9	55.1	82.9			
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
		218	328	596	896	491	738	377	567	317	477		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
		178	267	485	728	400	600	307	461	258	388		
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
		63.7	95.8	160	240	135	203	106	159	90.8	136		
Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
		49.2	73.9	153	231	128	193	101	151	85.6	129		
Properties													
Area, in. ²		7.29		19.9		16.4		12.6		10.6			
$r_x = r_y$, in.		3.99		3.38		3.43		3.50		3.53			
$I_x = I_y$, in. ⁴		116		227		193		154		132			

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.
 Note: Confirm ASTM A1085 material availability before specifying.



HSS9-HSS8

Table 6-E (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS9x9x				HSS8x8x						
	$\frac{1}{4}^f$	$\frac{3}{16}^{c,f}$	$\frac{5}{8}$	$\frac{1}{2}$	$\frac{3}{8}$						
t_{des} , in.	0.250	0.188	0.625	0.500	0.375						
lb/ft	29.2	22.2	59.3	48.9	37.7						
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	257	387	162	243	521	783	431	648	332	499
	1	257	386	162	243	520	782	431	647	332	499
	2	256	385	162	243	518	779	429	645	331	497
	3	255	384	161	242	515	775	427	641	329	495
	4	254	381	161	241	511	768	423	636	327	491
	5	252	379	160	240	506	760	419	630	323	486
	6	250	375	159	239	499	750	414	622	319	480
	7	247	371	158	237	491	739	407	612	315	473
	8	244	367	156	235	483	725	400	602	310	465
	9	240	361	155	233	473	711	393	590	304	457
	10	237	356	154	231	462	695	384	577	298	447
	11	233	350	152	228	451	678	375	564	291	437
	12	228	343	150	225	439	659	365	549	284	426
	13	223	336	148	222	426	640	355	533	276	415
	14	219	328	146	219	412	620	344	517	268	402
	15	213	321	144	216	398	599	333	500	259	390
	16	208	312	141	212	384	577	321	482	251	377
	17	202	304	139	208	369	555	309	464	242	363
	18	196	295	136	204	354	532	297	446	232	349
	19	191	286	133	200	339	509	284	427	223	335
	20	184	277	130	196	323	486	272	408	214	321
	22	172	259	124	187	292	439	247	371	195	293
	24	159	240	118	178	262	394	222	333	176	265
	26	147	220	112	168	232	349	198	297	158	237
	28	134	202	103	155	204	307	174	262	140	210
	30	122	183	93.5	141	178	268	152	229	123	185
	32	110	165	84.4	127	156	235	134	201	108	162
	34	98.3	148	75.7	114	139	208	119	178	95.7	144
	36	87.7	132	67.5	101	124	186	106	159	85.4	128
	38	78.7	118	60.6	91.1	111	167	94.9	143	76.6	115
	40	71.0	107	54.7	82.2	100	150	85.7	129	69.1	104
42	64.4	96.8	49.6	74.5	90.8	137	77.7	117	62.7	94.3	
44	58.7	88.2	45.2	67.9	82.8	124	70.8	106	57.1	85.9	
46	53.7	80.7	41.3	62.1	75.7	114	64.8	97.4	52.3	78.6	
48	49.3	74.1	38.0	57.1	69.5	105	59.5	89.4	48.0	72.2	
50	45.5	68.3	35.0	52.6			54.8	82.4	44.3	66.5	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Properties											
Area, in. ²	8.59		6.54		17.4		14.4		11.1		
$r_x = r_y$, in.	3.56		3.58		2.97		3.02		3.09		
$I_x = I_y$, in. ⁴	109		84.0		153		131		106		

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A1085 material availability before specifying.



HSS8-HSS7

Table 6-E (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS8x8x						HSS7x7x				
	$\frac{5}{16}$		$\frac{1}{4}$ ^f		$\frac{3}{16}$ ^{e,f}		$\frac{5}{8}$		$\frac{1}{2}$		
t_{des} , in.	0.313		0.250		0.188		0.625		0.500		
lb/ft	31.8		25.8		19.6		50.8		42.1		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	281	422	227	342	156	235	446	670	371	558
	1	280	421	227	341	156	234	445	669	371	557
	2	279	420	226	340	156	234	443	666	369	555
	3	278	418	225	338	155	233	440	661	366	550
	4	276	414	223	336	154	232	435	653	362	544
	5	273	410	221	333	153	231	429	644	357	537
	6	270	406	219	329	152	229	421	633	351	528
	7	266	400	216	324	151	227	412	620	344	517
	8	262	393	212	319	149	224	403	605	336	505
	9	257	386	209	313	148	222	392	589	328	492
	10	252	378	204	307	146	219	380	571	318	478
	11	246	370	200	300	143	216	367	552	308	463
	12	240	361	195	293	141	212	354	532	297	447
	13	234	351	190	285	139	208	340	511	286	430
	14	227	341	185	277	136	204	326	489	274	412
	15	220	331	179	269	133	200	311	467	262	394
	16	213	320	173	260	130	196	296	444	250	376
	17	205	308	167	251	127	191	280	421	238	357
	18	198	297	161	242	124	186	265	398	225	338
	19	190	285	155	233	119	179	250	375	212	319
	20	182	274	149	223	114	172	235	353	200	301
	22	166	250	136	204	105	157	205	308	176	264
	24	150	226	123	185	95.0	143	177	266	152	229
	26	135	203	111	167	85.6	129	151	227	130	196
	28	120	181	98.9	149	76.5	115	130	195	112	169
	30	106	159	87.3	131	67.8	102	113	170	98.0	147
	32	93.0	140	76.8	115	59.6	89.5	99.5	150	86.1	129
	34	82.4	124	68.0	102	52.8	79.3	88.2	133	76.3	115
	36	73.5	110	60.7	91.2	47.1	70.8	78.6	118	68.0	102
	38	65.9	99.1	54.4	81.8	42.3	63.5	70.6	106	61.1	91.8
	40	59.5	89.4	49.1	73.8	38.1	57.3	63.7	95.7	55.1	82.8
42	54.0	81.1	44.6	67.0	34.6	52.0	57.8	86.8	50.0	75.1	
44	49.2	73.9	40.6	61.0	31.5	47.4					
46	45.0	67.6	37.2	55.8	28.8	43.3					
48	41.3	62.1	34.1	51.3	26.5	39.8					
50	38.1	57.2	31.4	47.3	24.4	36.7					
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Properties											
Area, in. ²	9.37		7.59		5.78		14.9		12.4		
$r_x = r_y$, in.	3.12		3.15		3.18		2.56		2.61		
$I_x = I_y$, in. ⁴	91.0		75.2		58.4		97.6		84.7		

^e Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A1085 material availability before specifying.



HSS7-HSS6

Table 6-E (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS7x7x								HSS6x6x		
	3/8		5/16		1/4		3/16 ^{c,f}		5/8		
t_{des} , in.	0.375		0.313		0.250		0.188		0.625		
lb/ft	32.6		27.6		22.4		17.1		42.3		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	287	431	243	365	197	297	149	224	371	558
	1	286	430	243	365	197	296	149	224	370	557
	2	285	429	242	363	196	295	149	223	368	553
	3	283	425	240	361	195	293	148	222	364	547
	4	280	421	238	357	193	290	147	221	358	538
	5	277	416	235	353	191	286	146	219	351	527
	6	272	409	231	347	188	282	143	215	342	514
	7	267	401	227	341	184	277	141	212	332	499
	8	261	392	222	333	180	271	138	207	321	482
	9	255	383	216	325	176	265	135	203	309	464
	10	248	372	211	317	171	258	131	197	296	444
	11	240	361	204	307	167	250	128	192	282	424
	12	232	349	198	297	161	242	124	186	267	402
	13	224	337	191	287	156	234	119	180	253	380
	14	215	323	184	276	150	225	115	173	238	357
	15	206	310	176	265	144	216	111	166	222	334
	16	197	296	168	253	138	207	106	159	207	311
	17	188	282	161	241	132	198	101	152	192	289
	18	178	268	153	230	125	188	96.5	145	177	267
	19	169	254	145	218	119	179	91.8	138	163	245
	20	160	240	137	206	113	169	87.0	131	149	224
	22	141	212	121	183	100	150	77.5	117	124	186
	24	123	185	106	160	88.0	132	68.3	103	104	156
	26	106	160	92.1	138	76.4	115	59.6	89.5	88.5	133
	28	91.6	138	79.4	119	65.9	99.0	51.4	77.2	76.3	115
	30	79.8	120	69.2	104	57.4	86.2	44.8	67.3	66.5	99.9
32	70.1	105	60.8	91.4	50.4	75.8	39.3	59.1	58.4	87.8	
34	62.1	93.4	53.8	80.9	44.7	67.1	34.8	52.4	51.8	77.8	
36	55.4	83.3	48.0	72.2	39.8	59.9	31.1	46.7			
38	49.7	74.8	43.1	64.8	35.8	53.8	27.9	41.9			
40	44.9	67.5	38.9	58.5	32.3	48.5	25.2	37.8			
42	40.7	61.2	35.3	53.0	29.3	44.0	22.8	34.3			
44	37.1	55.8	32.2	48.3	26.7	40.1	20.8	31.3			
46							19.0	28.6			
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Properties											
Area, in.²	9.58		8.12		6.59		5.03		12.4		
$r_x = r_y$, in.	2.68		2.71		2.74		2.77		2.15		
$I_x = I_y$, in.⁴	68.7		59.6		49.4		38.6		57.4		

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.

Notes: Heavy line indicates L_c/r equal to or greater than 200.

Confirm ASTM A1085 material availability before specifying.



HSS6

Table 6-E (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape		HSS6x6x										
		1/2		3/8		5/16		1/4		3/16 ^f		
t_{des} , in.		0.500		0.375		0.313		0.250		0.188		
lb/ft		35.2		27.5		23.3		19.0		14.5		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	311	468	242	364	206	309	167	252	128	193	
	1	311	467	241	363	205	309	167	251	128	192	
	2	309	464	240	361	204	307	166	250	127	191	
	3	305	459	238	357	202	304	164	247	126	189	
	4	301	452	234	352	199	299	162	244	124	187	
	5	295	443	230	345	196	294	159	240	122	184	
	6	288	433	225	338	191	288	156	235	120	180	
	7	280	421	219	329	187	280	152	229	117	176	
	8	271	407	212	319	181	272	148	222	114	171	
	9	261	392	205	308	175	263	143	215	110	165	
	10	251	377	197	296	169	253	138	207	106	159	
	11	239	360	189	284	162	243	132	199	102	153	
	12	228	342	180	271	154	232	127	190	97.6	147	
	13	216	324	171	257	147	221	121	181	93.1	140	
	14	203	306	162	244	139	209	114	172	88.5	133	
	15	191	287	153	230	131	198	108	163	83.7	126	
	16	178	268	143	216	124	186	102	153	79.0	119	
	17	166	250	134	201	116	174	95.6	144	74.2	112	
	18	154	231	125	188	108	162	89.3	134	69.5	104	
	19	142	213	116	174	100	151	83.1	125	64.8	97.3	
	20	130	196	107	161	92.8	139	77.0	116	60.2	90.4	
	22	109	163	89.8	135	78.4	118	65.5	98.4	51.3	77.1	
	24	91.2	137	75.4	113	65.9	99.0	55.0	82.7	43.2	64.9	
	26	77.7	117	64.3	96.6	56.1	84.3	46.9	70.4	36.8	55.3	
	28	67.0	101	55.4	83.3	48.4	72.7	40.4	60.7	31.7	47.7	
	30	58.4	87.7	48.3	72.6	42.1	63.4	35.2	52.9	27.6	41.6	
	32	51.3	77.1	42.4	63.8	37.0	55.7	30.9	46.5	24.3	36.5	
	34	45.5	68.3	37.6	56.5	32.8	49.3	27.4	41.2	21.5	32.4	
	36	40.5	60.9	33.5	50.4	29.3	44.0	24.4	36.7	19.2	28.9	
	38					26.3	39.5	21.9	33.0	17.2	25.9	
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
	Properties											
	Area, in. ²		10.4		8.08		6.87		5.59		4.28	
	$r_x = r_y$, in.		2.20		2.27		2.30		2.33		2.36	
	$I_x = I_y$, in. ⁴		50.5		41.6		36.3		30.3		23.8	

^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A1085 material availability before specifying.

Shape		HSS5½x5½x								HSS5x5x		
		⅜		⅝		¼		⅜		½		
t_{des} , in.		0.375		0.313		0.250		0.188		0.500		
lb/ft		24.9		21.2		17.3		13.3		28.4		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	219	330	187	281	152	229	117	175	250	376	
	1	219	329	186	280	152	229	117	175	249	375	
	2	217	327	185	278	151	227	116	174	247	371	
	3	215	323	183	275	149	224	114	172	243	365	
	4	211	317	180	270	147	221	113	169	238	357	
	5	206	310	176	265	144	216	110	166	231	347	
	6	201	302	171	258	140	211	108	162	223	335	
	7	195	292	166	250	136	204	104	157	213	321	
	8	188	282	160	241	131	197	101	152	203	306	
	9	180	270	154	231	126	190	97.1	146	192	289	
	10	172	258	147	221	121	182	93.0	140	181	272	
	11	163	245	140	210	115	173	88.6	133	169	254	
	12	154	232	132	199	109	164	84.1	126	157	236	
	13	145	218	125	188	103	155	79.5	119	145	217	
	14	136	204	117	176	96.7	145	74.7	112	132	199	
	15	126	190	109	164	90.4	136	69.9	105	120	181	
	16	117	176	101	152	84.1	126	65.2	98.0	109	164	
	17	108	162	93.7	141	77.9	117	60.5	90.9	97.9	147	
	18	99	149	86.2	130	71.8	108	55.8	83.9	87.3	131	
	19	90.4	136	78.9	119	65.9	99.1	51.3	77.1	78.3	118	
	20	82.0	123	71.8	108	60.2	90.5	46.9	70.6	70.7	106	
	22	67.7	102	59.3	89.2	49.8	74.9	38.9	58.4	58.4	87.8	
	24	56.9	85.5	49.9	75.0	41.8	62.9	32.7	49.1	49.1	73.8	
	26	48.5	72.9	42.5	63.9	35.7	53.6	27.8	41.8	41.8	62.9	
	28	41.8	62.9	36.6	55.1	30.7	46.2	24.0	36.1	36.1	54.2	
	30	36.4	54.7	31.9	48.0	26.8	40.3	20.9	31.4	31.4	47.2	
	32	32.0	48.1	28.1	42.2	23.5	35.4	18.4	27.6			
	34	28.4	42.6	24.8	37.3	20.9	31.3	16.3	24.5			
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
	Properties											
	Area, in. ²		7.33		6.24		5.09		3.90		8.36	
$r_x = r_y$, in.		2.07		2.10		2.13		2.15		1.80		
$I_x = I_y$, in. ⁴		31.3		27.4		23.0		18.1		27.1		

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A1085 material availability before specifying.



HSS5–HSS4½

Table 6-E (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS5x5x								HSS4½x4½x		
	⅜		⅝		¼		⅜		½		
t_{des} , in.	0.375		0.313		0.250		0.188		0.500		
lb/ft	22.4		19.1		15.6		12.0		25.0		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	197	296	168	253	137	207	106	159	220	331
	1	196	295	168	252	137	206	105	158	219	330
	2	195	293	166	250	136	204	105	157	217	326
	3	192	288	164	246	134	201	103	155	212	319
	4	188	282	161	241	131	197	101	152	206	310
	5	183	274	156	235	128	192	98.6	148	199	298
	6	177	265	151	227	124	186	95.7	144	190	285
	7	170	255	146	219	119	180	92.3	139	180	270
	8	162	244	139	209	114	172	88.5	133	169	254
	9	154	231	133	199	109	164	84.5	127	157	236
	10	145	218	125	188	103	155	80.1	120	145	218
	11	136	205	118	177	97.3	146	75.6	114	133	200
	12	127	191	110	165	91.1	137	70.9	107	121	182
	13	118	177	102	154	84.8	127	66.2	99.5	109	164
	14	108	163	94.4	142	78.5	118	61.4	92.3	97.4	146
	15	99.3	149	86.7	130	72.3	109	56.7	85.2	86.3	130
	16	90.4	136	79.1	119	66.1	99.4	52.0	78.2	75.9	114
	17	81.8	123	71.8	108	60.2	90.5	47.5	71.4	67.2	101
	18	73.3	110	64.7	97.2	54.5	81.9	43.1	64.8	59.9	90.1
	19	65.8	98.9	58.0	87.2	48.9	73.5	38.8	58.3	53.8	80.9
	20	59.4	89.3	52.4	78.7	44.2	66.4	35.0	52.6	48.6	73.0
	22	49.1	73.8	43.3	65.1	36.5	54.8	28.9	43.5	40.1	60.3
	24	41.3	62.0	36.4	54.7	30.7	46.1	24.3	36.6	33.7	50.7
	26	35.1	52.8	31.0	46.6	26.1	39.3	20.7	31.2	28.7	43.2
	28	30.3	45.6	26.7	40.2	22.5	33.9	17.9	26.9		
	30	26.4	39.7	23.3	35.0	19.6	29.5	15.6	23.4		
	32					17.2	25.9	13.7	20.6		
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	197	296	168	253	137	207	106	159	220	331
	Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
		27.9	42.0	24.2	36.4	20.1	30.3	15.7	23.7	26.7	40.1
Properties											
Area, in. ²	6.58		5.62		4.59		3.53		7.36		
$r_x = r_y$, in.	1.86		1.89		1.92		1.95		1.59		
$I_x = I_y$, in. ⁴	22.8		20.1		16.9		13.4		18.7		
Notes: Heavy line indicates L_c/r equal to or greater than 200. Confirm ASTM A1085 material availability before specifying.											

Shape		HSS4½x4½x								HSS4x4x		
		⅜		5/16		¼		3/16		½		
t_{des} , in.		0.375		0.313		0.250		0.188		0.500		
lb/ft		19.8		17.0		13.9		10.7		21.6		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	175	262	149	225	122	184	94.3	142	190	286	
	1	174	261	149	224	122	183	94.0	141	189	285	
	2	172	258	147	221	121	181	93.0	140	186	280	
	3	169	253	145	217	119	178	91.4	137	181	273	
	4	164	247	141	212	116	174	89.3	134	175	262	
	5	159	238	136	205	112	168	86.5	130	166	250	
	6	152	229	131	197	108	162	83.3	125	156	235	
	7	145	218	125	187	103	155	79.7	120	146	219	
	8	137	205	118	177	97.5	147	75.7	114	134	202	
	9	128	193	111	167	91.8	138	71.4	107	122	184	
	10	119	179	103	155	85.8	129	66.9	101	110	166	
	11	110	165	95.6	144	79.6	120	62.2	93.5	98.5	148	
	12	101	151	87.9	132	73.4	110	57.5	86.4	86.9	131	
	13	91.5	138	80.1	120	67.1	101	52.8	79.3	75.8	114	
	14	82.5	124	72.5	109	61.0	91.6	48.1	72.3	65.4	98.4	
	15	73.9	111	65.2	98.0	55.0	82.6	43.5	65.4	57.0	85.7	
	16	65.5	98.5	58.1	87.3	49.2	74.0	39.1	58.8	50.1	75.3	
	17	58.0	87.2	51.5	77.4	43.7	65.7	34.8	52.4	44.4	66.7	
	18	51.8	77.8	45.9	69.0	39.0	58.6	31.1	46.7	39.6	59.5	
	19	46.5	69.8	41.2	61.9	35.0	52.6	27.9	41.9	35.5	53.4	
	20	41.9	63.0	37.2	55.9	31.6	47.5	25.2	37.8	32.1	48.2	
	22	34.6	52.1	30.7	46.2	26.1	39.2	20.8	31.3	26.5	39.8	
	24	29.1	43.8	25.8	38.8	21.9	33.0	17.5	26.3			
	26	24.8	37.3	22.0	33.1	18.7	28.1	14.9	22.4			
	28			19.0	28.5	16.1	24.2	12.8	19.3			
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Properties												
Area, in. ²		5.83		4.99		4.09		3.15		6.36		
$r_x = r_y$, in.		1.66		1.69		1.72		1.75		1.39		
$I_x = I_y$, in. ⁴		16.0		14.2		12.1		9.62		12.3		

Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A1085 material availability before specifying.




HSS4–HSS3½

Table 6-E (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS4x4x								HSS3½x3½x		
	¾		5/16		¼		3/16		¾		
t_{des} , in.	0.375		0.313		0.250		0.188		0.375		
lb/ft	17.3		14.8		12.2		9.42		14.7		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	152	229	131	196	107	162	83.2	125	130	195
	1	151	227	130	195	107	161	82.9	125	129	194
	2	149	224	128	192	106	159	81.8	123	126	190
	3	145	219	125	188	103	155	80.0	120	122	183
	4	140	211	121	182	99.8	150	77.5	117	116	175
	5	134	202	116	174	95.8	144	74.5	112	110	165
	6	127	191	110	165	91.0	137	70.9	107	102	153
	7	119	179	103	155	85.7	129	67.0	101	93.2	140
	8	110	166	96.0	144	80.0	120	62.6	94.2	84.2	127
	9	101	152	88.4	133	73.9	111	58.1	87.3	75.1	113
	10	92.2	139	80.7	121	67.7	102	53.4	80.3	66.1	99.3
	11	83.0	125	73.0	110	61.5	92.4	48.6	73.1	57.4	86.2
	12	73.9	111	65.3	98.2	55.3	83.1	43.9	66.0	49.0	73.7
	13	65.2	98.1	57.9	87.1	49.3	74.0	39.3	59.1	41.8	62.8
	14	56.9	85.5	50.9	76.4	43.5	65.3	34.9	52.4	36.0	54.2
	15	49.5	74.5	44.3	66.6	38.0	57.1	30.6	46.0	31.4	47.2
	16	43.5	65.5	38.9	58.5	33.4	50.2	26.9	40.4	27.6	41.5
	17	38.6	58.0	34.5	51.8	29.6	44.4	23.8	35.8	24.4	36.7
	18	34.4	51.7	30.8	46.2	26.4	39.6	21.2	31.9	21.8	32.8
	19	30.9	46.4	27.6	41.5	23.7	35.6	19.1	28.7	19.6	29.4
	20	27.9	41.9	24.9	37.5	21.4	32.1	17.2	25.9	17.7	26.5
	22	23.0	34.6	20.6	31.0	17.7	26.5	14.2	21.4		
	24	19.4	29.1	17.3	26.0	14.8	22.3	11.9	18.0		
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Properties											
Area, in.²	5.08		4.36		3.59		2.78		4.33		
$r_x = r_y$, in.	1.45		1.48		1.51		1.54		1.25		
$I_x = I_y$, in.⁴	10.7		9.59		8.22		6.61		6.74		
Notes: Heavy line indicates L_c/r equal to or greater than 200. Confirm ASTM A1085 material availability before specifying.											

 HSS3½-HSS3		Table 6-E (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Square HSS						A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi			
		HSS3½x3½x			HSS3x3x						
Shape		5/16		3/8		5/8		5/16			
t_{des} , in.		0.313		0.250		0.188		0.375		0.313	
lb/ft		12.7		10.5		8.15		12.2		10.6	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	112	168	92.5	139	71.9	108	107	161	93.1	140
	1	111	167	91.9	138	71.4	107	106	160	92.3	139
	2	109	164	90.3	136	70.2	105	103	155	89.8	135
	3	106	159	87.5	132	68.2	102	98.2	148	85.7	129
	4	101	152	83.9	126	65.4	98.3	91.7	138	80.4	121
	5	95.4	143	79.4	119	62.1	93.3	84.0	126	74.0	111
	6	88.8	134	74.2	111	58.2	87.4	75.5	113	66.9	101
	7	81.7	123	68.5	103	53.9	81.0	66.5	100	59.3	89.2
	8	74.2	112	62.5	93.9	49.4	74.2	57.5	86.4	51.7	77.7
	9	66.5	100	56.3	84.6	44.7	67.2	48.7	73.2	44.2	66.4
	10	58.9	88.5	50.1	75.3	40.0	60.1	40.4	60.7	37.1	55.8
	11	51.5	77.3	44.0	66.2	35.3	53.1	33.4	50.2	30.7	46.2
	12	44.4	66.7	38.2	57.5	30.9	46.4	28.1	42.2	25.8	38.8
	13	37.8	56.9	32.8	49.2	26.6	40.0	23.9	35.9	22.0	33.1
	14	32.6	49.0	28.2	42.4	23.0	34.5	20.6	31.0	19.0	28.5
	15	28.4	42.7	24.6	37.0	20.0	30.0	18.0	27.0	16.5	24.8
	16	25.0	37.6	21.6	32.5	17.6	26.4	15.8	23.7	14.5	21.8
	17	22.1	33.3	19.2	28.8	15.6	23.4	14.0	21.0	12.9	19.3
	18	19.7	29.7	17.1	25.7	13.9	20.9				
	19	17.7	26.6	15.3	23.0	12.5	18.7				
	20	16.0	24.0	13.8	20.8	11.2	16.9				
	22					9.29	14.0				
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Properties											
Area, in. ²		3.74		3.09		2.40		3.58		3.11	
$r_x = r_y$, in.		1.28		1.31		1.34		1.04		1.07	
$I_x = I_y$, in. ⁴		6.11		5.29		4.30		3.89		3.59	
Notes: Heavy line indicates L_c/r equal to or greater than 200. Confirm ASTM A1085 material availability before specifying.											



HSS3-HSS2½

Table 6-E (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS3x3x				HSS2½x2½x						
	¼		⅜		⅝		¾		⅞		
t_{des} , in.	0.250		0.188		0.313		0.250		0.188		
lb/ft	8.81		6.87		8.45		7.11		5.59		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	77.5	117	60.5	90.9	74.6	112	62.6	94.0	49.4	74.2
	1	76.9	116	60.0	90.2	73.5	110	61.8	92.8	48.8	73.4
	2	74.9	113	58.6	88.0	70.5	106	59.4	89.3	47.1	70.7
	3	71.7	108	56.2	84.5	65.8	98.8	55.7	83.6	44.3	66.6
	4	67.5	101	53.1	79.8	59.6	89.6	50.8	76.4	40.7	61.1
	5	62.4	93.8	49.4	74.2	52.6	79.1	45.2	67.9	36.5	54.8
	6	56.7	85.2	45.2	67.9	45.1	67.8	39.1	58.8	31.9	47.9
	7	50.6	76.1	40.7	61.1	37.6	56.6	33.0	49.7	27.2	40.9
	8	44.4	66.8	36.0	54.1	30.5	45.9	27.2	40.9	22.7	34.1
	9	38.3	57.6	31.4	47.2	24.2	36.4	21.8	32.7	18.4	27.7
	10	32.5	48.8	26.9	40.4	19.6	29.5	17.6	26.5	14.9	22.4
	11	27.0	40.6	22.6	34.0	16.2	24.4	14.6	21.9	12.3	18.5
	12	22.7	34.1	19.0	28.6	13.6	20.5	12.2	18.4	10.4	15.6
	13	19.4	29.1	16.2	24.4	11.6	17.5	10.4	15.7	8.83	13.3
	14	16.7	25.1	14.0	21.0	10.0	15.1	9.00	13.5	7.62	11.4
	15	14.5	21.9	12.2	18.3					6.63	9.97
	16	12.8	19.2	10.7	16.1						
	17	11.3	17.0	9.48	14.3						
18	10.1	15.2	8.46	12.7							
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
	77.5	117	60.5	90.9	74.6	112	62.6	94.1	49.4	74.3	
	63.1	94.7	49.2	73.9	60.7	91.0	50.9	76.4	40.2	60.3	
	20.2	30.4	16.5	24.8	17.6	26.4	15.7	23.6	13.1	19.7	
	6.51	9.79	5.24	7.88	4.89	7.35	4.27	6.41	3.49	5.25	
Properties											
Area, in. ²	2.59		2.02		2.49		2.09		1.65		
$r_x = r_y$, in.	1.10		1.14		0.869		0.899		0.931		
$I_x = I_y$, in. ⁴	3.16		2.61		1.88		1.69		1.43		
Notes: Heavy line indicates L_c/r equal to or greater than 200. Confirm ASTM A1085 material availability before specifying.											



HSS2¼-HSS2

Table 6-E (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A1085 Gr. A
 $F_y = 50$ ksi
 $F_u = 65$ ksi

Shape	HSS2¼x2¼x				HSS2x2x				
	¼		⅜		¼		⅜		
t_{des} , in.	0.250		0.188		0.250		0.188		
lb/ft	6.26		4.96		5.41		4.32		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	55.1	82.8	43.7	65.7	47.6	71.5	38.0	57.1
	1	54.2	81.4	43.0	64.7	46.6	70.0	37.3	56.0
	2	51.6	77.5	41.1	61.8	43.6	65.6	35.1	52.8
	3	47.5	71.3	38.1	57.2	39.1	58.8	31.8	47.7
	4	42.3	63.5	34.2	51.4	33.6	50.5	27.6	41.5
	5	36.4	54.7	29.8	44.8	27.6	41.5	23.1	34.7
	6	30.3	45.6	25.1	37.8	21.7	32.6	18.5	27.8
	7	24.5	36.8	20.6	31.0	16.4	24.6	14.3	21.4
	8	19.1	28.7	16.3	24.5	12.5	18.8	10.9	16.4
	9	15.1	22.6	12.9	19.4	9.90	14.9	8.63	13.0
	10	12.2	18.3	10.4	15.7	8.02	12.0	6.99	10.5
	11	10.1	15.2	8.63	13.0	6.63	9.96	5.77	8.68
	12	8.47	12.7	7.26	10.9			4.85	7.29
13	7.22	10.8	6.18	9.29					
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Properties									
Area, in. ²	1.84		1.46		1.59		1.27		
$r_x = r_y$, in.	0.797		0.828		0.695		0.726		
$I_x = I_y$, in. ⁴	1.17		1.00		0.769		0.670		
Notes: Heavy line indicates L_c/r equal to or greater than 200. Confirm ASTM A1085 material availability before specifying.									



HSS22-HSS20

Table 6-F
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS22x22x				HSS20x20x						
	$\frac{7}{8}$		$\frac{3}{4}$ ^f		$\frac{7}{8}$		$\frac{3}{4}$		$\frac{5}{8}$ ^f		
t_{des} , in.	0.814		0.698		0.814		0.698		0.581		
lb/ft	245		212		221		192		161		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	2010	3030	1740	2620	1820	2740	1570	2370	1330	1990
	1	2010	3030	1740	2620	1820	2740	1570	2370	1330	1990
	2	2010	3030	1740	2620	1820	2730	1570	2370	1330	1990
	3	2010	3020	1740	2620	1820	2730	1570	2360	1320	1990
	4	2010	3020	1740	2610	1820	2730	1570	2360	1320	1990
	5	2010	3020	1740	2610	1810	2720	1570	2360	1320	1990
	6	2000	3010	1730	2610	1810	2720	1570	2350	1320	1980
	7	2000	3010	1730	2600	1800	2710	1560	2350	1320	1980
	8	2000	3000	1730	2600	1800	2710	1560	2340	1310	1970
	9	1990	2990	1720	2590	1790	2700	1550	2330	1310	1970
	10	1990	2990	1720	2580	1790	2690	1550	2330	1300	1960
	11	1980	2980	1710	2570	1780	2680	1540	2320	1300	1950
	12	1970	2970	1710	2570	1780	2670	1540	2310	1290	1950
	13	1970	2960	1700	2560	1770	2660	1530	2300	1290	1940
	14	1960	2940	1700	2550	1760	2640	1520	2290	1280	1930
	15	1950	2930	1690	2540	1750	2630	1520	2280	1280	1920
	16	1940	2920	1680	2530	1740	2620	1510	2270	1270	1910
	17	1930	2910	1670	2510	1730	2600	1500	2250	1260	1900
	18	1920	2890	1660	2500	1720	2590	1490	2240	1260	1890
	19	1910	2880	1660	2490	1710	2570	1480	2230	1250	1880
	20	1900	2860	1650	2480	1700	2550	1470	2210	1240	1860
	22	1880	2830	1630	2450	1670	2510	1450	2180	1220	1840
	24	1860	2790	1610	2420	1650	2470	1430	2140	1200	1810
	26	1830	2750	1580	2380	1620	2430	1400	2110	1180	1780
	28	1800	2710	1560	2350	1590	2390	1380	2070	1160	1750
	30	1770	2660	1540	2310	1560	2340	1350	2030	1140	1710
	32	1740	2620	1510	2270	1520	2290	1320	1990	1110	1680
	34	1710	2570	1480	2230	1490	2240	1290	1940	1090	1640
	36	1670	2520	1450	2180	1450	2180	1260	1900	1060	1600
	38	1640	2460	1420	2140	1420	2130	1230	1850	1040	1560
40	1600	2410	1390	2090	1380	2070	1200	1800	1010	1520	
42	1570	2350	1360	2040	1340	2010	1160	1750	983	1480	
44	1530	2300	1330	1990	1300	1950	1130	1700	955	1440	
46	1490	2240	1290	1940	1260	1890	1100	1650	926	1390	
48	1450	2180	1260	1890	1220	1830	1060	1600	897	1350	
50	1410	2120	1230	1840	1180	1770	1030	1540	868	1300	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	2010	3030	1740	2620	1820	2740	1570	2370	1330	1990	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
	1560	2350	1350	2030	1410	2120	1220	1830	1030	1540	
	574	862	499	750	514	773	448	674	382	574	
	1320	1990	1120	1680	1080	1620	943	1420	723	1090	
Properties											
Area, in. ²	67.3		58.2		60.8		52.6		44.3		
$r_x = r_y$, in.	8.59		8.65		7.77		7.84		7.88		
$I_x = I_y$, in. ⁴	4970		4350		3670		3230		2750		

^fShape exceeds the compact limit for flexure for $F_y = 50$ ksi.



HSS20-HSS18

Table 6-F (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape		HSS20x20x				HSS18x18x					
		$\frac{1}{2}^c$ ^f		$\frac{7}{8}$	$\frac{3}{4}$	$\frac{5}{8}^f$		$\frac{1}{2}^c$ ^f			
t_{des} , in.		0.465		0.814	0.698	0.581		0.465			
lb/ft		131		197	171	144		117			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	961	1440	1630	2440	1410	2120	1190	1780	927	1390
	1	961	1440	1630	2440	1410	2120	1190	1780	927	1390
	2	960	1440	1620	2440	1410	2120	1180	1780	927	1390
	3	960	1440	1620	2440	1410	2120	1180	1780	926	1390
	4	959	1440	1620	2440	1410	2110	1180	1780	925	1390
	5	958	1440	1620	2430	1400	2110	1180	1770	924	1390
	6	957	1440	1610	2420	1400	2100	1180	1770	923	1390
	7	955	1440	1610	2420	1400	2100	1170	1760	921	1380
	8	954	1430	1600	2410	1390	2090	1170	1760	919	1380
	9	952	1430	1600	2400	1390	2080	1170	1750	917	1380
	10	950	1430	1590	2390	1380	2070	1160	1740	914	1370
	11	948	1420	1580	2380	1370	2070	1160	1740	912	1370
	12	945	1420	1580	2370	1370	2060	1150	1730	909	1370
	13	943	1420	1570	2360	1360	2040	1140	1720	905	1360
	14	940	1410	1560	2340	1350	2030	1140	1710	902	1360
	15	937	1410	1550	2330	1340	2020	1130	1700	898	1350
	16	934	1400	1540	2310	1340	2010	1120	1690	894	1340
	17	930	1400	1530	2290	1330	1990	1120	1680	890	1340
	18	927	1390	1520	2280	1320	1980	1110	1660	885	1330
	19	923	1390	1500	2260	1310	1960	1100	1650	881	1320
	20	919	1380	1490	2240	1290	1950	1090	1640	876	1320
	22	910	1370	1460	2200	1270	1910	1070	1610	865	1300
	24	901	1350	1430	2160	1250	1870	1050	1580	853	1280
	26	891	1340	1400	2110	1220	1830	1030	1550	836	1260
	28	880	1320	1370	2060	1190	1790	1010	1510	817	1230
	30	869	1310	1340	2010	1160	1750	981	1470	798	1200
	32	856	1290	1300	1960	1130	1700	956	1440	777	1170
	34	844	1270	1260	1900	1100	1660	929	1400	756	1140
	36	830	1250	1230	1840	1070	1610	902	1360	735	1100
	38	816	1230	1190	1790	1040	1560	875	1310	713	1070
	40	802	1210	1150	1730	1000	1510	846	1270	690	1040
42	787	1180	1110	1670	967	1450	818	1230	667	1000	
44	771	1160	1070	1600	932	1400	789	1190	644	967	
46	753	1130	1030	1540	897	1350	759	1140	620	932	
48	730	1100	985	1480	862	1300	730	1100	596	896	
50	707	1060	944	1420	827	1240	700	1050	573	861	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Properties											
Area, in. ²		35.8		54.3		47.1		39.6		32.1	
$r_x = r_y$, in.		7.95		6.96		7.02		7.07		7.13	
$I_x = I_y$, in. ⁴		2260		2630		2320		1980		1630	

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.



HSS16

Table 6-F (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape		HSS16x16x									
		$\frac{7}{8}$		$\frac{3}{4}$		$\frac{5}{8}$		$\frac{1}{2}$ ^f		$\frac{3}{8}$ ^{c,f}	
t_{des} , in.		0.814		0.698		0.581		0.465		0.349	
lb/ft		173		151		127		103		78.5	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	1430	2150	1240	1870	1050	1570	847	1270	551	827
	1	1430	2150	1240	1870	1050	1570	847	1270	550	827
	2	1430	2140	1240	1870	1050	1570	846	1270	550	827
	3	1420	2140	1240	1860	1050	1570	845	1270	550	826
	4	1420	2140	1240	1860	1040	1570	844	1270	549	825
	5	1420	2130	1230	1850	1040	1560	842	1270	548	824
	6	1410	2130	1230	1850	1040	1560	839	1260	547	822
	7	1410	2120	1230	1840	1030	1550	836	1260	546	821
	8	1400	2110	1220	1830	1030	1550	833	1250	545	819
	9	1400	2100	1220	1830	1030	1540	829	1250	543	816
	10	1390	2090	1210	1820	1020	1530	825	1240	541	814
	11	1380	2080	1200	1810	1010	1520	821	1230	539	811
	12	1370	2060	1190	1800	1010	1520	816	1230	537	808
	13	1360	2050	1190	1780	1000	1500	810	1220	535	804
	14	1350	2030	1180	1770	994	1490	805	1210	533	800
	15	1340	2020	1170	1760	986	1480	798	1200	530	796
	16	1330	2000	1160	1740	978	1470	792	1190	527	792
	17	1320	1980	1150	1720	969	1460	785	1180	524	788
	18	1300	1960	1140	1710	960	1440	778	1170	521	783
	19	1290	1940	1130	1690	951	1430	770	1160	518	778
	20	1280	1920	1110	1670	941	1410	762	1150	514	773
	22	1250	1880	1090	1630	920	1380	746	1120	507	762
	24	1220	1830	1060	1590	897	1350	728	1090	499	750
	26	1180	1780	1030	1550	873	1310	709	1070	490	737
	28	1150	1720	1000	1510	848	1270	689	1040	481	723
	30	1110	1670	970	1460	822	1240	668	1000	472	709
	32	1070	1610	938	1410	795	1200	646	971	462	694
	34	1030	1550	904	1360	767	1150	624	938	451	678
	36	994	1490	870	1310	739	1110	601	904	440	661
	38	954	1430	836	1260	710	1070	578	869	429	644
	40	913	1370	800	1200	681	1020	555	834	417	626
42	873	1310	765	1150	651	979	531	799	405	608	
44	832	1250	730	1100	622	935	508	763	390	585	
46	791	1190	695	1040	592	890	484	728	372	559	
48	750	1130	660	992	563	846	461	692	354	532	
50	710	1070	625	940	534	803	437	657	336	506	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		1430	2150	1240	1870	1050	1580	847	1270	644	968
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		1110	1660	965	1450	814	1220	658	987	500	750
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		398	598	348	524	297	447	244	367	187	282
Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
		669	1010	586	881	499	750	372	559	247	372
Properties											
Area, in. ²		47.7		41.5		35.0		28.3		21.5	
$r_x = r_y$, in.		6.14		6.19		6.25		6.31		6.37	
$I_x = I_y$, in. ⁴		1800		1590		1370		1130		873	

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.



HSS16-HSS14

Table 6-F (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape		HSS16x16x		HSS14x14x							
		^{5/16} c,f		^{7/8}	^{3/4}	^{5/8}	^{1/2} f				
t_{des} , in.		0.291		0.814		0.698		0.581		0.465	
lb/ft		65.9		150		130		110		89.7	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	402	604	1230	1850	1070	1620	907	1360	737	1110
	1	402	604	1230	1850	1070	1610	907	1360	736	1110
	2	402	604	1230	1850	1070	1610	906	1360	735	1110
	3	401	603	1230	1850	1070	1610	904	1360	734	1100
	4	401	603	1230	1840	1070	1610	902	1360	732	1100
	5	400	602	1220	1840	1070	1600	899	1350	730	1100
	6	400	601	1220	1830	1060	1590	896	1350	727	1090
	7	399	599	1210	1820	1060	1590	892	1340	724	1090
	8	398	598	1200	1810	1050	1580	887	1330	720	1080
	9	397	596	1200	1800	1040	1570	881	1320	716	1080
	10	396	595	1190	1790	1040	1560	875	1320	711	1070
	11	394	593	1180	1770	1030	1550	869	1310	706	1060
	12	393	590	1170	1760	1020	1530	862	1300	700	1050
	13	391	588	1160	1740	1010	1520	854	1280	694	1040
	14	389	585	1150	1720	1000	1500	846	1270	688	1030
	15	388	583	1130	1710	990	1490	837	1260	681	1020
	16	386	580	1120	1690	979	1470	828	1240	674	1010
	17	384	577	1110	1670	968	1450	819	1230	666	1000
	18	382	573	1090	1640	955	1440	808	1220	658	989
	19	379	570	1080	1620	943	1420	798	1200	649	976
	20	377	566	1060	1600	929	1400	787	1180	640	963
	22	372	559	1030	1550	901	1350	764	1150	622	935
	24	366	550	996	1500	872	1310	739	1110	602	905
	26	360	541	960	1440	841	1260	713	1070	582	874
	28	354	532	922	1390	808	1210	686	1030	560	842
	30	347	522	884	1330	775	1160	659	990	538	808
	32	340	511	844	1270	741	1110	630	947	515	774
	34	333	500	804	1210	706	1060	601	904	492	739
	36	325	489	763	1150	671	1010	572	860	468	704
	38	317	477	722	1090	636	955	543	816	445	668
	40	309	465	682	1020	601	903	513	772	421	633
42	301	452	642	964	566	850	484	728	398	598	
44	292	439	602	905	531	799	456	685	375	563	
46	283	426	563	846	498	748	427	642	352	529	
48	274	412	525	789	465	699	400	601	329	495	
50	265	398	488	734	433	651	373	560	308	462	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
Properties											
Area, in. ²		18.1		41.2		35.9		30.3		24.6	
$r_x = r_y$, in.		6.39		5.33		5.38		5.44		5.49	
$I_x = I_y$, in. ⁴		739		1170		1040		897		743	

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.



HSS14-HSS12

Table 6-F (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS14x14x				HSS12x12x						
	$\frac{3}{8}^c$		$\frac{5}{16}^c$		$\frac{3}{4}$	$\frac{5}{8}$	$\frac{1}{2}$				
t_{des} , in.	0.349		0.291		0.698		0.581		0.465		
lb/ft	68.3		57.4		110		93.3		76.1		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	527	792	387	582	907	1360	769	1160	626	940
	1	527	792	387	582	907	1360	769	1160	625	940
	2	527	792	387	581	905	1360	768	1150	625	939
	3	526	791	386	581	903	1360	766	1150	623	936
	4	525	789	386	580	900	1350	763	1150	621	933
	5	524	788	385	579	896	1350	760	1140	618	929
	6	523	786	384	577	891	1340	756	1140	615	924
	7	521	783	383	576	885	1330	751	1130	611	919
	8	519	781	382	574	878	1320	746	1120	607	912
	9	517	778	380	572	871	1310	739	1110	602	905
	10	515	774	379	569	862	1300	732	1100	596	896
	11	513	770	377	567	853	1280	725	1090	590	887
	12	510	766	375	564	843	1270	717	1080	584	878
	13	507	762	373	561	833	1250	708	1060	577	867
	14	504	757	371	558	821	1230	699	1050	569	856
	15	500	752	369	554	810	1220	689	1040	562	844
	16	497	746	366	550	797	1200	678	1020	553	832
	17	493	741	364	546	784	1180	667	1000	545	819
	18	489	734	361	542	770	1160	656	986	535	805
	19	484	728	358	538	756	1140	644	968	526	791
	20	480	721	355	533	741	1110	632	949	516	776
	22	470	707	348	523	710	1070	606	911	496	745
	24	460	691	341	513	678	1020	579	870	474	713
	26	444	668	334	501	644	968	551	829	452	680
	28	428	644	326	489	610	917	523	786	429	645
	30	412	619	317	477	575	864	494	742	406	610
	32	395	593	308	464	540	812	464	698	382	575
	34	377	567	299	450	505	759	435	654	359	540
	36	360	540	290	436	471	707	406	610	336	504
	38	342	514	280	421	437	656	377	567	313	470
40	324	487	270	406	404	606	349	525	290	436	
42	306	460	259	389	371	558	322	484	268	403	
44	289	434	244	367	340	511	296	445	247	371	
46	272	408	230	345	311	467	271	407	226	339	
48	255	383	216	324	285	429	249	374	207	312	
50	238	358	202	303	263	395	229	344	191	287	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Properties											
Area, in. ²	18.7		15.7		30.3		25.7		20.9		
$r_x = r_y$, in.	5.55		5.58		4.56		4.62		4.68		
$I_x = I_y$, in. ⁴	577		490		631		548		457		

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.



HSS12-HSS10

Table 6-F (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A500 Gr. C

$F_y = 50$ ksi

$F_u = 62$ ksi


Shape	HSS12x12x								HSS10x10x		
	$\frac{3}{8}^f$		$\frac{5}{16}^{c,f}$		$\frac{1}{4}^{c,f}$		$\frac{3}{16}^{c,f}$		$\frac{3}{4}$		
t_{des} , in.	0.349		0.291		0.233		0.174		0.698		
lb/ft	58.1		48.9		39.4		29.8		89.5		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	479	720	371	557	252	379	150	225	740	1110
	1	479	720	371	557	252	379	150	225	739	1110
	2	478	719	370	556	252	379	149	225	737	1110
	3	477	717	370	556	252	379	149	224	735	1100
	4	475	715	369	554	251	378	149	224	731	1100
	5	473	712	368	553	251	377	149	223	726	1090
	6	471	708	367	551	250	376	148	223	720	1080
	7	468	704	365	549	249	374	148	222	713	1070
	8	465	699	363	546	248	373	147	221	705	1060
	9	461	693	361	543	247	371	146	220	696	1050
	10	457	687	359	540	245	369	146	219	686	1030
	11	453	680	357	536	244	366	145	218	675	1020
	12	448	673	354	533	242	364	144	216	664	998
	13	442	665	352	528	240	361	143	215	652	979
	14	437	657	349	524	238	358	142	213	639	960
	15	431	648	345	519	236	355	141	212	625	939
	16	425	638	342	514	234	352	140	210	611	918
	17	418	628	338	509	232	349	138	208	596	895
	18	411	618	335	503	230	345	137	206	580	872
	19	404	608	331	497	227	342	136	204	564	848
	20	397	596	326	491	225	338	134	202	548	824
	22	381	573	318	478	219	329	131	197	515	774
	24	365	549	307	461	213	320	128	192	480	722
	26	349	524	293	440	207	311	124	187	446	670
	28	331	498	279	419	200	301	121	181	411	618
	30	314	471	264	397	193	291	117	176	377	567
	32	296	445	249	375	186	280	113	170	344	516
	34	278	418	234	352	179	269	109	164	311	468
	36	260	391	220	330	171	257	105	157	280	420
	38	243	365	205	308	163	245	100	151	251	377
40	226	339	191	287	155	233	95.9	144	227	341	
42	209	314	177	266	144	216	91.4	137	206	309	
44	193	289	163	245	133	200	87.0	131	187	281	
46	177	265	150	225	122	184	82.4	124	171	258	
48	162	244	138	207	112	169	77.9	117	157	237	
50	149	225	127	191	103	156	73.8	111	145	218	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Properties											
Area, in. ²	16.0		13.4		10.8		8.15		24.7		
$r_x = r_y$, in.	4.73		4.76		4.79		4.82		3.75		
$I_x = I_y$, in. ⁴	357		304		248		189		347		

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.

Shape		HSS10x10x									
		5/8		1/2		3/8		5/16 ^f		1/4 ^{c,f}	
t_{des} , in.		0.581		0.465		0.349		0.291		0.233	
lb/ft		76.3		62.5		47.9		40.4		32.6	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	629	945	515	774	395	594	332	499	241	362
	1	628	944	515	773	395	594	332	499	241	362
	2	627	942	514	772	394	592	331	498	240	361
	3	625	939	512	769	393	590	330	496	240	360
	4	621	934	509	765	391	588	329	494	239	359
	5	617	928	506	760	388	584	327	491	238	358
	6	612	921	502	755	386	580	324	487	237	356
	7	607	912	497	748	382	574	321	483	236	354
	8	600	902	492	740	378	569	318	478	234	352
	9	593	891	486	731	374	562	315	473	232	349
	10	585	879	480	721	369	555	311	467	230	346
	11	576	865	473	711	364	547	306	460	228	343
	12	566	851	465	699	358	538	301	453	226	339
	13	556	835	457	687	352	529	296	445	223	336
	14	545	819	448	674	346	519	291	437	221	331
	15	534	802	439	660	339	509	285	429	218	327
	16	522	784	430	646	332	498	279	420	215	323
	17	509	765	420	631	324	487	273	411	211	318
	18	496	746	410	616	317	476	267	401	208	313
	19	483	726	399	600	309	464	260	391	205	307
	20	470	706	388	583	300	452	253	381	201	302
	22	442	664	366	550	284	426	239	360	193	290
	24	413	621	343	515	266	400	225	338	183	274
	26	384	577	319	480	249	374	210	316	171	257
	28	355	534	296	445	231	347	195	293	159	239
	30	326	490	273	410	213	321	180	271	147	221
	32	298	448	250	375	196	294	166	249	135	203
	34	271	407	228	342	179	269	152	228	124	186
	36	244	367	206	310	163	244	138	207	113	170
	38	219	329	185	278	147	220	125	187	102	153
	40	198	297	167	251	132	199	112	169	92.1	138
42	179	270	152	228	120	180	102	153	83.6	126	
44	163	246	138	208	109	164	92.9	140	76.1	114	
46	150	225	126	190	100	150	85.0	128	69.7	105	
48	137	206	116	175	91.9	138	78.1	117	64.0	96.2	
50	127	190	107	161	84.7	127	71.9	108	59.0	88.6	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		629	945	515	774	395	594	332	499	241	362
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		488	732	400	600	307	460	258	387	208	312
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		172	259	144	216	112	169	95.5	144	77.8	117
Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
		183	275	151	228	118	177	90.9	137	65.8	98.9
Properties											
Area, in. ²		21.0		17.2		13.2		11.1		8.96	
$r_x = r_y$, in.		3.80		3.86		3.92		3.94		3.97	
$I_x = I_y$, in. ⁴		304		256		202		172		141	

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.

 HSS10-HSS9		Table 6-F (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Square HSS										A500 Gr. C $F_y = 50$ ksi $F_u = 62$ ksi	
		HSS10x10x		HSS9x9x									
Shape		$\frac{3}{16}^{c,f}$		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		$\frac{5}{16}^f$			
t_{des} , in.		0.174		0.581		0.465		0.349		0.291			
lb/ft		24.7		67.8		55.7		42.8		36.1			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	145	217	560	841	458	688	353	531	297	446		
	1	145	217	559	841	458	688	353	531	297	446		
	2	144	217	558	838	456	686	352	529	296	445		
	3	144	217	555	835	454	683	351	527	295	443		
	4	144	216	552	829	452	679	348	524	293	440		
	5	143	215	547	823	448	673	346	520	291	437		
	6	143	214	542	814	444	667	343	515	288	433		
	7	142	213	535	805	439	659	339	509	285	428		
	8	141	212	528	794	433	651	334	503	281	423		
	9	140	210	520	782	426	641	330	495	277	417		
	10	139	209	511	768	419	630	324	488	273	410		
	11	138	207	501	754	412	619	319	479	268	403		
	12	136	205	491	738	403	606	312	470	263	396		
	13	135	203	480	721	394	593	306	460	258	387		
	14	134	201	468	704	385	579	299	449	252	379		
	15	132	198	456	686	375	564	291	438	246	370		
	16	130	196	443	666	365	549	284	427	240	360		
	17	129	193	430	647	355	533	276	415	233	350		
	18	127	190	417	626	344	517	268	403	226	340		
	19	125	188	403	606	333	500	260	390	219	330		
	20	123	185	389	585	322	483	251	377	212	319		
	22	119	178	360	542	299	449	234	351	198	297		
	24	114	171	331	498	275	414	216	325	183	275		
	26	109	164	302	455	252	379	198	298	168	253		
	28	104	157	274	412	229	344	181	272	154	231		
	30	99.3	149	247	371	207	311	164	246	139	210		
	32	94.1	141	220	331	185	278	147	221	126	189		
	34	88.8	133	195	293	164	247	131	197	112	169		
	36	83.4	125	174	262	147	220	117	176	100	150		
	38	77.9	117	156	235	132	198	105	158	89.9	135		
	40	70.6	106	141	212	119	179	94.8	143	81.1	122		
42	64.0	96.2	128	192	108	162	86.0	129	73.6	111			
44	58.3	87.6	117	175	98.2	148	78.4	118	67.0	101			
46	53.4	80.2	107	160	89.8	135	71.7	108	61.3	92.2			
48	49.0	73.6	97.9	147	82.5	124	65.9	99.0	56.3	84.6			
50	45.2	67.9	90.3	136	76.0	114	60.7	91.2	51.9	78.0			
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$		
Properties													
Area, in. ²		6.76		18.7		15.3		11.8		9.92			
$r_x = r_y$, in.		4.00		3.40		3.45		3.51		3.54			
$I_x = I_y$, in. ⁴		108		216		183		145		124			

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.



HSS9-HSS8

Table 6-F (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS9x9x				HSS8x8x						
	$\frac{1}{4}^c$		$\frac{3}{16}^c$		$\frac{5}{8}$		$\frac{1}{2}$		$\frac{3}{8}$		
t_{des} , in.	0.233		0.174		0.581		0.465		0.349		
lb/ft	29.2		22.2		59.3		48.9		37.7		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	232	349	141	212	491	738	404	607	311	468
	1	232	349	141	212	490	737	404	607	311	467
	2	232	348	141	212	489	735	402	605	310	466
	3	231	347	141	211	486	730	400	601	308	463
	4	230	346	140	211	482	724	397	597	306	460
	5	229	344	140	210	477	717	393	590	303	455
	6	228	342	139	209	471	707	388	583	299	450
	7	226	340	138	207	463	697	382	575	295	444
	8	224	337	137	206	455	684	376	565	290	436
	9	222	333	136	204	446	671	369	554	285	428
	10	219	330	134	202	436	656	361	542	279	419
	11	217	326	133	199	426	640	352	529	273	410
	12	213	321	131	197	414	623	343	516	266	400
	13	209	314	129	195	402	605	333	501	259	389
	14	204	307	128	192	390	586	323	486	251	378
	15	199	300	126	189	377	566	313	470	243	366
	16	194	292	124	186	363	546	302	454	235	354
	17	189	284	122	183	349	525	291	437	227	341
	18	184	276	119	179	335	504	279	420	218	328
	19	178	268	117	176	321	482	268	403	210	315
	20	172	259	115	172	307	461	256	385	201	302
	22	161	242	109	165	278	417	233	350	183	275
	24	149	224	104	157	249	374	210	315	166	249
	26	137	206	98.6	148	221	333	187	281	148	223
	28	125	188	92.8	139	195	293	165	249	132	198
	30	114	171	86.9	131	170	256	145	217	116	174
	32	103	154	78.6	118	149	225	127	191	102	153
	34	91.9	138	70.5	106	132	199	113	169	90.2	136
	36	82.0	123	62.9	94.5	118	177	100	151	80.5	121
	38	73.6	111	56.5	84.9	106	159	90.2	136	72.2	109
	40	66.4	99.8	51.0	76.6	95.6	144	81.4	122	65.2	98.0
42	60.2	90.5	46.2	69.5	86.8	130	73.8	111	59.1	88.9	
44	54.9	82.5	42.1	63.3	79.0	119	67.3	101	53.9	81.0	
46	50.2	75.5	38.5	57.9	72.3	109	61.5	92.5	49.3	74.1	
48	46.1	69.3	35.4	53.2	66.4	99.8	56.5	85.0	45.3	68.1	
50	42.5	63.9	32.6	49.0			52.1	78.3	41.7	62.7	
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Properties											
Area, in. ²	8.03		6.06		16.4		13.5		10.4		
$r_x = r_y$, in.	3.56		3.59		2.99		3.04		3.10		
$I_x = I_y$, in. ⁴	102		78.2		146		125		100		

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

^d Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS8-HSS7

Table 6-F (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS8x8x						HSS7x7x				
	$\frac{5}{16}$		$\frac{1}{4}$ ^f		$\frac{3}{16}$ ^{e,f}		$\frac{5}{8}$		$\frac{1}{2}$		
t_{des} , in.	0.291		0.233		0.174		0.581		0.465		
lb/ft	31.8		25.8		19.6		50.8		42.1		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	262	394	213	319	137	206	419	630	347	522
	1	262	394	212	319	137	206	418	629	347	521
	2	261	393	212	318	137	205	417	626	345	519
	3	260	390	211	316	136	205	413	621	343	515
	4	258	387	209	314	136	204	409	614	339	509
	5	255	384	207	311	135	203	403	606	334	503
	6	252	379	205	308	134	201	396	595	329	494
	7	249	374	202	303	133	199	388	583	322	484
	8	245	368	199	299	131	197	379	569	315	474
	9	240	361	195	293	130	195	369	554	307	461
	10	236	354	191	287	128	192	358	538	298	448
	11	230	346	187	281	126	190	346	520	289	434
	12	225	338	182	274	124	187	334	502	279	419
	13	219	329	178	267	122	183	321	482	269	404
	14	212	319	173	260	120	180	307	462	258	387
	15	206	310	167	252	117	176	294	441	247	371
	16	199	299	162	243	115	173	280	420	235	354
	17	192	289	156	235	112	169	265	399	224	336
	18	185	278	151	227	109	165	251	377	212	319
	19	178	267	145	218	107	160	237	356	200	301
	20	171	256	139	209	104	156	223	335	189	284
	22	156	234	127	191	97.1	146	195	293	166	250
	24	141	212	115	173	88.3	133	169	253	145	217
	26	127	191	104	156	79.5	120	144	216	124	186
	28	113	170	92.5	139	71.1	107	124	186	107	161
	30	99.5	150	81.7	123	63.0	94.7	108	162	93.1	140
	32	87.5	131	71.8	108	55.4	83.2	95.0	143	81.8	123
	34	77.5	116	63.6	95.6	49.0	73.7	84.1	126	72.4	109
	36	69.1	104	56.7	85.3	43.7	65.7	75.1	113	64.6	97.1
	38	62.0	93.2	50.9	76.5	39.3	59.0	67.4	101	58.0	87.2
	40	56.0	84.1	46.0	69.1	35.4	53.2	60.8	91.4	52.3	78.7
42	50.8	76.3	41.7	62.7	32.1	48.3	55.1	82.9	47.5	71.4	
44	46.3	69.5	38.0	57.1	29.3	44.0					
46	42.3	63.6	34.8	52.2	26.8	40.3					
48	38.9	58.4	31.9	48.0	24.6	37.0					
50	35.8	53.9	29.4	44.2	22.7	34.1					
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Properties											
Area, in. ²	8.76		7.10		5.37		14.0		11.6		
$r_x = r_y$, in.	3.13		3.15		3.18		2.58		2.63		
$I_x = I_y$, in. ⁴	85.6		70.7		54.4		93.4		80.5		

^e Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS7-HSS6

Table 6-F (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS7x7x								HSS6x6x		
	$\frac{3}{8}$		$\frac{5}{16}$		$\frac{1}{4}$ ^f		$\frac{3}{16}$ ^{c,f}		$\frac{5}{8}$		
t_{des} , in.	0.349		0.291		0.233		0.174		0.581		
lb/ft	32.6		27.6		22.4		17.1		42.3		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	269	404	227	342	185	278	131	198	350	526
	1	268	403	227	341	184	277	131	197	350	525
	2	267	401	226	340	184	276	131	197	347	522
	3	265	398	224	337	182	274	130	196	343	516
	4	262	394	222	334	181	272	129	195	338	508
	5	259	389	219	330	178	268	128	193	331	498
	6	255	383	216	324	176	264	127	191	323	486
	7	250	376	212	319	173	259	126	189	314	472
	8	245	368	207	312	169	254	124	186	304	456
	9	239	359	203	304	165	248	122	183	292	439
	10	232	349	197	296	161	242	120	180	280	421
	11	225	338	191	288	156	235	117	176	267	402
	12	218	327	185	278	151	227	115	172	254	382
	13	210	316	179	269	146	219	111	167	240	361
	14	202	303	172	258	141	211	107	161	226	340
	15	194	291	165	248	135	203	103	154	212	318
	16	185	278	158	237	129	194	98.4	148	198	297
	17	176	265	151	226	124	186	94.0	141	184	276
	18	168	252	143	215	118	177	89.6	135	170	255
	19	159	239	136	204	112	168	85.2	128	156	235
	20	150	226	129	193	106	159	80.8	121	143	215
	22	133	200	114	172	94.2	142	72.0	108	119	179
	24	116	175	100	150	82.8	125	63.4	95.3	99.8	150
	26	100	151	86.7	130	72.1	108	55.3	83.1	85.1	128
	28	86.4	130	74.8	112	62.1	93.4	47.7	71.7	73.4	110
	30	75.3	113	65.1	97.9	54.1	81.3	41.6	62.5	63.9	96.0
32	66.2	99.4	57.2	86.0	47.6	71.5	36.5	54.9	56.2	84.4	
34	58.6	88.1	50.7	76.2	42.1	63.3	32.4	48.6	49.7	74.8	
36	52.3	78.6	45.2	68.0	37.6	56.5	28.9	43.4	44.4	66.7	
38	46.9	70.5	40.6	61.0	33.7	50.7	25.9	38.9			
40	42.3	63.6	36.6	55.1	30.4	45.8	23.4	35.1			
42	38.4	57.7	33.2	49.9	27.6	41.5	21.2	31.9			
44	35.0	52.6	30.3	45.5	25.2	37.8	19.3	29.0			
46							17.7	26.6			
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Properties											
Area, in. ²	8.97		7.59		6.17		4.67		11.7		
$r_x = r_y$, in.	2.69		2.72		2.75		2.77		2.17		
$I_x = I_y$, in. ⁴	65.0		56.1		46.5		36.0		55.2		

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.

^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS6

Table 6-F (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape		HSS6x6x										
		1/2		3/8		5/16		1/4		3/16 ^f		
t_{des} , in.		0.465		0.349		0.291		0.233		0.174		
lb/ft		35.2		27.5		23.3		19.0		14.5		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	292	438	227	341	193	289	157	236	119	179	
	1	291	437	226	340	192	289	157	235	119	179	
	2	289	435	225	338	191	287	156	234	118	178	
	3	286	430	223	335	189	284	154	232	117	176	
	4	282	424	220	330	187	280	152	229	116	174	
	5	277	416	216	324	183	275	150	225	114	171	
	6	270	406	211	317	179	270	146	220	111	167	
	7	263	395	206	309	175	263	143	215	109	163	
	8	255	383	199	300	170	255	139	208	106	159	
	9	246	369	193	289	164	247	134	202	102	154	
	10	236	355	185	279	158	238	129	195	98.8	148	
	11	226	339	178	267	152	228	124	187	95.0	143	
	12	215	323	170	255	145	218	119	179	91.0	137	
	13	204	306	161	242	138	207	113	170	86.8	130	
	14	193	289	153	229	131	197	108	162	82.5	124	
	15	181	272	144	216	123	186	102	153	78.2	117	
	16	170	255	135	203	116	175	95.9	144	73.7	111	
	17	158	238	126	190	109	164	90.0	135	69.3	104	
	18	147	221	118	177	102	153	84.1	126	64.9	97.6	
	19	136	204	109	164	94.4	142	78.4	118	60.6	91.0	
	20	125	188	101	152	87.4	131	72.7	109	56.3	84.6	
	22	104	157	85.0	128	74.0	111	61.9	93.0	48.1	72.3	
	24	87.8	132	71.4	107	62.2	93.5	52.0	78.1	40.5	60.9	
	26	74.8	112	60.8	91.4	53.0	79.6	44.3	66.6	34.5	51.9	
	28	64.5	96.9	52.5	78.8	45.7	68.7	38.2	57.4	29.8	44.7	
	30	56.2	84.4	45.7	68.7	39.8	59.8	33.3	50.0	25.9	39.0	
	32	49.4	74.2	40.2	60.4	35.0	52.6	29.2	44.0	22.8	34.2	
	34	43.7	65.7	35.6	53.5	31.0	46.6	25.9	38.9	20.2	30.3	
	36	39.0	58.6	31.7	47.7	27.6	41.5	23.1	34.7	18.0	27.1	
	38					24.8	37.3	20.7	31.2	16.2	24.3	
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
	Properties											
	Area, in. ²		9.74		7.58		6.43		5.24		3.98	
	$r_x = r_y$, in.		2.23		2.28		2.31		2.34		2.37	
	$I_x = I_y$, in. ⁴		48.3		39.5		34.3		28.6		22.3	

^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.
 Note: Heavy line indicates L_c/r equal to or greater than 200.

Shape		HSS5½x5½x								HSS5x5x		
		⅜		⅝		¼		⅜ ^f		½		
<i>t_{des}</i> , in.		0.349		0.291		0.233		0.174		0.465		
lb/ft		24.9		21.2		17.3		13.3		28.4		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, <i>L_c</i> (ft), with respect to the least radius of gyration, <i>r_y</i>	0	206	310	175	263	143	215	109	163	236	355	
	1	205	309	175	263	142	214	108	163	235	353	
	2	204	307	174	261	141	213	108	162	233	350	
	3	202	303	171	258	140	210	106	160	229	345	
	4	198	298	169	253	138	207	105	158	224	337	
	5	194	291	165	248	135	203	103	154	218	328	
	6	189	284	161	242	131	197	100	151	210	316	
	7	183	275	156	234	127	192	97.3	146	202	303	
	8	176	265	151	226	123	185	94.1	141	192	289	
	9	169	254	145	217	118	178	90.5	136	182	274	
	10	161	243	138	208	113	170	86.7	130	172	258	
	11	153	231	132	198	108	162	82.7	124	161	241	
	12	145	218	125	187	102	154	78.5	118	149	224	
	13	137	205	117	177	96.5	145	74.2	112	138	207	
	14	128	192	110	166	90.6	136	69.8	105	127	190	
	15	119	179	103	155	84.7	127	65.4	98.3	115	173	
	16	110	166	95.6	144	78.8	118	61.0	91.7	105	157	
	17	102	153	88.4	133	73.0	110	56.6	85.1	94.2	142	
	18	93.6	141	81.4	122	67.3	101	52.3	78.6	84.1	126	
	19	85.6	129	74.6	112	61.8	92.9	48.1	72.3	75.5	113	
	20	77.7	117	68.0	102	56.4	84.8	44.1	66.2	68.1	102	
	22	64.2	96.5	56.2	84.4	46.7	70.1	36.5	54.9	56.3	84.6	
	24	53.9	81.1	47.2	70.9	39.2	58.9	30.7	46.1	47.3	71.1	
	26	46.0	69.1	40.2	60.4	33.4	50.2	26.2	39.3	40.3	60.6	
	28	39.6	59.6	34.7	52.1	28.8	43.3	22.5	33.9	34.8	52.2	
	30	34.5	51.9	30.2	45.4	25.1	37.7	19.6	29.5	30.3	45.5	
	32	30.3	45.6	26.5	39.9	22.1	33.2	17.3	25.9			
	34	26.9	40.4	23.5	35.3	19.5	29.4	15.3	23.0			
	36							13.6	20.5			
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure, kip-ft		M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
	Properties											
	Area, in. ²		6.88		5.85		4.77		3.63		7.88	
	<i>r_x</i> = <i>r_y</i> , in.		2.08		2.11		2.13		2.16		1.82	
<i>I_x</i> = <i>I_y</i> , in. ⁴		29.7		25.9		21.7		17.0		26.0		

^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.
 Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS5–HSS4½

Table 6-F (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS5x5x								HSS4½x4½x		
	⅜		⅝		¼		⅜		½		
t_{des} , in.	0.349		0.291		0.233		0.174		0.465		
lb/ft	22.4		19.1		15.6		12.0		25.0		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	185	278	157	237	129	193	98.2	148	208	313
	1	184	277	157	236	128	193	97.9	147	207	311
	2	183	275	156	234	127	191	97.1	146	205	308
	3	180	271	153	231	126	189	95.8	144	201	302
	4	176	265	150	226	123	185	94.0	141	195	293
	5	172	258	146	220	120	180	91.7	138	188	283
	6	166	250	142	213	116	175	89.0	134	180	270
	7	160	240	137	205	112	168	85.9	129	171	256
	8	153	229	131	196	107	161	82.4	124	160	241
	9	145	218	124	187	102	154	78.7	118	150	225
	10	137	206	118	177	97.0	146	74.7	112	139	208
	11	129	193	111	166	91.5	137	70.5	106	127	191
	12	120	180	103	156	85.7	129	66.2	99.5	116	174
	13	111	167	96.2	145	79.8	120	61.8	92.9	105	157
	14	103	154	88.9	134	74.0	111	57.4	86.3	93.9	141
	15	94.0	141	81.7	123	68.2	102	53.0	79.7	83.4	125
	16	85.6	129	74.6	112	62.4	93.8	48.7	73.2	73.5	110
	17	77.5	116	67.8	102	56.9	85.5	44.5	66.8	65.1	97.8
	18	69.6	105	61.2	91.9	51.5	77.4	40.4	60.7	58.0	87.2
	19	62.5	93.9	54.9	82.5	46.3	69.6	36.4	54.8	52.1	78.3
	20	56.4	84.8	49.6	74.5	41.8	62.8	32.9	49.4	47.0	70.7
	22	46.6	70.0	41.0	61.5	34.5	51.9	27.2	40.8	38.9	58.4
	24	39.2	58.9	34.4	51.7	29.0	43.6	22.8	34.3	32.6	49.1
	26	33.4	50.2	29.3	44.1	24.7	37.2	19.5	29.2	27.8	41.8
	28	28.8	43.2	25.3	38.0	21.3	32.1	16.8	25.2		
	30	25.1	37.7	22.0	33.1	18.6	27.9	14.6	22.0		
	32					16.3	24.5	12.8	19.3		
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	185	278	157	237	129	194	98.2	148	208	313
	Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$
	Properties										
Area, in. ²	6.18		5.26		4.30		3.28		6.95		
$r_x = r_y$, in.	1.87		1.90		1.93		1.96		1.61		
$I_x = I_y$, in. ⁴	21.7		19.0		16.0		12.6		18.1		

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS4½-HSS4

Table 6-F (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS4½x4½x								HSS4x4x		
	⅜		⅝		¼		⅜		½		
t_{des} , in.	0.349		0.291		0.233		0.174		0.465		
lb/ft	19.8		17.0		13.9		10.7		21.6		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	164	247	140	211	115	173	87.7	132	180	271
	1	163	246	140	210	115	172	87.4	131	179	269
	2	162	243	138	208	113	170	86.5	130	176	265
	3	159	238	136	204	111	167	85.1	128	172	258
	4	154	232	132	199	109	163	83.0	125	166	249
	5	149	224	128	192	105	158	80.5	121	158	237
	6	143	215	123	185	101	152	77.5	117	149	224
	7	136	205	117	176	96.8	145	74.1	111	139	209
	8	129	194	111	167	91.8	138	70.4	106	128	193
	9	121	182	104	157	86.5	130	66.4	99.8	117	176
	10	112	169	97.3	146	80.9	122	62.2	93.5	106	160
	11	104	156	90.2	136	75.1	113	57.9	87.0	95.0	143
	12	95.3	143	82.9	125	69.3	104	53.5	80.4	84.1	126
	13	86.7	130	75.7	114	63.4	95.4	49.1	73.7	73.6	111
	14	78.3	118	68.6	103	57.7	86.7	44.7	67.2	63.7	95.8
	15	70.2	105	61.7	92.8	52.1	78.3	40.5	60.8	55.5	83.5
	16	62.3	93.7	55.1	82.9	46.7	70.2	36.4	54.7	48.8	73.3
	17	55.2	83.0	48.8	73.4	41.5	62.4	32.4	48.7	43.2	65.0
	18	49.2	74.0	43.6	65.5	37.0	55.6	28.9	43.4	38.6	58.0
	19	44.2	66.4	39.1	58.8	33.2	49.9	25.9	39.0	34.6	52.0
	20	39.9	59.9	35.3	53.0	30.0	45.1	23.4	35.2	31.2	46.9
	22	33.0	49.5	29.2	43.8	24.8	37.3	19.4	29.1	25.8	38.8
	24	27.7	41.6	24.5	36.8	20.8	31.3	16.3	24.4		
	26	23.6	35.5	20.9	31.4	17.7	26.7	13.9	20.8		
	28			18.0	27.1	15.3	23.0	11.9	18.0		
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Properties											
Area, in. ²	5.48		4.68		3.84		2.93		6.02		
$r_x = r_y$, in.	1.67		1.70		1.73		1.75		1.41		
$I_x = I_y$, in. ⁴	15.3		13.5		11.4		9.02		11.9		

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS4–HSS3½

Table 6-F (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS4x4x								HSS3½x3½x		
	¾		5/16		¼		3/16		¾		
t_{des} , in.	0.349		0.291		0.233		0.174		0.349		
lb/ft	17.3		14.8		12.2		9.42		14.7		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	143	215	123	184	101	152	77.2	116	122	184
	1	142	214	122	184	100	151	76.9	116	122	183
	2	140	211	120	181	99.1	149	75.9	114	119	179
	3	137	206	118	177	96.8	146	74.3	112	115	173
	4	132	199	114	171	93.8	141	72.0	108	110	166
	5	127	190	109	164	90.0	135	69.2	104	104	156
	6	120	180	103	156	85.6	129	66.0	99.2	96.4	145
	7	113	169	97.3	146	80.7	121	62.3	93.7	88.5	133
	8	105	157	90.6	136	75.4	113	58.4	87.7	80.1	120
	9	96.4	145	83.6	126	69.8	105	54.2	81.4	71.6	108
	10	87.9	132	76.4	115	64.0	96.1	49.8	74.9	63.1	94.8
	11	79.4	119	69.2	104	58.1	87.4	45.5	68.3	54.9	82.5
	12	71.0	107	62.0	93.2	52.3	78.7	41.1	61.8	47.1	70.7
	13	62.8	94.4	55.1	82.8	46.7	70.2	36.8	55.4	40.1	60.3
	14	55.0	82.7	48.5	72.8	41.3	62.1	32.7	49.2	34.6	52.0
	15	47.9	72.0	42.2	63.5	36.1	54.3	28.8	43.2	30.1	45.3
	16	42.1	63.3	37.1	55.8	31.7	47.7	25.3	38.0	26.5	39.8
	17	37.3	56.1	32.9	49.4	28.1	42.3	22.4	33.6	23.5	35.2
	18	33.3	50.0	29.3	44.1	25.1	37.7	20.0	30.0	20.9	31.4
	19	29.9	44.9	26.3	39.6	22.5	33.8	17.9	26.9	18.8	28.2
	20	27.0	40.5	23.8	35.7	20.3	30.5	16.2	24.3	16.9	25.5
	22	22.3	33.5	19.6	29.5	16.8	25.2	13.4	20.1		
	24	18.7	28.1	16.5	24.8	14.1	21.2	11.2	16.9		
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Properties											
Area, in. ²	4.78		4.10		3.37		2.58		4.09		
$r_x = r_y$, in.	1.47		1.49		1.52		1.55		1.26		
$I_x = I_y$, in. ⁴	10.3		9.14		7.80		6.21		6.49		

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS3½-HSS3

Table 6-F (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS3½x3½x						HSS3x3x				
	5/16		¼		3/16		3/8		5/16		
t_{des} , in.	0.291		0.233		0.174		0.349		0.291		
lb/ft	12.7		10.5		8.15		12.2		10.6		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	105	158	87.1	131	67.1	101	101	153	88.0	132
	1	105	157	86.6	130	66.7	100	101	151	87.2	131
	2	103	154	85.0	128	65.5	98.5	97.8	147	84.9	128
	3	99.6	150	82.5	124	63.7	95.7	93.3	140	81.2	122
	4	95.2	143	79.1	119	61.1	91.9	87.4	131	76.2	115
	5	90.0	135	74.9	113	58.0	87.2	80.3	121	70.2	106
	6	83.9	126	70.1	105	54.5	81.9	72.4	109	63.6	95.6
	7	77.3	116	64.8	97.4	50.5	75.9	64.1	96.4	56.6	85.0
	8	70.3	106	59.2	89.0	46.3	69.6	55.7	83.7	49.4	74.2
	9	63.1	94.9	53.4	80.3	42.0	63.1	47.5	71.4	42.4	63.7
	10	56.0	84.1	47.6	71.6	37.6	56.6	39.8	59.8	35.7	53.6
	11	49.0	73.7	41.9	63.0	33.3	50.1	32.9	49.4	29.6	44.5
	12	42.4	63.7	36.5	54.9	29.2	43.9	27.6	41.5	24.9	37.4
	13	36.2	54.4	31.3	47.1	25.2	37.9	23.5	35.4	21.2	31.8
	14	31.2	46.9	27.0	40.6	21.7	32.7	20.3	30.5	18.3	27.4
	15	27.2	40.8	23.5	35.4	18.9	28.5	17.7	26.6	15.9	23.9
	16	23.9	35.9	20.7	31.1	16.6	25.0	15.5	23.3	14.0	21.0
	17	21.2	31.8	18.3	27.5	14.7	22.2	13.8	20.7	12.4	18.6
	18	18.9	28.4	16.3	24.6	13.2	19.8			11.0	16.6
	19	16.9	25.5	14.7	22.0	11.8	17.7				
	20	15.3	23.0	13.2	19.9	10.7	16.0				
	22			10.9	16.4	8.80	13.2				
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Properties											
Area, in. ²	3.52		2.91		2.24		3.39		2.94		
$r_x = r_y$, in.	1.29		1.32		1.35		1.06		1.08		
$I_x = I_y$, in. ⁴	5.84		5.04		4.05		3.78		3.45		

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS3-HSS2½

Table 6-F (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS3x3x				HSS2½x2½x						
	¼		⅜		⅝		¾		⅞		
t_{des} , in.	0.233		0.174		0.291		0.233		0.174		
lb/ft	8.81		6.87		8.45		7.11		5.59		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	73.1	110	56.6	85.0	70.4	106	59.0	88.6	46.1	69.3
	1	72.4	109	56.1	84.4	69.4	104	58.2	87.5	45.6	68.5
	2	70.6	106	54.8	82.3	66.6	100	56.0	84.2	43.9	66.1
	3	67.6	102	52.6	79.1	62.3	93.6	52.6	79.0	41.4	62.2
	4	63.7	95.8	49.7	74.7	56.6	85.1	48.1	72.3	38.1	57.2
	5	59.0	88.7	46.2	69.5	50.1	75.3	42.9	64.4	34.2	51.3
	6	53.7	80.7	42.3	63.5	43.1	64.8	37.2	56.0	29.9	45.0
	7	48.1	72.2	38.0	57.2	36.1	54.3	31.5	47.4	25.6	38.5
	8	42.3	63.5	33.7	50.6	29.5	44.3	26.0	39.1	21.4	32.2
	9	36.6	55.0	29.4	44.1	23.5	35.2	20.9	31.5	17.4	26.2
	10	31.1	46.7	25.2	37.8	19.0	28.6	17.0	25.5	14.1	21.2
	11	25.9	39.0	21.2	31.8	15.7	23.6	14.0	21.1	11.7	17.5
	12	21.8	32.8	17.8	26.8	13.2	19.8	11.8	17.7	9.80	14.7
	13	18.6	27.9	15.2	22.8	11.2	16.9	10.0	15.1	8.35	12.6
	14	16.0	24.1	13.1	19.7	9.69	14.6	8.65	13.0	7.20	10.8
	15	13.9	21.0	11.4	17.1			7.53	11.3	6.27	9.43
	16	12.3	18.4	10.0	15.1						
	17	10.9	16.3	8.87	13.3						
18	9.69	14.6	7.91	11.9							
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Properties											
Area, in. ²	2.44		1.89		2.35		1.97		1.54		
$r_x = r_y$, in.	1.11		1.14		0.880		0.908		0.937		
$I_x = I_y$, in. ⁴	3.02		2.46		1.82		1.63		1.35		

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS2¼-HSS2

Table 6-F (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Square HSS

A500 Gr. C
 $F_y = 50$ ksi
 $F_u = 62$ ksi

Shape	HSS2¼x2¼x				HSS2x2x				
	¼	3/16	¼	3/16	¼	3/16	¼	3/16	
t_{des} , in.	0.233	0.174	0.233	0.174	0.233	0.174	0.233	0.174	
lb/ft	6.26	4.96	6.26	4.96	5.41	4.32	5.41	4.32	
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y	0	52.1	78.3	41.0	61.6	45.2	67.9	35.6	53.5
	1	51.3	77.0	40.4	60.7	44.3	66.5	34.9	52.5
	2	48.8	73.4	38.6	58.0	41.5	62.4	32.9	49.5
	3	45.0	67.7	35.8	53.8	37.3	56.1	29.9	44.9
	4	40.2	60.4	32.2	48.4	32.2	48.4	26.0	39.1
	5	34.7	52.2	28.1	42.3	26.6	40.0	21.8	32.8
	6	29.1	43.7	23.8	35.8	21.0	31.6	17.6	26.4
	7	23.5	35.4	19.6	29.4	15.9	24.0	13.6	20.5
	8	18.4	27.7	15.6	23.4	12.2	18.3	10.4	15.7
	9	14.6	21.9	12.3	18.5	9.64	14.5	8.24	12.4
	10	11.8	17.7	9.97	15.0	7.81	11.7	6.67	10.0
	11	9.75	14.7	8.24	12.4	6.46	9.70	5.52	8.29
	12	8.19	12.3	6.92	10.4			4.63	6.97
	13	6.98	10.5	5.90	8.87				
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	M_{nx}/Ω_b	$\phi_b M_{nx}$	
Properties									
Area, in. ²	1.74		1.37		1.51		1.19		
$r_x = r_y$, in.	0.806		0.835		0.704		0.733		
$I_x = I_y$, in. ⁴	1.13		0.953		0.747		0.641		

Note: Heavy line indicates L_c/r equal to or greater than 200.

Shape	HSS20.000x		HSS18.000x		HSS16.000x						
	0.500	0.375 ^f	0.500	0.375 ^f	0.500	0.625					
t_{des} , in.	0.500	0.375	0.500	0.375	0.500	0.625					
lb/ft	104	78.7	93.5	70.7	103						
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD					
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$					
Effective length, L_e (ft), with respect to the radius of gyration, r	0	916	1380	692	1040	823	1240	623	936	904	1360
	1	916	1380	691	1040	823	1240	623	936	904	1360
	2	915	1380	691	1040	822	1240	622	935	903	1360
	3	914	1370	690	1040	821	1230	621	934	901	1350
	4	913	1370	689	1040	820	1230	620	932	899	1350
	5	911	1370	688	1030	818	1230	619	930	896	1350
	6	909	1370	686	1030	815	1230	617	927	893	1340
	7	906	1360	684	1030	812	1220	615	924	889	1340
	8	903	1360	682	1030	809	1220	612	920	884	1330
	9	900	1350	679	1020	805	1210	609	916	879	1320
	10	896	1350	677	1020	801	1200	606	911	873	1310
	11	892	1340	674	1010	796	1200	603	906	866	1300
	12	887	1330	670	1010	791	1190	599	900	859	1290
	13	883	1330	667	1000	786	1180	595	894	851	1280
	14	877	1320	663	996	780	1170	591	888	843	1270
	15	872	1310	658	990	774	1160	586	881	835	1250
	16	866	1300	654	983	767	1150	581	873	825	1240
	17	859	1290	649	976	760	1140	576	865	816	1230
	18	853	1280	644	968	753	1130	570	857	806	1210
	19	846	1270	639	961	746	1120	565	849	795	1200
	20	839	1260	634	952	738	1110	559	840	784	1180
	22	823	1240	622	935	721	1080	546	821	761	1140
	24	807	1210	610	917	703	1060	533	801	737	1110
	26	789	1190	597	897	684	1030	518	779	711	1070
	28	770	1160	583	876	664	998	503	757	684	1030
	30	751	1130	568	854	643	966	488	733	656	987
	32	731	1100	553	831	621	934	472	709	628	944
	34	709	1070	537	807	599	901	455	684	599	901
	36	688	1030	521	783	577	867	438	659	570	857
	38	666	1000	504	758	554	832	421	633	541	813
	40	643	967	487	733	530	797	403	606	512	769
	42	620	932	470	707	507	762	386	580	483	726
	44	597	897	453	681	484	727	368	554	454	682
	46	574	862	435	655	460	692	351	527	426	640
	48	550	827	418	628	437	657	333	501	398	599
	50	527	792	400	602	414	623	316	475	372	558
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_g = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
	Properties										
	Area, in. ²	30.6		23.1		27.5		20.8		30.2	
	I , in. ⁴	1460		1110		1050		807		894	
	r , in.	6.90		6.94		6.19		6.23		5.44	

^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.
 Note: Confirm ASTM A1085 material availability before specifying.

Shape		HSS16.000x									
		0.500		0.438		0.375 ^f		0.312 ^f		0.250 ^{c,f}	
t_{des} , in.		0.500		0.438		0.375		0.312		0.250	
lb/ft		82.9		72.9		62.6		52.3		42.1	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_e (ft), with respect to the radius of gyration, r	0	728	1090	641	963	551	828	461	693	375	564
	1	727	1090	640	963	551	828	461	693	375	564
	2	727	1090	640	962	550	827	460	692	375	563
	3	725	1090	639	960	549	825	460	691	374	562
	4	723	1090	637	958	548	823	459	689	373	561
	5	721	1080	635	955	546	821	457	687	372	559
	6	718	1080	633	951	544	818	455	685	371	557
	7	715	1070	630	947	542	814	453	681	369	555
	8	711	1070	627	942	539	810	451	678	367	552
	9	707	1060	623	936	536	805	448	674	365	549
	10	702	1060	619	930	532	800	446	670	363	545
	11	697	1050	614	923	528	794	442	665	360	541
	12	692	1040	609	916	524	788	439	660	357	537
	13	686	1030	604	908	520	781	435	654	354	533
	14	679	1020	598	899	515	774	431	648	351	528
	15	672	1010	592	890	510	766	427	642	348	523
	16	665	1000	586	881	504	758	422	635	344	517
	17	657	988	579	871	499	750	418	628	340	511
	18	649	976	572	860	493	741	413	620	336	505
	19	641	963	565	849	487	731	408	613	332	499
	20	632	950	557	838	480	721	402	604	328	493
	22	614	923	541	814	466	701	391	587	318	479
	24	595	894	524	788	452	679	379	569	309	464
	26	574	863	506	761	437	656	366	550	298	449
	28	553	831	488	733	421	632	353	530	288	432
	30	531	798	468	704	404	607	339	509	277	416
	32	508	764	449	674	387	582	325	488	265	399
	34	485	729	428	644	370	556	311	467	254	381
	36	462	694	408	613	353	530	296	445	242	363
	38	439	659	388	583	335	504	281	423	230	346
	40	415	624	367	552	318	477	267	401	218	328
42	392	589	347	521	300	451	252	379	206	310	
44	369	555	327	491	283	425	238	358	195	292	
46	346	521	307	461	266	400	224	336	183	275	
48	324	488	287	432	249	375	210	315	172	258	
50	303	455	268	403	233	350	196	295	161	242	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_g = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
Properties											
Area, in. ²		24.3		21.4		18.4		15.4		12.4	
I , in. ⁴		732		649		562		473		384	
r , in.		5.48		5.50		5.53		5.55		5.57	

^c Shape is slender with respect to uniform compression for $F_y = 50$ ksi.
^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.
 Note: Confirm ASTM A1085 material availability before specifying.

Shape		HSS14.000x										
		0.625		0.500		0.375		0.312 ^f		0.250 ^f		
f _{des} , in.		0.625		0.500		0.375		0.312		0.250		
lb/ft		89.4		72.2		54.6		45.7		36.8		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L _c (ft), with respect to the radius of gyration, r	0	787	1180	635	954	482	724	401	603	323	486	
	1	787	1180	634	954	482	724	401	603	323	486	
	2	786	1180	634	952	481	723	400	602	323	485	
	3	784	1180	632	950	480	722	400	601	322	484	
	4	782	1170	630	947	479	719	398	599	321	483	
	5	778	1170	627	943	477	716	397	596	320	481	
	6	774	1160	624	938	474	713	395	593	318	478	
	7	769	1160	621	933	471	709	392	590	316	475	
	8	764	1150	616	926	468	704	390	586	314	472	
	9	758	1140	611	919	465	698	387	581	312	469	
	10	751	1130	606	911	461	692	384	576	309	465	
	11	744	1120	600	902	456	686	380	571	306	460	
	12	736	1110	594	893	452	679	376	565	303	456	
	13	727	1090	587	883	446	671	372	559	300	451	
	14	718	1080	580	872	441	663	367	552	296	445	
	15	708	1060	572	860	435	654	363	545	292	440	
	16	698	1050	564	848	429	645	358	537	288	434	
	17	687	1030	556	835	423	636	352	530	284	427	
	18	676	1020	547	822	416	626	347	521	280	421	
	19	664	999	537	808	409	615	341	513	275	414	
	20	652	980	528	793	402	604	335	504	271	407	
	22	627	942	508	763	387	582	323	485	261	392	
	24	600	902	487	732	371	558	310	465	250	376	
	26	573	861	465	699	355	533	296	445	239	360	
	28	544	818	442	665	338	508	282	424	228	343	
	30	516	775	419	630	321	482	268	402	216	325	
	32	486	731	396	595	303	456	253	381	205	308	
	34	457	687	373	560	285	429	239	359	193	290	
	36	428	643	349	525	268	403	224	337	181	273	
	38	399	600	326	490	251	377	210	315	170	255	
	40	371	557	304	456	233	351	195	294	158	238	
	42	343	516	282	423	217	326	182	273	147	221	
	44	317	476	260	391	200	301	168	253	136	205	
	46	290	436	239	359	185	277	155	233	126	189	
	48	267	401	219	330	169	255	142	214	116	174	
	50	246	369	202	304	156	235	131	197	107	160	
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
			787	1180	635	954	482	725	401	603	323	486
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
			641	962	517	775	392	589	327	490	263	395
	Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
			236	355	190	286	145	217	120	181	97.0	146
	Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
			279	420	228	342	174	261	142	214	111	167
	Properties											
	Area, in. ²		26.3		21.2		16.1		13.4		10.8	
	I, in. ⁴		589		484		373		314		255	
	r, in.		4.73		4.78		4.82		4.84		4.86	

^f Shape exceeds the compact limit for flexure for F_y = 50 ksi.
 Note: Confirm ASTM A1085 material availability before specifying.

Shape		HSS12.750x						HSS10.750x			
		0.500		0.375		0.250 ^f		0.500		0.375	
f_{des} , in.		0.500		0.375		0.250		0.500		0.375	
lb/ft		65.5		49.6		33.4		54.8		41.6	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	575	864	437	657	294	442	482	724	365	549
	1	575	864	437	657	294	442	482	724	365	549
	2	574	862	436	656	293	441	480	722	364	547
	3	572	860	435	654	293	440	479	719	363	545
	4	570	856	433	651	291	438	476	715	361	542
	5	567	852	431	648	290	436	473	710	358	538
	6	563	847	429	644	288	433	468	704	355	534
	7	559	841	426	640	286	430	464	697	352	528
	8	555	833	422	634	284	427	458	688	347	522
	9	549	826	418	628	281	423	452	679	343	515
	10	543	817	414	622	279	419	445	669	338	508
	11	537	807	409	615	275	414	438	658	332	499
	12	530	797	404	607	272	409	430	646	326	491
	13	523	786	398	599	268	403	421	633	320	481
	14	515	774	393	590	265	398	412	619	313	471
	15	507	761	386	581	260	391	403	605	306	460
	16	498	748	380	571	256	385	393	590	299	449
	17	489	735	373	561	252	378	383	575	291	438
	18	479	720	366	550	247	371	372	559	284	426
	19	469	705	359	539	242	364	361	543	275	414
	20	459	690	351	528	237	356	350	526	267	402
	22	438	658	335	504	227	340	327	492	250	376
	24	416	625	319	479	216	324	304	457	233	350
	26	393	591	302	453	204	307	281	422	215	324
	28	370	556	284	427	193	290	258	387	198	297
	30	347	521	267	401	181	272	235	353	181	272
32	323	486	249	375	169	254	213	320	164	247	
34	300	451	232	348	158	237	191	288	148	222	
36	278	417	215	323	146	220	171	257	132	199	
38	255	384	198	297	135	203	153	230	119	179	
40	234	352	182	273	124	187	138	208	107	161	
42	213	320	166	249	114	171	126	189	97.2	146	
44	194	292	151	227	103	155	114	172	88.6	133	
46	178	267	138	208	94.6	142	105	157	81.1	122	
48	163	245	127	191	86.9	131	96.1	144	74.4	112	
50	150	226	117	176	80.1	120	88.6	133	68.6	103	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
Properties											
Area, in. ²		19.2		14.6		9.82		16.1		12.2	
I_x , in. ⁴		362		279		192		212		165	
r_x , in.		4.33		4.38		4.42		3.63		3.67	

^f Shape exceeds the compact limit for flexure for $F_y = 50$ ksi.
 Note: Confirm ASTM A1085 material availability before specifying.

Shape		HSS10.750x		HSS10.000x							
		0.250 ^f	0.625	0.500	0.375	0.312					
f _{des} , in.		0.250	0.625	0.500	0.375	0.312					
lb/ft		28.1	62.6	50.8	38.6	32.3					
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L _c (ft), with respect to the radius of gyration, r	0	247	371	551	828	446	670	338	508	284	427
	1	247	371	550	827	446	670	338	508	284	427
	2	246	370	549	825	444	668	337	507	283	426
	3	245	369	546	821	442	665	336	504	282	424
	4	244	367	543	815	440	661	333	501	280	421
	5	242	364	538	808	436	655	331	497	278	418
	6	240	361	532	800	431	648	327	492	275	414
	7	238	358	526	790	426	641	324	486	272	409
	8	235	354	518	779	420	632	319	480	269	404
	9	232	349	510	766	414	622	314	473	265	398
	10	229	344	501	753	406	611	309	464	260	391
	11	225	338	491	738	399	599	303	456	255	384
	12	221	333	480	722	390	586	297	446	250	376
	13	217	326	469	705	381	573	290	436	245	367
	14	213	320	457	687	372	558	283	426	239	359
	15	208	313	444	668	362	544	276	415	233	350
	16	203	305	431	648	351	528	268	403	226	340
	17	198	298	418	628	341	512	260	391	220	330
	18	193	290	404	608	330	496	252	379	213	320
	19	187	282	390	587	319	479	244	367	206	309
	20	182	273	376	565	307	462	236	354	199	299
	22	171	256	347	521	284	427	218	328	184	277
	24	159	239	318	478	261	392	201	302	170	255
	26	147	221	289	434	237	357	183	276	155	233
	28	136	204	261	392	215	323	166	250	141	212
	30	124	186	233	350	193	290	150	225	127	191
	32	113	170	207	311	171	258	134	201	114	171
	34	102	153	183	275	152	228	119	178	101	152
	36	91.5	137	163	246	135	204	106	159	90.0	135
	38	82.1	123	147	220	122	183	95.0	143	80.8	121
40	74.1	111	132	199	110	165	85.7	129	72.9	110	
42	67.2	101	120	180	99.5	150	77.8	117	66.1	99.4	
44	61.2	92.0	109	164	90.7	136	70.8	106	60.3	90.6	
46	56.0	84.2	100	150	83.0	125	64.8	97.4	55.1	82.9	
48	51.4	77.3	91.9	138	76.2	115	59.5	89.5	50.6	76.1	
50	47.4	71.3	84.7	127	70.2	106	54.9	82.5	46.7	70.1	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		247	371	551	828	446	671	338	509	284	428
Available Strength in Tensile Rupture (A _e = 0.75A _g), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		201	302	449	673	363	545	275	413	232	347
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		74.1	111	165	248	134	201	101	153	85.3	128
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
		67.9	102	137	206	113	170	86.8	131	73.1	110
Properties											
Area, in. ²		8.25		18.4		14.9		11.3		9.50	
I, in. ⁴		114		203		169		132		112	
r, in.		3.71		3.32		3.36		3.41		3.43	

^f Shape exceeds the compact limit for flexure for F_y = 50 ksi.
 Note: Confirm ASTM A1085 material availability before specifying.

Shape		HSS10.000x				HSS9.625x					
		0.250		0.188 ^f		0.500		0.375		0.312	
f _{des} , in.		0.250		0.188		0.500		0.375		0.312	
lb/ft		26.1		19.7		48.8		37.1		31.1	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P _n /Ω _c	φ _c P _n	P _n /Ω _c	φ _c P _n	P _n /Ω _c	φ _c P _n	P _n /Ω _c	φ _c P _n	P _n /Ω _c	φ _c P _n
Effective length, L _c (ft), with respect to the radius of gyration, r	0	229	345	174	261	428	643	326	490	273	411
	1	229	344	174	261	428	643	326	490	273	410
	2	229	343	173	260	426	641	325	489	272	409
	3	228	342	172	259	424	638	323	486	271	407
	4	226	340	171	257	421	633	321	483	269	405
	5	224	337	170	255	417	627	318	479	267	401
	6	222	334	168	253	413	621	315	473	264	397
	7	220	330	166	250	407	612	311	467	261	392
	8	217	326	164	247	401	603	306	461	257	386
	9	213	321	162	243	395	593	301	453	253	380
	10	210	316	159	239	387	582	296	445	248	373
	11	206	310	156	235	379	570	290	435	243	365
	12	202	303	153	230	370	556	283	426	238	357
	13	197	297	150	225	361	543	276	415	232	349
	14	193	290	146	220	351	528	269	404	226	340
	15	188	282	143	214	341	513	261	393	220	330
	16	183	275	139	209	331	497	254	381	213	320
	17	178	267	135	203	320	481	246	369	206	310
	18	172	259	131	197	309	464	237	357	199	300
	19	167	250	127	190	297	447	229	344	192	289
	20	161	242	122	184	286	430	220	331	185	278
	22	149	225	114	171	263	395	203	305	171	257
	24	138	207	105	158	239	360	185	278	156	235
	26	126	190	96.2	145	216	325	168	252	142	213
	28	115	172	87.5	131	194	292	151	227	128	192
	30	103	155	79.0	119	173	259	135	202	114	171
	32	92.7	139	70.9	107	152	229	119	179	101	151
	34	82.3	124	63.1	94.8	135	202	105	158	89.2	134
	36	73.4	110	56.2	84.5	120	181	93.9	141	79.6	120
	38	65.9	99.1	50.5	75.9	108	162	84.3	127	71.4	107
	40	59.5	89.4	45.6	68.5	97.3	146	76.0	114	64.5	96.9
42	53.9	81.1	41.3	62.1	88.3	133	69.0	104	58.5	87.9	
44	49.2	73.9	37.7	56.6	80.4	121	62.8	94.4	53.3	80.1	
46	45.0	67.6	34.5	51.8	73.6	111	57.5	86.4	48.7	73.3	
48	41.3	62.1	31.6	47.6	67.6	102	52.8	79.4	44.8	67.3	
50	38.1	57.2	29.2	43.8	62.3	93.6	48.7	73.1	41.3	62.0	
Available Strength in Tensile Yielding, kips		P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n
		229	345	174	261	428	644	326	491	273	411
Available Strength in Tensile Rupture (A _e = 0.75A _g), kips		P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n
		187	280	141	212	349	523	266	399	223	334
Available Strength in Shear, kips		V _n /Ω _v	φ _v V _n	V _n /Ω _v	φ _v V _n	V _n /Ω _v	φ _v V _n	V _n /Ω _v	φ _v V _n	V _n /Ω _v	φ _v V _n
		68.8	103	52.1	78.3	128	193	97.9	147	82.0	123
Available Strength in Flexure, kip-ft		M _n /Ω _b	φ _b M _n	M _n /Ω _b	φ _b M _n	M _n /Ω _b	φ _b M _n	M _n /Ω _b	φ _b M _n	M _n /Ω _b	φ _b M _n
		59.4	89.3	42.9	64.5	104	156	80.1	120	67.6	102
Properties											
Area, in. ²		7.66		5.80		14.3		10.9		9.13	
I, in. ⁴		91.1		69.8		150		117		99.1	
r, in.		3.45		3.47		3.23		3.27		3.29	

^f Shape exceeds the compact limit for flexure for F_y = 50 ksi.
 Note: Confirm ASTM A1085 material availability before specifying.

Shape		HSS9.625x				HSS8.625x					
		0.250		0.188 ^f		0.625		0.500		0.375	
f _{des} , in.		0.250		0.188		0.625		0.500		0.375	
lb/ft		25.1		19.0		53.5		43.4		33.1	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P _n /Ω _c	φ _c P _n	P _n /Ω _c	φ _c P _n	P _n /Ω _c	φ _c P _n	P _n /Ω _c	φ _c P _n	P _n /Ω _c	φ _c P _n
Effective length, L _c (ft), with respect to the radius of gyration, r	0	220	331	167	251	470	706	383	576	291	437
	1	220	331	167	250	469	706	383	575	291	437
	2	220	330	166	250	468	703	381	573	290	435
	3	218	328	165	249	465	698	379	569	288	433
	4	217	326	164	247	460	692	376	564	285	429
	5	215	323	163	245	455	684	371	558	282	424
	6	213	320	161	242	448	674	366	550	278	418
	7	210	316	159	239	441	663	360	541	274	412
	8	207	312	157	236	432	650	353	531	269	404
	9	204	307	154	232	423	636	346	520	263	396
	10	200	301	152	228	413	620	338	507	257	387
	11	196	295	149	224	401	603	329	494	251	377
	12	192	289	146	219	390	585	319	480	244	366
	13	188	282	142	214	377	567	309	465	236	355
	14	183	275	139	208	364	547	299	449	228	343
	15	178	267	135	203	350	527	288	433	220	331
	16	173	259	131	197	337	506	277	416	212	319
	17	167	251	127	191	322	484	266	399	204	306
	18	162	243	123	185	308	463	254	382	195	293
	19	156	235	119	178	293	441	242	364	186	280
	20	150	226	114	172	279	419	231	347	178	267
	22	139	209	106	159	250	376	207	312	160	241
	24	127	191	96.8	146	222	333	184	277	143	215
	26	116	174	88.1	132	194	292	162	244	126	190
	28	104	157	79.6	120	169	253	141	212	110	166
	30	93.3	140	71.3	107	147	221	123	185	96.1	144
	32	82.7	124	63.3	95.2	129	194	108	163	84.5	127
	34	73.3	110	56.1	84.3	114	172	95.9	144	74.8	112
	36	65.3	98.2	50.0	75.2	102	153	85.5	129	66.7	100
	38	58.6	88.1	44.9	67.5	91.5	138	76.7	115	59.9	90.0
	40	52.9	79.5	40.5	60.9	82.6	124	69.3	104	54.1	81.3
42	48.0	72.1	36.8	55.3	74.9	113	62.8	94.4	49.0	73.7	
44	43.7	65.7	33.5	50.4	68.3	103	57.2	86.0	44.7	67.2	
46	40.0	60.1	30.7	46.1	62.5	93.9	52.4	78.7	40.9	61.4	
48	36.8	55.2	28.2	42.3			48.1	72.3	37.5	56.4	
50	33.9	50.9	25.9	39.0							
Available Strength in Tensile Yielding, kips		P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n
		220	331	167	251	470	707	383	576	291	437
Available Strength in Tensile Rupture (A _e = 0.75A _g), kips		P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n
		179	269	136	204	383	574	312	468	237	355
Available Strength in Shear, kips		V _n /Ω _v	φ _v V _n	V _n /Ω _v	φ _v V _n	V _n /Ω _v	φ _v V _n	V _n /Ω _v	φ _v V _n	V _n /Ω _v	φ _v V _n
		66.1	99.4	50.0	75.2	141	212	115	173	87.3	131
Available Strength in Flexure, kip-ft		M _n /Ω _b	φ _b M _n	M _n /Ω _b	φ _b M _n	M _n /Ω _b	φ _b M _n	M _n /Ω _b	φ _b M _n	M _n /Ω _b	φ _b M _n
		54.9	82.5	39.8	59.9	100	150	82.3	124	63.6	95.6
Properties											
Area, in. ²		7.36		5.57		15.7		12.8		9.72	
I, in. ⁴		81.0		62.1		126		106		82.9	
r, in.		3.32		3.34		2.84		2.88		2.92	

^f Shape exceeds the compact limit for flexure for F_y = 50 ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A1085 material availability before specifying.

Shape		HSS8.625x						HSS7.625x			
		0.322		0.250		0.188 ^f		0.375		0.328	
f _{des} , in.		0.322		0.250		0.188		0.375		0.328	
lb/ft		28.6		22.4		17.0		29.1		25.6	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P _n /Ω _c	φ _c P _n	P _n /Ω _c	φ _c P _n	P _n /Ω _c	φ _c P _n	P _n /Ω _c	φ _c P _n	P _n /Ω _c	φ _c P _n
Effective length, L _c (ft), with respect to the radius of gyration, r	0	251	378	197	296	149	224	256	384	225	338
	1	251	378	197	296	149	224	255	384	225	338
	2	250	376	196	295	148	223	254	382	224	336
	3	249	374	195	293	148	222	252	379	222	334
	4	247	371	193	290	146	220	249	375	220	330
	5	244	367	191	287	145	218	246	369	216	325
	6	241	362	189	284	143	215	241	363	213	320
	7	237	356	186	279	141	211	236	355	208	313
	8	233	350	182	274	138	208	231	347	203	306
	9	228	342	179	269	135	204	225	338	198	298
	10	223	335	175	263	132	199	218	328	192	289
	11	217	326	170	256	129	194	211	317	186	279
	12	211	317	166	249	126	189	203	305	179	269
	13	205	308	161	242	122	183	195	294	172	259
	14	198	298	156	234	118	178	187	281	165	248
	15	191	287	150	226	114	172	179	268	158	237
	16	184	277	145	218	110	165	170	256	150	226
	17	177	266	139	209	106	159	161	242	143	214
	18	169	255	133	201	102	153	153	229	135	203
	19	162	244	128	192	97.2	146	144	216	127	191
	20	154	232	122	183	92.8	139	135	203	120	180
	22	139	210	110	166	84.0	126	118	178	105	157
	24	125	187	98.6	148	75.3	113	102	153	90.5	136
	26	110	166	87.4	131	66.9	101	87.1	131	77.3	116
28	96.7	145	76.8	115	58.9	88.5	75.1	113	66.6	100	
30	84.2	127	66.9	100	51.3	77.1	65.4	98.3	58.1	87.3	
32	74.0	111	58.8	88.3	45.1	67.8	57.5	86.4	51.0	76.7	
34	65.6	98.5	52.1	78.2	39.9	60.0	50.9	76.5	45.2	67.9	
36	58.5	87.9	46.4	69.8	35.6	53.5	45.4	68.3	40.3	60.6	
38	52.5	78.9	41.7	62.6	32.0	48.0	40.8	61.3	36.2	54.4	
40	47.4	71.2	37.6	56.5	28.9	43.4	36.8	55.3	32.7	49.1	
42	43.0	64.6	34.1	51.3	26.2	39.3	33.4	50.2	29.6	44.5	
44	39.1	58.8	31.1	46.7	23.8	35.8					
46	35.8	53.8	28.4	42.7	21.8	32.8					
48	32.9	49.4	26.1	39.3	20.0	30.1					
Available Strength in Tensile Yielding, kips		P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n
		251	378	197	296	149	224	256	384	225	338
Available Strength in Tensile Rupture (A _e = 0.75A _g), kips		P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n
		205	307	160	241	121	182	208	312	183	275
Available Strength in Shear, kips		V _n /Ω _v	φ _v V _n	V _n /Ω _v	φ _v V _n	V _n /Ω _v	φ _v V _n	V _n /Ω _v	φ _v V _n	V _n /Ω _v	φ _v V _n
		75.4	113	59.1	88.8	44.7	67.2	76.7	115	67.5	102
Available Strength in Flexure, kip-ft		M _n /Ω _b	φ _b M _n	M _n /Ω _b	φ _b M _n	M _n /Ω _b	φ _b M _n	M _n /Ω _b	φ _b M _n	M _n /Ω _b	φ _b M _n
		55.4	83.3	43.7	65.6	32.5	48.9	49.2	73.9	43.7	65.6
Properties											
Area, in. ²		8.40		6.58		4.98		8.54		7.52	
I, in. ⁴		72.5		57.7		44.4		56.3		50.1	
r, in.		2.94		2.96		2.98		2.57		2.58	

^f Shape exceeds the compact limit for flexure for F_y = 50 ksi.
 Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A1085 material availability before specifying.

Shape		HSS7.500x									
		0.500		0.375		0.312		0.250		0.188	
f_{des} , in.		0.500		0.375		0.312		0.250		0.188	
lb/ft		37.4		28.6		24.0		19.4		14.7	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	329	495	251	378	211	317	170	256	129	194
	1	329	494	251	377	211	317	170	256	129	194
	2	327	492	250	375	210	315	169	254	129	193
	3	324	487	247	372	208	313	168	252	128	192
	4	320	482	245	368	206	309	166	250	126	190
	5	316	474	241	362	203	305	164	246	124	187
	6	310	465	237	356	199	299	161	242	122	184
	7	303	455	232	348	195	293	157	237	120	180
	8	295	444	226	340	190	286	154	231	117	176
	9	287	431	220	330	185	278	150	225	114	171
	10	278	417	213	320	179	269	145	218	111	166
	11	268	402	206	309	173	260	140	211	107	161
	12	257	387	198	297	167	251	135	203	103	155
	13	247	371	190	285	160	241	130	195	99.2	149
	14	235	354	182	273	153	230	124	187	95.1	143
	15	224	337	173	260	146	220	119	178	90.9	137
	16	212	319	164	247	139	209	113	170	86.5	130
	17	201	302	156	234	132	198	107	161	82.2	124
	18	189	284	147	221	124	187	101	152	77.8	117
	19	178	267	138	208	117	176	95.4	143	73.4	110
	20	166	250	129	195	110	165	89.6	135	69.0	104
22	144	216	113	169	95.8	144	78.3	118	60.5	90.9	
24	123	184	96.6	145	82.5	124	67.5	101	52.4	78.7	
26	104	157	82.3	124	70.2	106	57.6	86.5	44.7	67.3	
28	90.1	135	70.9	107	60.6	91.0	49.6	74.6	38.6	58.0	
30	78.5	118	61.8	92.9	52.8	79.3	43.2	65.0	33.6	50.5	
32	69.0	104	54.3	81.6	46.4	69.7	38.0	57.1	29.5	44.4	
34	61.1	91.8	48.1	72.3	41.1	61.7	33.7	50.6	26.2	39.3	
36	54.5	81.9	42.9	64.5	36.6	55.1	30.0	45.1	23.3	35.1	
38	48.9	73.5	38.5	57.9	32.9	49.4	27.0	40.5	20.9	31.5	
40	44.1	66.3	34.8	52.2	29.7	44.6	24.3	36.6	18.9	28.4	
42			31.5	47.4	26.9	40.5	22.1	33.2	17.1	25.8	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
Properties											
Area, in. ²		11.0		8.39		7.05		5.69		4.32	
I_x , in. ⁴		67.7		53.4		45.6		37.5		28.9	
r_x , in.		2.48		2.52		2.54		2.56		2.59	

Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A1085 material availability before specifying.

Shape		HSS7.000x										
		0.500		0.375		0.312		0.250		0.188		
f_{des} , in.		0.500		0.375		0.312		0.250		0.188		
lb/ft		34.7		26.6		22.3		18.0		13.7		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	305	459	234	351	196	295	159	238	120	181	
	1	305	458	233	350	196	295	158	238	120	181	
	2	303	455	232	348	195	293	158	237	119	180	
	3	300	451	230	345	193	290	156	235	118	178	
	4	296	445	227	340	191	286	154	232	117	176	
	5	291	437	223	335	187	282	152	228	115	173	
	6	284	427	218	328	184	276	148	223	113	169	
	7	277	416	213	320	179	269	145	218	110	166	
	8	269	404	207	311	174	262	141	212	107	161	
	9	260	391	200	301	169	254	137	205	104	156	
	10	250	376	193	290	163	245	132	198	100	151	
	11	240	361	185	279	157	235	127	191	96.7	145	
	12	229	345	177	267	150	225	122	183	92.7	139	
	13	218	328	169	254	143	215	116	175	88.6	133	
	14	207	311	161	242	136	204	111	166	84.4	127	
	15	195	293	152	229	129	194	105	158	80.0	120	
	16	183	276	143	215	122	183	99.0	149	75.7	114	
	17	172	258	135	202	114	172	93.1	140	71.3	107	
	18	160	241	126	189	107	161	87.3	131	66.9	101	
	19	149	224	117	176	99.8	150	81.6	123	62.6	94.0	
	20	138	207	109	164	92.8	139	75.9	114	58.3	87.6	
	22	116	175	92.8	139	79.3	119	65.0	97.7	50.1	75.2	
	24	97.8	147	78.1	117	66.8	100	54.9	82.5	42.3	63.6	
	26	83.3	125	66.5	100	56.9	85.5	46.7	70.3	36.1	54.2	
	28	71.8	108	57.3	86.2	49.1	73.7	40.3	60.6	31.1	46.7	
	30	62.6	94.1	50.0	75.1	42.7	64.2	35.1	52.8	27.1	40.7	
	32	55.0	82.7	43.9	66.0	37.6	56.5	30.9	46.4	23.8	35.8	
	34	48.7	73.2	38.9	58.5	33.3	50.0	27.3	41.1	21.1	31.7	
	36	43.5	65.3	34.7	52.1	29.7	44.6	24.4	36.6	18.8	28.3	
	38	39.0	58.6	31.1	46.8	26.6	40.0	21.9	32.9	16.9	25.4	
	40									15.2	22.9	
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
	Properties											
	Area, in. ²	10.2		7.80		6.56		5.30		4.02		
	I_x , in. ⁴	54.2		43.0		36.7		30.2		23.4		
	r_x , in.	2.30		2.35		2.37		2.39		2.41		


Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A1085 material availability before specifying.

Shape		HSS6.875x										
		0.500		0.375		0.312		0.250		0.188		
f_{des} , in.		0.500		0.375		0.312		0.250		0.188		
lb/ft		34.1		26.1		21.9		17.7		13.4		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	299	450	229	345	193	289	156	234	118	178	
	1	299	449	229	344	192	289	155	234	118	177	
	2	297	446	228	342	191	287	154	232	117	176	
	3	294	442	225	339	189	284	153	230	116	175	
	4	290	435	222	334	187	280	151	227	115	172	
	5	284	427	218	328	183	276	148	223	113	170	
	6	278	418	213	321	179	270	145	218	111	166	
	7	271	407	208	313	175	263	142	213	108	162	
	8	262	394	202	303	170	255	138	207	105	158	
	9	253	381	195	293	164	247	133	200	102	153	
	10	244	366	188	282	158	238	128	193	98.0	147	
	11	233	351	180	271	152	228	123	185	94.3	142	
	12	223	334	172	259	145	218	118	177	90.3	136	
	13	211	318	164	246	138	208	112	169	86.2	129	
	14	200	300	155	233	131	197	107	161	81.9	123	
	15	188	283	147	220	124	186	101	152	77.6	117	
	16	177	265	138	207	117	175	95.2	143	73.2	110	
	17	165	248	129	194	109	164	89.3	134	68.8	103	
	18	154	231	120	181	102	154	83.5	126	64.4	96.8	
	19	142	214	112	168	95.0	143	77.8	117	60.1	90.3	
	20	131	197	103	155	88.0	132	72.1	108	55.9	84.0	
	22	110	166	87.4	131	74.6	112	61.4	92.3	47.7	71.7	
	24	92.6	139	73.4	110	62.7	94.3	51.6	77.6	40.2	60.4	
	26	78.9	119	62.6	94.0	53.4	80.3	44.0	66.1	34.3	51.5	
	28	68.0	102	53.9	81.1	46.1	69.3	37.9	57.0	29.5	44.4	
	30	59.2	89.0	47.0	70.6	40.1	60.3	33.0	49.6	25.7	38.7	
	32	52.1	78.3	41.3	62.1	35.3	53.0	29.0	43.6	22.6	34.0	
	34	46.1	69.3	36.6	55.0	31.2	47.0	25.7	38.6	20.0	30.1	
	36	41.1	61.8	32.6	49.1	27.9	41.9	22.9	34.5	17.9	26.9	
	38			29.3	44.0	25.0	37.6	20.6	30.9	16.0	24.1	
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
	Properties											
	Area, in. ²		10.0		7.66		6.43		5.20		3.95	
	I_x , in. ⁴		51.2		40.6		34.7		28.6		22.1	
	r_x , in.		2.26		2.30		2.32		2.34		2.37	


Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A1085 material availability before specifying.

Shape		HSS6.625x										
		0.500		0.432		0.375		0.312		0.280		
f _{des} , in.		0.500		0.432		0.375		0.312		0.280		
lb/ft		32.7		28.6		25.1		21.1		19.0		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P _n /Ω _c	φ _c P _n	P _n /Ω _c	φ _c P _n	P _n /Ω _c	φ _c P _n	P _n /Ω _c	φ _c P _n	P _n /Ω _c	φ _c P _n	
Effective length, L _c (ft), with respect to the radius of gyration, r	0	288	433	251	378	220	331	185	279	167	251	
	1	287	432	251	377	220	330	185	278	167	251	
	2	285	429	249	375	218	328	184	276	166	249	
	3	282	424	247	371	216	325	182	273	164	246	
	4	278	418	243	365	213	320	179	269	162	243	
	5	272	409	238	358	209	314	176	264	159	238	
	6	266	399	232	349	204	306	172	258	155	233	
	7	258	388	226	339	198	298	167	251	151	227	
	8	250	375	219	328	192	289	162	243	146	220	
	9	240	361	211	316	185	278	156	235	141	212	
	10	230	346	202	303	178	267	150	225	136	204	
	11	220	330	193	290	170	255	143	216	130	195	
	12	209	314	183	276	162	243	137	205	124	186	
	13	197	297	174	261	153	230	130	195	118	177	
	14	186	279	164	246	144	217	122	184	111	167	
	15	174	262	153	231	136	204	115	173	105	157	
	16	162	244	143	215	127	191	108	162	98.1	147	
	17	151	227	133	200	118	178	101	151	91.6	138	
	18	140	210	123	186	110	165	93.3	140	85.2	128	
	19	128	193	114	171	101	152	86.3	130	78.9	119	
	20	118	177	105	157	93.0	140	79.5	119	72.7	109	
	22	97.7	147	86.9	131	77.5	117	66.4	99.8	60.9	91.6	
	24	82.1	123	73.0	110	65.1	97.9	55.8	83.8	51.2	76.9	
	26	69.9	105	62.2	93.5	55.5	83.4	47.5	71.4	43.6	65.6	
	28	60.3	90.6	53.6	80.6	47.9	71.9	41.0	61.6	37.6	56.5	
	30	52.5	79.0	46.7	70.2	41.7	62.7	35.7	53.7	32.8	49.2	
	32	46.2	69.4	41.1	61.7	36.6	55.1	31.4	47.2	28.8	43.3	
	34	40.9	61.5	36.4	54.7	32.5	48.8	27.8	41.8	25.5	38.3	
	36	36.5	54.8	32.4	48.8	29.0	43.5	24.8	37.3	22.8	34.2	
	Available Strength in Tensile Yielding, kips		P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n
	Available Strength in Tensile Rupture (A _e = 0.75A _g), kips		P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n	P _n /Ω _t	φ _t P _n
	Available Strength in Shear, kips		V _n /Ω _v	φ _v V _n	V _n /Ω _v	φ _v V _n	V _n /Ω _v	φ _v V _n	V _n /Ω _v	φ _v V _n	V _n /Ω _v	φ _v V _n
	Available Strength in Flexure, kip-ft		M _n /Ω _b	φ _b M _n	M _n /Ω _b	φ _b M _n	M _n /Ω _b	φ _b M _n	M _n /Ω _b	φ _b M _n	M _n /Ω _b	φ _b M _n
	Properties											
	Area, in. ²		9.62		8.40		7.36		6.19		5.58	
	I, in. ⁴		45.4		40.5		36.1		30.9		28.1	
r, in.		2.17		2.19		2.21		2.23		2.25		


Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A1085 material availability before specifying.

 HSS6.625- HSS6.000		Table 6-G (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Round HSS										A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi	
		HSS6.625x					HSS6.000x						
Shape		0.250		0.188		0.500		0.375		0.312			
f_{des} , in.		0.250		0.188		0.500		0.375		0.312			
lb/ft		17.0		12.9		29.4		22.6		19.0			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the radius of gyration, r	0	150	225	114	171	259	389	199	298	167	251		
	1	150	225	114	171	258	388	198	298	167	250		
	2	149	224	113	170	256	385	196	295	165	248		
	3	147	221	112	168	252	379	194	291	163	245		
	4	145	218	110	166	247	372	190	286	160	241		
	5	142	214	108	163	241	363	186	279	157	235		
	6	139	209	106	159	234	352	180	271	152	229		
	7	136	204	103	155	226	339	174	262	147	221		
	8	131	198	99.9	150	217	326	167	252	141	213		
	9	127	191	96.6	145	207	311	160	241	135	203		
	10	122	183	92.9	140	196	295	152	229	129	193		
	11	117	176	89.0	134	185	278	144	216	122	183		
	12	111	168	85.0	128	174	261	135	203	115	173		
	13	106	159	80.8	121	162	243	127	190	108	162		
	14	100	151	76.5	115	150	226	118	177	100	151		
	15	94.3	142	72.1	108	139	209	109	164	92.9	140		
	16	88.5	133	67.7	102	127	191	101	151	85.7	129		
	17	82.7	124	63.4	95.2	116	175	92.1	138	78.7	118		
	18	76.9	116	59.0	88.7	105	159	83.9	126	71.8	108		
	19	71.3	107	54.8	82.3	95.0	143	75.9	114	65.2	98.0		
	20	65.8	98.8	50.6	76.1	85.7	129	68.5	103	58.8	88.4		
	22	55.2	82.9	42.6	64.0	70.9	106	56.6	85.1	48.6	73.1		
	24	46.4	69.7	35.8	53.8	59.5	89.5	47.6	71.5	40.9	61.4		
	26	39.5	59.4	30.5	45.8	50.7	76.2	40.5	60.9	34.8	52.3		
	28	34.1	51.2	26.3	39.5	43.7	65.7	35.0	52.5	30.0	45.1		
	30	29.7	44.6	22.9	34.4	38.1	57.3	30.5	45.8	26.1	39.3		
	32	26.1	39.2	20.1	30.3	33.5	50.3	26.8	40.2	23.0	34.5		
	34	23.1	34.7	17.8	26.8								
	36	20.6	31.0	15.9	23.9								
	38			14.3	21.5								
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	
	Properties												
	Area, in. ²		5.01		3.80		8.64		6.63		5.58		
	I_x , in. ⁴		25.5		19.7		32.9		26.3		22.6		
	r_x , in.		2.26		2.28		1.95		1.99		2.01		


Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A1085 material availability before specifying.

 HSS6.000– HSS5.563		Table 6-G (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Round HSS						A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi			
		HSS6.000x			HSS5.563x						
Shape	0.280		0.250		0.188		0.500		0.375		
f_{des} , in.	0.280		0.250		0.188		0.500		0.375		
lb/ft	17.1		15.4		11.7		27.1		20.8		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	151	226	135	203	103	154	238	358	183	275
	1	150	226	135	203	102	154	237	357	182	274
	2	149	224	134	201	102	153	235	353	181	272
	3	147	221	132	199	100	151	231	347	178	267
	4	145	217	130	195	98.7	148	226	340	174	262
	5	141	212	127	191	96.5	145	219	330	169	254
	6	137	206	123	186	93.9	141	212	318	164	246
	7	133	199	119	179	90.9	137	203	305	157	236
	8	128	192	115	173	87.6	132	193	291	150	225
	9	122	184	110	165	84.0	126	183	275	142	214
	10	116	175	105	158	80.1	120	172	258	134	201
	11	110	166	99.3	149	76.1	114	161	241	126	189
	12	104	156	93.7	141	71.8	108	149	224	117	176
	13	97.4	146	87.9	132	67.5	101	137	207	108	163
	14	90.8	137	82.0	123	63.1	94.9	126	189	99.4	149
	15	84.3	127	76.2	114	58.8	88.3	115	172	90.9	137
	16	77.8	117	70.4	106	54.4	81.8	104	156	82.5	124
	17	71.4	107	64.7	97.2	50.1	75.4	93.1	140	74.5	112
	18	65.3	98.1	59.1	88.9	46.0	69.1	83.0	125	66.6	100
	19	59.3	89.2	53.8	80.9	41.9	63.0	74.5	112	59.8	89.9
	20	53.6	80.5	48.6	73.1	38.0	57.1	67.2	101	54.0	81.1
	22	44.3	66.5	40.2	60.4	31.4	47.2	55.6	83.5	44.6	67.1
	24	37.2	55.9	33.8	50.7	26.4	39.6	46.7	70.2	37.5	56.3
	26	31.7	47.6	28.8	43.2	22.5	33.8	39.8	59.8	31.9	48.0
	28	27.3	41.1	24.8	37.3	19.4	29.1	34.3	51.5	27.5	41.4
	30	23.8	35.8	21.6	32.5	16.9	25.4	29.9	44.9	24.0	36.1
	32	20.9	31.4	19.0	28.5	14.8	22.3				
	34					13.1	19.8				
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
	Properties										
	Area, in. ²	5.03		4.52		3.43		7.95		6.11	
I , in. ⁴	20.6		18.7		14.5		25.7		20.7		
r , in.	2.02		2.03		2.06		1.80		1.84		


Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A1085 material availability before specifying.

 HSS5.563- HSS5.500		Table 6-G (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Round HSS								A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi	
		HSS5.563x				HSS5.500x					
Shape	0.258		0.188		0.500		0.375		0.258		
f_{des} , in.	0.258		0.188		0.500		0.375		0.258		
lb/ft	14.6		10.8		26.7		20.6		14.5		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	129	193	94.9	143	235	353	181	272	127	191
	1	128	193	94.6	142	234	352	180	271	127	191
	2	127	191	93.8	141	232	349	179	268	126	189
	3	125	188	92.5	139	228	343	176	264	124	186
	4	123	184	90.6	136	223	335	172	258	121	182
	5	120	180	88.2	133	216	325	167	251	118	177
	6	116	174	85.5	128	209	313	161	242	114	171
	7	111	167	82.3	124	200	300	155	233	110	165
	8	106	160	78.7	118	190	286	148	222	105	157
	9	101	152	74.9	113	180	270	140	210	99.4	149
	10	95.6	144	70.9	107	169	253	132	198	93.9	141
	11	89.8	135	66.7	100	157	236	123	185	88.0	132
	12	83.8	126	62.4	93.7	146	219	114	172	82.1	123
	13	77.8	117	58.0	87.1	134	201	106	159	76.1	114
	14	71.8	108	53.6	80.5	123	184	97.0	146	70.1	105
	15	65.9	99.0	49.2	74.0	111	167	88.4	133	64.2	96.4
	16	60.1	90.3	45.0	67.6	100	151	80.1	120	58.4	87.7
	17	54.4	81.8	40.9	61.4	89.8	135	72.2	108	52.8	79.4
	18	49.0	73.6	36.9	55.4	80.1	120	64.5	96.9	47.4	71.2
	19	43.9	66.0	33.1	49.7	71.9	108	57.8	86.9	42.5	63.9
	20	39.7	59.6	29.9	44.9	64.9	97.5	52.2	78.5	38.4	57.7
	22	32.8	49.3	24.7	37.1	53.6	80.6	43.1	64.9	31.7	47.7
	24	27.5	41.4	20.7	31.2	45.1	67.7	36.3	54.5	26.6	40.0
	26	23.5	35.3	17.7	26.6	38.4	57.7	30.9	46.4	22.7	34.1
	28	20.2	30.4	15.2	22.9	33.1	49.8	26.6	40.0	19.6	29.4
	30	17.6	26.5	13.3	19.9			23.2	34.9	17.1	25.6
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
	Properties										
Area, in. ²	4.30		3.17		7.85		6.04		4.25		
I_x , in. ⁴	15.2		11.5		24.8		19.9		14.6		
r_x , in.	1.88		1.90		1.78		1.82		1.86		


Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A1085 material availability before specifying.

 HSS5.000		Table 6-G (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Round HSS								A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi		
		HSS5.000x										
Shape		0.500		0.375		0.312		0.258		0.250		
f_{des} , in.		0.500		0.375		0.312		0.258		0.250		
lb/ft		24.1		18.5		15.6		13.1		12.7		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	212	318	163	245	138	207	115	173	112	168	
	1	211	317	163	244	137	206	115	172	111	167	
	2	208	313	161	241	136	204	113	170	110	165	
	3	204	307	158	237	133	200	111	167	108	162	
	4	198	298	153	230	130	195	108	163	105	158	
	5	191	287	148	222	125	188	105	157	102	153	
	6	183	274	142	213	120	180	101	151	97.6	147	
	7	173	260	135	202	114	172	95.8	144	93.0	140	
	8	163	245	127	191	108	162	90.6	136	88.0	132	
	9	152	228	119	179	101	152	85.0	128	82.6	124	
	10	140	211	110	166	94.0	141	79.2	119	76.9	116	
	11	129	193	102	153	86.7	130	73.2	110	71.1	107	
	12	117	176	92.9	140	79.4	119	67.2	101	65.3	98.1	
	13	106	159	84.2	127	72.2	109	61.2	92.0	59.5	89.4	
	14	94.5	142	75.8	114	65.1	97.9	55.3	83.2	53.8	80.8	
	15	83.9	126	67.6	102	58.3	87.6	49.7	74.6	48.2	72.5	
	16	73.8	111	59.8	89.8	51.7	77.7	44.2	66.4	42.9	64.5	
	17	65.4	98.3	52.9	79.6	45.8	68.8	39.1	58.8	38.0	57.1	
	18	58.3	87.6	47.2	71.0	40.8	61.4	34.9	52.5	33.9	51.0	
	19	52.3	78.7	42.4	63.7	36.7	55.1	31.3	47.1	30.4	45.8	
	20	47.2	71.0	38.3	57.5	33.1	49.7	28.3	42.5	27.5	41.3	
	22	39.0	58.7	31.6	47.5	27.3	41.1	23.4	35.1	22.7	34.1	
	24	32.8	49.3	26.6	39.9	23.0	34.5	19.6	29.5	19.1	28.7	
	26	27.9	42.0	22.6	34.0	19.6	29.4	16.7	25.2	16.3	24.4	
	28							14.4	21.7	14.0	21.1	
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	
Properties												
Area, in. ²		7.07		5.45		4.60		3.84		3.73		
I_x , in. ⁴		18.1		14.7		12.7		10.8		10.6		
r_x , in.		1.60		1.64		1.66		1.68		1.68		


Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A1085 material availability before specifying.

 HSS5.000– HSS4.500		Table 6-G (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Round HSS										A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi	
		HSS5.000x		0.375		0.337		0.237		0.188			
Shape		0.188		0.375		0.337		0.237		0.188			
f_{des} , in.		0.188		0.375		0.337		0.237		0.188			
lb/ft		9.67		16.5		15.0		10.8		8.67			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the radius of gyration, r	0	85.0	128	146	219	132	198	94.9	143	76.3	115		
	1	84.7	127	145	218	131	197	94.5	142	76.0	114		
	2	83.8	126	143	214	130	195	93.2	140	75.0	113		
	3	82.3	124	139	209	126	190	91.0	137	73.3	110		
	4	80.2	121	134	202	122	184	88.2	132	71.0	107		
	5	77.6	117	129	193	117	176	84.6	127	68.2	103		
	6	74.6	112	122	183	111	167	80.4	121	64.9	97.6		
	7	71.1	107	114	172	104	157	75.7	114	61.2	92.1		
	8	67.3	101	106	159	97.1	146	70.6	106	57.3	86.0		
	9	63.3	95.1	97.5	147	89.5	134	65.3	98.1	53.0	79.7		
	10	59.1	88.8	88.8	133	81.6	123	59.8	89.9	48.7	73.2		
	11	54.7	82.2	80.0	120	73.8	111	54.3	81.6	44.3	66.6		
	12	50.3	75.6	71.4	107	66.1	99.3	48.8	73.4	39.9	60.0		
	13	45.9	69.0	63.1	94.9	58.6	88.1	43.5	65.4	35.7	53.7		
	14	41.6	62.6	55.2	82.9	51.4	77.3	38.4	57.7	31.6	47.5		
	15	37.5	56.3	48.1	72.2	44.8	67.4	33.5	50.4	27.7	41.6		
	16	33.5	50.3	42.2	63.5	39.4	59.2	29.5	44.3	24.3	36.6		
	17	29.6	44.6	37.4	56.2	34.9	52.4	26.1	39.2	21.6	32.4		
	18	26.4	39.7	33.4	50.2	31.1	46.8	23.3	35.0	19.2	28.9		
	19	23.7	35.7	30.0	45.0	27.9	42.0	20.9	31.4	17.3	25.9		
	20	21.4	32.2	27.0	40.6	25.2	37.9	18.9	28.3	15.6	23.4		
	22	17.7	26.6	22.3	33.6	20.8	31.3	15.6	23.4	12.9	19.3		
	24	14.9	22.4	18.8	28.2	17.5	26.3	13.1	19.7	10.8	16.3		
	26	12.7	19.0										
	28	10.9	16.4										
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$		
Properties													
Area, in. ²		2.84		4.86		4.41		3.17		2.55			
I_x , in. ⁴		8.24		10.4		9.61		7.23		5.93			
r_x , in.		1.70		1.46		1.48		1.51		1.53			


Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A1085 material availability before specifying.

 HSS4.000		Table 6-G (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Round HSS								A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi	
		HSS4.000x									
Shape		0.313		0.250		0.237		0.226		0.220	
f_{des} , in.		0.313		0.250		0.237		0.226		0.220	
lb/ft		12.3		10.0		9.53		9.12		8.89	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	109	163	88.3	133	83.8	126	80.2	121	78.1	117
	1	108	162	87.8	132	83.3	125	79.8	120	77.7	117
	2	106	159	86.2	130	81.9	123	78.4	118	76.3	115
	3	103	155	83.7	126	79.5	119	76.1	114	74.1	111
	4	98.5	148	80.3	121	76.2	115	73.1	110	71.1	107
	5	93.2	140	76.1	114	72.2	109	69.3	104	67.5	101
	6	87.1	131	71.3	107	67.7	102	65.0	97.6	63.3	95.1
	7	80.5	121	66.0	99.2	62.6	94.1	60.2	90.5	58.6	88.1
	8	73.4	110	60.3	90.7	57.3	86.1	55.1	82.9	53.7	80.7
	9	66.1	99.4	54.5	82.0	51.8	77.8	49.9	75.0	48.6	73.0
	10	58.8	88.4	48.7	73.2	46.2	69.5	44.6	67.1	43.5	65.3
	11	51.7	77.8	43.0	64.6	40.8	61.3	39.5	59.3	38.4	57.8
	12	44.9	67.5	37.5	56.3	35.6	53.5	34.5	51.8	33.6	50.5
	13	38.5	57.8	32.2	48.4	30.6	46.0	29.7	44.7	28.9	43.5
	14	33.2	49.9	27.8	41.8	26.4	39.6	25.6	38.5	25.0	37.5
	15	28.9	43.4	24.2	36.4	23.0	34.5	22.3	33.6	21.7	32.7
	16	25.4	38.2	21.3	32.0	20.2	30.4	19.6	29.5	19.1	28.7
	17	22.5	33.8	18.8	28.3	17.9	26.9	17.4	26.1	16.9	25.4
	18	20.1	30.2	16.8	25.3	16.0	24.0	15.5	23.3	15.1	22.7
	19	18.0	27.1	15.1	22.7	14.3	21.5	13.9	20.9	13.6	20.4
	20	16.3	24.4	13.6	20.5	12.9	19.4	12.6	18.9	12.2	18.4
	22			11.3	16.9	10.7	16.1	10.4	15.6	10.1	15.2
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
Properties											
Area, in. ²		3.63		2.95		2.80		2.68		2.61	
I_x , in. ⁴		6.21		5.20		4.98		4.79		4.68	
r_x , in.		1.31		1.33		1.33		1.34		1.34	


Notes: Heavy line indicates L_c/r equal to or greater than 200.
 Confirm ASTM A1085 material availability before specifying.

 HSS4.000– HSS3.500		Table 6-G (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Round HSS										A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi	
		HSS4.000x		0.313		0.300		0.250		0.216			
Shape		0.188		0.313		0.300		0.250		0.216			
f_{des} , in.		0.188		0.313		0.300		0.250		0.216			
lb/ft		7.66		10.7		10.3		8.69		7.58			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the radius of gyration, r	0	67.4	101	93.7	141	90.4	136	76.3	115	66.8	100		
	1	67.0	101	92.9	140	89.7	135	75.7	114	66.2	99.6		
	2	65.8	98.9	90.7	136	87.5	132	74.0	111	64.7	97.3		
	3	64.0	96.1	87.0	131	84.1	126	71.1	107	62.2	93.5		
	4	61.4	92.3	82.1	123	79.4	119	67.2	101	58.9	88.5		
	5	58.3	87.6	76.3	115	73.8	111	62.6	94.0	54.9	82.5		
	6	54.7	82.2	69.6	105	67.5	102	57.3	86.2	50.4	75.7		
	7	50.8	76.3	62.6	94.0	60.8	91.4	51.7	77.7	45.5	68.4		
	8	46.5	70.0	55.3	83.1	53.8	80.9	45.9	68.9	40.5	60.8		
	9	42.2	63.4	48.1	72.2	46.9	70.5	40.1	60.2	35.4	53.2		
	10	37.8	56.8	41.1	61.8	40.2	60.4	34.4	51.8	30.5	45.9		
	11	33.5	50.3	34.5	51.8	33.9	50.9	29.1	43.7	25.9	38.9		
	12	29.3	44.1	29.0	43.5	28.4	42.8	24.4	36.7	21.8	32.7		
	13	25.3	38.1	24.7	37.1	24.2	36.4	20.8	31.3	18.5	27.9		
	14	21.8	32.8	21.3	32.0	20.9	31.4	18.0	27.0	16.0	24.0		
	15	19.0	28.6	18.5	27.9	18.2	27.4	15.6	23.5	13.9	20.9		
	16	16.7	25.1	16.3	24.5	16.0	24.1	13.8	20.7	12.2	18.4		
	17	14.8	22.3	14.4	21.7	14.2	21.3	12.2	18.3	10.8	16.3		
	18	13.2	19.9	12.9	19.4	12.6	19.0	10.9	16.3	9.67	14.5		
	19	11.9	17.8			11.3	17.1	9.75	14.7	8.68	13.0		
	20	10.7	16.1										
	22	8.84	13.3										
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$		
Properties													
Area, in. ²	2.25		3.13		3.02		2.55		2.23				
I_x , in. ⁴	4.10		4.02		3.89		3.39		3.02				
r_x , in.	1.35		1.13		1.14		1.15		1.16				


Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A1085 material availability before specifying.

 HSS3.500- HSS3.000		Table 6-G (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Round HSS								A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi	
		HSS3.500x				HSS3.000x					
Shape	0.203		0.188		0.250		0.216		0.203		
f_{des} , in.	0.203		0.188		0.250		0.216		0.203		
lb/ft	7.15		6.66		7.35		6.43		6.07		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	62.9	94.5	58.7	88.2	64.7	97.2	56.6	85.0	53.3	80.1
	1	62.4	93.8	58.2	87.5	64.0	96.1	56.0	84.1	52.7	79.2
	2	61.0	91.6	56.9	85.5	61.9	93.0	54.2	81.5	51.1	76.7
	3	58.7	88.2	54.8	82.3	58.5	88.0	51.3	77.2	48.4	72.7
	4	55.6	83.6	51.9	78.0	54.2	81.4	47.6	71.5	44.9	67.5
	5	51.9	78.0	48.4	72.8	49.1	73.7	43.2	64.9	40.8	61.3
	6	47.7	71.6	44.5	66.9	43.4	65.3	38.3	57.6	36.2	54.5
	7	43.1	64.8	40.3	60.5	37.6	56.6	33.3	50.1	31.5	47.4
	8	38.4	57.8	35.9	53.9	31.9	47.9	28.3	42.6	26.8	40.3
	9	33.7	50.7	31.5	47.3	26.4	39.7	23.6	35.4	22.4	33.6
	10	29.1	43.8	27.2	40.9	21.5	32.3	19.2	28.9	18.2	27.4
	11	24.8	37.3	23.1	34.8	17.7	26.7	15.9	23.9	15.1	22.7
	12	20.8	31.3	19.4	29.2	14.9	22.4	13.3	20.1	12.7	19.0
	13	17.8	26.7	16.6	24.9	12.7	19.1	11.4	17.1	10.8	16.2
	14	15.3	23.0	14.3	21.5	11.0	16.5	9.81	14.7	9.31	14.0
	15	13.3	20.0	12.4	18.7	9.55	14.3	8.54	12.8	8.11	12.2
	16	11.7	17.6	10.9	16.4	8.39	12.6	7.51	11.3	7.13	10.7
	17	10.4	15.6	9.69	14.6						
	18	9.26	13.9	8.64	13.0						
	19	8.31	12.5	7.76	11.7						
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	62.9	94.5	58.7	88.2	64.7	97.2	56.6	85.1	53.3	80.1	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	51.2	76.8	47.8	71.7	52.7	79.0	46.1	69.1	43.4	65.1	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	18.9	28.4	17.6	26.5	19.4	29.2	17.0	25.5	16.0	24.0	
Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	
	5.51	8.29	5.14	7.73	4.74	7.13	4.19	6.30	3.97	5.96	
Properties											
Area, in. ²	2.10		1.96		2.16		1.89		1.78		
I_x , in. ⁴	2.87		2.69		2.06		1.84		1.75		
r_x , in.	1.17		1.17		0.976		0.987		0.991		

Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A1085 material availability before specifying.


 HSS3.000– HSS2.875		Table 6-G (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Round HSS										A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi	
		HSS3.000x				HSS2.875x							
Shape		0.188		0.152		0.250		0.203		0.188			
t_{des} , in.		0.188		0.152		0.250		0.203		0.188			
lb/ft		5.65		4.63		7.02		5.80		5.40			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the radius of gyration, r	0	49.7	74.7	40.7	61.2	61.7	92.7	50.9	76.5	47.6	71.5		
	1	49.2	73.9	40.3	60.6	60.9	91.6	50.3	75.6	47.1	70.7		
	2	47.6	71.6	39.1	58.7	58.8	88.3	48.6	73.0	45.4	68.3		
	3	45.2	67.9	37.1	55.8	55.3	83.1	45.8	68.8	42.9	64.4		
	4	41.9	63.0	34.5	51.9	50.8	76.4	42.2	63.4	39.5	59.4		
	5	38.1	57.3	31.5	47.3	45.6	68.5	38.0	57.0	35.6	53.5		
	6	33.9	51.0	28.1	42.2	39.9	59.9	33.4	50.1	31.3	47.1		
	7	29.5	44.4	24.6	36.9	34.1	51.2	28.6	43.0	26.9	40.5		
	8	25.2	37.9	21.0	31.6	28.4	42.7	24.0	36.1	22.6	34.0		
	9	21.0	31.6	17.6	26.5	23.1	34.7	19.6	29.5	18.6	27.9		
	10	17.2	25.8	14.5	21.8	18.7	28.1	15.9	23.9	15.0	22.6		
	11	14.2	21.4	12.0	18.0	15.4	23.2	13.2	19.8	12.4	18.7		
	12	11.9	17.9	10.1	15.1	13.0	19.5	11.1	16.6	10.4	15.7		
	13	10.2	15.3	8.57	12.9	11.1	16.6	9.42	14.2	8.90	13.4		
	14	8.77	13.2	7.39	11.1	9.53	14.3	8.12	12.2	7.67	11.5		
	15	7.64	11.5	6.44	9.67	8.30	12.5	7.07	10.6	6.69	10.0		
	16	6.71	10.1	5.66	8.50								
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$		
Properties													
Area, in. ²		1.66		1.36		2.06		1.70		1.59			
I_x , in. ⁴		1.65		1.38		1.79		1.53		1.44			
r_x , in.		0.996		1.01		0.932		0.947		0.952			

Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A1085 material availability before specifying.

 HSS2.500- HSS2.375		Table 6-G (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Round HSS										A1085 Gr. A $F_y = 50$ ksi $F_u = 65$ ksi	
		HSS2.500x					HSS2.375x						
Shape		0.250		0.188		0.250		0.218		0.188			
t_{des} , in.		0.250		0.188		0.250		0.218		0.188			
lb/ft		6.01		4.65		5.68		5.03		4.40			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the radius of gyration, r	0	53.0	79.6	41.0	61.6	50.0	75.1	44.3	66.6	38.6	58.0		
	1	52.1	78.4	40.4	60.7	49.1	73.8	43.5	65.4	38.0	57.0		
	2	49.6	74.6	38.5	57.9	46.4	69.8	41.2	62.0	36.0	54.1		
	3	45.7	68.7	35.6	53.5	42.4	63.7	37.7	56.7	33.0	49.6		
	4	40.7	61.2	31.9	48.0	37.2	56.0	33.3	50.0	29.2	43.9		
	5	35.1	52.8	27.7	41.7	31.5	47.4	28.3	42.5	24.9	37.5		
	6	29.3	44.1	23.3	35.1	25.8	38.7	23.2	34.9	20.6	30.9		
	7	23.7	35.6	19.0	28.6	20.3	30.5	18.4	27.6	16.4	24.6		
	8	18.5	27.8	15.0	22.6	15.6	23.4	14.2	21.3	12.7	19.0		
	9	14.6	21.9	11.9	17.8	12.3	18.5	11.2	16.8	10.0	15.0		
	10	11.8	17.8	9.62	14.5	9.96	15.0	9.06	13.6	8.11	12.2		
	11	9.77	14.7	7.95	11.9	8.23	12.4	7.49	11.3	6.70	10.1		
	12	8.21	12.3	6.68	10.0	6.92	10.4	6.29	9.46	5.63	8.46		
	13	7.00	10.5	5.69	8.55								
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$		
Properties													
Area, in. ²		1.77		1.37		1.67		1.48		1.29			
I_x , in. ⁴		1.13		0.918		0.955		0.868		0.778			
r_x , in.		0.800		0.820		0.756		0.766		0.776			

Notes: Heavy line indicates L_c/r equal to or greater than 200.
Confirm ASTM A1085 material availability before specifying.

Shape	HSS2.375x		HSS1.900x		
	0.154	0.188	0.154	0.188	
f_{des} , in.	0.154		0.188		
lb/ft	3.66		3.44		
Design	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	32.0	48.1	30.2	45.4
	1	31.5	47.3	29.4	44.2
	2	29.9	45.0	27.0	40.6
	3	27.5	41.3	23.4	35.2
	4	24.4	36.7	19.2	28.9
	5	20.9	31.5	14.9	22.4
	6	17.4	26.1	10.9	16.3
	7	13.9	20.9	7.98	12.0
	8	10.8	16.2	6.11	9.18
	9	8.54	12.8	4.83	7.26
	10	6.92	10.4	3.91	5.88
	11	5.72	8.59		
	12	4.80	7.22		
	13	4.09	6.15		
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	
Properties					
Area, in. ²	1.07		1.01		
I_x , in. ⁴	0.666		0.375		
r_x , in.	0.787		0.609		
Notes: Heavy line indicates L_c/r equal to or greater than 200. Confirm ASTM A1085 material availability before specifying.					

 HSS20.000– HSS16.000		Table 6-H Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Round HSS								A500 Gr. C $F_y = 46$ ksi $F_u = 62$ ksi	
		HSS20.000x				HSS18.000x				HSS16.000x	
Shape		0.500		0.375 ¹		0.500		0.375 ¹		0.625	
t_{des} , in.		0.465		0.349		0.465		0.349		0.581	
lb/ft		104		78.7		93.5		70.7		103	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	785	1180	592	890	705	1060	534	803	774	1160
	1	785	1180	592	890	705	1060	534	803	774	1160
	2	784	1180	592	889	704	1060	534	802	773	1160
	3	784	1180	591	888	704	1060	533	801	772	1160
	4	782	1180	590	887	702	1060	532	800	770	1160
	5	781	1170	589	886	701	1050	531	798	768	1150
	6	779	1170	588	884	699	1050	530	796	765	1150
	7	777	1170	586	881	696	1050	528	793	762	1140
	8	775	1160	585	879	694	1040	526	790	758	1140
	9	772	1160	583	876	691	1040	524	787	754	1130
	10	769	1160	580	872	688	1030	521	783	749	1130
	11	766	1150	578	869	684	1030	519	779	744	1120
	12	762	1150	575	865	680	1020	516	775	739	1110
	13	759	1140	572	860	676	1020	512	770	733	1100
	14	754	1130	569	856	671	1010	509	765	726	1090
	15	750	1130	566	851	666	1000	505	759	719	1080
	16	745	1120	563	846	661	994	501	754	712	1070
	17	740	1110	559	840	656	985	497	747	705	1060
	18	735	1100	555	834	650	977	493	741	697	1050
	19	730	1100	551	828	644	968	488	734	688	1030
	20	724	1090	547	821	638	958	484	727	680	1020
	22	712	1070	537	808	624	938	474	712	661	994
	24	698	1050	528	793	610	917	463	696	642	965
	26	684	1030	517	777	595	894	452	679	621	934
	28	670	1010	506	761	579	870	440	661	600	902
	30	654	983	494	743	562	845	427	642	578	868
	32	638	959	482	725	545	819	414	623	555	834
	34	621	933	470	706	527	792	401	602	532	799
	36	604	907	457	686	509	765	387	582	508	764
	38	586	880	443	666	490	737	373	561	484	728
40	567	853	430	646	471	708	359	539	460	692	
42	549	825	416	625	452	680	345	518	436	656	
44	530	797	402	604	433	651	330	496	413	620	
46	511	768	387	582	414	622	316	474	389	585	
48	492	739	373	561	395	593	301	453	366	550	
50	473	711	359	539	376	564	287	431	344	516	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		785	1180	592	890	705	1060	534	803	774	1160
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		663	994	500	750	595	893	451	677	653	980
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		236	354	178	267	212	318	160	241	232	349
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
		406	611	294	442	328	493	242	363	317	476
Properties											
Area, in. ²		28.5		21.5		25.6		19.4		28.1	
I , in. ⁴		1360		1040		985		754		838	
r , in.		6.91		6.95		6.20		6.24		5.46	

¹ Shape exceeds the compact limit for flexure for $F_y = 46$ ksi.

Shape		HSS16.000x									
		0.500		0.438		0.375 ^f		0.312 ^f		0.250 ^f	
t_{des} , in.		0.465		0.407		0.349		0.291		0.233	
lb/ft		82.9		72.9		62.6		52.3		42.1	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	625	940	548	824	474	712	397	596	317	476
	1	625	939	548	824	474	712	397	596	317	476
	2	624	939	547	823	473	711	396	595	316	476
	3	623	937	547	821	472	710	396	594	316	475
	4	622	935	545	820	471	708	395	593	315	474
	5	620	932	544	817	470	706	394	591	314	472
	6	618	929	542	814	468	704	392	589	313	471
	7	615	925	540	811	466	701	391	587	312	469
	8	613	921	537	807	464	698	389	584	311	467
	9	609	916	534	803	462	694	387	581	309	464
	10	605	910	531	798	459	690	384	578	307	462
	11	601	904	527	793	456	685	382	574	305	459
	12	597	897	524	787	453	680	379	570	303	455
	13	592	890	519	781	449	675	376	565	301	452
	14	587	882	515	774	445	669	373	561	298	448
	15	582	874	510	767	441	663	370	555	295	444
	16	576	866	505	759	437	657	366	550	293	440
	17	570	856	500	751	432	650	362	544	290	435
	18	563	847	494	743	428	643	358	538	286	430
	19	557	837	489	734	423	635	354	532	283	426
	20	550	826	482	725	417	627	350	526	280	420
	22	535	804	470	706	406	611	341	512	272	410
	24	520	781	456	686	395	593	331	497	265	398
	26	503	756	442	664	382	575	321	482	257	386
	28	486	730	427	642	370	555	310	466	248	373
	30	468	704	411	618	356	535	299	449	239	360
	32	450	676	395	594	343	515	287	432	230	346
	34	431	648	379	570	329	494	276	414	221	332
	36	412	620	363	545	314	472	264	397	212	318
	38	393	591	346	520	300	451	252	379	202	304
	40	374	562	329	494	285	429	240	360	193	289
42	355	533	312	469	271	407	228	342	183	275	
44	336	504	296	444	257	386	216	324	173	261	
46	317	476	279	419	242	364	204	306	164	246	
48	298	448	263	395	228	343	192	289	155	232	
50	280	421	247	371	215	323	181	272	146	219	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
Properties											
Area, in. ²		22.7		19.9		17.2		14.4		11.5	
I , in. ⁴		685		606		526		443		359	
r , in.		5.49		5.51		5.53		5.55		5.58	

^f Shape exceeds the compact limit for flexure for $F_y = 46$ ksi.



HSS14.000

Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS

A500 Gr. C

$F_y = 46$ ksi


$F_u = 62$ ksi

Shape		HSS14.000x									
		0.625		0.500		0.375		0.312 ¹		0.250 ¹	
t_{des} , in.		0.581		0.465		0.349		0.291		0.233	
lb/ft		89.4		72.2		54.6		45.7		36.8	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	675	1010	545	820	413	621	344	517	278	418
	1	675	1010	545	819	413	621	344	517	278	418
	2	674	1010	544	818	412	620	344	517	278	417
	3	672	1010	543	817	412	619	343	516	277	417
	4	670	1010	542	814	410	617	342	514	276	415
	5	668	1000	540	811	409	615	341	512	275	414
	6	665	999	537	807	407	612	339	510	274	412
	7	661	993	534	803	405	608	337	507	273	410
	8	657	987	531	798	402	605	335	504	271	407
	9	652	980	527	792	400	600	333	501	269	405
	10	646	972	523	786	396	596	330	497	267	401
	11	641	963	518	779	393	591	328	492	265	398
	12	634	953	513	771	389	585	324	488	262	394
	13	628	943	508	763	385	579	321	483	260	390
	14	620	932	502	755	381	572	318	477	257	386
	15	613	921	496	745	376	566	314	472	254	381
	16	605	909	490	736	372	558	310	466	251	377
	17	596	896	483	726	366	551	306	459	247	372
	18	587	883	476	715	361	543	301	453	244	366
	19	578	869	468	704	356	535	297	446	240	361
	20	568	854	461	692	350	526	292	439	236	355
	22	548	824	445	668	338	508	282	424	228	343
	24	527	792	428	643	325	489	272	408	220	330
	26	505	759	410	616	312	469	261	392	211	317
	28	482	724	392	589	298	448	249	375	202	304
	30	459	689	373	561	284	427	238	357	193	290
	32	435	653	354	532	270	406	226	339	183	275
	34	411	617	335	503	256	384	214	321	174	261
	36	387	581	316	474	241	363	202	303	164	246
	38	363	546	296	446	227	341	190	286	154	232
40	340	510	278	417	213	320	178	268	145	218	
42	316	476	259	389	199	299	167	250	135	203	
44	294	442	241	362	185	278	155	233	126	190	
46	272	409	223	336	172	258	144	217	117	176	
48	250	376	206	309	159	238	133	200	109	163	
50	231	347	190	285	146	220	123	185	100	150	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		675	1010	545	820	413	621	344	518	278	418
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		570	854	460	691	349	523	291	436	235	352
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		202	304	164	246	124	186	103	155	83.5	125
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
		241	362	196	294	149	225	123	185	95.5	144
Properties											
Area, in. ²		24.5		19.8		15.0		12.5		10.1	
I , in. ⁴		552		453		349		295		239	
r , in.		4.75		4.79		4.83		4.85		4.87	


¹Shape exceeds the compact limit for flexure for $F_y = 46$ ksi.

Shape		HSS12.750x						HSS10.750x			
		0.500		0.375		0.250 ^f		0.500		0.375	
t_{des} , in.		0.465		0.349		0.233		0.465		0.349	
lb/ft		65.5		49.6		33.4		54.8		41.6	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	493	741	375	563	252	379	413	621	314	472
	1	493	741	374	563	252	379	413	621	314	472
	2	492	740	374	562	252	378	412	619	313	471
	3	491	738	373	560	251	378	410	617	312	469
	4	489	735	372	559	250	376	408	614	310	467
	5	487	732	370	556	249	375	406	610	308	464
	6	484	728	368	553	248	373	402	605	306	460
	7	481	723	365	549	246	370	399	599	303	456
	8	477	717	363	545	244	367	394	593	300	451
	9	473	711	360	541	242	364	389	585	296	445
	10	468	704	356	535	240	361	384	577	292	439
	11	463	697	353	530	238	357	378	568	288	433
	12	458	688	348	524	235	353	372	559	283	426
	13	452	680	344	517	232	349	365	549	278	418
	14	446	670	339	510	229	344	358	538	273	410
	15	439	660	335	503	226	339	351	527	267	402
	16	432	650	329	495	222	334	343	515	261	393
	17	425	639	324	487	219	329	334	503	255	384
	18	418	628	318	478	215	323	326	490	249	374
	19	410	616	312	470	211	317	317	477	243	365
	20	402	604	306	460	207	311	308	464	236	355
	22	385	578	294	441	199	299	290	436	222	334
	24	367	552	280	422	190	285	271	408	208	313
	26	349	524	267	401	181	272	252	379	194	291
	28	330	496	253	380	171	258	233	350	179	269
	30	311	467	238	358	162	243	214	322	165	248
	32	292	439	224	337	152	229	195	294	151	227
	34	273	410	210	315	143	214	177	267	137	206
	36	254	382	195	294	133	200	160	241	124	187
	38	235	354	181	272	124	186	144	216	112	168
	40	217	327	168	252	115	172	130	195	101	151
42	200	300	154	232	106	159	118	177	91.4	137	
44	183	274	141	212	96.9	146	107	161	83.2	125	
46	167	251	129	194	88.7	133	98.0	147	76.2	114	
48	153	231	119	178	81.4	122	90.0	135	69.9	105	
50	141	213	109	164	75.1	113	83.0	125	64.5	96.9	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		493	741	375	563	252	379	413	621	314	472
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		416	624	316	474	213	319	349	523	265	398
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		148	222	112	169	75.7	114	124	186	94.2	142
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
		161	242	123	185	80.4	121	113	170	86.8	130
Properties											
Area, in. ²		17.9		13.6		9.16		15.0		11.4	
I , in. ⁴		339		262		180		199		154	
r , in.		4.35		4.39		4.43		3.64		3.68	

^f Shape exceeds the compact limit for flexure for $F_y = 46$ ksi.

 HSS10.750- HSS10.000		Table 6-H (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Round HSS										A500 Gr. C $F_y = 46$ ksi $F_u = 62$ ksi	
		HSS10.750x		HSS10.000x									
Shape		0.250 ^f		0.625		0.500		0.375		0.312			
t_{des} , in.		0.233		0.581		0.465		0.349		0.291			
lb/ft		28.1		62.6		50.8		38.6		32.3			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the radius of gyration, r	0	212	319	474	712	383	575	292	439	245	368		
	1	212	319	473	711	383	575	292	438	244	367		
	2	212	318	472	710	382	574	291	437	244	366		
	3	211	317	470	707	380	571	290	436	243	365		
	4	210	315	467	702	378	568	288	433	241	363		
	5	208	313	464	697	375	563	286	430	240	360		
	6	207	311	459	690	371	558	283	426	237	357		
	7	205	308	454	682	367	552	280	421	235	353		
	8	203	305	448	674	363	545	277	416	232	349		
	9	200	301	442	664	357	537	273	410	229	344		
	10	198	297	434	653	352	529	269	404	225	339		
	11	195	293	427	641	346	519	264	397	221	333		
	12	192	288	418	628	339	509	259	389	217	327		
	13	188	283	409	615	332	499	254	381	213	320		
	14	185	278	400	601	324	487	248	373	208	313		
	15	181	272	390	586	316	476	242	364	203	305		
	16	177	266	379	570	308	463	236	355	198	298		
	17	173	260	369	554	300	450	230	345	193	290		
	18	169	254	358	537	291	437	223	335	187	282		
	19	165	248	346	520	282	424	216	325	182	273		
	20	160	241	335	503	273	410	209	314	176	264		
	22	151	227	311	468	254	382	195	293	164	247		
	24	142	213	287	432	235	353	181	272	152	229		
	26	132	199	263	396	216	324	166	250	140	211		
	28	123	184	240	360	197	296	152	228	128	193		
	30	113	170	217	326	179	268	138	207	117	175		
	32	104	156	195	293	161	242	124	187	105	158		
	34	94.4	142	173	260	143	216	111	167	94.3	142		
	36	85.6	129	155	232	128	192	99.3	149	84.1	126		
	38	77.0	116	139	208	115	173	89.1	134	75.5	114		
	40	69.5	104	125	188	104	156	80.4	121	68.2	102		
42	63.1	94.8	114	171	94.0	141	72.9	110	61.8	92.9			
44	57.4	86.3	103	155	85.6	129	66.5	99.9	56.3	84.7			
46	52.6	79.0	94.7	142	78.3	118	60.8	91.4	51.5	77.5			
48	48.3	72.6	86.9	131	71.9	108	55.8	83.9	47.3	71.1			
50	44.5	66.9	80.1	120	66.3	99.7	51.5	77.3	43.6	65.6			
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
		212	319	474	712	383	575	292	439	245	368		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
		179	269	400	600	323	485	246	370	206	310		
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
		63.6	95.6	142	214	115	173	87.6	132	73.4	110		
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$		
		58.5	87.9	118	178	97.1	146	74.6	112	62.9	94.5		
Properties													
Area, in. ²		7.70		17.2		13.9		10.6		8.88			
I , in. ⁴		106		191		159		123		105			
r , in.		3.72		3.34		3.38		3.41		3.43			

^fShape exceeds the compact limit for flexure for $F_y = 46$ ksi.

 HSS10.000– HSS9.625		Table 6-H (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Round HSS										A500 Gr. C $F_y = 46$ ksi $F_u = 62$ ksi	
		HSS10.000x					HSS9.625x						
Shape		0.250		0.188 ¹		0.500		0.375		0.312			
t_{des} , in.		0.233		0.174		0.465		0.349		0.291			
lb/ft		26.1		19.7		48.8		37.1		31.1			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the radius of gyration, r	0	197	296	148	222	369	555	281	422	235	353		
	1	197	296	148	222	369	554	281	422	235	353		
	2	196	295	147	222	368	553	280	421	234	352		
	3	196	294	147	221	366	550	279	419	233	350		
	4	194	292	146	219	364	547	277	416	232	348		
	5	193	290	145	218	361	542	275	413	230	345		
	6	191	287	144	216	357	537	272	409	228	342		
	7	189	284	142	214	353	530	269	404	225	338		
	8	187	281	140	211	348	523	265	399	222	334		
	9	184	277	139	208	343	515	261	393	219	329		
	10	182	273	136	205	337	506	257	386	215	323		
	11	178	268	134	202	330	496	252	379	211	317		
	12	175	263	132	198	323	486	247	371	207	311		
	13	172	258	129	194	316	475	241	363	202	304		
	14	168	252	126	190	308	463	236	354	197	297		
	15	164	246	123	186	300	451	229	345	192	289		
	16	160	240	120	181	291	438	223	335	187	281		
	17	156	234	117	176	283	425	217	326	182	273		
	18	151	227	114	171	274	411	210	315	176	265		
	19	147	221	111	166	265	398	203	305	170	256		
	20	142	214	107	161	255	384	196	295	165	247		
	22	133	200	100	151	236	355	182	273	153	230		
	24	123	185	93.1	140	217	326	167	251	141	212		
	26	114	171	85.9	129	198	297	153	230	129	194		
	28	104	156	78.7	118	179	269	139	208	117	176		
	30	94.7	142	71.7	108	161	242	125	188	106	159		
	32	85.6	129	64.9	97.5	143	216	112	168	94.5	142		
	34	76.9	116	58.4	87.7	127	191	99.1	149	83.9	126		
	36	68.5	103	52.1	78.3	113	170	88.4	133	74.8	112		
	38	61.5	92.5	46.7	70.2	102	153	79.3	119	67.1	101		
	40	55.5	83.4	42.2	63.4	91.8	138	71.6	108	60.6	91.1		
42	50.4	75.7	38.3	57.5	83.2	125	64.9	97.6	55.0	82.6			
44	45.9	69.0	34.9	52.4	75.8	114	59.2	88.9	50.1	75.3			
46	42.0	63.1	31.9	47.9	69.4	104	54.1	81.4	45.8	68.9			
48	38.6	57.9	29.3	44.0	63.7	95.8	49.7	74.7	42.1	63.3			
50	35.5	53.4	27.0	40.6	58.7	88.3	45.8	68.9	38.8	58.3			
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
		197	296	148	222	369	555	281	422	235	353		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
		166	249	125	187	312	467	237	356	198	297		
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
		59.1	88.8	44.4	66.7	111	166	84.3	127	70.5	106		
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$		
		51.0	76.6	36.7	55.2	89.5	135	68.9	104	58.3	87.6		
Properties													
Area, in. ²		7.15		5.37		13.4		10.2		8.53			
I , in. ⁴		85.3		64.8		141		110		93.0			
r , in.		3.45		3.47		3.24		3.28		3.30			

¹Shape exceeds the compact limit for flexure for $F_y = 46$ ksi.



HSS9.625–
HSS8.625

Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS

A500 Gr. C

$F_y = 46$ ksi
 $F_u = 62$ ksi

Shape	HSS9.625x				HSS8.625x						
	0.250		0.188 [†]		0.625		0.500		0.375		
t_{des} , in.	0.233		0.174		0.581		0.465		0.349		
lb/ft	25.1		19.0		53.5		43.4		33.1		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	189	284	142	214	405	609	328	493	250	375
	1	189	284	142	214	404	608	327	492	250	375
	2	189	283	142	213	403	606	326	490	249	374
	3	188	282	141	212	401	602	324	488	247	372
	4	187	280	140	211	397	597	322	484	245	369
	5	185	278	139	209	393	591	318	479	243	365
	6	183	276	138	207	388	583	314	473	240	361
	7	181	272	136	205	382	574	310	465	236	355
	8	179	269	135	202	375	564	304	457	232	349
	9	176	265	133	200	368	553	298	448	228	343
	10	173	260	131	196	359	540	292	439	223	335
	11	170	256	128	193	351	527	285	428	218	328
	12	167	251	126	189	341	513	277	417	212	319
	13	163	245	123	185	331	497	269	405	206	310
	14	159	239	120	181	321	482	261	392	200	301
	15	155	233	117	176	310	465	252	380	194	291
	16	151	227	114	171	298	448	244	366	187	281
	17	147	221	111	167	287	431	234	352	180	271
	18	142	214	107	162	275	414	225	338	173	261
	19	138	207	104	156	263	396	216	324	166	250
	20	133	200	101	151	251	378	206	310	159	239
	22	124	186	93.5	141	227	342	187	281	145	217
	24	114	171	86.4	130	204	306	168	253	130	196
	26	104	157	79.2	119	181	272	150	225	117	175
	28	95.0	143	72.1	108	159	239	132	198	103	155
	30	85.8	129	65.2	98.0	138	208	115	173	90.3	136
	32	76.9	116	58.5	88.0	122	183	101	152	79.4	119
	34	68.4	103	52.1	78.3	108	162	89.7	135	70.3	106
	36	61.0	91.7	46.5	69.8	96.2	145	80.0	120	62.7	94.3
	38	54.7	82.3	41.7	62.7	86.3	130	71.8	108	56.3	84.6
	40	49.4	74.2	37.6	56.6	77.9	117	64.8	97.5	50.8	76.3
42	44.8	67.3	34.1	51.3	70.7	106	58.8	88.4	46.1	69.3	
44	40.8	61.4	31.1	46.7	64.4	96.8	53.6	80.5	42.0	63.1	
46	37.4	56.1	28.5	42.8	58.9	88.5	49.0	73.7	38.4	57.7	
48	34.3	51.6	26.1	39.3			45.0	67.7	35.3	53.0	
50	31.6	47.5	24.1	36.2							
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	189	284	142	214	405	609	328	493	250	375	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	160	240	120	180	342	513	277	415	211	316	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	56.8	85.3	42.7	64.2	121	183	98.3	148	74.9	113	
Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	
	47.3	71.1	34.1	51.3	86.5	130	71.2	107	54.9	82.5	
Properties											
Area, in. ²	6.87		5.17		14.7		11.9		9.07		
I , in. ⁴	75.9		57.7		119		100		77.8		
r , in.	3.32		3.34		2.85		2.89		2.93		

[†] Shape exceeds the compact limit for flexure for $F_y = 46$ ksi.
Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS8.625–
HSS7.625

Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS

A500 Gr. C

$F_y = 46$ ksi
 $F_u = 62$ ksi

Shape	HSS8.625x						HSS7.625x				
	0.322		0.250		0.188 [†]		0.375		0.328		
t_{des} , in.	0.300		0.233		0.174		0.349		0.305		
lb/ft	28.6		22.4		17.0		29.1		25.6		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	216	325	169	254	127	191	220	330	193	290
	1	216	325	169	254	127	191	219	330	193	290
	2	215	324	168	253	127	190	219	328	192	289
	3	214	322	167	252	126	189	217	326	191	286
	4	212	319	166	250	125	188	215	323	189	284
	5	210	316	165	247	124	186	212	319	186	280
	6	208	312	163	244	122	184	209	314	183	276
	7	205	308	160	241	121	181	205	308	180	270
	8	201	303	158	237	119	178	200	301	176	265
	9	198	297	155	233	117	175	195	294	172	258
	10	193	291	152	228	114	172	190	286	167	251
	11	189	284	148	223	112	168	184	277	162	244
	12	184	277	144	217	109	164	178	268	157	236
	13	179	269	140	211	106	159	172	258	151	227
	14	174	261	136	205	103	155	165	248	145	219
	15	168	253	132	199	99.7	150	158	238	140	210
	16	163	244	128	192	96.4	145	151	228	133	201
	17	157	236	123	185	93.0	140	144	217	127	191
	18	151	227	118	178	89.6	135	137	206	121	182
	19	145	217	114	171	86.1	129	130	195	115	172
	20	139	208	109	164	82.5	124	123	185	108	163
	22	126	190	99.4	149	75.3	113	109	163	96.0	144
	24	114	171	89.8	135	68.2	102	95.1	143	84.0	126
	26	102	153	80.5	121	61.2	91.9	82.0	123	72.6	109
	28	90.3	136	71.5	107	54.4	81.8	70.7	106	62.6	94.1
	30	79.2	119	62.8	94.4	47.9	72.0	61.6	92.6	54.5	82.0
	32	69.6	105	55.2	83.0	42.1	63.3	54.1	81.4	47.9	72.0
	34	61.7	92.7	48.9	73.5	37.3	56.1	48.0	72.1	42.5	63.8
36	55.0	82.7	43.6	65.6	33.3	50.0	42.8	64.3	37.9	56.9	
38	49.4	74.2	39.2	58.8	29.9	44.9	38.4	57.7	34.0	51.1	
40	44.6	67.0	35.3	53.1	26.9	40.5	34.7	52.1	30.7	46.1	
42	40.4	60.8	32.0	48.2	24.4	36.7	31.4	47.2	27.8	41.8	
44	36.8	55.4	29.2	43.9	22.3	33.5					
46	33.7	50.6	26.7	40.2	20.4	30.6					
48	30.9	46.5	24.5	36.9	18.7	28.1					
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	216	325	169	254	127	191	220	330	193	290	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	183	274	143	214	107	161	186	278	163	244	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	64.9	97.5	50.7	76.3	38.2	57.4	65.9	99.1	57.9	87.1	
Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	
	47.7	71.8	37.6	56.6	27.8	41.8	42.5	63.8	37.6	56.6	
Properties											
Area, in. ²	7.85		6.14		4.62		7.98		7.01		
I , in. ⁴	68.1		54.1		41.3		52.9		47.1		
r , in.	2.95		2.97		2.99		2.58		2.59		

[†] Shape exceeds the compact limit for flexure for $F_y = 46$ ksi.
Note: Heavy line indicates L_c/r equal to or greater than 200.

Shape		HSS7.500x									
		0.500		0.375		0.312		0.250		0.188	
t_{des} , in.		0.465		0.349		0.291		0.233		0.174	
lb/ft		37.4		28.6		24.0		19.4		14.7	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	284	426	216	325	182	273	147	220	110	166
	1	283	426	216	324	181	272	146	220	110	165
	2	282	424	215	323	180	271	146	219	110	165
	3	280	420	213	320	179	269	145	217	109	163
	4	277	416	211	317	177	266	143	215	108	162
	5	273	410	208	313	175	263	141	212	106	160
	6	268	403	205	307	172	259	139	209	105	157
	7	263	395	201	301	169	254	136	205	103	154
	8	257	386	196	295	165	248	133	201	100	151
	9	250	376	191	287	161	242	130	196	98.0	147
	10	243	365	186	279	156	235	127	190	95.4	143
	11	235	353	180	270	152	228	123	184	92.5	139
	12	227	341	174	261	146	220	119	178	89.5	135
	13	218	327	167	251	141	212	114	172	86.3	130
	14	209	314	161	241	136	204	110	165	83.0	125
	15	200	300	154	231	130	195	105	158	79.6	120
	16	190	286	147	220	124	186	101	151	76.1	114
	17	181	271	139	210	118	177	95.9	144	72.6	109
	18	171	257	132	199	112	168	91.1	137	69.0	104
	19	161	243	125	188	106	159	86.3	130	65.4	98.3
	20	152	228	118	177	100	150	81.5	123	61.8	92.9
22	133	200	104	156	88.3	133	72.1	108	54.8	82.3	
24	115	173	90.3	136	77.0	116	63.0	94.6	48.0	72.1	
26	98.6	148	77.5	116	66.2	99.4	54.3	81.5	41.4	62.3	
28	85.0	128	66.8	100	57.1	85.7	46.8	70.3	35.7	53.7	
30	74.1	111	58.2	87.5	49.7	74.7	40.8	61.3	31.1	46.8	
32	65.1	97.8	51.2	76.9	43.7	65.7	35.8	53.8	27.4	41.1	
34	57.7	86.7	45.3	68.1	38.7	58.2	31.7	47.7	24.2	36.4	
36	51.4	77.3	40.4	60.7	34.5	51.9	28.3	42.5	21.6	32.5	
38	46.2	69.4	36.3	54.5	31.0	46.6	25.4	38.2	19.4	29.2	
40	41.7	62.6	32.7	49.2	28.0	42.0	22.9	34.5	17.5	26.3	
42			29.7	44.6	25.4	38.1	20.8	31.3	15.9	23.9	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
Properties											
Area, in. ²		10.3		7.84		6.59		5.32		4.00	
I , in. ⁴		63.9		50.2		42.9		35.2		26.9	
r , in.		2.49		2.53		2.55		2.57		2.59	

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS7.000

Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS


A500 Gr. C

$F_y = 46$ ksi

$F_u = 62$ ksi

Shape		HSS7.000x										
		0.500		0.375		0.312		0.250		0.188		
t_{des} , in.		0.465		0.349		0.291		0.233		0.174		
lb/ft		34.7		26.6		22.3		18.0		13.7		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	263	395	201	302	169	254	136	205	103	154	
	1	263	395	200	301	169	253	136	205	103	154	
	2	261	393	199	300	168	252	135	204	102	153	
	3	259	389	198	297	166	250	134	202	101	152	
	4	256	384	195	293	164	247	133	199	100	150	
	5	251	378	192	289	162	243	131	196	98.5	148	
	6	247	371	189	283	159	239	128	193	96.8	145	
	7	241	362	184	277	155	233	125	189	94.7	142	
	8	234	352	179	270	151	227	122	184	92.3	139	
	9	227	342	174	262	147	221	119	179	89.8	135	
	10	220	330	168	253	142	214	115	173	87.0	131	
	11	212	318	162	244	137	206	111	167	84.0	126	
	12	203	305	156	234	132	198	107	161	80.8	121	
	13	194	292	149	224	126	190	102	154	77.5	116	
	14	185	278	142	214	120	181	97.8	147	74.1	111	
	15	175	264	135	203	115	172	93.1	140	70.6	106	
	16	166	249	128	193	109	163	88.3	133	67.0	101	
	17	156	235	121	182	103	154	83.5	126	63.4	95.4	
	18	147	221	114	171	96.6	145	78.7	118	59.9	90.0	
	19	137	206	107	160	90.6	136	73.9	111	56.3	84.6	
	20	128	192	99.6	150	84.7	127	69.2	104	52.7	79.2	
	22	110	165	85.9	129	73.3	110	60.0	90.2	45.8	68.9	
	24	93.1	140	73.0	110	62.4	93.8	51.2	77.0	39.3	59.0	
	26	79.4	119	62.2	93.4	53.2	79.9	43.7	65.6	33.5	50.3	
	28	68.4	103	53.6	80.6	45.8	68.9	37.6	56.6	28.8	43.4	
	30	59.6	89.6	46.7	70.2	39.9	60.0	32.8	49.3	25.1	37.8	
	32	52.4	78.8	41.0	61.7	35.1	52.8	28.8	43.3	22.1	33.2	
	34	46.4	69.8	36.4	54.6	31.1	46.7	25.5	38.4	19.6	29.4	
	36	41.4	62.2	32.4	48.7	27.7	41.7	22.8	34.2	17.4	26.2	
	38	37.2	55.8	29.1	43.7	24.9	37.4	20.4	30.7	15.7	23.5	
	40									14.1	21.2	
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
	Properties											
	Area, in. ²		9.55		7.29		6.13		4.95		3.73	
	I , in. ⁴		51.2		40.4		34.6		28.4		21.7	
	r , in.		2.32		2.35		2.37		2.39		2.41	

Note: Heavy line indicates L_c/r equal to or greater than 200.

 HSS7.000- HSS6.875		Table 6-H (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Round HSS										A500 Gr. C $F_y = 46$ ksi $F_u = 62$ ksi	
		HSS7.000x		HSS6.875x									
Shape		0.125 [†]		0.500		0.375		0.312		0.250			
t_{des} , in.		0.116		0.465		0.349		0.291		0.233			
lb/ft		9.19		34.1		26.1		21.9		17.7			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the radius of gyration, r	0	69.1	104	258	388	197	296	166	249	134	201		
	1	69.0	104	257	387	197	296	166	249	134	201		
	2	68.7	103	256	385	196	294	165	247	133	200		
	3	68.1	102	253	381	194	292	163	245	132	198		
	4	67.3	101	250	376	192	288	161	242	130	196		
	5	66.4	99.7	246	370	188	283	159	238	128	193		
	6	65.2	98.0	241	362	185	278	156	234	126	189		
	7	63.8	95.9	235	353	180	271	152	228	123	185		
	8	62.2	93.6	229	344	176	264	148	222	120	180		
	9	60.5	91.0	221	333	170	256	144	216	116	175		
	10	58.7	88.2	214	321	164	247	139	209	112	169		
	11	56.7	85.2	205	309	158	238	134	201	108	163		
	12	54.6	82.1	197	296	152	228	128	193	104	156		
	13	52.4	78.8	188	282	145	218	123	184	99.5	150		
	14	50.1	75.3	178	268	138	208	117	176	94.9	143		
	15	47.8	71.8	169	254	131	197	111	167	90.2	136		
	16	45.4	68.3	159	239	124	186	105	158	85.4	128		
	17	43.0	64.7	150	225	117	175	99.0	149	80.6	121		
	18	40.6	61.1	140	211	110	165	93.0	140	75.8	114		
	19	38.2	57.5	131	197	102	154	87.1	131	71.1	107		
	20	35.9	53.9	122	183	95.4	143	81.2	122	66.4	99.8		
	22	31.3	47.0	104	156	81.9	123	69.9	105	57.3	86.1		
	24	26.9	40.4	87.4	131	69.2	104	59.2	89.0	48.6	73.1		
	26	22.9	34.4	74.5	112	59.0	88.7	50.5	75.8	41.4	62.3		
	28	19.7	29.7	64.2	96.5	50.9	76.5	43.5	65.4	35.7	53.7		
	30	17.2	25.8	55.9	84.1	44.3	66.6	37.9	57.0	31.1	46.8		
	32	15.1	22.7	49.2	73.9	38.9	58.5	33.3	50.1	27.4	41.1		
	34	13.4	20.1	43.5	65.5	34.5	51.9	29.5	44.4	24.2	36.4		
	36	11.9	17.9	38.8	58.4	30.8	46.2	26.3	39.6	21.6	32.5		
	38	10.7	16.1			27.6	41.5	23.6	35.5	19.4	29.2		
	40	9.67	14.5										
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	
	Properties												
	Area, in. ²		2.51		9.36		7.16		6.02		4.86		
	I , in. ⁴		14.9		48.3		38.2		32.7		26.8		
	r , in.		2.43		2.27		2.31		2.33		2.35		

[†] Shape exceeds the compact limit for flexure for $F_y = 46$ ksi.
 Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS6.875x
HSS6.625

Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS

A500 Gr. C

$F_y = 46$ ksi
 $F_u = 62$ ksi

Shape	HSS6.875x		HSS6.625x								
	0.188		0.500		0.432		0.375		0.312		
t_{des} , in.	0.174		0.465		0.402		0.349		0.291		
lb/ft	13.4		32.7		28.6		25.1		21.1		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
	Effective length, L_c (ft), with respect to the radius of gyration, r	0	101	152	248	373	217	325	190	285	159
1		101	151	247	372	216	325	189	284	159	239
2		100	150	246	370	215	323	188	283	158	238
3		99.3	149	243	366	213	320	186	280	157	236
4		98.1	147	240	361	210	315	184	276	155	232
5		96.6	145	236	354	206	310	180	271	152	228
6		94.7	142	230	346	201	303	177	265	149	224
7		92.6	139	224	337	196	295	172	259	145	218
8		90.3	136	218	327	190	286	167	251	141	212
9		87.7	132	210	316	184	277	162	243	136	205
10		84.8	128	202	304	177	266	156	234	131	198
11		81.8	123	194	291	170	255	149	225	126	190
12		78.6	118	185	278	162	244	143	215	121	182
13		75.3	113	176	264	154	232	136	204	115	173
14		71.9	108	166	250	146	220	129	194	109	164
15		68.4	103	157	236	138	207	122	183	103	155
16		64.8	97.4	147	221	130	195	115	172	97.3	146
17		61.2	92.1	138	207	121	182	107	161	91.3	137
18		57.7	86.7	128	193	113	170	100	151	85.3	128
19		54.1	81.3	119	179	105	158	93.2	140	79.4	119
20		50.6	76.0	110	165	97.2	146	86.3	130	73.7	111
22		43.8	65.8	92.2	139	82.0	123	73.1	110	62.7	94.2
24		37.3	56.0	77.5	116	68.9	104	61.4	92.4	52.6	79.1
26		31.7	47.7	66.0	99.3	58.7	88.3	52.4	78.7	44.9	67.4
28		27.4	41.1	56.9	85.6	50.6	76.1	45.1	67.9	38.7	58.1
30		23.8	35.8	49.6	74.6	44.1	66.3	39.3	59.1	33.7	50.6
32		21.0	31.5	43.6	65.5	38.8	58.3	34.6	51.9	29.6	44.5
34		18.6	27.9	38.6	58.0	34.4	51.6	30.6	46.0	26.2	39.4
36		16.6	24.9	34.4	51.8	30.6	46.1	27.3	41.0	23.4	35.2
38		14.9	22.3								
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		101	152	248	373	217	325	190	285	159	240
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		85.1	128	209	314	183	274	160	240	135	202
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		30.2	45.5	74.4	112	65.0	97.6	56.9	85.4	47.8	71.9
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
		17.9	26.9	40.6	61.1	35.8	53.8	31.7	47.6	26.9	40.4
Properties											
Area, in. ²	3.66		9.00		7.86		6.88		5.79		
I , in. ⁴	20.6		42.9		38.2		34.0		29.1		
r , in.	2.37		2.18		2.20		2.22		2.24		

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS6.625-
HSS6.000

Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS

A500 Gr. C

$F_y = 46$ ksi

$F_u = 62$ ksi

Shape	HSS6.625x								HSS6.000x		
	0.280		0.250		0.188		0.125 [†]		0.500		
	0.260		0.233		0.174		0.116		0.465		
t_{des} , in.	19.0		17.0		12.9		8.69		29.4		
lb/ft	19.0		17.0		12.9		8.69		29.4		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	143	215	129	194	97.2	146	65.3	98.1	223	335
	1	143	215	129	193	97.1	146	65.2	97.9	222	334
	2	142	214	128	192	96.5	145	64.8	97.4	221	332
	3	141	212	127	190	95.6	144	64.2	96.5	218	327
	4	139	209	125	188	94.4	142	63.4	95.3	214	322
	5	137	205	123	185	92.8	139	62.4	93.7	209	314
	6	134	201	120	181	90.9	137	61.1	91.9	204	306
	7	130	196	117	177	88.7	133	59.7	89.7	197	296
	8	127	190	114	172	86.3	130	58.1	87.3	190	285
	9	123	184	111	166	83.6	126	56.3	84.6	182	273
	10	118	178	107	160	80.7	121	54.4	81.7	173	260
	11	114	171	102	154	77.6	117	52.3	78.6	164	247
	12	109	163	98.1	147	74.4	112	50.2	75.4	155	233
	13	104	156	93.6	141	71.0	107	47.9	72.0	146	219
	14	98.4	148	88.9	134	67.5	101	45.6	68.5	136	204
	15	93.1	140	84.1	126	63.9	96.1	43.2	65.0	126	190
	16	87.8	132	79.3	119	60.3	90.7	40.9	61.4	117	176
	17	82.4	124	74.5	112	56.7	85.3	38.5	57.8	108	162
	18	77.1	116	69.7	105	53.2	79.9	36.1	54.2	98.4	148
	19	71.8	108	65.0	97.7	49.6	74.6	33.7	50.7	89.7	135
	20	66.6	100	60.4	90.7	46.1	69.4	31.4	47.2	81.1	122
	22	56.7	85.3	51.5	77.4	39.5	59.3	26.9	40.4	67.0	101
	24	47.7	71.7	43.3	65.1	33.3	50.0	22.7	34.1	56.3	84.6
	26	40.6	61.1	36.9	55.5	28.3	42.6	19.4	29.1	48.0	72.1
	28	35.0	52.7	31.8	47.8	24.4	36.7	16.7	25.1	41.4	62.2
	30	30.5	45.9	27.7	41.7	21.3	32.0	14.5	21.9	36.0	54.2
	32	26.8	40.3	24.4	36.6	18.7	28.1	12.8	19.2	31.7	47.6
	34	23.8	35.7	21.6	32.4	16.6	24.9	11.3	17.0		
	36	21.2	31.9	19.3	28.9	14.8	22.2	10.1	15.2		
	38					13.3	19.9	9.06	13.6		
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		143	215	129	194	97.2	146	65.3	98.1	223	335
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		121	181	109	163	82.1	123	55.1	82.7	188	282
	Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		43.0	64.6	38.7	58.1	29.2	43.8	19.6	29.4	66.9	100
	Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
		24.1	36.2	21.9	32.8	16.6	25.0	10.7	16.1	32.8	49.3
Properties											
Area, in. ²	5.20		4.68		3.53		2.37		8.09		
I , in. ⁴	26.4		23.9		18.4		12.6		31.2		
r , in.	2.25		2.26		2.28		2.30		1.96		

[†] Shape exceeds the compact limit for flexure for $F_y = 46$ ksi.
Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS6.000

Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS

A500 Gr. C

$F_y = 46$ ksi

$F_u = 62$ ksi

Shape		HSS6.000x										
		0.375		0.312		0.280		0.250		0.188		
t_{des} , in.		0.349		0.291		0.260		0.233		0.174		
lb/ft		22.6		19.0		17.1		15.4		11.7		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	171	257	144	216	129	194	116	175	87.6	132	
	1	170	256	143	216	129	194	116	174	87.4	131	
	2	169	254	142	214	128	192	115	173	86.8	130	
	3	167	251	141	212	126	190	114	171	85.8	129	
	4	164	247	138	208	124	187	112	168	84.5	127	
	5	161	242	135	204	122	183	110	165	82.7	124	
	6	157	235	132	198	119	178	107	161	80.7	121	
	7	152	228	128	192	115	173	104	156	78.3	118	
	8	146	220	124	186	111	167	100	151	75.7	114	
	9	140	211	119	178	107	161	96.3	145	72.8	109	
	10	134	201	113	170	102	153	92.1	138	69.7	105	
	11	127	191	108	162	97.2	146	87.7	132	66.5	99.9	
	12	121	181	102	154	92.1	138	83.1	125	63.1	94.8	
	13	113	170	96.3	145	86.8	131	78.4	118	59.6	89.5	
	14	106	160	90.3	136	81.5	122	73.7	111	56.0	84.2	
	15	99.0	149	84.3	127	76.1	114	68.9	103	52.4	78.8	
	16	91.9	138	78.3	118	70.8	106	64.1	96.3	48.8	73.4	
	17	84.8	127	72.4	109	65.5	98.4	59.3	89.2	45.3	68.1	
	18	77.9	117	66.6	100	60.3	90.7	54.7	82.2	41.8	62.8	
	19	71.2	107	61.0	91.7	55.3	83.1	50.2	75.4	38.4	57.8	
	20	64.7	97.3	55.6	83.5	50.5	75.8	45.8	68.9	35.2	52.8	
	22	53.5	80.4	45.9	69.0	41.7	62.6	37.9	56.9	29.1	43.7	
	24	44.9	67.5	38.6	58.0	35.0	52.6	31.8	47.8	24.5	36.8	
	26	38.3	57.6	32.9	49.4	29.8	44.9	27.1	40.8	20.8	31.3	
	28	33.0	49.6	28.4	42.6	25.7	38.7	23.4	35.1	18.0	27.0	
	30	28.8	43.2	24.7	37.1	22.4	33.7	20.4	30.6	15.7	23.5	
	32	25.3	38.0	21.7	32.6	19.7	29.6	17.9	26.9	13.8	20.7	
	34							15.9	23.8	12.2	18.3	
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
	Properties											
	Area, in. ²		6.20		5.22		4.69		4.22		3.18	
I , in. ⁴		24.8		21.3		19.3		17.6		13.5		
r , in.		2.00		2.02		2.03		2.04		2.06		

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS6.000–
HSS5.563

Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS

A500 Gr. C

$F_y = 46$ ksi
 $F_u = 62$ ksi

Shape	HSS6.000x		HSS5.563x								
	0.125 [†]		0.500		0.375		0.258		0.188		
t_{des} , in.	0.116		0.465		0.349		0.240		0.174		
lb/ft	7.85		27.1		20.8		14.6		10.8		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	58.9	88.6	205	308	158	237	110	166	81.3	122
	1	58.8	88.4	205	308	157	236	110	166	81.0	122
	2	58.4	87.8	203	305	156	234	109	164	80.4	121
	3	57.8	86.8	200	300	154	231	108	162	79.3	119
	4	56.9	85.5	196	294	151	226	106	159	77.9	117
	5	55.7	83.8	191	286	147	221	103	155	76.0	114
	6	54.4	81.7	184	277	142	214	100	150	73.8	111
	7	52.8	79.4	178	267	137	206	96.6	145	71.3	107
	8	51.1	76.8	170	255	131	198	92.7	139	68.6	103
	9	49.2	73.9	162	243	125	188	88.5	133	65.5	98.5
	10	47.1	70.8	153	229	119	178	84.0	126	62.3	93.6
	11	45.0	67.6	143	216	112	168	79.3	119	58.9	88.6
	12	42.7	64.2	134	201	105	158	74.4	112	55.4	83.3
	13	40.4	60.7	125	187	97.7	147	69.5	104	51.9	78.0
	14	38.0	57.1	115	173	90.5	136	64.6	97.0	48.3	72.6
	15	35.6	53.5	106	159	83.3	125	59.6	89.6	44.7	67.2
	16	33.2	49.9	96.3	145	76.3	115	54.8	82.3	41.2	61.9
	17	30.9	46.4	87.3	131	69.5	105	50.0	75.2	37.7	56.7
	18	28.5	42.9	78.6	118	63.0	94.7	45.5	68.3	34.4	51.7
	19	26.3	39.5	70.6	106	56.6	85.1	41.0	61.6	31.1	46.8
	20	24.1	36.2	63.7	95.7	51.1	76.8	37.0	55.6	28.1	42.2
	22	20.0	30.0	52.6	79.1	42.2	63.5	30.6	45.9	23.2	34.9
	24	16.8	25.2	44.2	66.5	35.5	53.3	25.7	38.6	19.5	29.3
	26	14.3	21.5	37.7	56.6	30.2	45.4	21.9	32.9	16.6	25.0
	28	12.3	18.5	32.5	48.8	26.1	39.2	18.9	28.4	14.3	21.5
	30	10.7	16.1	28.3	42.5	22.7	34.1	16.4	24.7	12.5	18.8
	32	9.44	14.2								
	34	8.36	12.6								
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
	Properties										
	Area, in. ²	2.14	7.45	5.72	4.01	2.95					
I , in. ⁴	9.28	24.4	19.5	14.2	10.7						
r , in.	2.08	1.81	1.85	1.88	1.91						

[†] Shape exceeds the compact limit for flexure for $F_y = 46$ ksi.
Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS5.563x-
HSS5.000

Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS

A500 Gr. C

$F_y = 46$ ksi
 $F_u = 62$ ksi

Shape	HSS5.563x		HSS5.500x				HSS5.000x				
	0.134 [†]		0.500		0.375		0.258		0.500		
t_{des} , in.	0.124		0.465		0.349		0.240		0.465		
lb/ft	7.78		26.7		20.6		14.5		24.1		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	58.4	87.8	203	305	156	234	109	164	182	274
	1	58.2	87.5	202	304	155	233	109	164	182	273
	2	57.8	86.9	200	301	154	231	108	163	180	270
	3	57.0	85.7	197	297	152	228	107	160	176	265
	4	56.0	84.2	193	290	149	223	105	157	172	258
	5	54.7	82.2	188	283	145	218	102	153	166	250
	6	53.1	79.8	182	273	140	211	98.9	149	159	240
	7	51.3	77.2	175	263	135	203	95.3	143	152	228
	8	49.4	74.2	167	251	129	194	91.4	137	144	216
	9	47.2	70.9	159	239	123	185	87.2	131	135	202
	10	44.9	67.5	150	225	117	175	82.6	124	125	189
	11	42.5	63.9	141	211	110	165	77.9	117	116	174
	12	40.0	60.1	131	197	103	154	73.1	110	106	160
	13	37.5	56.3	122	183	95.5	143	68.1	102	97.0	146
	14	34.9	52.4	112	168	88.3	133	63.2	94.9	87.7	132
	15	32.3	48.6	103	154	81.2	122	58.2	87.5	78.7	118
	16	29.8	44.8	93.5	141	74.2	112	53.4	80.3	70.0	105
	17	27.3	41.1	84.6	127	67.5	101	48.7	73.2	62.0	93.2
	18	24.9	37.5	76.0	114	61.0	91.6	44.1	66.3	55.3	83.1
	19	22.6	34.0	68.2	102	54.7	82.2	39.7	59.7	49.6	74.6
	20	20.4	30.7	61.5	92.5	49.4	74.2	35.8	53.9	44.8	67.3
	22	16.9	25.3	50.9	76.4	40.8	61.3	29.6	44.5	37.0	55.6
	24	14.2	21.3	42.7	64.2	34.3	51.5	24.9	37.4	31.1	46.7
	26	12.1	18.1	36.4	54.7	29.2	43.9	21.2	31.9	26.5	39.8
	28	10.4	15.6	31.4	47.2	25.2	37.9	18.3	27.5		
	30	9.06	13.6			21.9	33.0	15.9	23.9		
	32	7.97	12.0								
	Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		58.4	87.8	203	305	156	234	109	164	182	274
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		49.3	73.9	171	257	131	197	92.3	138	154	231
	Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
	17.5	26.3	60.8	91.4	46.7	70.2	32.8	49.3	54.7	82.2	
Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	
	8.38	12.6	27.1	40.7	21.3	32.0	15.2	22.9	22.0	33.1	
Properties											
Area, in. ²	2.12		7.36		5.65		3.97		6.62		
I , in. ⁴	7.84		23.5		18.8		13.7		17.2		
r , in.	1.92		1.79		1.83		1.86		1.61		

[†] Shape exceeds the compact limit for flexure for $F_y = 46$ ksi.
Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS5.000

Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS

A500 Gr. C

$F_y = 46$ ksi

$F_u = 62$ ksi

Shape		HSS5.000x										
		0.375		0.312		0.258		0.250		0.188		
t_{des} , in.		0.349		0.291		0.240		0.233		0.174		
lb/ft		18.5		15.6		13.1		12.7		9.67		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	140	211	118	178	98.9	149	96.1	144	72.7	109	
	1	140	210	118	177	98.6	148	95.8	144	72.5	109	
	2	138	208	117	176	97.6	147	94.8	143	71.8	108	
	3	136	204	115	173	95.9	144	93.2	140	70.6	106	
	4	133	199	112	168	93.7	141	91.1	137	69.0	104	
	5	129	193	109	163	90.8	137	88.3	133	66.9	101	
	6	124	186	105	157	87.5	132	85.1	128	64.5	97.0	
	7	118	177	99.9	150	83.7	126	81.4	122	61.8	92.9	
	8	112	168	94.8	143	79.6	120	77.4	116	58.8	88.4	
	9	105	158	89.4	134	75.1	113	73.0	110	55.6	83.6	
	10	98.4	148	83.7	126	70.4	106	68.5	103	52.2	78.5	
	11	91.3	137	77.8	117	65.6	98.6	63.8	95.9	48.7	73.2	
	12	84.2	126	71.8	108	60.7	91.2	59.0	88.7	45.1	67.8	
	13	77.0	116	65.9	99.0	55.7	83.8	54.2	81.5	41.5	62.4	
	14	69.9	105	60.0	90.1	50.9	76.5	49.5	74.3	38.0	57.1	
	15	63.1	94.8	54.2	81.5	46.1	69.3	44.8	67.4	34.5	51.9	
	16	56.5	84.9	48.7	73.2	41.5	62.4	40.3	60.6	31.1	46.8	
	17	50.1	75.4	43.3	65.1	37.0	55.7	36.0	54.1	27.9	41.9	
	18	44.7	67.2	38.6	58.1	33.0	49.6	32.1	48.3	24.9	37.4	
	19	40.1	60.3	34.7	52.1	29.6	44.6	28.8	43.3	22.3	33.5	
	20	36.2	54.5	31.3	47.0	26.8	40.2	26.0	39.1	20.1	30.3	
	22	29.9	45.0	25.9	38.9	22.1	33.2	21.5	32.3	16.6	25.0	
	24	25.2	37.8	21.7	32.7	18.6	27.9	18.1	27.1	14.0	21.0	
	26	21.4	32.2	18.5	27.8	15.8	23.8	15.4	23.1	11.9	17.9	
	28					13.7	20.5	13.3	19.9	10.3	15.4	
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	
Properties												
Area, in. ²		5.10		4.30		3.59		3.49		2.64		
I , in. ⁴		13.9		12.0		10.2		9.94		7.69		
r , in.		1.65		1.67		1.69		1.69		1.71		

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS5.000–
HSS4.500


Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS

A500 Gr. C


$F_y = 46$ ksi
 $F_u = 62$ ksi

Shape	HSS5.000x		HSS4.500x								
	0.125		0.375		0.337		0.237		0.188		
t_{des} , in.	0.116		0.349		0.313		0.220		0.174		
lb/ft	6.51		16.5		15.0		10.8		8.67		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
	Effective length, L_c (ft), with respect to the radius of gyration, r	0	49.0	73.7	125	188	113	171	81.5	123	65.0
1		48.9	73.5	125	188	113	170	81.2	122	64.7	97.3
2		48.4	72.7	123	185	111	168	80.2	121	63.9	96.1
3		47.6	71.6	120	181	109	164	78.5	118	62.6	94.1
4		46.6	70.0	117	175	106	159	76.2	115	60.8	91.4
5		45.2	68.0	112	168	102	153	73.4	110	58.6	88.1
6		43.6	65.6	107	160	96.8	145	70.1	105	56.0	84.2
7		41.8	62.9	101	151	91.4	137	66.4	99.8	53.1	79.8
8		39.9	59.9	94.1	141	85.5	129	62.3	93.7	49.9	75.0
9		37.7	56.7	87.2	131	79.3	119	58.1	87.3	46.5	69.9
10		35.5	53.3	80.1	120	72.9	110	53.6	80.6	43.0	64.6
11		33.1	49.8	72.9	110	66.5	99.9	49.1	73.8	39.4	59.2
12		30.8	46.2	65.7	98.8	60.0	90.2	44.6	67.0	35.8	53.8
13		28.4	42.6	58.8	88.3	53.7	80.8	40.1	60.3	32.3	48.6
14		26.0	39.1	52.1	78.2	47.7	71.7	35.8	53.9	28.9	43.4
15		23.7	35.6	45.6	68.6	41.9	62.9	31.7	47.7	25.6	38.5
16		21.4	32.2	40.1	60.3	36.8	55.3	27.9	41.9	22.5	33.9
17		19.2	28.9	35.5	53.4	32.6	49.0	24.7	37.1	20.0	30.0
18		17.2	25.8	31.7	47.6	29.1	43.7	22.0	33.1	17.8	26.8
19		15.4	23.2	28.4	42.7	26.1	39.2	19.8	29.7	16.0	24.0
20		13.9	20.9	25.7	38.6	23.5	35.4	17.8	26.8	14.4	21.7
22		11.5	17.3	21.2	31.9	19.5	29.3	14.7	22.2	11.9	17.9
24		9.65	14.5	17.8	26.8	16.4	24.6	12.4	18.6	10.0	15.0
26		8.23	12.4								
28		7.09	10.7								
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		49.0	73.7	125	188	113	171	81.5	123	65.0	97.7
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
	41.4	62.1	106	159	95.8	144	68.8	103	54.9	82.3	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	14.7	22.1	37.6	56.5	34.0	51.2	24.5	36.8	19.5	29.3	
Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	
	6.36	9.56	13.8	20.8	12.6	19.0	9.25	13.9	7.48	11.2	
Properties											
Area, in. ²	1.78	4.55	4.12	2.96	2.36						
I , in. ⁴	5.31	9.87	9.07	6.79	5.54						
r , in.	1.73	1.47	1.48	1.52	1.53						

Note: Heavy line indicates L_c/r equal to or greater than 200.

 HSS4.500- HSS4.000		Table 6-H (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Round HSS										A500 Gr. C $F_y = 46$ ksi $F_u = 62$ ksi	
		HSS4.500x		HSS4.000x									
Shape	0.125		0.313		0.250		0.237		0.226				
t_{des} , in.	0.116		0.291		0.233		0.220		0.210				
lb/ft	5.85		12.3		10.0		9.53		9.12				
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD			
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$			
	Effective length, L_c (ft), with respect to the radius of gyration, r	0	44.1	66.2	93.4	140	76.0	114	71.9	108	68.9	103	
1		43.9	66.0	92.9	140	75.6	114	71.5	107	68.5	103		
2		43.4	65.2	91.3	137	74.4	112	70.4	106	67.4	101		
3		42.5	63.9	88.8	133	72.4	109	68.5	103	65.6	98.6		
4		41.3	62.1	85.4	128	69.6	105	65.9	99.1	63.2	94.9		
5		39.8	59.9	81.3	122	66.3	99.6	62.8	94.4	60.2	90.4		
6		38.1	57.3	76.4	115	62.4	93.8	59.2	89.0	56.7	85.2		
7		36.2	54.4	71.1	107	58.1	87.4	55.2	83.0	52.9	79.5		
8		34.0	51.2	65.4	98.3	53.5	80.5	50.9	76.5	48.8	73.3		
9		31.8	47.8	59.5	89.5	48.8	73.3	46.4	69.8	44.5	66.9		
10		29.4	44.3	53.6	80.5	44.0	66.1	41.9	63.0	40.2	60.3		
11		27.1	40.7	47.7	71.6	39.2	58.9	37.4	56.3	35.9	53.9		
12		24.7	37.1	41.9	63.0	34.6	51.9	33.1	49.7	31.7	47.6		
13		22.3	33.5	36.5	54.8	30.1	45.3	28.9	43.4	27.7	41.6		
14		20.0	30.1	31.5	47.3	26.0	39.1	25.0	37.5	23.9	35.9		
15		17.8	26.7	27.4	41.2	22.6	34.0	21.7	32.7	20.8	31.3		
16		15.7	23.6	24.1	36.2	19.9	29.9	19.1	28.7	18.3	27.5		
17		13.9	20.9	21.3	32.1	17.6	26.5	16.9	25.4	16.2	24.4		
18		12.4	18.6	19.0	28.6	15.7	23.6	15.1	22.7	14.5	21.7		
19		11.1	16.7	17.1	25.7	14.1	21.2	13.6	20.4	13.0	19.5		
20		10.0	15.1	15.4	23.2	12.7	19.1	12.2	18.4	11.7	17.6		
22		8.29	12.5	12.7	19.1	10.5	15.8	10.1	15.2	9.68	14.6		
24		6.97	10.5										
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$			
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$			
Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$			
Properties													
Area, in. ²	1.60	3.39	2.76	2.61	2.50								
I , in. ⁴	3.84	5.87	4.91	4.68	4.50								
r , in.	1.55	1.32	1.33	1.34	1.34								

Note: Heavy line indicates L_c/r equal to or greater than 200.

 HSS4.000– HSS3.500		Table 6-H (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Round HSS						A500 Gr. C $F_y = 46$ ksi $F_u = 62$ ksi			
		HSS4.000x						HSS3.500x			
Shape		0.220		0.188		0.125		0.313		0.300	
t_{des} , in.		0.205		0.174		0.116		0.291		0.279	
lb/ft		8.89		7.66		5.18		10.7		10.3	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	67.2	101	57.6	86.5	39.1	58.8	80.7	121	77.7	117
	1	66.8	100	57.3	86.1	38.9	58.5	80.1	120	77.1	116
	2	65.8	98.9	56.4	84.7	38.3	57.6	78.3	118	75.4	113
	3	64.0	96.2	54.9	82.5	37.3	56.1	75.5	113	72.6	109
	4	61.7	92.7	52.9	79.5	36.0	54.1	71.6	108	68.9	104
	5	58.7	88.3	50.4	75.8	34.4	51.7	67.0	101	64.5	96.9
	6	55.3	83.2	47.5	71.5	32.5	48.8	61.7	92.8	59.4	89.3
	7	51.6	77.6	44.4	66.7	30.4	45.7	56.0	84.2	53.9	81.0
	8	47.6	71.5	41.0	61.6	28.1	42.3	50.1	75.3	48.2	72.5
	9	43.4	65.3	37.4	56.3	25.8	38.7	44.1	66.3	42.5	63.8
	10	39.2	58.9	33.8	50.9	23.3	35.1	38.3	57.6	36.9	55.4
	11	35.0	52.6	30.3	45.5	20.9	31.5	32.8	49.2	31.5	47.4
	12	30.9	46.5	26.8	40.2	18.6	28.0	27.6	41.5	26.6	39.9
	13	27.0	40.6	23.4	35.2	16.4	24.6	23.5	35.3	22.6	34.0
	14	23.3	35.1	20.3	30.5	14.2	21.3	20.3	30.5	19.5	29.3
	15	20.3	30.5	17.7	26.6	12.4	18.6	17.7	26.6	17.0	25.6
	16	17.9	26.8	15.5	23.3	10.9	16.3	15.5	23.3	14.9	22.5
	17	15.8	23.8	13.8	20.7	9.63	14.5	13.8	20.7	13.2	19.9
	18	14.1	21.2	12.3	18.4	8.59	12.9	12.3	18.4	11.8	17.7
	19	12.7	19.0	11.0	16.6	7.71	11.6	11.0	16.5	10.6	15.9
	20	11.4	17.2	9.94	14.9	6.95	10.5				
	22	9.45	14.2	8.21	12.3	5.75	8.64				
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t
		67.2	101	57.6	86.5	39.1	58.8	80.7	121	77.7	117
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		56.7	85.1	48.6	72.9	33.0	49.5	68.1	102	65.6	98.3
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		20.2	30.3	17.3	26.0	11.7	17.6	24.2	36.4	23.3	35.0
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
		6.79	10.2	5.85	8.80	4.02	6.04	6.89	10.4	6.66	10.0
Properties											
Area, in. ²		2.44		2.09		1.42		2.93		2.82	
I , in. ⁴		4.41		3.83		2.67		3.81		3.69	
r , in.		1.34		1.35		1.37		1.14		1.14	

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS3.500

Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS

A500 Gr. C

$F_y = 46$ ksi

$F_u = 62$ ksi

Shape		HSS3.500x									
		0.250		0.216		0.203		0.188		0.125	
t_{des} , in.		0.233		0.201		0.189		0.174		0.116	
lb/ft		8.69		7.58		7.15		6.66		4.51	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	65.8	98.9	57.3	86.1	54.3	81.6	50.1	75.3	33.9	50.9
	1	65.4	98.2	56.9	85.5	53.9	81.0	49.8	74.8	33.7	50.6
	2	64.0	96.1	55.7	83.7	52.7	79.3	48.8	73.3	33.0	49.6
	3	61.7	92.7	53.8	80.8	50.9	76.5	47.1	70.8	31.9	47.9
	4	58.7	88.2	51.2	76.9	48.5	72.8	44.9	67.4	30.4	45.7
	5	55.0	82.6	48.0	72.1	45.5	68.3	42.1	63.3	28.6	43.0
	6	50.8	76.4	44.4	66.7	42.1	63.2	39.0	58.7	26.6	40.0
	7	46.3	69.5	40.5	60.9	38.4	57.7	35.7	53.6	24.4	36.6
	8	41.5	62.4	36.4	54.7	34.5	51.9	32.1	48.3	22.0	33.1
	9	36.7	55.2	32.3	48.5	30.6	46.0	28.5	42.9	19.6	29.5
	10	32.0	48.2	28.2	42.4	26.7	40.2	25.0	37.6	17.3	26.0
	11	27.6	41.4	24.3	36.6	23.0	34.6	21.6	32.5	15.0	22.6
	12	23.3	35.0	20.6	31.0	19.5	29.4	18.4	27.6	12.8	19.3
	13	19.9	29.9	17.6	26.4	16.7	25.0	15.7	23.5	10.9	16.4
	14	17.1	25.7	15.2	22.8	14.4	21.6	13.5	20.3	9.43	14.2
	15	14.9	22.4	13.2	19.9	12.5	18.8	11.8	17.7	8.22	12.3
	16	13.1	19.7	11.6	17.4	11.0	16.5	10.3	15.5	7.22	10.9
	17	11.6	17.5	10.3	15.5	9.74	14.6	9.15	13.8	6.40	9.61
	18	10.4	15.6	9.17	13.8	8.69	13.1	8.16	12.3	5.71	8.58
	19	9.30	14.0	8.23	12.4	7.80	11.7	7.33	11.0	5.12	7.70
	20									4.62	6.95
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		65.8	98.9	57.3	86.1	54.3	81.6	50.1	75.3	33.9	50.9
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		55.6	83.4	48.4	72.5	45.8	68.7	42.3	63.5	28.6	42.9
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		19.7	29.7	17.2	25.8	16.3	24.5	15.0	22.6	10.2	15.3
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
		5.72	8.59	5.03	7.56	4.75	7.14	4.43	6.66	3.05	4.59
Properties											
Area, in. ²		2.39		2.08		1.97		1.82		1.23	
I , in. ⁴		3.21		2.84		2.70		2.52		1.77	
r , in.		1.16		1.17		1.17		1.18		1.20	

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS3.000

Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS

A500 Gr. C

$F_y = 46$ ksi

$F_u = 62$ ksi

Shape		HSS3.000x									
		0.250		0.216		0.203		0.188		0.152	
t_{des} , in.		0.233		0.201		0.189		0.174		0.141	
lb/ft		7.35		6.43		6.07		5.65		4.63	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	55.9	84.0	48.8	73.3	46.0	69.1	42.4	63.8	35.0	52.6
	1	55.4	83.2	48.3	72.6	45.6	68.5	42.0	63.1	34.7	52.1
	2	53.7	80.7	46.9	70.4	44.2	66.5	40.8	61.3	33.7	50.6
	3	51.1	76.8	44.6	67.1	42.1	63.3	38.9	58.4	32.1	48.3
	4	47.6	71.6	41.7	62.6	39.3	59.1	36.3	54.6	30.1	45.2
	5	43.5	65.4	38.1	57.3	36.0	54.2	33.3	50.0	27.6	41.5
	6	38.9	58.5	34.2	51.4	32.4	48.6	29.9	45.0	24.9	37.4
	7	34.2	51.4	30.1	45.2	28.5	42.8	26.4	39.7	22.0	33.0
	8	29.4	44.2	26.0	39.0	24.6	37.0	22.8	34.3	19.1	28.6
	9	24.8	37.3	22.0	33.0	20.9	31.3	19.4	29.1	16.2	24.4
	10	20.4	30.7	18.2	27.3	17.3	26.0	16.1	24.2	13.5	20.3
	11	16.9	25.4	15.0	22.6	14.3	21.5	13.3	20.0	11.2	16.8
	12	14.2	21.3	12.6	19.0	12.0	18.0	11.2	16.8	9.39	14.1
	13	12.1	18.2	10.8	16.2	10.2	15.4	9.51	14.3	8.00	12.0
	14	10.4	15.7	9.28	13.9	8.82	13.3	8.20	12.3	6.90	10.4
	15	9.08	13.6	8.08	12.1	7.69	11.6	7.14	10.7	6.01	9.03
	16	7.98	12.0	7.10	10.7	6.75	10.2	6.28	9.44	5.28	7.94
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
Properties											
Area, in. ²		2.03		1.77		1.67		1.54		1.27	
I , in. ⁴		1.95		1.74		1.66		1.55		1.30	
r , in.		0.982		0.992		0.996		1.00		1.01	

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS3.000–
HSS2.875

Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS

A500 Gr. C

$F_y = 46$ ksi
 $F_u = 62$ ksi

Shape	HSS3.000x				HSS2.875x						
	0.134		0.125		0.250		0.203		0.188		
t_{des} , in.	0.124		0.116		0.233		0.189		0.174		
lb/ft	4.11		3.84		7.02		5.80		5.40		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	30.9	46.4	28.9	43.5	53.2	79.9	43.8	65.8	40.8	61.3
	1	30.6	45.9	28.7	43.1	52.6	79.0	43.3	65.1	40.3	60.6
	2	29.7	44.7	27.9	41.9	50.9	76.5	42.0	63.1	39.1	58.7
	3	28.4	42.6	26.6	40.0	48.1	72.4	39.8	59.8	37.1	55.7
	4	26.6	40.0	24.9	37.5	44.6	67.0	36.9	55.5	34.4	51.7
	5	24.4	36.7	22.9	34.4	40.4	60.7	33.5	50.4	31.3	47.0
	6	22.1	33.2	20.7	31.1	35.8	53.8	29.8	44.8	27.9	41.9
	7	19.5	29.4	18.3	27.5	31.0	46.6	25.9	39.0	24.3	36.5
	8	17.0	25.6	15.9	24.0	26.3	39.5	22.1	33.2	20.7	31.1
	9	14.5	21.8	13.6	20.4	21.8	32.8	18.4	27.7	17.3	26.0
	10	12.2	18.3	11.4	17.1	17.7	26.6	15.0	22.6	14.1	21.3
	11	10.1	15.1	9.42	14.2	14.6	22.0	12.4	18.7	11.7	17.6
	12	8.45	12.7	7.92	11.9	12.3	18.5	10.4	15.7	9.83	14.8
	13	7.20	10.8	6.75	10.1	10.5	15.8	8.90	13.4	8.37	12.6
	14	6.21	9.33	5.82	8.74	9.04	13.6	7.67	11.5	7.22	10.8
	15	5.41	8.12	5.07	7.62	7.88	11.8	6.69	10.0	6.29	9.45
	16	4.75	7.14	4.45	6.69						
17	4.21	6.33	3.95	5.93							
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	
Properties											
Area, in. ²	1.12		1.05		1.93		1.59		1.48		
I , in. ⁴	1.16		1.09		1.70		1.45		1.35		
r , in.	1.02		1.02		0.938		0.952		0.957		

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS2.875x
HSS2.375

Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS

A500 Gr. C

$F_y = 46$ ksi
 $F_u = 62$ ksi

Shape	HSS2.875x		HSS2.500x				HSS2.375x				
	0.125		0.250		0.188		0.125				
t_{des} , in.	0.116		0.233		0.174		0.116				
lb/ft	3.67		6.01		4.65		3.17				
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD			
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$			
Effective length, L_c (ft), with respect to the radius of gyration, r	0	27.8	41.8	45.7	68.7	35.0	52.6	23.9	36.0	43.2	65.0
	1	27.5	41.4	45.0	67.7	34.5	51.8	23.6	35.5	42.5	63.9
	2	26.7	40.1	43.1	64.7	33.0	49.7	22.7	34.1	40.5	60.8
	3	25.4	38.2	40.0	60.1	30.8	46.3	21.2	31.8	37.2	55.9
	4	23.6	35.5	36.0	54.1	27.9	41.9	19.3	28.9	33.1	49.8
	5	21.6	32.4	31.5	47.3	24.5	36.8	17.0	25.6	28.5	42.8
	6	19.3	29.0	26.7	40.2	21.0	31.5	14.7	22.1	23.7	35.7
	7	16.9	25.4	22.0	33.1	17.4	26.2	12.3	18.5	19.1	28.7
	8	14.5	21.8	17.6	26.4	14.1	21.1	10.0	15.1	14.9	22.3
	9	12.2	18.3	13.9	20.9	11.1	16.7	7.98	12.0	11.7	17.7
	10	10.0	15.1	11.3	16.9	9.02	13.6	6.46	9.71	9.52	14.3
	11	8.30	12.5	9.30	14.0	7.46	11.2	5.34	8.03	7.86	11.8
	12	6.97	10.5	7.82	11.7	6.27	9.42	4.49	6.74	6.61	9.93
	13	5.94	8.93	6.66	10.0	5.34	8.02	3.82	5.75		
	14	5.12	7.70					3.30	4.95		
	15	4.46	6.71								
	16	3.92	5.90								
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	27.8	41.8	45.7	68.7	35.0	52.6	23.9	36.0	43.2	65.0	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	23.5	35.2	38.6	57.9	29.5	44.3	20.2	30.3	36.5	54.8	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	8.35	12.5	13.7	20.6	10.5	15.8	7.18	10.8	13.0	19.5	
Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	
	2.03	3.05	2.75	4.14	2.16	3.25	1.51	2.28	2.46	3.69	
Properties											
Area, in. ²	1.01		1.66		1.27		0.869		1.57		
I , in. ⁴	0.958		1.08		0.865		0.619		0.910		
r , in.	0.976		0.806		0.825		0.844		0.762		
Note: Heavy line indicates L_c/r equal to or greater than 200.											



HSS2.375-
HSS1.900

Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS

A500 Gr. C

$F_y = 46$ ksi
 $F_u = 62$ ksi

Shape	HSS2.375x								HSS1.900x		
	0.218		0.188		0.154		0.125		0.188		
t_{des} , in.	0.203		0.174		0.143		0.116		0.174		
lb/ft	5.03		4.40		3.66		3.01		3.44		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	38.3	57.5	33.1	49.7	27.5	41.4	22.7	34.1	26.0	39.0
	1	37.7	56.6	32.5	48.9	27.1	40.8	22.3	33.6	25.3	38.0
	2	35.9	53.9	31.0	46.6	25.9	38.9	21.3	32.1	23.4	35.2
	3	33.1	49.7	28.7	43.1	24.0	36.0	19.8	29.7	20.6	31.0
	4	29.5	44.3	25.6	38.5	21.5	32.3	17.8	26.7	17.2	25.8
	5	25.5	38.3	22.2	33.4	18.7	28.1	15.5	23.3	13.6	20.5
	6	21.3	32.0	18.7	28.0	15.8	23.7	13.1	19.8	10.3	15.4
	7	17.2	25.9	15.2	22.8	12.9	19.4	10.8	16.2	7.55	11.3
	8	13.5	20.3	11.9	17.9	10.2	15.3	8.59	12.9	5.78	8.69
	9	10.6	16.0	9.43	14.2	8.06	12.1	6.79	10.2	4.57	6.86
	10	8.62	13.0	7.64	11.5	6.53	9.82	5.50	8.26	3.70	5.56
	11	7.13	10.7	6.31	9.49	5.40	8.11	4.54	6.83		
	12	5.99	9.00	5.31	7.97	4.54	6.82	3.82	5.74		
13			4.52	6.79	3.86	5.81	3.25	4.89			
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	38.3	57.5	33.1	49.7	27.5	41.4	22.7	34.1	26.0	39.0	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	32.3	48.5	27.9	41.9	23.3	34.9	19.1	28.7	21.9	32.9	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	11.5	17.3	9.92	14.9	8.26	12.4	6.80	10.2	7.79	11.7	
Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	
	2.20	3.31	1.94	2.92	1.64	2.46	1.36	2.04	1.19	1.79	
Properties											
Area, in. ²	1.39		1.20		1.00		0.823		0.943		
I , in. ⁴	0.824		0.733		0.627		0.527		0.355		
r , in.	0.771		0.781		0.791		0.800		0.613		

Note: Heavy line indicates L_c/r equal to or greater than 200.



HSS1.900–
HSS1.660

Table 6-H (continued)
Available Strength for Members
Subject to Axial, Shear,
Flexural and Combined Forces
Round HSS

A500 Gr. C

$F_y = 46$ ksi
 $F_u = 62$ ksi

Shape	HSS1.900x				HSS1.660x		
	0.145		0.120		0.140		
t_{des} , in.	0.135		0.111		0.130		
lb/ft	2.72		2.28		2.27		
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	20.6	31.0	17.2	25.8	17.2	25.9
	1	20.1	30.3	16.8	25.2	16.7	25.0
	2	18.7	28.1	15.6	23.5	15.1	22.7
	3	16.5	24.8	13.8	20.8	12.8	19.3
	4	13.9	20.9	11.7	17.6	10.2	15.3
	5	11.1	16.7	9.41	14.1	7.57	11.4
	6	8.47	12.7	7.22	10.8	5.34	8.03
	7	6.25	9.40	5.34	8.03	3.93	5.90
	8	4.79	7.19	4.09	6.15	3.01	4.52
	9	3.78	5.68	3.23	4.86	2.37	3.57
	10	3.06	4.60	2.62	3.93		
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	20.6	31.0	17.2	25.8	17.2	25.9	
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	
	17.4	26.1	14.5	21.8	14.5	21.8	
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	
	6.19	9.30	5.16	7.75	5.16	7.76	
Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	
	0.966	1.45	0.817	1.23	0.700	1.05	
Properties							
Area, in. ²	0.749		0.624		0.625		
I , in. ⁴	0.293		0.251		0.184		
r , in.	0.626		0.634		0.543		

Note: Heavy line indicates L_c/r equal to or greater than 200.

Shape		Pipe 26				Pipe 24				Pipe 20	
		x-Strong		Std ¹		x-Strong		Std ¹		x-Strong	
t_{des} , in.		0.465		0.349		0.465		0.349		0.465	
lb/ft		136		103		126		94.7		104	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	757	1140	591	888	698	1050	545	819	578	869
	1	757	1140	591	888	698	1050	545	819	578	869
	2	756	1140	591	888	698	1050	545	819	578	869
	3	756	1140	591	888	697	1050	544	818	578	868
	4	755	1140	590	887	697	1050	544	818	577	867
	5	755	1130	590	886	696	1050	543	817	576	866
	6	754	1130	589	885	695	1040	543	816	575	865
	7	753	1130	588	884	694	1040	542	815	574	863
	8	752	1130	588	883	693	1040	541	813	573	861
	9	751	1130	587	882	692	1040	540	812	571	859
	10	750	1130	586	880	691	1040	539	810	570	856
	11	748	1120	585	879	689	1040	538	809	568	853
	12	747	1120	583	877	687	1030	537	807	566	850
	13	745	1120	582	875	685	1030	535	805	564	847
	14	743	1120	581	873	684	1030	534	802	561	843
	15	741	1110	579	871	681	1020	532	800	559	840
	16	739	1110	578	868	679	1020	530	797	556	836
	17	737	1110	576	866	677	1020	529	794	553	831
	18	735	1100	574	863	674	1010	527	791	550	827
	19	732	1100	572	860	672	1010	525	788	547	822
	20	730	1100	570	857	669	1010	522	785	544	817
	22	724	1090	566	851	663	996	518	778	537	807
	24	718	1080	561	844	656	987	513	771	529	795
	26	712	1070	556	836	650	976	507	763	521	783
	28	705	1060	551	828	642	965	502	754	513	770
	30	697	1050	545	819	634	953	496	745	503	757
	32	690	1040	539	810	626	941	489	735	494	742
	34	682	1020	533	801	617	928	482	725	484	727
	36	673	1010	526	791	608	914	475	714	474	712
	38	664	998	519	781	599	900	468	703	463	696
40	655	984	512	770	589	885	460	692	452	679	
42	645	970	505	758	579	870	452	680	441	662	
44	635	955	497	747	568	854	444	668	429	645	
46	625	939	489	735	557	838	436	655	417	627	
48	614	923	481	723	546	821	427	642	405	609	
50	604	907	472	710	535	804	419	629	393	591	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		757	1140	591	888	698	1050	545	819	578	869
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		812	1220	635	952	749	1120	585	878	621	932
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		227	341	177	266	209	315	163	246	174	261
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
		513	772	383	576	437	656	333	500	300	452
Properties											
Area, in. ²		36.1		28.2		33.3		26.0		27.6	
I_x , in. ⁴		2950		2320		2310		1820		1320	
r_x , in.		9.03		9.07		8.33		8.36		6.91	

¹Shape exceeds the compact limit for flexure for $F_y = 35$ ksi.

Shape		Pipe 20		Pipe 18				Pipe 16			
		Std		x-Strong		Std		x-Strong		Std	
t_{des} , in.		0.349		0.465		0.349		0.465		0.349	
lb/ft		78.7		93.5		70.7		82.9		62.6	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	453	680	520	781	407	611	461	693	360	542
	1	453	680	520	781	407	611	461	693	360	542
	2	452	680	519	781	406	611	461	692	360	541
	3	452	679	519	780	406	610	460	691	360	541
	4	452	679	518	779	405	609	459	690	359	540
	5	451	678	517	777	405	608	458	689	358	539
	6	450	677	516	776	404	607	457	687	357	537
	7	449	675	515	774	403	605	456	685	356	535
	8	448	674	513	772	402	604	454	682	355	534
	9	447	672	512	769	400	602	452	679	354	531
	10	446	670	510	766	399	600	450	676	352	529
	11	444	668	508	763	397	597	448	673	350	526
	12	443	666	506	760	396	595	445	669	348	523
	13	441	663	503	756	394	592	442	665	346	520
	14	439	660	501	752	392	589	440	661	344	517
	15	437	657	498	748	390	586	436	656	341	513
	16	435	654	495	744	387	582	433	651	339	509
	17	433	651	492	739	385	579	430	646	336	505
	18	431	648	489	734	382	575	426	640	333	501
	19	428	644	485	729	380	571	422	635	330	497
	20	426	640	482	724	377	567	418	629	327	492
	22	420	632	474	712	371	558	410	616	321	482
	24	415	623	466	700	365	548	401	602	314	472
	26	408	614	457	687	358	538	391	588	306	460
	28	402	604	447	672	351	527	381	573	298	449
	30	395	593	438	658	343	515	370	557	290	436
	32	387	582	427	642	335	503	359	540	282	423
	34	379	570	417	626	327	491	348	523	273	410
	36	371	558	406	610	318	478	336	505	264	396
	38	363	546	394	593	309	465	324	487	255	383
40	355	533	383	575	300	451	312	469	245	368	
42	346	520	371	558	291	438	300	451	236	354	
44	337	506	359	540	282	424	288	432	226	340	
46	328	493	347	521	272	409	275	414	216	325	
48	319	479	335	503	263	395	263	395	207	311	
50	309	465	322	484	253	381	251	377	197	297	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		453	680	520	781	407	611	461	693	360	542
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		486	729	558	837	437	655	495	743	387	581
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		136	204	156	234	122	183	138	208	108	163
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
		236	354	243	365	190	286	190	286	150	225
Properties											
Area, in. ²		21.6		24.8		19.4		22.0		17.2	
I , in. ⁴		1040		956		756		665		527	
r , in.		6.95		6.21		6.24		5.50		5.53	

Shape		Pipe 14				Pipe 12					
		x-Strong		Std		xx-Strong		x-Strong		Std	
t_{des} , in.		0.465		0.349		0.930		0.465		0.349	
lb/ft		72.2		54.6		126		65.5		49.6	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	402	605	314	472	742	1120	367	551	287	432
	1	402	605	314	472	742	1110	367	551	287	431
	2	402	604	314	472	741	1110	366	550	287	431
	3	401	603	313	471	739	1110	365	549	286	430
	4	400	602	313	470	737	1110	364	548	285	429
	5	399	600	312	469	734	1100	363	546	284	427
	6	398	598	311	467	731	1100	362	544	283	426
	7	396	595	310	465	727	1090	360	541	282	424
	8	394	592	308	463	722	1090	358	538	280	421
	9	392	589	306	461	717	1080	355	534	278	418
	10	390	586	305	458	712	1070	353	530	276	415
	11	387	582	303	455	705	1060	350	526	274	412
	12	384	577	300	451	699	1050	347	521	272	408
	13	381	573	298	448	691	1040	343	516	269	405
	14	378	568	295	444	684	1030	340	511	266	400
	15	374	563	293	440	675	1020	336	505	263	396
	16	371	557	290	436	667	1000	332	499	260	391
	17	367	551	287	431	658	988	328	493	257	386
	18	363	545	284	427	648	974	323	486	254	381
	19	358	539	280	422	638	959	319	479	250	376
	20	354	532	277	416	628	943	314	472	246	370
	22	344	518	270	406	606	911	304	457	239	359
	24	334	503	262	394	583	877	293	440	230	346
	26	324	487	254	382	559	841	282	424	222	333
	28	313	470	245	369	535	804	270	406	213	320
	30	301	453	237	356	509	766	258	388	204	306
	32	290	435	227	342	484	727	246	370	194	292
	34	278	417	218	328	458	688	234	351	185	277
	36	265	399	209	314	432	649	221	333	175	263
	38	253	380	199	299	406	610	209	314	165	248
40	241	362	190	285	380	571	197	296	156	234	
42	228	343	180	271	355	534	185	277	146	220	
44	216	325	171	256	330	497	173	259	137	206	
46	204	306	161	242	306	461	161	242	128	192	
48	192	289	152	228	283	425	150	225	119	179	
50	180	271	143	214	261	392	138	208	110	166	
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		402	605	314	473	742	1120	367	551	287	432
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		432	648	338	506	797	1190	394	591	308	462
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		121	181	94.3	142	223	335	110	165	86.1	129
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
		144	217	114	171	234	352	123	184	93.8	141
Properties											
Area, in. ²		19.2		15.0		35.4		17.5		13.7	
I , in. ⁴		440		350		625		339		262	
r , in.		4.79		4.83		4.20		4.35		4.39	

Shape		Pipe 10						Pipe 8			
		xx-Strong		x-Strong		Std		xx-Strong		x-Strong	
t_{des} , in.		0.930		0.465		0.340		0.816		0.465	
lb/ft		104		54.8		40.5		72.5		43.4	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	604	907	316	476	241	362	419	630	249	375
	1	603	907	316	475	241	362	419	629	249	375
	2	602	905	316	475	240	361	418	628	249	374
	3	600	902	315	473	240	360	416	625	247	372
	4	598	899	314	471	239	359	413	620	246	370
	5	595	894	312	469	238	357	409	615	244	367
	6	591	888	310	466	236	355	405	609	242	363
	7	586	881	308	463	235	353	400	601	239	359
	8	581	873	305	459	233	350	394	593	236	354
	9	575	864	303	455	231	347	388	583	232	349
	10	569	855	299	450	228	343	381	573	228	343
	11	561	844	296	445	226	339	373	561	224	337
	12	554	832	292	439	223	335	365	549	220	330
	13	546	820	288	433	220	330	357	536	215	323
	14	537	807	284	427	217	326	348	523	210	315
	15	528	793	279	420	213	320	338	508	204	307
	16	518	778	274	413	210	315	328	494	199	299
	17	508	763	269	405	206	310	318	478	193	290
	18	497	747	264	397	202	304	308	463	187	282
	19	486	731	259	389	198	298	297	447	181	273
	20	475	714	253	381	194	291	286	430	175	263
	22	452	679	242	363	185	278	264	397	163	245
	24	428	643	230	345	176	265	242	364	150	225
	26	403	605	217	327	167	251	220	331	137	206
	28	378	568	205	308	157	236	198	298	125	188
	30	352	530	192	288	148	222	178	267	113	169
	32	327	492	179	269	138	207	158	237	101	152
	34	302	454	166	250	128	193	140	210	89.7	135
	36	278	418	154	231	119	179	124	187	80.0	120
	38	254	382	142	213	110	165	112	168	71.8	108
40	231	348	130	195	101	152	101	152	64.8	97.5	
42	210	316	118	178	92.2	139	91.5	137	58.8	88.4	
44	191	288	108	162	84.0	126	83.3	125	53.6	80.5	
46	175	263	98.7	148	76.8	115	76.2	115	49.0	73.7	
48	161	242	90.6	136	70.6	106			45.0	67.7	
50	148	223	83.5	126	65.0	97.7					
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		604	907	316	476	241	362	419	630	249	375
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		648	972	340	510	259	388	450	675	268	402
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		181	272	94.9	143	72.3	109	126	189	74.8	112
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
		159	239	85.9	129	64.4	96.9	87.2	131	54.1	81.4
Properties											
Area, in. ²		28.8		15.1		11.5		20.0		11.9	
I_x , in. ⁴		354		199		151		154		100	
r_x , in.		3.51		3.64		3.68		2.78		2.89	


Note: Heavy line indicates L_c/r equal to or greater than 200.

Shape		Pipe 8		Pipe 6				Pipe 5			
		Std		xx-Strong		x-Strong		Std			
t_{des} , in.		0.300		0.805		0.403		0.261			
lb/ft		28.6		53.2		28.6		19.0			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the radius of gyration, r	0	165	247	308	463	164	247	109	164	224	337
	1	164	247	308	462	164	246	109	164	224	336
	2	164	246	306	460	163	245	108	163	222	334
	3	163	245	303	456	162	243	108	162	219	330
	4	162	244	300	451	160	241	106	160	216	324
	5	161	242	295	444	158	237	105	158	211	317
	6	160	240	290	436	155	233	103	155	205	309
	7	158	237	283	426	152	229	101	153	199	299
	8	156	234	276	415	149	224	99.3	149	192	288
	9	154	231	268	403	145	218	96.9	146	184	277
	10	151	227	260	391	141	212	94.2	142	176	264
	11	148	223	251	377	136	205	91.4	137	167	251
	12	146	219	241	362	132	198	88.4	133	158	237
	13	143	214	231	347	127	191	85.2	128	149	223
	14	139	209	221	332	122	183	81.9	123	139	209
	15	136	204	210	316	116	175	78.5	118	130	195
	16	132	199	199	299	111	167	75.1	113	120	181
	17	129	194	188	283	106	159	71.6	108	111	167
	18	125	188	177	267	100	151	68.0	102	102	153
	19	121	182	167	250	94.7	142	64.4	96.8	93.1	140
	20	117	176	156	234	89.2	134	60.9	91.5	84.5	127
	22	109	164	135	203	78.5	118	53.9	81.0	69.9	105
	24	101	152	115	173	68.3	103	47.1	70.8	58.7	88.2
	26	92.8	139	98.2	148	58.5	88.0	40.6	61.1	50.0	75.2
	28	84.7	127	84.7	127	50.5	75.8	35.0	52.7	43.1	64.8
	30	76.8	115	73.8	111	44.0	66.1	30.5	45.9		
	32	69.1	104	64.8	97.4	38.6	58.1	26.8	40.3		
	34	61.7	92.7	57.4	86.3	34.2	51.4	23.8	35.7		
36	55.0	82.7			30.5	45.9	21.2	31.9			
38	49.4	74.2									
40	44.6	67.0									
42	40.4	60.8									
44	36.8	55.4									
46	33.7	50.6									
48	30.9	46.5									
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		165	247	308	463	164	247	109	164	224	337
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		177	265	331	496	176	264	117	176	241	361
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		49.4	74.2	92.4	139	49.2	74.0	32.7	49.1	67.3	101
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
		36.3	54.6	47.9	71.9	27.2	41.0	18.5	27.8	29.2	43.8
Properties											
Area, in. ²		7.85		14.7		7.83		5.20		10.7	
I_x , in. ⁴		68.1		63.5		38.3		26.5		32.2	
r_x , in.		2.95		2.08		2.20		2.25		1.74	

Note: Heavy line indicates L_c/r equal to or greater than 200.

Shape		Pipe 5				Pipe 4						
		x-Strong		Std		xx-Strong		x-Strong		Std		
t_{des} , in.		0.349		0.241		0.628		0.315		0.221		
lb/ft		20.8		14.6		27.6		15.0		10.8		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	
Effective length, L_c (ft), with respect to the radius of gyration, r	0	120	180	84.0	126	161	241	86.8	130	62.0	93.2	
	1	120	180	83.9	126	160	240	86.5	130	61.8	92.9	
	2	119	179	83.3	125	158	238	85.6	129	61.2	92.0	
	3	118	177	82.5	124	155	233	84.2	127	60.3	90.6	
	4	116	174	81.3	122	151	227	82.2	124	58.9	88.5	
	5	114	171	79.8	120	146	219	79.8	120	57.2	86.0	
	6	111	167	78.0	117	140	210	76.9	116	55.2	83.0	
	7	108	162	75.9	114	133	200	73.6	111	52.9	79.6	
	8	105	157	73.5	111	126	189	70.0	105	50.4	75.8	
	9	101	152	71.0	107	118	177	66.1	99.3	47.7	71.8	
	10	96.8	146	68.2	103	110	165	62.0	93.1	44.9	67.5	
	11	92.5	139	65.3	98.1	101	152	57.7	86.8	42.0	63.1	
	12	88.1	132	62.2	93.6	92.7	139	53.4	80.3	38.9	58.5	
	13	83.5	125	59.1	88.8	84.3	127	49.1	73.8	35.9	54.0	
	14	78.7	118	55.8	83.9	76.0	114	44.9	67.4	32.9	49.5	
	15	74.0	111	52.6	79.0	68.1	102	40.7	61.2	30.0	45.1	
	16	69.2	104	49.3	74.1	60.3	90.7	36.7	55.1	27.1	40.8	
	17	64.4	96.9	46.0	69.1	53.5	80.3	32.8	49.2	24.4	36.6	
	18	59.8	89.8	42.8	64.3	47.7	71.7	29.2	43.9	21.7	32.7	
	19	55.2	83.0	39.6	59.5	42.8	64.3	26.2	39.4	19.5	29.3	
	20	50.7	76.3	36.5	54.9	38.6	58.0	23.7	35.6	17.6	26.5	
	22	42.3	63.6	30.6	45.9	31.9	48.0	19.6	29.4	14.6	21.9	
	24	35.5	53.4	25.7	38.6			16.4	24.7	12.2	18.4	
	26	30.3	45.5	21.9	32.9							
	28	26.1	39.2	18.9	28.4							
	30	22.7	34.2	16.4	24.7							
	Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
			120	180	84.0	126	161	241	86.8	130	62.0	93.2
	Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
			129	193	90.2	135	172	259	93.2	140	66.6	99.9
	Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		36.0	54.1	25.2	37.9	48.2	72.4	26.0	39.1	18.6	28.0	
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	
		16.6	24.9	11.9	17.9	16.6	24.9	9.66	14.5	7.07	10.6	
Properties												
Area, in. ²		5.73		4.01		7.66		4.14		2.96		
I_x , in. ⁴		19.5		14.3		14.7		9.12		6.82		
r_x , in.		1.85		1.88		1.39		1.48		1.51		

Note: Heavy line indicates L_c/r equal to or greater than 200.


 PIPE 3½– PIPE 3		Table 6-I (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Pipe										$F_y = 35$ ksi
		Pipe 3½				Pipe 3						
Shape	x-Strong		Std		xx-Strong		x-Strong		Std			
t_{des} , in.	0.296		0.211		0.559		0.280		0.201			
lb/ft	12.5		9.12		18.6		10.3		7.58			
Design	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Available Compressive Strength, kips	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the radius of gyration, r	0	71.9	108	52.4	78.7	108	163	59.3	89.1	43.4	65.2	
	1	71.6	108	52.2	78.4	108	162	59.0	88.6	43.2	64.9	
	2	70.7	106	51.5	77.5	106	159	58.0	87.1	42.5	63.8	
	3	69.2	104	50.5	75.9	102	154	56.4	84.7	41.3	62.1	
	4	67.1	101	49.1	73.7	97.6	147	54.2	81.4	39.8	59.8	
	5	64.6	97.0	47.3	71.1	92.0	138	51.5	77.4	37.9	57.0	
	6	61.6	92.6	45.2	67.9	85.6	129	48.4	72.7	35.7	53.7	
	7	58.2	87.5	42.8	64.4	78.6	118	44.9	67.5	33.3	50.1	
	8	54.6	82.1	40.3	60.6	71.2	107	41.3	62.0	30.7	46.2	
	9	50.8	76.3	37.6	56.5	63.7	95.7	37.5	56.3	28.0	42.2	
	10	46.8	70.3	34.8	52.2	56.2	84.5	33.6	50.6	25.3	38.1	
	11	42.8	64.3	31.9	47.9	49.0	73.6	29.9	44.9	22.6	34.0	
	12	38.7	58.2	29.0	43.6	42.1	63.3	26.2	39.4	20.0	30.0	
	13	34.8	52.3	26.2	39.4	35.9	53.9	22.7	34.1	17.5	26.2	
	14	31.0	46.6	23.4	35.2	30.9	46.5	19.6	29.4	15.1	22.7	
	15	27.3	41.0	20.8	31.3	26.9	40.5	17.1	25.6	13.1	19.8	
	16	24.0	36.1	18.3	27.5	23.7	35.6	15.0	22.5	11.6	17.4	
	17	21.3	32.0	16.2	24.4	21.0	31.5	13.3	20.0	10.2	15.4	
	18	19.0	28.5	14.5	21.7			11.8	17.8	9.13	13.7	
	19	17.0	25.6	13.0	19.5			10.6	16.0	8.19	12.3	
	20	15.4	23.1	11.7	17.6							
	22			9.68	14.6							
Available Strength in Tensile Yielding, kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
	71.9	108	52.4	78.8	108	163	59.3	89.1	43.4	65.2		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$		
	77.2	116	56.3	84.4	116	174	63.7	95.5	46.6	69.9		
Available Strength in Shear, kips	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$		
	21.6	32.4	15.7	23.6	32.5	48.9	17.8	26.7	13.0	19.6		
Available Strength in Flexure, kip-ft	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$		
	7.11	10.7	5.29	7.95	8.54	12.8	5.08	7.64	3.82	5.75		
Properties												
Area, in. ²	3.43		2.50		5.17		2.83		2.07			
I_x , in. ⁴	5.94		4.52		5.79		3.70		2.85			
r_x , in.	1.31		1.34		1.06		1.14		1.17			
Note: Heavy line indicates L_c/r equal to or greater than 200.												


Shape		Pipe 2½						Pipe 2			
		xx-Strong		x-Strong		Std		xx-Strong		x-Strong	
t_{des} , in.		0.514		0.257		0.189		0.406		0.204	
lb/ft		13.7		7.67		5.80		9.04		5.03	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	80.3	121	44.0	66.1	33.7	50.7	52.6	79.1	29.3	44.1
	1	79.5	119	43.6	65.6	33.5	50.3	51.8	77.9	29.0	43.6
	2	77.1	116	42.5	63.9	32.7	49.1	49.6	74.6	27.9	42.0
	3	73.3	110	40.8	61.3	31.4	47.1	46.1	69.3	26.2	39.4
	4	68.3	103	38.4	57.7	29.6	44.5	41.7	62.6	24.1	36.2
	5	62.3	93.7	35.6	53.5	27.5	41.4	36.5	54.9	21.5	32.3
	6	55.8	83.9	32.4	48.7	25.2	37.8	31.1	46.8	18.8	28.2
	7	48.9	73.5	29.0	43.6	22.7	34.0	25.7	38.7	16.0	24.0
	8	42.0	63.2	25.5	38.3	20.1	30.1	20.7	31.1	13.3	19.9
	9	35.4	53.2	22.1	33.2	17.5	26.2	16.4	24.6	10.7	16.1
	10	29.2	43.8	18.8	28.2	15.0	22.5	13.2	19.9	8.69	13.1
	11	24.1	36.2	15.7	23.5	12.6	18.9	10.9	16.5	7.18	10.8
	12	20.2	30.4	13.2	19.8	10.6	15.9			6.03	9.07
	13	17.3	25.9	11.2	16.9	9.01	13.5				
	14	14.9	22.4	9.67	14.5	7.77	11.7				
	15			8.43	12.7	6.77	10.2				
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		80.3	121	44.0	66.2	33.7	50.7	52.6	79.1	29.3	44.1
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		86.2	129	47.3	70.9	36.2	54.3	56.5	84.7	31.5	47.3
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		24.1	36.2	13.2	19.8	10.1	15.2	15.8	23.7	8.80	13.2
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
		5.08	7.64	3.09	4.65	2.39	3.60	2.79	4.20	1.68	2.53
Properties											
Area, in. ²		3.83		2.10		1.61		2.51		1.40	
I_x , in. ⁴		2.78		1.83		1.45		1.27		0.827	
r_x , in.		0.854		0.930		0.952		0.711		0.771	


Note: Heavy line indicates L_c/r equal to or greater than 200.


Shape		Pipe 2		Pipe 1½				Pipe 1¼			
		Std		x-Strong		Std		x-Strong		Std	
t_{des} , in.		0.143		0.186		0.135		0.178		0.130	
lb/ft		3.66		3.63		2.72		3.00		2.27	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	21.4	32.1	21.0	31.5	15.7	23.6	17.5	26.4	13.1	19.7
	1	21.1	31.8	20.5	30.9	15.4	23.2	17.1	25.7	12.8	19.2
	2	20.4	30.7	19.4	29.1	14.6	21.9	15.8	23.7	11.9	17.8
	3	19.2	28.9	17.5	26.4	13.3	19.9	13.8	20.8	10.5	15.7
	4	17.7	26.6	15.3	22.9	11.6	17.5	11.5	17.3	8.78	13.2
	5	15.9	23.9	12.8	19.2	9.81	14.7	9.06	13.6	7.01	10.5
	6	14.0	21.0	10.3	15.4	7.98	12.0	6.77	10.2	5.33	8.01
	7	12.0	18.0	7.93	11.9	6.25	9.39	4.97	7.47	3.93	5.90
	8	10.1	15.1	6.07	9.12	4.79	7.19	3.81	5.72	3.01	4.52
	9	8.22	12.4	4.80	7.21	3.78	5.68			2.37	3.57
	10	6.66	10.0	3.88	5.84	3.06	4.60				
	11	5.51	8.27								
	12	4.63	6.95								
13	3.94	5.92									
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		21.4	32.1	21.0	31.5	15.7	23.6	17.5	26.4	13.1	19.7
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		23.0	34.4	22.5	33.8	16.9	25.3	18.8	28.2	14.1	21.1
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		6.41	9.64	6.29	9.45	4.71	7.08	5.26	7.91	3.93	5.91
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
		1.25	1.87	0.959	1.44	0.735	1.11	0.686	1.03	0.533	0.801
Properties											
Area, in. ²		1.02		1.00		0.749		0.837		0.625	
I_x , in. ⁴		0.627		0.372		0.293		0.231		0.184	
r_x , in.		0.791		0.610		0.626		0.528		0.543	
Note: Heavy line indicates L_c/r equal to or greater than 200.											


Shape		Pipe 1				Pipe ¾				Pipe ½	
		x-Strong		Std		x-Strong		Std		x-Strong	
t_{des} , in.		0.166		0.124		0.143		0.105		0.137	
lb/ft		2.17		1.68		1.48		1.13		1.09	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$	P_n/Ω_c	$\phi_c P_n$
Effective length, L_c (ft), with respect to the radius of gyration, r	0	12.6	19.0	9.83	14.8	8.53	12.8	6.54	9.83	6.35	9.54
	1	12.1	18.1	9.43	14.2	7.96	12.0	6.13	9.21	5.66	8.51
	2	10.6	15.9	8.34	12.5	6.45	9.70	5.04	7.57	4.01	6.02
	3	8.50	12.8	6.78	10.2	4.55	6.84	3.63	5.46	2.25	3.38
	4	6.26	9.40	5.09	7.64	2.80	4.22	2.30	3.45	1.27	1.90
	5	4.23	6.35	3.50	5.27	1.79	2.70	1.47	2.21		
	6	2.93	4.41	2.43	3.66						
	7			1.79	2.69						
Available Strength in Tensile Yielding, kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		12.6	19.0	9.83	14.8	8.53	12.8	6.54	9.83	6.35	9.54
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$	P_n/Ω_t	$\phi_t P_n$
		13.5	20.3	10.6	15.8	9.16	13.7	7.02	10.5	6.82	10.2
Available Strength in Shear, kips		V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$	V_n/Ω_v	$\phi_v V_n$
		3.79	5.69	2.95	4.43	2.56	3.85	1.96	2.95	1.91	2.86
Available Strength in Flexure, kip-ft		M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$	M_n/Ω_b	$\phi_b M_n$
		0.386	0.580	0.309	0.465	0.208	0.312	0.165	0.247	0.120	0.180
Properties											
Area, in. ²		0.602		0.469		0.407		0.312		0.303	
I , in. ⁴		0.101		0.0830		0.0430		0.0350		0.0190	
r , in.		0.410		0.423		0.325		0.336		0.253	
Note: Heavy line indicates L_c/r equal to or greater than 200.											


 PIPE ½			Table 6-I (continued) Available Strength for Members Subject to Axial, Shear, Flexural and Combined Forces Pipe		$F_y = 35$ ksi
Shape		Pipe ½			
		Std			
t_{des} , in.		0.101			
lb/ft		0.850			
Design		ASD	LRFD		
Available Compressive Strength, kips		P_n/Ω_c	$\phi_c P_n$		
Effective length, L_c (ft), with respect to the radius of gyration, r	0	4.90	7.37		
	1	4.41	6.63		
	2	3.21	4.83		
	3	1.89	2.84		
	4	1.06	1.60		
Available Strength in Tensile Yielding, kips		P_n/Ω_t 4.90	$\phi_t P_n$ 7.37		
Available Strength in Tensile Rupture ($A_e = 0.75A_g$), kips		P_n/Ω_t 5.27	$\phi_t P_n$ 7.90		
Available Strength in Shear, kips		V_n/Ω_v 1.47	$\phi_v V_n$ 2.21		
Available Strength in Flexure, kip-ft		M_n/Ω_b 0.0969	$\phi_b M_n$ 0.146		
Properties					
Area, in. ²		0.234			
I , in. ⁴		0.0160			
r , in.		0.264			
Note: Heavy line indicates L_c/r equal to or greater than 200.					


 W44		Table 6-J Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		Shape		W44 \times									
Design		335 ^c				290 ^c				262 ^c			
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.345	0.229	0.220	0.146	0.416	0.277	0.253	0.168	0.473	0.315	0.281	0.187
	11	0.377	0.251	0.220	0.146	0.455	0.303	0.253	0.168	0.518	0.345	0.281	0.187
	12	0.384	0.256	0.220	0.146	0.463	0.308	0.253	0.168	0.527	0.351	0.281	0.187
	13	0.392	0.261	0.222	0.148	0.472	0.314	0.255	0.170	0.537	0.357	0.284	0.189
	14	0.402	0.267	0.225	0.150	0.482	0.320	0.259	0.173	0.548	0.365	0.289	0.192
	15	0.412	0.274	0.229	0.152	0.492	0.327	0.264	0.175	0.560	0.373	0.294	0.196
	16	0.423	0.281	0.232	0.155	0.504	0.335	0.268	0.178	0.574	0.382	0.299	0.199
	17	0.435	0.290	0.236	0.157	0.516	0.343	0.273	0.181	0.588	0.391	0.304	0.203
	18	0.449	0.299	0.240	0.160	0.530	0.353	0.277	0.184	0.604	0.402	0.310	0.206
	19	0.463	0.308	0.244	0.162	0.545	0.362	0.282	0.188	0.621	0.413	0.316	0.210
	20	0.479	0.319	0.248	0.165	0.561	0.373	0.287	0.191	0.640	0.426	0.322	0.214
	22	0.515	0.343	0.256	0.171	0.597	0.397	0.298	0.198	0.681	0.453	0.335	0.223
	24	0.558	0.371	0.266	0.177	0.643	0.428	0.309	0.206	0.730	0.486	0.348	0.232
	26	0.608	0.405	0.275	0.183	0.702	0.467	0.321	0.214	0.787	0.524	0.363	0.242
	28	0.668	0.444	0.286	0.190	0.770	0.512	0.335	0.223	0.859	0.571	0.379	0.252
	30	0.738	0.491	0.297	0.198	0.851	0.567	0.349	0.232	0.950	0.632	0.397	0.264
	32	0.822	0.547	0.310	0.206	0.948	0.631	0.365	0.243	1.06	0.705	0.417	0.277
	34	0.923	0.614	0.323	0.215	1.06	0.708	0.382	0.254	1.19	0.793	0.438	0.292
	36	1.03	0.689	0.338	0.225	1.19	0.794	0.401	0.267	1.34	0.889	0.465	0.310
	38	1.15	0.767	0.354	0.235	1.33	0.885	0.429	0.286	1.49	0.990	0.507	0.337
40	1.28	0.850	0.377	0.251	1.47	0.980	0.464	0.309	1.65	1.10	0.549	0.365	
42	1.41	0.937	0.404	0.269	1.62	1.08	0.499	0.332	1.82	1.21	0.592	0.394	
44	1.55	1.03	0.431	0.287	1.78	1.19	0.534	0.355	2.00	1.33	0.635	0.423	
46	1.69	1.12	0.459	0.305	1.95	1.30	0.570	0.379	2.18	1.45	0.679	0.452	
48	1.84	1.22	0.486	0.323	2.12	1.41	0.605	0.403	2.37	1.58	0.722	0.481	
50	2.00	1.33	0.514	0.342	2.30	1.53	0.641	0.426	2.58	1.71	0.766	0.510	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹	1.51		1.00		1.74		1.16		1.96		1.30		
$t_y \times 10^3$, (kips) ⁻¹	0.339		0.226		0.391		0.260		0.433		0.288		
$t_r \times 10^3$, (kips) ⁻¹	0.417		0.278		0.480		0.320		0.531		0.354		
r_x/r_y	5.10				5.10				5.10				
r_y , in.	3.49				3.49				3.47				
^c Shape is slender for compression for $F_y = 50$ ksi.													


 W44-W40		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		W44 \times				W40 \times							
Shape		230 ^{c,v}				655 ^h				593 ^h			
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
		Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.555	0.369	0.324	0.215	0.173	0.115	0.116	0.0770	0.192	0.128
11	0.609		0.405	0.324	0.215	0.189	0.125	0.116	0.0770	0.210	0.139	0.129	0.0859
12	0.620		0.413	0.324	0.215	0.192	0.127	0.116	0.0770	0.213	0.142	0.129	0.0859
13	0.632		0.421	0.329	0.219	0.195	0.130	0.116	0.0770	0.217	0.144	0.129	0.0859
14	0.646		0.430	0.335	0.223	0.199	0.132	0.116	0.0772	0.221	0.147	0.130	0.0863
15	0.660		0.439	0.341	0.227	0.203	0.135	0.117	0.0777	0.226	0.150	0.131	0.0870
16	0.676		0.450	0.347	0.231	0.207	0.138	0.118	0.0783	0.231	0.154	0.132	0.0877
17	0.694		0.461	0.354	0.235	0.212	0.141	0.119	0.0789	0.237	0.158	0.133	0.0884
18	0.712		0.474	0.360	0.240	0.218	0.145	0.119	0.0795	0.243	0.162	0.134	0.0892
19	0.733		0.488	0.367	0.244	0.223	0.149	0.120	0.0801	0.250	0.166	0.135	0.0899
20	0.755		0.503	0.375	0.249	0.230	0.153	0.121	0.0807	0.257	0.171	0.136	0.0907
22	0.806		0.536	0.390	0.260	0.244	0.162	0.123	0.0820	0.273	0.182	0.139	0.0923
24	0.865		0.575	0.407	0.271	0.260	0.173	0.125	0.0833	0.292	0.194	0.141	0.0939
26	0.934		0.621	0.425	0.283	0.279	0.186	0.127	0.0846	0.314	0.209	0.144	0.0956
28	1.01		0.675	0.446	0.296	0.301	0.200	0.129	0.0860	0.340	0.226	0.146	0.0973
30	1.11		0.738	0.468	0.311	0.327	0.217	0.131	0.0874	0.370	0.246	0.149	0.0991
32	1.23		0.820	0.492	0.327	0.357	0.237	0.134	0.0889	0.405	0.269	0.152	0.101
34	1.39		0.924	0.519	0.346	0.392	0.261	0.136	0.0904	0.446	0.297	0.155	0.103
36	1.56		1.04	0.568	0.378	0.432	0.288	0.138	0.0920	0.494	0.329	0.158	0.105
38	1.73		1.15	0.621	0.413	0.481	0.320	0.141	0.0936	0.551	0.366	0.161	0.107
40	1.92	1.28	0.674	0.449	0.533	0.355	0.143	0.0953	0.610	0.406	0.164	0.109	
42	2.12	1.41	0.729	0.485	0.588	0.391	0.146	0.0971	0.673	0.448	0.168	0.112	
44	2.33	1.55	0.784	0.522	0.645	0.429	0.149	0.0989	0.738	0.491	0.171	0.114	
46	2.54	1.69	0.840	0.559	0.705	0.469	0.152	0.101	0.807	0.537	0.175	0.116	
48	2.77	1.84	0.897	0.597	0.768	0.511	0.154	0.103	0.879	0.585	0.179	0.119	
50	3.00	2.00	0.954	0.634	0.833	0.554	0.158	0.105	0.953	0.634	0.183	0.122	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹	2.27		1.51		0.657		0.437		0.741		0.493		
$t_y \times 10^3$, (kips) ⁻¹	0.493		0.328		0.173		0.115		0.192		0.128		
$t_r \times 10^3$, (kips) ⁻¹	0.605		0.403		0.213		0.142		0.236		0.157		
r_x/r_y	5.10				4.43				4.47				
r_y , in.	3.43				3.86				3.80				
^c Shape is slender for compression for $F_y = 50$ ksi. ^h Flange thickness greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c. ^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(1) with $F_y = 50$ ksi; therefore, $\phi_v = 0.90$ and $\Omega_v = 1.67$.													


 W40		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		503 ^h				431 ^h				397 ^h			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
		Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.226	0.150	0.154	0.102	0.263	0.175	0.182	0.121	0.285	0.190
11	0.247		0.165	0.154	0.102	0.289	0.193	0.182	0.121	0.314	0.209	0.198	0.132
12	0.252		0.168	0.154	0.102	0.295	0.196	0.182	0.121	0.320	0.213	0.198	0.132
13	0.257		0.171	0.154	0.102	0.301	0.200	0.182	0.121	0.327	0.217	0.198	0.132
14	0.262		0.174	0.155	0.103	0.307	0.204	0.184	0.122	0.334	0.222	0.201	0.133
15	0.268		0.178	0.156	0.104	0.314	0.209	0.186	0.124	0.341	0.227	0.203	0.135
16	0.274		0.182	0.158	0.105	0.322	0.214	0.188	0.125	0.350	0.233	0.205	0.137
17	0.281		0.187	0.159	0.106	0.330	0.220	0.190	0.127	0.359	0.239	0.208	0.138
18	0.289		0.192	0.161	0.107	0.340	0.226	0.193	0.128	0.369	0.246	0.211	0.140
19	0.297		0.198	0.163	0.108	0.350	0.233	0.195	0.130	0.380	0.253	0.213	0.142
20	0.306		0.204	0.164	0.109	0.361	0.240	0.197	0.131	0.392	0.261	0.216	0.144
22	0.326		0.217	0.168	0.112	0.386	0.257	0.202	0.134	0.419	0.279	0.221	0.147
24	0.350		0.233	0.171	0.114	0.415	0.276	0.207	0.138	0.451	0.300	0.227	0.151
26	0.377		0.251	0.175	0.117	0.449	0.299	0.212	0.141	0.488	0.325	0.234	0.155
28	0.410		0.273	0.179	0.119	0.489	0.325	0.218	0.145	0.532	0.354	0.240	0.160
30	0.448		0.298	0.183	0.122	0.536	0.356	0.224	0.149	0.584	0.388	0.247	0.164
32	0.492		0.327	0.187	0.125	0.591	0.393	0.230	0.153	0.644	0.429	0.255	0.169
34	0.544		0.362	0.192	0.128	0.656	0.436	0.236	0.157	0.715	0.476	0.262	0.175
36	0.606		0.403	0.197	0.131	0.734	0.488	0.243	0.162	0.801	0.533	0.271	0.180
38	0.675		0.449	0.201	0.134	0.818	0.544	0.251	0.167	0.892	0.594	0.280	0.186
40	0.748	0.498	0.207	0.138	0.906	0.603	0.259	0.172	0.989	0.658	0.289	0.192	
42	0.825	0.549	0.212	0.141	0.999	0.665	0.267	0.178	1.09	0.725	0.299	0.199	
44	0.906	0.603	0.218	0.145	1.10	0.729	0.276	0.184	1.20	0.796	0.310	0.206	
46	0.990	0.659	0.224	0.149	1.20	0.797	0.285	0.190	1.31	0.870	0.322	0.214	
48	1.08	0.717	0.230	0.153	1.30	0.868	0.295	0.197	1.42	0.947	0.338	0.225	
50	1.17	0.778	0.237	0.158	1.42	0.942	0.308	0.205	1.55	1.03	0.356	0.237	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		0.904		0.602		1.09		0.723		1.19		0.790	
$t_y \times 10^3$, (kips) ⁻¹		0.226		0.150		0.263		0.175		0.285		0.190	
$t_r \times 10^3$, (kips) ⁻¹		0.277		0.185		0.323		0.215		0.351		0.234	
r_x/r_y		4.52				4.55				4.56			
r_y , in.		3.72				3.65				3.64			
^h Flange thickness greater than 2 in. Special requirements may apply per AISC <i>Specification</i> Section A3.1c.													


 W40		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		392 ^h				372 ^h				362 ^h			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
		Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.288	0.192	0.208	0.139	0.304	0.202	0.212	0.141	0.315	0.210
11	0.346		0.230	0.213	0.142	0.335	0.223	0.212	0.141	0.348	0.231	0.217	0.145
12	0.358		0.238	0.217	0.144	0.341	0.227	0.212	0.141	0.354	0.236	0.217	0.145
13	0.372		0.247	0.220	0.146	0.348	0.232	0.213	0.142	0.361	0.240	0.218	0.145
14	0.387		0.258	0.223	0.148	0.356	0.237	0.215	0.143	0.369	0.246	0.221	0.147
15	0.404		0.269	0.227	0.151	0.365	0.243	0.218	0.145	0.378	0.252	0.224	0.149
16	0.424		0.282	0.23	0.153	0.374	0.249	0.221	0.147	0.388	0.258	0.227	0.151
17	0.446		0.296	0.234	0.156	0.384	0.255	0.224	0.149	0.398	0.265	0.230	0.153
18	0.470		0.313	0.238	0.158	0.395	0.263	0.227	0.151	0.410	0.273	0.233	0.155
19	0.497		0.331	0.241	0.161	0.407	0.271	0.230	0.153	0.422	0.281	0.236	0.157
20	0.527		0.351	0.245	0.163	0.420	0.280	0.233	0.155	0.436	0.290	0.239	0.159
22	0.598		0.398	0.254	0.169	0.450	0.299	0.240	0.159	0.467	0.311	0.246	0.164
24	0.687		0.457	0.263	0.175	0.485	0.323	0.246	0.164	0.503	0.335	0.253	0.168
26	0.801		0.533	0.273	0.181	0.526	0.350	0.254	0.169	0.546	0.363	0.261	0.174
28	0.929		0.618	0.283	0.188	0.574	0.382	0.261	0.174	0.596	0.396	0.269	0.179
30	1.07		0.710	0.295	0.196	0.631	0.420	0.270	0.179	0.655	0.436	0.278	0.185
32	1.21		0.807	0.307	0.204	0.698	0.464	0.278	0.185	0.724	0.482	0.287	0.191
34	1.37		0.911	0.320	0.213	0.777	0.517	0.288	0.191	0.806	0.536	0.297	0.197
36	1.54		1.02	0.335	0.223	0.871	0.579	0.298	0.198	0.904	0.601	0.307	0.204
38	1.71		1.14	0.351	0.233	0.970	0.646	0.308	0.205	1.01	0.670	0.319	0.212
40	1.90	1.26	0.372	0.248	1.08	0.715	0.320	0.213	1.12	0.742	0.331	0.220	
42	2.09	1.39	0.394	0.262	1.19	0.789	0.332	0.221	1.23	0.818	0.344	0.229	
44	2.29	1.53	0.415	0.276	1.30	0.866	0.345	0.230	1.35	0.898	0.358	0.238	
46					1.42	0.946	0.365	0.243	1.48	0.982	0.380	0.253	
48					1.55	1.03	0.385	0.256	1.61	1.07	0.401	0.267	
50					1.68	1.12	0.405	0.270	1.74	1.16	0.422	0.281	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		1.71		1.14		1.29		0.856		1.32		0.878	
$t_y \times 10^3$, (kips) ⁻¹		0.288		0.192		0.304		0.202		0.315		0.210	
$t_r \times 10^3$, (kips) ⁻¹		0.354		0.236		0.373		0.249		0.387		0.258	
r_x/r_y		6.10				4.58				4.58			
r_y , in.		2.64				3.60				3.60			
^h Flange thickness greater than 2 in. Special requirements may apply per AISC <i>Specification</i> Section A3.1c. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W40		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		331 ^h				327 ^h				324			
Shape	Design	$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.342	0.227	0.249	0.166	0.348	0.232	0.253	0.168	0.350	0.233	0.244	0.162
	11	0.415	0.276	0.257	0.171	0.422	0.281	0.261	0.174	0.387	0.258	0.244	0.162
	12	0.430	0.286	0.262	0.174	0.437	0.291	0.265	0.177	0.394	0.262	0.244	0.162
	13	0.448	0.298	0.266	0.177	0.455	0.303	0.270	0.180	0.403	0.268	0.245	0.163
	14	0.467	0.311	0.271	0.18	0.475	0.316	0.275	0.183	0.412	0.274	0.249	0.165
	15	0.489	0.326	0.276	0.184	0.497	0.331	0.280	0.186	0.422	0.281	0.252	0.168
	16	0.514	0.342	0.281	0.187	0.522	0.347	0.285	0.190	0.433	0.288	0.256	0.170
	17	0.542	0.361	0.287	0.191	0.550	0.366	0.290	0.193	0.444	0.296	0.259	0.173
	18	0.573	0.381	0.292	0.194	0.581	0.387	0.296	0.197	0.457	0.304	0.263	0.175
	19	0.608	0.404	0.298	0.198	0.616	0.410	0.302	0.201	0.471	0.314	0.267	0.178
	20	0.647	0.430	0.304	0.202	0.656	0.436	0.308	0.205	0.487	0.324	0.271	0.180
	22	0.739	0.492	0.317	0.211	0.749	0.498	0.321	0.213	0.522	0.347	0.279	0.186
	24	0.856	0.570	0.331	0.220	0.866	0.576	0.335	0.223	0.563	0.374	0.288	0.192
	26	1.00	0.668	0.346	0.230	1.01	0.675	0.350	0.233	0.611	0.406	0.298	0.198
	28	1.16	0.774	0.362	0.241	1.18	0.783	0.367	0.244	0.667	0.444	0.308	0.205
	30	1.34	0.889	0.381	0.253	1.35	0.899	0.385	0.256	0.734	0.488	0.319	0.212
	32	1.52	1.01	0.401	0.267	1.54	1.02	0.406	0.270	0.813	0.541	0.330	0.22
	34	1.72	1.14	0.425	0.283	1.73	1.15	0.430	0.286	0.907	0.603	0.343	0.228
	36	1.92	1.28	0.456	0.304	1.95	1.29	0.462	0.307	1.02	0.676	0.357	0.237
	38	2.14	1.43	0.488	0.324	2.17	1.44	0.494	0.329	1.13	0.754	0.371	0.247
40	2.38	1.58	0.519	0.345	2.40	1.60	0.526	0.350	1.25	0.835	0.387	0.258	
42	2.62	1.74	0.550	0.366	2.65	1.76	0.557	0.371	1.38	0.921	0.408	0.272	
44									1.52	1.01	0.435	0.289	
46									1.66	1.10	0.461	0.307	
48									1.81	1.20	0.488	0.324	
50									1.96	1.30	0.514	0.342	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		2.10		1.40		2.12		1.41		1.49		0.992	
$t_y \times 10^3$, (kips) ⁻¹		0.342		0.227		0.348		0.232		0.350		0.233	
$t_r \times 10^3$, (kips) ⁻¹		0.420		0.280		0.428		0.285		0.430		0.287	
r_x/r_y		6.19				6.20				4.58			
r_y , in.		2.57				2.58				3.58			
^h Flange thickness greater than 2 in. Special requirements may apply per AISC <i>Specification</i> Section A3.1c. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W40		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		297 ^c				294				278			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.385	0.256	0.268	0.178	0.387	0.258	0.281	0.187	0.406	0.270	0.299	0.199
	11	0.424	0.282	0.268	0.178	0.471	0.314	0.291	0.194	0.496	0.330	0.312	0.207
	12	0.432	0.287	0.268	0.178	0.489	0.325	0.296	0.197	0.515	0.343	0.318	0.211
	13	0.441	0.293	0.270	0.179	0.509	0.339	0.302	0.201	0.537	0.357	0.324	0.216
	14	0.451	0.300	0.274	0.182	0.532	0.354	0.308	0.205	0.562	0.374	0.331	0.220
	15	0.462	0.308	0.278	0.185	0.558	0.371	0.314	0.209	0.589	0.392	0.338	0.225
	16	0.474	0.316	0.282	0.188	0.586	0.390	0.321	0.214	0.620	0.413	0.345	0.229
	17	0.488	0.325	0.286	0.190	0.619	0.412	0.328	0.218	0.655	0.436	0.352	0.234
	18	0.502	0.334	0.291	0.193	0.655	0.436	0.335	0.223	0.694	0.462	0.360	0.240
	19	0.518	0.345	0.295	0.197	0.695	0.463	0.342	0.228	0.738	0.491	0.369	0.245
	20	0.535	0.356	0.300	0.200	0.740	0.493	0.350	0.233	0.788	0.524	0.377	0.251
	22	0.575	0.382	0.310	0.206	0.848	0.564	0.366	0.244	0.905	0.602	0.396	0.263
	24	0.621	0.413	0.321	0.213	0.985	0.655	0.384	0.256	1.06	0.702	0.416	0.277
	26	0.675	0.449	0.332	0.221	1.16	0.769	0.404	0.269	1.24	0.824	0.439	0.292
	28	0.739	0.492	0.344	0.229	1.34	0.892	0.426	0.284	1.44	0.956	0.464	0.309
	30	0.815	0.542	0.357	0.238	1.54	1.02	0.451	0.300	1.65	1.10	0.493	0.328
	32	0.904	0.602	0.372	0.247	1.75	1.16	0.482	0.320	1.88	1.25	0.535	0.356
	34	1.01	0.674	0.387	0.257	1.98	1.31	0.521	0.347	2.12	1.41	0.580	0.386
	36	1.13	0.755	0.404	0.269	2.22	1.47	0.561	0.373	2.38	1.58	0.624	0.415
	38	1.26	0.841	0.422	0.281	2.47	1.64	0.601	0.400	2.65	1.76	0.669	0.445
40	1.40	0.932	0.446	0.297	2.73	1.82	0.640	0.426	2.93	1.95	0.714	0.475	
42	1.54	1.03	0.478	0.318	3.02	2.01	0.679	0.452	3.23	2.15	0.758	0.504	
44	1.70	1.13	0.509	0.339									
46	1.85	1.23	0.541	0.360									
48	2.02	1.34	0.573	0.381									
50	2.19	1.46	0.605	0.403									
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		1.66		1.10		2.38		1.58		2.56		1.70	
$t_y \times 10^3$, (kips) ⁻¹		0.383		0.255		0.387		0.258		0.406		0.270	
$t_r \times 10^3$, (kips) ⁻¹		0.470		0.313		0.476		0.317		0.498		0.332	
r_x/r_y		4.60				6.24				6.27			
r_y , in.		3.54				2.55				2.52			
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W40		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		277 ^c				264				249 ^c			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.424	0.282	0.285	0.190	0.432	0.287	0.315	0.210	0.482	0.320	0.318	0.212
	11	0.462	0.308	0.285	0.190	0.527	0.351	0.329	0.219	0.526	0.350	0.318	0.212
	12	0.470	0.313	0.285	0.190	0.548	0.365	0.335	0.223	0.535	0.356	0.318	0.212
	13	0.479	0.319	0.287	0.191	0.571	0.380	0.342	0.228	0.545	0.363	0.320	0.213
	14	0.488	0.325	0.291	0.193	0.597	0.397	0.349	0.233	0.556	0.370	0.325	0.217
	15	0.498	0.332	0.295	0.196	0.627	0.417	0.357	0.238	0.568	0.378	0.331	0.220
	16	0.510	0.339	0.300	0.199	0.660	0.439	0.365	0.243	0.581	0.387	0.336	0.224
	17	0.522	0.347	0.304	0.203	0.697	0.464	0.373	0.248	0.595	0.396	0.342	0.227
	18	0.535	0.356	0.309	0.206	0.738	0.491	0.382	0.254	0.611	0.406	0.347	0.231
	19	0.551	0.367	0.314	0.209	0.785	0.522	0.391	0.260	0.628	0.418	0.353	0.235
	20	0.569	0.379	0.320	0.213	0.838	0.557	0.401	0.267	0.646	0.430	0.359	0.239
	22	0.610	0.406	0.330	0.220	0.963	0.641	0.421	0.280	0.687	0.457	0.372	0.248
	24	0.658	0.438	0.342	0.228	1.12	0.747	0.444	0.295	0.735	0.489	0.386	0.257
	26	0.714	0.475	0.355	0.236	1.32	0.877	0.469	0.312	0.799	0.532	0.401	0.267
	28	0.780	0.519	0.368	0.245	1.53	1.02	0.498	0.331	0.875	0.582	0.417	0.278
	30	0.858	0.571	0.382	0.254	1.75	1.17	0.533	0.354	0.964	0.641	0.435	0.289
	32	0.950	0.632	0.398	0.265	2.00	1.33	0.582	0.387	1.07	0.711	0.454	0.302
	34	1.06	0.705	0.415	0.276	2.25	1.50	0.632	0.420	1.20	0.795	0.475	0.316
	36	1.19	0.791	0.434	0.289	2.53	1.68	0.681	0.453	1.34	0.892	0.498	0.331
	38	1.32	0.881	0.454	0.302	2.81	1.87	0.730	0.486	1.49	0.994	0.530	0.353
40	1.47	0.976	0.484	0.322	3.12	2.07	0.780	0.519	1.65	1.10	0.573	0.381	
42	1.62	1.08	0.519	0.345	3.44	2.29	0.829	0.552	1.82	1.21	0.616	0.410	
44	1.78	1.18	0.555	0.369					2.00	1.33	0.659	0.438	
46	1.94	1.29	0.590	0.393					2.19	1.46	0.702	0.467	
48	2.11	1.41	0.625	0.416					2.38	1.59	0.746	0.496	
50	2.29	1.53	0.661	0.440					2.59	1.72	0.790	0.525	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		1.75		1.16		2.70		1.80		1.96		1.30	
$t_y \times 10^3$, (kips) ⁻¹		0.410		0.273		0.432		0.287		0.454		0.302	
$t_r \times 10^3$, (kips) ⁻¹		0.503		0.336		0.530		0.353		0.558		0.372	
r_x/r_y		4.58				6.27				4.59			
r_y , in.		3.58				2.52				3.55			
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W40		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		235 ^c				215 ^c				211 ^c			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.503	0.335	0.353	0.235	0.577	0.384	0.370	0.246	0.576	0.383	0.393	0.262
	11	0.596	0.396	0.368	0.245	0.631	0.420	0.370	0.246	0.685	0.456	0.412	0.274
	12	0.615	0.409	0.376	0.250	0.642	0.427	0.370	0.246	0.708	0.471	0.422	0.281
	13	0.637	0.424	0.384	0.255	0.654	0.435	0.373	0.248	0.734	0.488	0.432	0.287
	14	0.666	0.443	0.393	0.261	0.667	0.444	0.379	0.252	0.763	0.507	0.442	0.294
	15	0.698	0.464	0.402	0.267	0.681	0.453	0.385	0.256	0.795	0.529	0.453	0.301
	16	0.734	0.488	0.411	0.274	0.697	0.464	0.392	0.261	0.831	0.553	0.464	0.309
	17	0.775	0.515	0.421	0.280	0.714	0.475	0.399	0.265	0.872	0.580	0.476	0.317
	18	0.820	0.546	0.431	0.287	0.733	0.488	0.406	0.270	0.924	0.615	0.489	0.325
	19	0.871	0.580	0.442	0.294	0.753	0.501	0.413	0.275	0.983	0.654	0.503	0.334
	20	0.928	0.618	0.454	0.302	0.775	0.516	0.421	0.280	1.05	0.698	0.517	0.344
	22	1.06	0.709	0.479	0.319	0.825	0.549	0.437	0.291	1.21	0.803	0.548	0.364
	24	1.24	0.823	0.507	0.337	0.883	0.588	0.455	0.302	1.41	0.938	0.582	0.388
	26	1.45	0.967	0.538	0.358	0.951	0.633	0.473	0.315	1.66	1.10	0.622	0.414
	28	1.68	1.12	0.573	0.381	1.03	0.685	0.494	0.329	1.92	1.28	0.679	0.452
	30	1.93	1.29	0.629	0.419	1.12	0.746	0.516	0.344	2.20	1.47	0.753	0.501
	32	2.20	1.46	0.690	0.459	1.24	0.827	0.541	0.360	2.51	1.67	0.827	0.550
	34	2.48	1.65	0.750	0.499	1.39	0.926	0.568	0.378	2.83	1.88	0.902	0.600
	36	2.79	1.85	0.811	0.540	1.56	1.04	0.603	0.401	3.17	2.11	0.978	0.650
	38	3.10	2.06	0.872	0.580	1.74	1.16	0.657	0.437	3.54	2.35	1.05	0.701
40	3.44	2.29	0.932	0.620	1.93	1.28	0.712	0.474	3.92	2.61	1.13	0.751	
42	3.79	2.52	0.993	0.661	2.12	1.41	0.768	0.511					
44					2.33	1.55	0.825	0.549					
46					2.55	1.69	0.882	0.587					
48					2.77	1.85	0.939	0.625					
50					3.01	2.00	0.997	0.663					
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		3.02		2.01		2.28		1.52		3.39		2.26	
$t_y \times 10^3$, (kips) ⁻¹		0.483		0.322		0.526		0.350		0.538		0.358	
$t_r \times 10^3$, (kips) ⁻¹		0.594		0.396		0.646		0.431		0.661		0.440	
r_x/r_y		6.26				4.58				6.29			
r_y , in.		2.54				3.54				2.51			
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W40		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		199 ^c				183 ^c				167 ^c			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
		Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.628	0.418	0.410	0.273	0.700	0.466	0.46	0.306	0.764	0.508
11	0.689		0.458	0.410	0.273	0.835	0.555	0.485	0.323	0.921	0.613	0.547	0.364
12	0.701		0.467	0.410	0.273	0.863	0.574	0.497	0.330	0.954	0.635	0.562	0.374
13	0.715		0.476	0.416	0.277	0.895	0.595	0.509	0.339	0.991	0.660	0.577	0.384
14	0.730		0.486	0.423	0.282	0.931	0.619	0.522	0.348	1.03	0.688	0.593	0.395
15	0.747		0.497	0.431	0.287	0.971	0.646	0.536	0.357	1.08	0.719	0.610	0.406
16	0.765		0.509	0.439	0.292	1.02	0.676	0.551	0.367	1.13	0.754	0.628	0.418
17	0.784		0.522	0.447	0.297	1.07	0.709	0.567	0.377	1.19	0.793	0.647	0.431
18	0.806		0.536	0.455	0.303	1.12	0.746	0.583	0.388	1.26	0.837	0.668	0.444
19	0.829		0.551	0.464	0.309	1.18	0.787	0.600	0.399	1.33	0.886	0.689	0.459
20	0.854		0.568	0.473	0.315	1.25	0.833	0.619	0.412	1.41	0.941	0.712	0.474
22	0.911		0.606	0.493	0.328	1.43	0.948	0.659	0.439	1.64	1.09	0.763	0.508
24	0.978		0.651	0.514	0.342	1.67	1.11	0.705	0.469	1.94	1.29	0.822	0.547
26	1.06		0.702	0.537	0.357	1.96	1.30	0.763	0.507	2.28	1.52	0.919	0.611
28	1.15		0.763	0.562	0.374	2.27	1.51	0.859	0.571	2.65	1.76	1.04	0.690
30	1.26		0.838	0.590	0.393	2.61	1.74	0.957	0.636	3.04	2.02	1.16	0.771
32	1.41		0.935	0.621	0.413	2.97	1.98	1.06	0.702	3.45	2.30	1.28	0.853
34	1.58		1.05	0.655	0.436	3.35	2.23	1.16	0.769	3.90	2.59	1.41	0.937
36	1.77		1.18	0.716	0.476	3.76	2.50	1.26	0.837	4.37	2.91	1.53	1.02
38	1.98		1.32	0.782	0.520	4.19	2.79	1.36	0.905	4.87	3.24	1.66	1.11
40	2.19	1.46	0.849	0.565	4.64	3.09	1.46	0.973	5.40	3.59	1.79	1.19	
42	2.41	1.61	0.918	0.610									
44	2.65	1.76	0.987	0.657									
46	2.90	1.93	1.06	0.703									
48	3.15	2.10	1.13	0.750									
50	3.42	2.28	1.20	0.797									
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		2.60		1.73		4.03		2.68		4.69		3.12	
$t_y \times 10^3$, (kips) ⁻¹		0.568		0.378		0.627		0.417		0.677		0.451	
$t_r \times 10^3$, (kips) ⁻¹		0.698		0.465		0.770		0.513		0.832		0.555	
r_x/r_y		4.64				6.31				6.38			
r_y , in.		3.45				2.49				2.40			
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W40-W36		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		W40 \times				925 ^h				W36 \times			
Shape		149 ^{c,v}											
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.879	0.585	0.596	0.396	0.123	0.0817	0.0863	0.0574	0.133	0.0885	0.0909	0.0605
	11	1.08	0.716	0.644	0.429	0.132	0.0876	0.0863	0.0574	0.143	0.0949	0.0909	0.0605
	12	1.12	0.744	0.663	0.441	0.133	0.0888	0.0863	0.0574	0.145	0.0962	0.0909	0.0605
	13	1.17	0.775	0.682	0.454	0.135	0.0901	0.0863	0.0574	0.147	0.0976	0.0909	0.0605
	14	1.22	0.811	0.703	0.468	0.138	0.0915	0.0863	0.0574	0.149	0.0991	0.0909	0.0605
	15	1.28	0.851	0.725	0.483	0.140	0.0931	0.0863	0.0574	0.151	0.101	0.0909	0.0605
	16	1.35	0.896	0.749	0.498	0.142	0.0948	0.0866	0.0576	0.154	0.103	0.0913	0.0607
	17	1.42	0.946	0.774	0.515	0.145	0.0966	0.0871	0.0579	0.157	0.105	0.0917	0.0610
	18	1.51	1.00	0.801	0.533	0.148	0.0986	0.0875	0.0582	0.160	0.107	0.0922	0.0613
	19	1.60	1.07	0.830	0.552	0.151	0.101	0.0879	0.0585	0.164	0.109	0.0927	0.0617
	20	1.71	1.14	0.861	0.573	0.155	0.103	0.0883	0.0587	0.167	0.111	0.0931	0.0620
	22	2.02	1.34	0.930	0.619	0.163	0.108	0.0891	0.0593	0.176	0.117	0.0941	0.0626
	24	2.40	1.60	1.03	0.683	0.172	0.114	0.0900	0.0599	0.185	0.123	0.0951	0.0632
	26	2.82	1.88	1.18	0.783	0.182	0.121	0.0909	0.0605	0.196	0.131	0.0961	0.0639
	28	3.27	2.18	1.33	0.887	0.194	0.129	0.0918	0.0611	0.209	0.139	0.0971	0.0646
	30	3.75	2.50	1.49	0.993	0.207	0.138	0.0927	0.0617	0.223	0.149	0.0981	0.0653
	32	4.27	2.84	1.66	1.10	0.222	0.148	0.0936	0.0623	0.240	0.159	0.0992	0.0660
	34	4.82	3.21	1.82	1.21	0.240	0.160	0.0946	0.0629	0.259	0.172	0.100	0.0667
	36	5.41	3.60	1.99	1.33	0.260	0.173	0.0956	0.0636	0.280	0.186	0.101	0.0674
	38	6.02	4.01	2.16	1.44	0.284	0.189	0.0966	0.0642	0.305	0.203	0.102	0.0682
40					0.311	0.207	0.0976	0.0649	0.334	0.222	0.104	0.0689	
42					0.342	0.228	0.0986	0.0656	0.368	0.245	0.105	0.0697	
44					0.376	0.250	0.100	0.0663	0.403	0.268	0.106	0.0705	
46					0.411	0.273	0.101	0.0670	0.441	0.293	0.107	0.0714	
48					0.447	0.298	0.102	0.0678	0.480	0.319	0.109	0.0722	
50					0.485	0.323	0.103	0.0685	0.521	0.347	0.110	0.0731	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		5.74		3.82		0.419		0.279		0.443		0.294	
$t_y \times 10^3$, (kips) ⁻¹		0.763		0.507		0.123		0.0817		0.133		0.0885	
$t_r \times 10^3$, (kips) ⁻¹		0.937		0.624		0.151		0.101		0.163		0.109	
r_x/r_y		6.55				3.85				3.90			
r_y , in.		2.29				4.26				4.28			
^c Shape is slender for compression for $F_y = 50$ ksi. ^h Flange thickness greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c. ^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(1) with $F_y = 50$ ksi; therefore, $\phi_v = 0.90$ and $\Omega_v = 1.67$. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W36		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes											$F_y = 50$ ksi	
		802 ^h				W36 ^x 723 ^h				652 ^h				
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.142	0.0942	0.0973	0.0648	0.157	0.104	0.109	0.0725	0.174	0.116	0.122	0.0815	
	11	0.152	0.101	0.0973	0.0648	0.169	0.112	0.109	0.0725	0.188	0.125	0.122	0.0815	
	12	0.154	0.103	0.0973	0.0648	0.171	0.114	0.109	0.0725	0.190	0.127	0.122	0.0815	
	13	0.156	0.104	0.0973	0.0648	0.174	0.116	0.109	0.0725	0.193	0.129	0.122	0.0815	
	14	0.159	0.106	0.0973	0.0648	0.177	0.117	0.109	0.0725	0.197	0.131	0.122	0.0815	
	15	0.162	0.108	0.0974	0.0648	0.180	0.120	0.109	0.0726	0.200	0.133	0.123	0.0817	
	16	0.165	0.110	0.0979	0.0651	0.183	0.122	0.110	0.0730	0.204	0.136	0.124	0.0823	
	17	0.168	0.112	0.0984	0.0655	0.187	0.124	0.110	0.0735	0.208	0.139	0.124	0.0828	
	18	0.171	0.114	0.0990	0.0658	0.191	0.127	0.111	0.0739	0.213	0.142	0.125	0.0833	
	19	0.175	0.117	0.100	0.0662	0.195	0.130	0.112	0.0743	0.218	0.145	0.126	0.0839	
	20	0.179	0.119	0.100	0.0665	0.200	0.133	0.112	0.0748	0.223	0.149	0.127	0.0845	
	22	0.188	0.125	0.101	0.0673	0.210	0.140	0.114	0.0757	0.236	0.157	0.129	0.0856	
	24	0.199	0.132	0.102	0.0680	0.222	0.148	0.115	0.0766	0.250	0.166	0.130	0.0868	
	26	0.211	0.140	0.103	0.0688	0.236	0.157	0.117	0.0776	0.266	0.177	0.132	0.0880	
	28	0.225	0.150	0.105	0.0696	0.252	0.168	0.118	0.0786	0.284	0.189	0.134	0.0892	
	30	0.241	0.160	0.106	0.0703	0.270	0.180	0.120	0.0796	0.306	0.203	0.136	0.0905	
	32	0.259	0.173	0.107	0.0712	0.292	0.194	0.121	0.0806	0.330	0.220	0.138	0.0918	
	34	0.280	0.187	0.108	0.0720	0.316	0.210	0.123	0.0817	0.359	0.239	0.140	0.0932	
	36	0.305	0.203	0.109	0.0728	0.344	0.229	0.124	0.0828	0.392	0.261	0.142	0.0946	
	38	0.332	0.221	0.111	0.0737	0.376	0.250	0.126	0.0839	0.430	0.286	0.144	0.0960	
40	0.365	0.243	0.112	0.0746	0.414	0.275	0.128	0.0850	0.475	0.316	0.147	0.0975		
42	0.402	0.268	0.114	0.0755	0.456	0.304	0.130	0.0862	0.524	0.348	0.149	0.0990		
44	0.441	0.294	0.115	0.0765	0.501	0.333	0.131	0.0874	0.575	0.382	0.151	0.101		
46	0.482	0.321	0.116	0.0774	0.547	0.364	0.133	0.0887	0.628	0.418	0.154	0.102		
48	0.525	0.349	0.118	0.0784	0.596	0.397	0.135	0.0900	0.684	0.455	0.156	0.104		
50	0.570	0.379	0.119	0.0794	0.647	0.430	0.137	0.0913	0.742	0.494	0.159	0.106		
Other Constants and Properties														
$b_y \times 10^3$, (kip-ft) ⁻¹		0.479		0.319		0.541		0.360		0.613		0.408		
$t_y \times 10^3$, (kips) ⁻¹		0.142		0.0942		0.157		0.104		0.174		0.116		
$t_r \times 10^3$, (kips) ⁻¹		0.174		0.116		0.193		0.128		0.214		0.142		
r_x/r_y		3.93				3.93				3.95				
r_y , in.		4.22				4.17				4.10				
^h Flange thickness greater than 2 in. Special requirements may apply per AISC <i>Specification</i> Section A3.1c.														


 W36		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes											$F_y = 50$ ksi	
		Shape		W36 \times										
Design		529 ^h				487 ^h				441 ^h				
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.214	0.142	0.153	0.102	0.234	0.155	0.167	0.111	0.257	0.171	0.187	0.124	
	11	0.232	0.154	0.153	0.102	0.253	0.169	0.167	0.111	0.279	0.186	0.187	0.124	
	12	0.235	0.157	0.153	0.102	0.257	0.171	0.167	0.111	0.284	0.189	0.187	0.124	
	13	0.239	0.159	0.153	0.102	0.262	0.174	0.167	0.111	0.288	0.192	0.187	0.124	
	14	0.244	0.162	0.153	0.102	0.266	0.177	0.167	0.111	0.294	0.196	0.187	0.124	
	15	0.248	0.165	0.154	0.102	0.272	0.181	0.169	0.112	0.300	0.199	0.189	0.125	
	16	0.253	0.169	0.155	0.103	0.277	0.185	0.170	0.113	0.306	0.204	0.190	0.127	
	17	0.259	0.172	0.157	0.104	0.284	0.189	0.172	0.114	0.313	0.208	0.192	0.128	
	18	0.265	0.176	0.158	0.105	0.290	0.193	0.173	0.115	0.321	0.213	0.194	0.129	
	19	0.272	0.181	0.159	0.106	0.298	0.198	0.175	0.116	0.329	0.219	0.196	0.130	
	20	0.279	0.185	0.160	0.107	0.306	0.203	0.176	0.117	0.338	0.225	0.198	0.132	
	22	0.294	0.196	0.163	0.109	0.323	0.215	0.180	0.120	0.358	0.238	0.202	0.135	
	24	0.313	0.208	0.166	0.110	0.344	0.229	0.183	0.122	0.381	0.254	0.206	0.137	
	26	0.334	0.222	0.169	0.112	0.368	0.245	0.187	0.124	0.408	0.272	0.211	0.140	
	28	0.359	0.239	0.172	0.114	0.395	0.263	0.190	0.127	0.440	0.293	0.215	0.143	
	30	0.387	0.258	0.175	0.117	0.427	0.284	0.194	0.129	0.476	0.317	0.220	0.147	
	32	0.420	0.279	0.178	0.119	0.465	0.309	0.198	0.132	0.518	0.345	0.225	0.150	
	34	0.458	0.305	0.182	0.121	0.508	0.338	0.202	0.135	0.567	0.377	0.231	0.153	
	36	0.502	0.334	0.185	0.123	0.558	0.371	0.207	0.138	0.624	0.415	0.236	0.157	
	38	0.554	0.369	0.189	0.126	0.617	0.410	0.211	0.141	0.693	0.461	0.242	0.161	
40	0.614	0.409	0.193	0.128	0.684	0.455	0.216	0.144	0.767	0.511	0.248	0.165		
42	0.677	0.450	0.197	0.131	0.754	0.501	0.221	0.147	0.846	0.563	0.255	0.169		
44	0.743	0.494	0.201	0.134	0.827	0.550	0.226	0.150	0.928	0.618	0.261	0.174		
46	0.812	0.540	0.205	0.137	0.904	0.601	0.232	0.154	1.01	0.675	0.269	0.179		
48	0.884	0.588	0.210	0.140	0.984	0.655	0.237	0.158	1.10	0.735	0.276	0.184		
50	0.960	0.638	0.215	0.143	1.07	0.711	0.243	0.162	1.20	0.798	0.284	0.189		
Other Constants and Properties														
$b_y \times 10^3$, (kip-ft) ⁻¹		0.785		0.522		0.865		0.575		0.968		0.644		
$t_y \times 10^3$, (kips) ⁻¹		0.214		0.142		0.234		0.155		0.257		0.171		
$t_r \times 10^3$, (kips) ⁻¹		0.263		0.175		0.287		0.191		0.316		0.210		
r_x/r_y		4.00				3.99				4.01				
r_y , in.		4.00				3.96				3.92				
^h Flange thickness greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.														


 W36		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes											$F_y = 50$ ksi	
		395 ^h				361 ^h				330				
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
		Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.288	0.192	0.208	0.139	0.315	0.210	0.230	0.153	0.345	0.229	0.253
11	0.313		0.208	0.208	0.139	0.343	0.228	0.230	0.153	0.376	0.250	0.253	0.168	
12	0.318		0.212	0.208	0.139	0.349	0.232	0.230	0.153	0.382	0.254	0.253	0.168	
13	0.324		0.216	0.208	0.139	0.355	0.236	0.230	0.153	0.389	0.259	0.253	0.168	
14	0.330		0.220	0.209	0.139	0.362	0.241	0.231	0.154	0.397	0.264	0.254	0.169	
15	0.337		0.224	0.211	0.141	0.370	0.246	0.234	0.155	0.405	0.270	0.257	0.171	
16	0.344		0.229	0.213	0.142	0.378	0.251	0.236	0.157	0.414	0.276	0.260	0.173	
17	0.352		0.234	0.216	0.144	0.387	0.257	0.239	0.159	0.424	0.282	0.264	0.175	
18	0.361		0.240	0.218	0.145	0.397	0.264	0.242	0.161	0.435	0.289	0.267	0.178	
19	0.371		0.247	0.221	0.147	0.407	0.271	0.245	0.163	0.447	0.297	0.270	0.180	
20	0.381		0.253	0.223	0.148	0.419	0.279	0.248	0.165	0.459	0.306	0.274	0.182	
22	0.404		0.269	0.228	0.152	0.444	0.296	0.254	0.169	0.488	0.325	0.281	0.187	
24	0.431		0.287	0.234	0.155	0.474	0.316	0.260	0.173	0.521	0.347	0.289	0.192	
26	0.462		0.307	0.239	0.159	0.509	0.339	0.267	0.178	0.560	0.373	0.297	0.198	
28	0.498		0.331	0.245	0.163	0.550	0.366	0.274	0.183	0.605	0.403	0.306	0.204	
30	0.540		0.359	0.251	0.167	0.597	0.397	0.282	0.188	0.658	0.438	0.315	0.210	
32	0.589		0.392	0.258	0.172	0.652	0.434	0.290	0.193	0.719	0.478	0.325	0.216	
34	0.646		0.430	0.265	0.176	0.716	0.477	0.299	0.199	0.790	0.526	0.335	0.223	
36	0.713		0.474	0.272	0.181	0.791	0.526	0.308	0.205	0.874	0.581	0.346	0.230	
38	0.792		0.527	0.280	0.186	0.880	0.586	0.317	0.211	0.973	0.648	0.358	0.238	
40	0.878	0.584	0.288	0.191	0.976	0.649	0.327	0.218	1.08	0.717	0.371	0.247		
42	0.968	0.644	0.296	0.197	1.08	0.716	0.338	0.225	1.19	0.791	0.384	0.256		
44	1.06	0.707	0.305	0.203	1.18	0.785	0.350	0.233	1.30	0.868	0.399	0.265		
46	1.16	0.772	0.315	0.210	1.29	0.858	0.362	0.241	1.43	0.949	0.417	0.277		
48	1.26	0.841	0.325	0.216	1.40	0.935	0.376	0.250	1.55	1.03	0.441	0.293		
50	1.37	0.913	0.336	0.224	1.52	1.01	0.395	0.263	1.69	1.12	0.465	0.309		
Other Constants and Properties														
$b_y \times 10^3$, (kip-ft) ⁻¹		1.10		0.729		1.22		0.809		1.34		0.894		
$t_y \times 10^3$, (kips) ⁻¹		0.288		0.192		0.315		0.210		0.345		0.229		
$t_r \times 10^3$, (kips) ⁻¹		0.354		0.236		0.387		0.258		0.423		0.282		
r_x/r_y		4.05				4.05				4.05				
r_y , in.		3.88				3.85				3.83				
^h Flange thickness greater than 2 in. Special requirements may apply per AISC <i>Specification</i> Section A3.1c.														


 W36		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		302				282 ^c				262 ^c			
Shape		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.375	0.250	0.278	0.185	0.404	0.269	0.299	0.199	0.439	0.292	0.324	0.215
	11	0.410	0.272	0.278	0.185	0.440	0.293	0.299	0.199	0.475	0.316	0.324	0.215
	12	0.416	0.277	0.278	0.185	0.447	0.298	0.299	0.199	0.483	0.321	0.324	0.215
	13	0.424	0.282	0.278	0.185	0.456	0.303	0.299	0.199	0.491	0.326	0.324	0.215
	14	0.432	0.288	0.280	0.186	0.465	0.309	0.302	0.201	0.501	0.333	0.327	0.218
	15	0.441	0.294	0.284	0.189	0.475	0.316	0.306	0.203	0.512	0.340	0.332	0.221
	16	0.451	0.300	0.287	0.191	0.486	0.323	0.310	0.206	0.524	0.348	0.337	0.224
	17	0.462	0.308	0.291	0.194	0.497	0.331	0.314	0.209	0.537	0.357	0.342	0.227
	18	0.474	0.315	0.295	0.196	0.510	0.339	0.319	0.212	0.551	0.366	0.347	0.231
	19	0.487	0.324	0.299	0.199	0.524	0.349	0.323	0.215	0.566	0.377	0.352	0.234
	20	0.501	0.333	0.303	0.202	0.539	0.359	0.328	0.218	0.583	0.388	0.357	0.238
	22	0.532	0.354	0.312	0.208	0.573	0.382	0.338	0.225	0.620	0.413	0.369	0.245
	24	0.569	0.378	0.321	0.214	0.613	0.408	0.348	0.232	0.664	0.442	0.381	0.253
	26	0.611	0.407	0.331	0.220	0.660	0.439	0.359	0.239	0.716	0.476	0.394	0.262
	28	0.661	0.440	0.341	0.227	0.714	0.475	0.371	0.247	0.776	0.516	0.408	0.271
	30	0.718	0.478	0.352	0.234	0.777	0.517	0.384	0.255	0.846	0.563	0.423	0.281
	32	0.786	0.523	0.364	0.242	0.850	0.566	0.397	0.264	0.928	0.617	0.439	0.292
	34	0.864	0.575	0.376	0.250	0.936	0.623	0.412	0.274	1.02	0.681	0.456	0.303
	36	0.956	0.636	0.389	0.259	1.04	0.690	0.428	0.284	1.14	0.757	0.474	0.316
	38	1.07	0.709	0.404	0.269	1.16	0.769	0.444	0.296	1.27	0.843	0.495	0.329
40	1.18	0.785	0.419	0.279	1.28	0.852	0.463	0.308	1.40	0.934	0.517	0.344	
42	1.30	0.866	0.436	0.290	1.41	0.939	0.482	0.321	1.55	1.03	0.551	0.367	
44	1.43	0.950	0.456	0.303	1.55	1.03	0.514	0.342	1.70	1.13	0.589	0.392	
46	1.56	1.04	0.484	0.322	1.69	1.13	0.547	0.364	1.86	1.24	0.628	0.418	
48	1.70	1.13	0.513	0.341	1.84	1.23	0.580	0.386	2.02	1.35	0.666	0.443	
50	1.84	1.23	0.541	0.360	2.00	1.33	0.612	0.407	2.19	1.46	0.705	0.469	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		1.48		0.984		1.60		1.06		1.75		1.16	
$t_y \times 10^3$, (kips) ⁻¹		0.375		0.250		0.403		0.268		0.433		0.288	
$t_r \times 10^3$, (kips) ⁻¹		0.461		0.307		0.495		0.330		0.531		0.354	
r_x/r_y		4.03				4.05				4.07			
r_y , in.		3.82				3.80				3.76			
^c Shape is slender for compression for $F_y = 50$ ksi.													


 W36		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		256				247 ^c				232 ^c			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.444	0.295	0.343	0.228	0.473	0.315	0.346	0.230	0.497	0.330	0.381	0.253
	11	0.532	0.354	0.353	0.235	0.513	0.341	0.346	0.230	0.591	0.393	0.394	0.262
	12	0.550	0.366	0.360	0.239	0.521	0.346	0.346	0.230	0.613	0.408	0.402	0.267
	13	0.571	0.380	0.367	0.244	0.529	0.352	0.346	0.230	0.637	0.424	0.410	0.273
	14	0.595	0.396	0.374	0.249	0.539	0.359	0.350	0.233	0.663	0.441	0.419	0.278
	15	0.622	0.414	0.381	0.254	0.549	0.365	0.355	0.236	0.694	0.461	0.427	0.284
	16	0.651	0.433	0.389	0.259	0.561	0.373	0.360	0.240	0.727	0.484	0.437	0.291
	17	0.684	0.455	0.397	0.264	0.573	0.381	0.366	0.243	0.765	0.509	0.447	0.297
	18	0.721	0.480	0.406	0.270	0.588	0.391	0.372	0.247	0.807	0.537	0.457	0.304
	19	0.762	0.507	0.414	0.276	0.605	0.402	0.378	0.251	0.855	0.569	0.468	0.311
	20	0.808	0.538	0.424	0.282	0.623	0.414	0.384	0.255	0.907	0.604	0.479	0.319
	22	0.916	0.610	0.443	0.295	0.663	0.441	0.396	0.264	1.03	0.687	0.503	0.335
	24	1.05	0.700	0.465	0.309	0.711	0.473	0.410	0.273	1.19	0.791	0.530	0.352
	26	1.22	0.815	0.489	0.325	0.766	0.510	0.424	0.282	1.39	0.923	0.559	0.372
	28	1.42	0.945	0.515	0.343	0.831	0.553	0.440	0.293	1.61	1.07	0.592	0.394
	30	1.63	1.08	0.545	0.362	0.907	0.603	0.457	0.304	1.85	1.23	0.631	0.420
	32	1.86	1.23	0.582	0.387	0.996	0.663	0.475	0.316	2.10	1.40	0.691	0.460
	34	2.09	1.39	0.632	0.420	1.10	0.732	0.495	0.329	2.37	1.58	0.751	0.500
	36	2.35	1.56	0.681	0.453	1.22	0.815	0.516	0.343	2.66	1.77	0.812	0.540
	38	2.62	1.74	0.730	0.486	1.36	0.908	0.539	0.359	2.96	1.97	0.872	0.580
40	2.90	1.93	0.779	0.519	1.51	1.01	0.570	0.379	3.28	2.18	0.932	0.620	
42	3.20	2.13	0.828	0.551	1.67	1.11	0.613	0.408	3.62	2.41	0.992	0.660	
44	3.51	2.33	0.877	0.584	1.83	1.22	0.657	0.437					
46					2.00	1.33	0.700	0.466					
48					2.18	1.45	0.744	0.495					
50					2.36	1.57	0.788	0.524					
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		2.60		1.73		1.88		1.25		2.92		1.94	
$t_y \times 10^3$, (kips) ⁻¹		0.444		0.295		0.461		0.307		0.491		0.327	
$t_r \times 10^3$, (kips) ⁻¹		0.545		0.363		0.566		0.377		0.603		0.402	
r_x/r_y		5.62				4.06				5.65			
r_y , in.		2.65				3.74				2.62			
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W36		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		231 ^c				210 ^c				194 ^c			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.510	0.339	0.370	0.246	0.554	0.368	0.428	0.285	0.616	0.410	0.464	0.309
	11	0.553	0.368	0.370	0.246	0.653	0.435	0.445	0.296	0.727	0.484	0.485	0.322
	12	0.562	0.374	0.370	0.246	0.678	0.451	0.454	0.302	0.750	0.499	0.496	0.330
	13	0.571	0.380	0.370	0.246	0.705	0.469	0.465	0.309	0.776	0.516	0.507	0.337
	14	0.581	0.387	0.375	0.249	0.736	0.489	0.475	0.316	0.805	0.536	0.519	0.345
	15	0.593	0.394	0.381	0.253	0.770	0.512	0.486	0.323	0.841	0.560	0.532	0.354
	16	0.605	0.403	0.387	0.257	0.809	0.538	0.498	0.331	0.884	0.588	0.545	0.363
	17	0.619	0.412	0.393	0.261	0.852	0.567	0.510	0.339	0.932	0.620	0.559	0.372
	18	0.633	0.421	0.399	0.266	0.901	0.599	0.523	0.348	0.986	0.656	0.574	0.382
	19	0.649	0.432	0.406	0.270	0.955	0.635	0.536	0.357	1.05	0.696	0.589	0.392
	20	0.667	0.443	0.412	0.274	1.02	0.676	0.550	0.366	1.11	0.741	0.606	0.403
	22	0.709	0.472	0.426	0.284	1.16	0.772	0.580	0.386	1.28	0.848	0.641	0.427
	24	0.761	0.506	0.442	0.294	1.34	0.893	0.614	0.409	1.48	0.984	0.681	0.453
	26	0.821	0.546	0.458	0.305	1.57	1.05	0.653	0.434	1.73	1.15	0.726	0.483
	28	0.892	0.594	0.476	0.316	1.82	1.21	0.696	0.463	2.01	1.34	0.786	0.523
	30	0.975	0.649	0.494	0.329	2.09	1.39	0.765	0.509	2.31	1.54	0.873	0.581
	32	1.07	0.713	0.515	0.343	2.38	1.58	0.841	0.559	2.63	1.75	0.961	0.639
	34	1.19	0.789	0.537	0.357	2.69	1.79	0.917	0.610	2.96	1.97	1.05	0.699
	36	1.32	0.880	0.562	0.374	3.01	2.00	0.993	0.661	3.32	2.21	1.14	0.758
	38	1.47	0.981	0.588	0.391	3.36	2.23	1.07	0.712	3.70	2.46	1.23	0.818
40	1.63	1.09	0.631	0.420	3.72	2.48	1.15	0.763	4.10	2.73	1.32	0.878	
42	1.80	1.20	0.680	0.452	4.10	2.73	1.22	0.814	4.52	3.01	1.41	0.938	
44	1.98	1.31	0.729	0.485									
46	2.16	1.44	0.778	0.518									
48	2.35	1.56	0.828	0.551									
50	2.55	1.70	0.878	0.584									
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		2.02		1.35		3.33		2.22		3.65		2.43	
$t_y \times 10^3$, (kips) ⁻¹		0.490		0.326		0.540		0.359		0.586		0.390	
$t_r \times 10^3$, (kips) ⁻¹		0.602		0.401		0.663		0.442		0.720		0.480	
r_x/r_y		4.07				5.66				5.70			
r_y , in.		3.71				2.58				2.56			
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W36		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		182 ^c				170 ^c				160 ^c			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.667	0.444	0.496	0.330	0.729	0.485	0.533	0.355	0.788	0.524	0.571	0.380
	11	0.787	0.524	0.519	0.345	0.863	0.574	0.559	0.372	0.936	0.623	0.601	0.400
	12	0.813	0.541	0.531	0.353	0.891	0.593	0.573	0.381	0.967	0.643	0.616	0.410
	13	0.841	0.559	0.544	0.362	0.923	0.614	0.587	0.390	1.00	0.667	0.632	0.420
	14	0.873	0.581	0.557	0.371	0.958	0.637	0.602	0.400	1.04	0.693	0.648	0.431
	15	0.908	0.604	0.571	0.380	0.997	0.664	0.617	0.411	1.08	0.722	0.666	0.443
	16	0.947	0.630	0.586	0.390	1.04	0.693	0.634	0.422	1.13	0.754	0.684	0.455
	17	0.995	0.662	0.601	0.400	1.09	0.725	0.651	0.433	1.19	0.790	0.703	0.468
	18	1.05	0.701	0.618	0.411	1.14	0.762	0.670	0.445	1.25	0.831	0.724	0.482
	19	1.12	0.744	0.635	0.422	1.21	0.805	0.689	0.458	1.32	0.876	0.746	0.496
	20	1.19	0.792	0.653	0.435	1.29	0.858	0.710	0.472	1.39	0.928	0.769	0.511
	22	1.36	0.908	0.693	0.461	1.48	0.985	0.755	0.502	1.61	1.07	0.820	0.545
	24	1.58	1.05	0.738	0.491	1.72	1.15	0.806	0.536	1.88	1.25	0.878	0.584
	26	1.86	1.24	0.789	0.525	2.02	1.35	0.864	0.575	2.20	1.47	0.950	0.632
	28	2.16	1.43	0.868	0.577	2.35	1.56	0.966	0.643	2.56	1.70	1.07	0.714
	30	2.47	1.65	0.966	0.642	2.69	1.79	1.08	0.717	2.94	1.95	1.20	0.797
	32	2.81	1.87	1.07	0.709	3.07	2.04	1.19	0.792	3.34	2.22	1.33	0.883
	34	3.18	2.11	1.17	0.775	3.46	2.30	1.31	0.869	3.77	2.51	1.46	0.969
	36	3.56	2.37	1.27	0.843	3.88	2.58	1.42	0.946	4.23	2.81	1.59	1.06
	38	3.97	2.64	1.37	0.911	4.32	2.88	1.54	1.02	4.71	3.13	1.72	1.15
40	4.40	2.93	1.47	0.979	4.79	3.19	1.66	1.10	5.22	3.47	1.86	1.23	
42	4.85	3.23	1.57	1.05	5.28	3.51	1.77	1.18					
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		3.93		2.61		4.25		2.83		4.61		3.07	
$t_y \times 10^3$, (kips) ⁻¹		0.623		0.415		0.668		0.444		0.711		0.473	
$t_r \times 10^3$, (kips) ⁻¹		0.765		0.510		0.821		0.547		0.873		0.582	
r_x/r_y		5.69				5.73				5.76			
r_y , in.		2.55				2.53				2.50			
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W36-W33		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes								$F_y = 50$ ksi			
		W36 ^x				135 ^{c,v}				W33 ^x			
Shape		150 ^c		135 ^{c,v}		135 ^{c,v}		135 ^{c,v}		387 ^h		387 ^h	
		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
		Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.848	0.564	0.613	0.408	0.963	0.641	0.700	0.466	0.293	0.195
11	1.01		0.673	0.648	0.431	1.16	0.772	0.748	0.498	0.320	0.213	0.228	0.152
12	1.05		0.696	0.665	0.442	1.20	0.800	0.769	0.512	0.326	0.217	0.228	0.152
13	1.08		0.721	0.682	0.454	1.25	0.832	0.791	0.526	0.332	0.221	0.228	0.152
14	1.13		0.750	0.701	0.466	1.30	0.867	0.814	0.541	0.339	0.225	0.230	0.153
15	1.18		0.782	0.721	0.479	1.36	0.907	0.838	0.558	0.346	0.230	0.232	0.155
16	1.23		0.818	0.741	0.493	1.43	0.951	0.864	0.575	0.354	0.236	0.235	0.156
17	1.29		0.858	0.763	0.508	1.50	1.00	0.892	0.593	0.363	0.241	0.237	0.158
18	1.36		0.903	0.786	0.523	1.59	1.06	0.921	0.613	0.372	0.248	0.239	0.159
19	1.43		0.953	0.811	0.540	1.68	1.12	0.952	0.634	0.383	0.255	0.242	0.161
20	1.52		1.01	0.837	0.557	1.78	1.19	0.986	0.656	0.394	0.262	0.244	0.163
22	1.74		1.16	0.895	0.596	2.06	1.37	1.06	0.706	0.419	0.279	0.250	0.166
24	2.04		1.36	0.962	0.640	2.44	1.62	1.15	0.763	0.449	0.299	0.255	0.170
26	2.40		1.59	1.06	0.706	2.87	1.91	1.31	0.871	0.483	0.322	0.261	0.174
28	2.78		1.85	1.20	0.799	3.32	2.21	1.49	0.989	0.524	0.348	0.267	0.178
30	3.19		2.12	1.34	0.894	3.82	2.54	1.67	1.11	0.571	0.380	0.273	0.182
32	3.63		2.42	1.49	0.991	4.34	2.89	1.85	1.23	0.626	0.416	0.280	0.186
34	4.10		2.73	1.64	1.09	4.90	3.26	2.05	1.36	0.690	0.459	0.287	0.191
36	4.59		3.06	1.79	1.19	5.49	3.66	2.24	1.49	0.766	0.510	0.294	0.196
38	5.12		3.41	1.94	1.29	6.12	4.07	2.44	1.62	0.854	0.568	0.302	0.201
40	5.67	3.77	2.10	1.40					0.946	0.629	0.310	0.206	
42									1.04	0.694	0.318	0.212	
44									1.14	0.762	0.327	0.218	
46									1.25	0.832	0.337	0.224	
48									1.36	0.906	0.347	0.231	
50									1.48	0.984	0.358	0.238	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		5.02		3.34		5.97		3.97		1.14		0.760	
$t_y \times 10^3$, (kips) ⁻¹		0.754		0.502		0.837		0.557		0.293		0.195	
$t_r \times 10^3$, (kips) ⁻¹		0.926		0.617		1.03		0.685		0.360		0.240	
r_x/r_y		5.79				5.88				3.87			
r_y , in.		2.47				2.38				3.77			
^c Shape is slender for compression for $F_y = 50$ ksi. ^h Flange thickness greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c. ^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(1) with $F_y = 50$ ksi; therefore, $\phi_v = 0.90$ and $\Omega_v = 1.67$. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W33		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		354 ^h				318				291			
Shape		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.321	0.214	0.251	0.167	0.356	0.237	0.281	0.187	0.390	0.260	0.307	0.204
	11	0.352	0.234	0.251	0.167	0.391	0.260	0.281	0.187	0.429	0.285	0.307	0.204
	12	0.358	0.238	0.251	0.167	0.398	0.265	0.281	0.187	0.436	0.290	0.307	0.204
	13	0.365	0.243	0.251	0.167	0.406	0.270	0.281	0.187	0.445	0.296	0.307	0.204
	14	0.372	0.248	0.253	0.168	0.414	0.276	0.283	0.189	0.454	0.302	0.311	0.207
	15	0.380	0.253	0.256	0.170	0.423	0.282	0.287	0.191	0.465	0.309	0.315	0.210
	16	0.389	0.259	0.259	0.172	0.434	0.288	0.290	0.193	0.476	0.317	0.319	0.212
	17	0.399	0.266	0.261	0.174	0.445	0.296	0.294	0.195	0.488	0.325	0.323	0.215
	18	0.410	0.273	0.264	0.176	0.457	0.304	0.297	0.198	0.502	0.334	0.328	0.218
	19	0.421	0.280	0.267	0.178	0.470	0.313	0.301	0.200	0.517	0.344	0.332	0.221
	20	0.434	0.289	0.270	0.180	0.484	0.322	0.305	0.203	0.533	0.354	0.337	0.224
	22	0.462	0.308	0.277	0.184	0.516	0.343	0.313	0.208	0.568	0.378	0.346	0.230
	24	0.495	0.330	0.283	0.189	0.554	0.368	0.321	0.214	0.611	0.406	0.356	0.237
	26	0.534	0.355	0.290	0.193	0.598	0.398	0.330	0.220	0.660	0.439	0.367	0.244
	28	0.579	0.386	0.298	0.198	0.649	0.432	0.339	0.226	0.718	0.478	0.378	0.251
	30	0.632	0.421	0.305	0.203	0.710	0.472	0.349	0.232	0.786	0.523	0.390	0.259
	32	0.694	0.462	0.313	0.208	0.780	0.519	0.359	0.239	0.865	0.576	0.403	0.268
	34	0.767	0.510	0.322	0.214	0.863	0.574	0.370	0.246	0.959	0.638	0.416	0.277
	36	0.854	0.568	0.331	0.220	0.963	0.641	0.382	0.254	1.07	0.713	0.431	0.287
	38	0.951	0.633	0.340	0.227	1.07	0.714	0.395	0.263	1.19	0.794	0.447	0.297
40	1.05	0.701	0.351	0.233	1.19	0.791	0.408	0.271	1.32	0.880	0.463	0.308	
42	1.16	0.773	0.361	0.240	1.31	0.872	0.422	0.281	1.46	0.970	0.482	0.320	
44	1.28	0.848	0.373	0.248	1.44	0.957	0.438	0.291	1.60	1.06	0.503	0.335	
46	1.39	0.927	0.385	0.256	1.57	1.05	0.454	0.302	1.75	1.16	0.533	0.354	
48	1.52	1.01	0.398	0.265	1.71	1.14	0.477	0.318	1.90	1.27	0.563	0.374	
50	1.65	1.10	0.412	0.274	1.86	1.24	0.502	0.334	2.07	1.37	0.592	0.394	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		1.26		0.841		1.43		0.948		1.58		1.05	
$t_y \times 10^3$, (kips) ⁻¹		0.321		0.214		0.356		0.237		0.390		0.260	
$t_r \times 10^3$, (kips) ⁻¹		0.394		0.263		0.438		0.292		0.479		0.320	
r_x/r_y		3.88				3.91				3.91			
r_y , in.		3.74				3.71				3.68			
^h Flange thickness greater than 2 in. Special requirements may apply per AISC <i>Specification</i> Section A3.1c.													


 W33		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		263				241 ^c				221 ^c			
Shape		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.432	0.287	0.343	0.228	0.470	0.313	0.379	0.252	0.520	0.346	0.416	0.277
	11	0.475	0.316	0.343	0.228	0.518	0.344	0.379	0.252	0.568	0.378	0.416	0.277
	12	0.483	0.322	0.343	0.228	0.527	0.351	0.379	0.252	0.577	0.384	0.416	0.277
	13	0.493	0.328	0.343	0.228	0.538	0.358	0.380	0.253	0.587	0.391	0.418	0.278
	14	0.503	0.335	0.348	0.231	0.550	0.366	0.386	0.257	0.600	0.399	0.424	0.282
	15	0.515	0.343	0.352	0.234	0.563	0.374	0.391	0.260	0.615	0.409	0.431	0.286
	16	0.528	0.351	0.357	0.238	0.577	0.384	0.397	0.264	0.630	0.419	0.437	0.291
	17	0.542	0.360	0.362	0.241	0.593	0.394	0.403	0.268	0.648	0.431	0.444	0.296
	18	0.557	0.370	0.367	0.244	0.609	0.405	0.409	0.272	0.666	0.443	0.451	0.300
	19	0.573	0.381	0.373	0.248	0.628	0.418	0.416	0.276	0.687	0.457	0.459	0.305
	20	0.591	0.393	0.378	0.252	0.648	0.431	0.422	0.281	0.709	0.472	0.467	0.310
	22	0.631	0.420	0.390	0.259	0.693	0.461	0.436	0.290	0.760	0.505	0.483	0.321
	24	0.679	0.452	0.402	0.267	0.746	0.496	0.450	0.300	0.819	0.545	0.500	0.333
	26	0.734	0.488	0.415	0.276	0.809	0.538	0.466	0.310	0.889	0.591	0.519	0.345
	28	0.799	0.532	0.428	0.285	0.882	0.587	0.483	0.321	0.970	0.646	0.539	0.358
	30	0.875	0.582	0.443	0.295	0.968	0.644	0.501	0.333	1.07	0.710	0.560	0.373
	32	0.965	0.642	0.459	0.305	1.07	0.712	0.520	0.346	1.18	0.786	0.584	0.388
	34	1.07	0.712	0.476	0.317	1.19	0.791	0.541	0.360	1.32	0.876	0.609	0.405
	36	1.20	0.797	0.494	0.329	1.33	0.887	0.564	0.375	1.48	0.982	0.637	0.424
	38	1.33	0.888	0.514	0.342	1.48	0.988	0.589	0.392	1.64	1.09	0.667	0.444
40	1.48	0.984	0.535	0.356	1.65	1.09	0.619	0.412	1.82	1.21	0.719	0.478	
42	1.63	1.08	0.562	0.374	1.81	1.21	0.663	0.441	2.01	1.34	0.772	0.514	
44	1.79	1.19	0.598	0.398	1.99	1.32	0.708	0.471	2.20	1.47	0.825	0.549	
46	1.96	1.30	0.635	0.422	2.18	1.45	0.753	0.501	2.41	1.60	0.879	0.585	
48	2.13	1.42	0.672	0.447	2.37	1.58	0.797	0.530	2.62	1.75	0.932	0.620	
50	2.31	1.54	0.708	0.471	2.57	1.71	0.842	0.560	2.85	1.89	0.986	0.656	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹	1.76		1.17		1.96		1.30		2.17		1.45		
$t_y \times 10^3$, (kips) ⁻¹	0.432		0.287		0.470		0.313		0.511		0.340		
$t_r \times 10^3$, (kips) ⁻¹	0.530		0.353		0.577		0.385		0.628		0.419		
r_x/r_y	3.91				3.90				3.93				
r_y , in.	3.66				3.62				3.59				
^c Shape is slender for compression for $F_y = 50$ ksi.													


 W33		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		201 ^c				169 ^c				152 ^c			
Shape		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.587	0.390	0.461	0.307	0.718	0.478	0.566	0.377	0.807	0.537	0.637	0.424
	11	0.641	0.426	0.461	0.307	0.855	0.569	0.595	0.396	0.964	0.641	0.673	0.447
	12	0.652	0.434	0.461	0.307	0.884	0.588	0.608	0.405	0.997	0.663	0.689	0.459
	13	0.664	0.441	0.464	0.309	0.917	0.610	0.623	0.415	1.03	0.688	0.707	0.470
	14	0.677	0.450	0.471	0.314	0.953	0.634	0.638	0.425	1.08	0.716	0.725	0.483
	15	0.691	0.460	0.479	0.319	0.994	0.661	0.654	0.435	1.12	0.747	0.745	0.496
	16	0.707	0.470	0.487	0.324	1.04	0.692	0.671	0.447	1.18	0.782	0.765	0.509
	17	0.724	0.482	0.495	0.329	1.10	0.731	0.689	0.458	1.23	0.821	0.787	0.524
	18	0.743	0.494	0.504	0.335	1.16	0.775	0.708	0.471	1.30	0.866	0.810	0.539
	19	0.763	0.508	0.512	0.341	1.24	0.825	0.728	0.484	1.39	0.923	0.834	0.555
	20	0.788	0.524	0.522	0.347	1.32	0.881	0.749	0.498	1.48	0.987	0.860	0.572
	22	0.845	0.562	0.541	0.360	1.52	1.01	0.794	0.528	1.71	1.14	0.917	0.610
	24	0.912	0.607	0.561	0.374	1.78	1.19	0.846	0.563	2.01	1.34	0.982	0.653
	26	0.991	0.659	0.584	0.388	2.09	1.39	0.905	0.602	2.36	1.57	1.07	0.709
	28	1.08	0.721	0.608	0.404	2.43	1.62	0.999	0.664	2.74	1.82	1.20	0.798
	30	1.19	0.794	0.634	0.422	2.79	1.85	1.11	0.737	3.15	2.09	1.33	0.888
	32	1.32	0.880	0.663	0.441	3.17	2.11	1.22	0.810	3.58	2.38	1.47	0.979
	34	1.48	0.984	0.694	0.462	3.58	2.38	1.33	0.883	4.04	2.69	1.61	1.07
	36	1.66	1.10	0.728	0.484	4.01	2.67	1.44	0.957	4.53	3.02	1.75	1.16
	38	1.85	1.23	0.782	0.520	4.47	2.98	1.55	1.03	5.05	3.36	1.89	1.26
40	2.05	1.36	0.846	0.563	4.95	3.30	1.66	1.10	5.60	3.72	2.03	1.35	
42	2.26	1.50	0.910	0.606									
44	2.48	1.65	0.975	0.649									
46	2.71	1.80	1.04	0.692									
48	2.95	1.96	1.11	0.736									
50	3.20	2.13	1.17	0.780									
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		2.42		1.61		4.22		2.81		4.82		3.21	
$t_y \times 10^3$, (kips) ⁻¹		0.565		0.376		0.675		0.449		0.744		0.495	
$t_r \times 10^3$, (kips) ⁻¹		0.694		0.463		0.829		0.553		0.914		0.609	
r_x/r_y		3.93				5.48				5.47			
r_y , in.		3.56				2.50				2.47			
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W33		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		141 ^c				130 ^c				118 ^{c,v}			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.888	0.591	0.693	0.461	0.979	0.651	0.763	0.508	1.11	0.736	0.858	0.571
	11	1.07	0.710	0.735	0.489	1.18	0.786	0.814	0.542	1.35	0.897	0.926	0.616
	12	1.10	0.735	0.754	0.502	1.22	0.815	0.837	0.557	1.40	0.931	0.952	0.634
	13	1.15	0.763	0.774	0.515	1.27	0.847	0.860	0.572	1.46	0.970	0.98	0.652
	14	1.19	0.795	0.796	0.529	1.33	0.883	0.885	0.589	1.52	1.01	1.01	0.672
	15	1.25	0.830	0.818	0.544	1.39	0.924	0.911	0.606	1.60	1.06	1.04	0.693
	16	1.31	0.870	0.841	0.560	1.46	0.969	0.939	0.624	1.68	1.12	1.08	0.716
	17	1.37	0.915	0.866	0.576	1.53	1.02	0.968	0.644	1.77	1.18	1.11	0.740
	18	1.45	0.964	0.893	0.594	1.62	1.08	0.999	0.665	1.88	1.25	1.15	0.765
	19	1.53	1.02	0.921	0.613	1.71	1.14	1.03	0.687	1.99	1.33	1.19	0.793
	20	1.64	1.09	0.951	0.633	1.82	1.21	1.07	0.711	2.12	1.41	1.24	0.822
	22	1.91	1.27	1.02	0.677	2.13	1.42	1.15	0.764	2.48	1.65	1.34	0.888
	24	2.25	1.50	1.09	0.728	2.52	1.68	1.24	0.826	2.95	1.97	1.48	0.984
	26	2.64	1.76	1.21	0.808	2.96	1.97	1.41	0.939	3.47	2.31	1.70	1.13
	28	3.07	2.04	1.37	0.911	3.43	2.28	1.60	1.06	4.02	2.68	1.92	1.28
	30	3.52	2.34	1.53	1.02	3.94	2.62	1.78	1.19	4.62	3.07	2.16	1.44
	32	4.00	2.66	1.69	1.12	4.48	2.98	1.98	1.32	5.25	3.49	2.40	1.59
	34	4.52	3.01	1.85	1.23	5.06	3.37	2.17	1.45	5.93	3.95	2.64	1.76
	36	5.07	3.37	2.02	1.34	5.68	3.78	2.37	1.58	6.65	4.42	2.89	1.92
	38	5.65	3.76	2.18	1.45	6.32	4.21	2.57	1.71	7.41	4.93	3.14	2.09
40	6.26	4.16	2.35	1.56									
42													
44													
46													
48													
50													
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		5.33		3.54		5.99		3.98		6.94		4.62	
$t_y \times 10^3$, (kips) ⁻¹		0.805		0.535		0.872		0.580		0.963		0.640	
$t_r \times 10^3$, (kips) ⁻¹		0.989		0.659		1.07		0.714		1.18		0.788	
r_x/r_y		5.51				5.52				5.60			
r_y , in.		2.43				2.39				3.32			
^c Shape is slender for compression for $F_y = 50$ ksi. ^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(1) with $F_y = 50$ ksi; therefore, $\phi_v = 0.90$ and $\Omega_v = 1.67$. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W30		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes											$F_y = 50$ ksi	
		391 ^h				357 ^h				326 ^h				
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.290	0.193	0.246	0.163	0.318	0.212	0.270	0.180	0.348	0.232	0.299	0.199	
	11	0.319	0.212	0.246	0.163	0.350	0.233	0.270	0.180	0.384	0.256	0.299	0.199	
	12	0.325	0.216	0.246	0.163	0.357	0.237	0.270	0.180	0.392	0.260	0.299	0.199	
	13	0.331	0.221	0.246	0.164	0.364	0.242	0.270	0.180	0.400	0.266	0.300	0.200	
	14	0.339	0.225	0.248	0.165	0.372	0.247	0.273	0.182	0.408	0.272	0.303	0.202	
	15	0.346	0.230	0.250	0.166	0.380	0.253	0.276	0.183	0.418	0.278	0.307	0.204	
	16	0.355	0.236	0.252	0.168	0.390	0.259	0.278	0.185	0.429	0.285	0.310	0.206	
	17	0.364	0.242	0.255	0.169	0.400	0.266	0.281	0.187	0.440	0.293	0.313	0.208	
	18	0.374	0.249	0.257	0.171	0.412	0.274	0.284	0.189	0.453	0.301	0.317	0.211	
	19	0.385	0.256	0.259	0.172	0.424	0.282	0.287	0.191	0.467	0.311	0.320	0.213	
	20	0.397	0.264	0.262	0.174	0.437	0.291	0.290	0.193	0.482	0.321	0.324	0.215	
	22	0.424	0.282	0.267	0.177	0.467	0.311	0.296	0.197	0.516	0.343	0.331	0.220	
	24	0.456	0.303	0.272	0.181	0.503	0.334	0.302	0.201	0.556	0.370	0.339	0.225	
	26	0.493	0.328	0.277	0.184	0.544	0.362	0.308	0.205	0.603	0.401	0.347	0.231	
	28	0.536	0.357	0.282	0.188	0.593	0.395	0.315	0.210	0.658	0.438	0.355	0.236	
	30	0.587	0.391	0.288	0.192	0.650	0.433	0.322	0.215	0.724	0.481	0.364	0.242	
	32	0.647	0.430	0.294	0.196	0.718	0.478	0.330	0.220	0.800	0.532	0.373	0.248	
	34	0.717	0.477	0.300	0.200	0.797	0.530	0.338	0.225	0.891	0.593	0.383	0.255	
	36	0.802	0.533	0.307	0.204	0.892	0.594	0.346	0.230	0.999	0.665	0.393	0.262	
	38	0.893	0.594	0.314	0.209	0.994	0.662	0.355	0.236	1.11	0.741	0.404	0.269	
40	0.990	0.658	0.321	0.213	1.10	0.733	0.364	0.242	1.23	0.821	0.416	0.277		
42	1.09	0.726	0.328	0.218	1.21	0.808	0.373	0.248	1.36	0.905	0.428	0.285		
44	1.20	0.797	0.336	0.224	1.33	0.887	0.383	0.255	1.49	0.993	0.441	0.293		
46	1.31	0.871	0.344	0.229	1.46	0.969	0.394	0.262	1.63	1.09	0.454	0.302		
48	1.43	0.948	0.353	0.235	1.59	1.06	0.405	0.270	1.78	1.18	0.469	0.312		
50	1.55	1.03	0.362	0.241	1.72	1.15	0.417	0.278	1.93	1.28	0.485	0.322		
Other Constants and Properties														
$b_y \times 10^3$, (kip-ft) ⁻¹		1.15		0.765		1.28		0.850		1.41		0.941		
$t_y \times 10^3$, (kips) ⁻¹		0.290		0.193		0.318		0.212		0.348		0.232		
$t_r \times 10^3$, (kips) ⁻¹		0.357		0.238		0.391		0.260		0.428		0.285		
r_x/r_y		3.65				3.65				3.67				
r_y , in.		3.67				3.64				3.60				
^h Flange thickness greater than 2 in. Special requirements may apply per AISC <i>Specification</i> Section A3.1c.														


 W30		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes												$F_y = 50$ ksi	
		292				261				235					
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$			
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.388	0.258	0.336	0.224	0.434	0.289	0.378	0.251	0.482	0.321	0.421	0.280		
	11	0.429	0.285	0.336	0.224	0.480	0.320	0.378	0.251	0.534	0.356	0.421	0.280		
	12	0.437	0.291	0.336	0.224	0.490	0.326	0.378	0.251	0.545	0.363	0.421	0.280		
	13	0.446	0.297	0.337	0.225	0.500	0.333	0.380	0.253	0.557	0.370	0.424	0.282		
	14	0.456	0.304	0.341	0.227	0.512	0.341	0.385	0.256	0.570	0.379	0.430	0.286		
	15	0.467	0.311	0.345	0.230	0.525	0.349	0.390	0.260	0.584	0.389	0.436	0.290		
	16	0.479	0.319	0.349	0.232	0.539	0.358	0.395	0.263	0.600	0.399	0.442	0.294		
	17	0.492	0.328	0.353	0.235	0.554	0.368	0.400	0.266	0.617	0.411	0.448	0.298		
	18	0.507	0.337	0.358	0.238	0.570	0.379	0.406	0.270	0.636	0.423	0.455	0.302		
	19	0.522	0.348	0.362	0.241	0.588	0.392	0.411	0.274	0.656	0.437	0.461	0.307		
	20	0.539	0.359	0.366	0.244	0.608	0.405	0.417	0.277	0.678	0.451	0.468	0.311		
	22	0.578	0.385	0.376	0.250	0.653	0.434	0.429	0.285	0.729	0.485	0.483	0.321		
	24	0.623	0.415	0.385	0.256	0.706	0.470	0.441	0.294	0.788	0.525	0.498	0.331		
	26	0.677	0.450	0.396	0.263	0.768	0.511	0.454	0.302	0.859	0.571	0.514	0.342		
	28	0.740	0.492	0.406	0.270	0.841	0.560	0.468	0.312	0.942	0.627	0.531	0.354		
	30	0.813	0.541	0.418	0.278	0.928	0.617	0.483	0.322	1.04	0.692	0.550	0.366		
	32	0.901	0.599	0.430	0.286	1.03	0.686	0.499	0.332	1.16	0.769	0.570	0.379		
	34	1.00	0.669	0.443	0.295	1.15	0.768	0.516	0.343	1.30	0.863	0.591	0.393		
	36	1.13	0.749	0.456	0.304	1.29	0.861	0.534	0.356	1.45	0.968	0.614	0.409		
	38	1.26	0.835	0.471	0.313	1.44	0.959	0.554	0.368	1.62	1.08	0.639	0.425		
40	1.39	0.925	0.486	0.323	1.60	1.06	0.575	0.382	1.80	1.19	0.666	0.443			
42	1.53	1.02	0.502	0.334	1.76	1.17	0.597	0.398	1.98	1.32	0.704	0.468			
44	1.68	1.12	0.520	0.346	1.93	1.29	0.626	0.416	2.17	1.45	0.748	0.498			
46	1.84	1.22	0.539	0.358	2.11	1.41	0.662	0.440	2.37	1.58	0.792	0.527			
48	2.00	1.33	0.564	0.375	2.30	1.53	0.698	0.464	2.59	1.72	0.837	0.557			
50	2.17	1.45	0.592	0.394	2.50	1.66	0.734	0.488	2.81	1.87	0.881	0.586			
Other Constants and Properties															
$b_y \times 10^3$, (kip-ft) ⁻¹		1.60		1.06		1.82		1.21		2.04		1.35			
$t_y \times 10^3$, (kips) ⁻¹		0.388		0.258		0.434		0.289		0.482		0.321			
$t_r \times 10^3$, (kips) ⁻¹		0.477		0.318		0.533		0.355		0.592		0.395			
r_x/r_y		3.69				3.71				3.70					
r_y , in.		3.58				3.53				3.51					


 W30		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		211				191 ^c				173 ^c			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.536	0.357	0.474	0.316	0.602	0.401	0.528	0.351	0.677	0.450	0.587	0.391
	11	0.595	0.396	0.474	0.316	0.662	0.441	0.528	0.351	0.745	0.495	0.587	0.391
	12	0.607	0.404	0.474	0.316	0.676	0.450	0.528	0.351	0.758	0.505	0.587	0.391
	13	0.620	0.413	0.479	0.319	0.691	0.460	0.534	0.355	0.774	0.515	0.596	0.396
	14	0.635	0.423	0.486	0.323	0.707	0.471	0.543	0.361	0.790	0.526	0.606	0.403
	15	0.651	0.433	0.493	0.328	0.726	0.483	0.551	0.367	0.809	0.538	0.616	0.410
	16	0.669	0.445	0.501	0.333	0.746	0.496	0.560	0.373	0.829	0.551	0.626	0.417
	17	0.688	0.458	0.509	0.338	0.768	0.511	0.570	0.379	0.851	0.566	0.637	0.424
	18	0.709	0.472	0.517	0.344	0.792	0.527	0.579	0.385	0.878	0.584	0.649	0.432
	19	0.732	0.487	0.525	0.349	0.818	0.544	0.589	0.392	0.908	0.604	0.660	0.439
	20	0.758	0.504	0.533	0.355	0.846	0.563	0.599	0.399	0.941	0.626	0.673	0.447
	22	0.815	0.542	0.551	0.367	0.911	0.606	0.621	0.413	1.01	0.675	0.698	0.465
	24	0.882	0.587	0.570	0.379	0.988	0.657	0.644	0.429	1.10	0.733	0.726	0.483
	26	0.962	0.640	0.591	0.393	1.08	0.718	0.669	0.445	1.21	0.802	0.756	0.503
	28	1.06	0.702	0.613	0.408	1.19	0.789	0.696	0.463	1.33	0.884	0.789	0.525
	30	1.17	0.777	0.636	0.423	1.31	0.874	0.726	0.483	1.48	0.982	0.825	0.549
	32	1.30	0.864	0.662	0.440	1.47	0.975	0.758	0.504	1.65	1.10	0.864	0.575
	34	1.46	0.971	0.690	0.459	1.65	1.10	0.793	0.527	1.86	1.24	0.906	0.603
	36	1.64	1.09	0.720	0.479	1.85	1.23	0.831	0.553	2.09	1.39	0.964	0.641
	38	1.82	1.21	0.753	0.501	2.06	1.37	0.889	0.591	2.32	1.55	1.05	0.696
40	2.02	1.34	0.802	0.533	2.28	1.52	0.957	0.637	2.57	1.71	1.13	0.751	
42	2.23	1.48	0.858	0.571	2.52	1.67	1.03	0.683	2.84	1.89	1.21	0.807	
44	2.44	1.63	0.914	0.608	2.76	1.84	1.10	0.729	3.12	2.07	1.30	0.863	
46	2.67	1.78	0.970	0.645	3.02	2.01	1.16	0.775	3.41	2.27	1.38	0.919	
48	2.91	1.94	1.03	0.683	3.29	2.19	1.23	0.821	3.71	2.47	1.47	0.976	
50	3.16	2.10	1.08	0.720	3.57	2.37	1.30	0.867	4.02	2.68	1.55	1.03	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		2.30		1.53		2.58		1.72		2.90		1.93	
$t_y \times 10^3$, (kips) ⁻¹		0.536		0.357		0.595		0.396		0.656		0.437	
$t_r \times 10^3$, (kips) ⁻¹		0.659		0.439		0.731		0.488		0.806		0.537	
r_x/r_y		3.70				3.70				3.71			
r_y , in.		3.49				3.46				3.42			
^c Shape is slender for compression for $F_y = 50$ ksi.													


 W30		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		148 ^c				132 ^c				124 ^c			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.799	0.531	0.713	0.474	0.914	0.608	0.815	0.542	0.988	0.657	0.873	0.581
	11	0.986	0.656	0.765	0.509	1.13	0.753	0.882	0.587	1.23	0.817	0.949	0.631
	12	1.03	0.683	0.784	0.522	1.18	0.785	0.906	0.603	1.28	0.851	0.976	0.649
	13	1.08	0.718	0.804	0.535	1.23	0.820	0.931	0.620	1.34	0.890	1.00	0.668
	14	1.14	0.758	0.826	0.550	1.29	0.861	0.958	0.638	1.40	0.935	1.03	0.688
	15	1.21	0.804	0.849	0.565	1.37	0.915	0.987	0.657	1.48	0.985	1.07	0.710
	16	1.29	0.856	0.873	0.581	1.47	0.975	1.02	0.677	1.57	1.05	1.10	0.732
	17	1.38	0.915	0.898	0.598	1.57	1.04	1.05	0.699	1.69	1.12	1.14	0.757
	18	1.48	0.982	0.925	0.616	1.69	1.12	1.08	0.721	1.82	1.21	1.18	0.782
	19	1.59	1.06	0.954	0.635	1.82	1.21	1.12	0.746	1.97	1.31	1.22	0.810
	20	1.72	1.15	0.984	0.655	1.98	1.32	1.16	0.772	2.13	1.42	1.26	0.840
	22	2.05	1.36	1.05	0.700	2.36	1.57	1.25	0.831	2.55	1.70	1.36	0.907
	24	2.43	1.62	1.13	0.751	2.81	1.87	1.36	0.904	3.04	2.02	1.51	1.01
	26	2.86	1.90	1.25	0.828	3.30	2.19	1.54	1.02	3.57	2.37	1.72	1.14
	28	3.31	2.20	1.39	0.923	3.82	2.54	1.72	1.15	4.14	2.75	1.92	1.28
	30	3.80	2.53	1.53	1.02	4.39	2.92	1.91	1.27	4.75	3.16	2.13	1.42
	32	4.33	2.88	1.67	1.11	4.99	3.32	2.09	1.39	5.40	3.60	2.35	1.56
34	4.89	3.25	1.82	1.21	5.64	3.75	2.28	1.52	6.10	4.06	2.56	1.70	
36	5.48	3.64	1.96	1.3	6.32	4.21	2.47	1.64	6.84	4.55	2.78	1.85	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		5.24		3.49		6.10		4.06		6.60		4.39	
$t_y \times 10^3$, (kips) ⁻¹		0.766		0.510		0.861		0.573		0.915		0.609	
$t_r \times 10^3$, (kips) ⁻¹		0.941		0.627		1.06		0.705		1.12		0.749	
r_x/r_y		5.44				5.42				5.43			
r_y , in.		2.28				2.25				2.23			
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


		Table 6-J (continued)										$F_y = 50$ ksi	
		116 ^c				108 ^c				99 ^c			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.07	0.711	0.943	0.627	1.17	0.779	1.03	0.685	1.31	0.868	1.14	0.760
	11	1.34	0.889	1.03	0.686	1.47	0.981	1.14	0.755	1.66	1.10	1.27	0.846
	12	1.39	0.928	1.06	0.706	1.54	1.02	1.17	0.779	1.74	1.16	1.31	0.874
	13	1.46	0.972	1.09	0.728	1.62	1.08	1.21	0.804	1.82	1.21	1.36	0.903
	14	1.54	1.02	1.13	0.750	1.70	1.13	1.25	0.830	1.93	1.28	1.41	0.935
	15	1.62	1.08	1.16	0.775	1.80	1.20	1.29	0.859	2.04	1.36	1.46	0.969
	16	1.72	1.14	1.20	0.801	1.91	1.27	1.34	0.889	2.17	1.44	1.51	1.01
	17	1.84	1.23	1.24	0.828	2.04	1.35	1.39	0.922	2.31	1.54	1.57	1.04
	18	1.99	1.32	1.29	0.858	2.20	1.47	1.44	0.957	2.50	1.66	1.63	1.09
	19	2.16	1.44	1.34	0.890	2.40	1.60	1.50	0.995	2.73	1.81	1.7	1.13
	20	2.35	1.56	1.39	0.924	2.62	1.74	1.56	1.04	3.00	1.99	1.78	1.18
	22	2.83	1.88	1.51	1.00	3.16	2.11	1.7	1.13	3.63	2.41	2.00	1.33
	24	3.36	2.24	1.70	1.13	3.77	2.51	1.96	1.31	4.31	2.87	2.32	1.54
	26	3.95	2.63	1.94	1.29	4.42	2.94	2.24	1.49	5.06	3.37	2.65	1.76
	28	4.58	3.05	2.18	1.45	5.13	3.41	2.52	1.68	5.87	3.91	2.99	1.99
	30	5.26	3.50	2.42	1.61	5.88	3.91	2.81	1.87	6.74	4.49	3.34	2.22
	32	5.98	3.98	2.67	1.78	6.69	4.45	3.10	2.06	7.67	5.10	3.69	2.46
34	6.75	4.49	2.92	1.94	7.56	5.03	3.40	2.26	8.66	5.76	4.06	2.70	
36	7.57	5.04	3.17	2.11									
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		7.24		4.82		8.12		5.40		9.23		6.14	
$t_y \times 10^3$, (kips) ⁻¹		0.977		0.650		1.05		0.701		1.15		0.766	
$t_r \times 10^3$, (kips) ⁻¹		1.20		0.800		1.290		0.863		1.41		0.943	
r_x/r_y		5.48				5.53				5.57			
r_y , in.		2.19				2.15				2.10			
^c Shape is slender for compression for $F_y = 50$ ksi.													
Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W30-W27		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes												$F_y = 50$ ksi	
		W30 \times				W27 \times									
Shape		90 ^{c,v}				539 ^h				368 ^h					
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$			
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹			
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
		Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.49	0.990	1.26	0.838	0.210	0.140	0.189	0.125	0.306	0.204	0.287	0.191
11	1.90		1.26	1.41	0.936	0.231	0.154	0.189	0.125	0.340	0.226	0.287	0.191		
12	1.99		1.32	1.45	0.968	0.235	0.157	0.189	0.125	0.347	0.231	0.287	0.191		
13	2.09		1.39	1.51	1.00	0.240	0.160	0.189	0.125	0.355	0.236	0.289	0.192		
14	2.21		1.47	1.56	1.04	0.245	0.163	0.190	0.126	0.363	0.242	0.291	0.194		
15	2.34		1.56	1.62	1.08	0.251	0.167	0.191	0.127	0.373	0.248	0.294	0.195		
16	2.49		1.65	1.68	1.12	0.257	0.171	0.192	0.128	0.383	0.255	0.296	0.197		
17	2.66		1.77	1.75	1.16	0.264	0.176	0.193	0.128	0.394	0.262	0.299	0.199		
18	2.85		1.90	1.82	1.21	0.271	0.181	0.194	0.129	0.406	0.270	0.301	0.200		
19	3.07		2.04	1.90	1.27	0.279	0.186	0.195	0.130	0.419	0.279	0.304	0.202		
20	3.34		2.22	1.99	1.32	0.288	0.192	0.196	0.131	0.434	0.289	0.306	0.204		
22	4.04		2.69	2.28	1.52	0.308	0.205	0.199	0.132	0.467	0.311	0.312	0.207		
24	4.80		3.20	2.65	1.76	0.331	0.220	0.201	0.134	0.506	0.336	0.317	0.211		
26	5.64		3.75	3.04	2.02	0.358	0.238	0.203	0.135	0.552	0.367	0.323	0.215		
28	6.54		4.35	3.44	2.29	0.390	0.260	0.206	0.137	0.606	0.403	0.329	0.219		
30	7.51		4.99	3.85	2.56	0.428	0.285	0.208	0.139	0.670	0.446	0.335	0.223		
32	8.54		5.68	4.27	2.84	0.472	0.314	0.211	0.140	0.746	0.497	0.342	0.227		
34	9.64		6.41	4.70	3.13	0.524	0.348	0.213	0.142	0.839	0.558	0.348	0.232		
36						0.586	0.390	0.216	0.144	0.941	0.626	0.355	0.236		
38						0.653	0.435	0.219	0.146	1.05	0.697	0.363	0.241		
40					0.724	0.481	0.222	0.148	1.16	0.773	0.370	0.246			
42					0.798	0.531	0.225	0.149	1.28	0.852	0.378	0.252			
44					0.876	0.583	0.228	0.151	1.41	0.935	0.386	0.257			
46					0.957	0.637	0.231	0.154	1.54	1.02	0.395	0.263			
48					1.04	0.693	0.234	0.156	1.67	1.11	0.404	0.269			
50					1.13	0.752	0.237	0.158	1.81	1.21	0.413	0.275			
Other Constants and Properties															
$b_y \times 10^3$, (kip-ft) ⁻¹		10.3		6.83		0.815		0.542		1.28		0.850			
$t_y \times 10^3$, (kips) ⁻¹		1.27		0.845		0.210		0.140		0.306		0.204			
$t_r \times 10^3$, (kips) ⁻¹		1.56		1.04		0.258		0.172		0.376		0.251			
r_x/r_y		5.60				3.48				3.51					
r_y , in.		2.09				3.65				3.48					
^c Shape is slender for compression for $F_y = 50$ ksi. ^h Flange thickness greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c. ^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(1) with $F_y = 50$ ksi; therefore, $\phi_v = 0.90$ and $\Omega_v = 1.67$. Note: Heavy line indicates L_c/r_y equal to or greater than 200.															


 W27		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		336 ^h				307 ^h				281			
Shape		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.337	0.224	0.315	0.210	0.370	0.246	0.346	0.230	0.402	0.267	0.381	0.253
	11	0.375	0.249	0.315	0.210	0.413	0.275	0.346	0.230	0.449	0.299	0.381	0.253
	12	0.382	0.254	0.315	0.210	0.422	0.281	0.346	0.230	0.459	0.305	0.381	0.253
	13	0.391	0.260	0.318	0.211	0.432	0.287	0.349	0.232	0.469	0.312	0.385	0.256
	14	0.400	0.266	0.320	0.213	0.442	0.294	0.353	0.235	0.481	0.320	0.389	0.259
	15	0.411	0.273	0.323	0.215	0.454	0.302	0.356	0.237	0.494	0.329	0.393	0.262
	16	0.422	0.281	0.326	0.217	0.467	0.311	0.360	0.239	0.508	0.338	0.397	0.264
	17	0.435	0.289	0.329	0.219	0.481	0.320	0.364	0.242	0.524	0.348	0.402	0.267
	18	0.448	0.298	0.332	0.221	0.497	0.330	0.367	0.244	0.541	0.360	0.406	0.270
	19	0.463	0.308	0.336	0.223	0.513	0.342	0.371	0.247	0.559	0.372	0.411	0.273
	20	0.480	0.319	0.339	0.225	0.532	0.354	0.375	0.250	0.580	0.386	0.416	0.277
	22	0.517	0.344	0.345	0.230	0.574	0.382	0.383	0.255	0.626	0.417	0.426	0.283
	24	0.560	0.373	0.352	0.234	0.624	0.415	0.392	0.261	0.681	0.453	0.436	0.290
	26	0.612	0.407	0.359	0.239	0.683	0.454	0.401	0.267	0.747	0.497	0.447	0.297
	28	0.674	0.448	0.367	0.244	0.753	0.501	0.410	0.273	0.824	0.548	0.458	0.305
	30	0.746	0.497	0.375	0.249	0.836	0.557	0.420	0.279	0.917	0.610	0.470	0.313
	32	0.833	0.554	0.383	0.255	0.936	0.623	0.430	0.286	1.03	0.683	0.482	0.321
	34	0.938	0.624	0.391	0.260	1.06	0.703	0.441	0.293	1.16	0.772	0.496	0.330
	36	1.05	0.700	0.400	0.266	1.18	0.788	0.452	0.301	1.30	0.865	0.510	0.339
	38	1.17	0.780	0.409	0.272	1.32	0.878	0.464	0.309	1.45	0.964	0.524	0.349
40	1.30	0.864	0.419	0.279	1.46	0.972	0.476	0.317	1.61	1.07	0.540	0.359	
42	1.43	0.952	0.429	0.285	1.61	1.07	0.490	0.326	1.77	1.18	0.557	0.370	
44	1.57	1.05	0.439	0.292	1.77	1.18	0.504	0.335	1.94	1.29	0.574	0.382	
46	1.72	1.14	0.451	0.300	1.93	1.29	0.518	0.345	2.12	1.41	0.593	0.395	
48	1.87	1.24	0.462	0.308	2.10	1.40	0.534	0.355	2.31	1.54	0.614	0.408	
50	2.03	1.35	0.475	0.316	2.28	1.52	0.551	0.367	2.51	1.67	0.639	0.425	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹	1.41		0.941		1.57		1.04		1.73		1.15		
$t_y \times 10^3$, (kips) ⁻¹	0.337		0.224		0.370		0.246		0.402		0.267		
$t_r \times 10^3$, (kips) ⁻¹	0.414		0.276		0.455		0.303		0.494		0.329		
r_x/r_y	3.51				3.52				3.54				
r_y , in.	3.45				3.41				3.39				
^h Flange thickness greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.													


 W27		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		258				235				217			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.439	0.292	0.418	0.278	0.481	0.320	0.461	0.307	0.523	0.348	0.501	0.333
	11	0.491	0.327	0.418	0.278	0.540	0.359	0.461	0.307	0.587	0.390	0.501	0.333
	12	0.502	0.334	0.419	0.279	0.552	0.367	0.463	0.308	0.600	0.399	0.503	0.335
	13	0.514	0.342	0.424	0.282	0.565	0.376	0.469	0.312	0.614	0.409	0.510	0.339
	14	0.527	0.351	0.429	0.285	0.580	0.386	0.475	0.316	0.630	0.419	0.517	0.344
	15	0.541	0.360	0.434	0.289	0.596	0.396	0.481	0.320	0.648	0.431	0.524	0.348
	16	0.557	0.371	0.439	0.292	0.614	0.408	0.487	0.324	0.667	0.444	0.531	0.353
	17	0.575	0.382	0.444	0.296	0.633	0.421	0.494	0.328	0.689	0.458	0.538	0.358
	18	0.594	0.395	0.450	0.299	0.655	0.436	0.500	0.333	0.712	0.474	0.546	0.363
	19	0.615	0.409	0.455	0.303	0.678	0.451	0.507	0.337	0.738	0.491	0.554	0.369
	20	0.637	0.424	0.461	0.307	0.704	0.468	0.514	0.342	0.766	0.510	0.562	0.374
	22	0.689	0.459	0.473	0.315	0.762	0.507	0.529	0.352	0.830	0.552	0.579	0.385
	24	0.751	0.500	0.485	0.323	0.832	0.553	0.544	0.362	0.906	0.603	0.597	0.398
	26	0.824	0.549	0.498	0.332	0.914	0.608	0.560	0.373	0.997	0.663	0.617	0.410
	28	0.912	0.607	0.512	0.341	1.01	0.674	0.578	0.384	1.11	0.735	0.637	0.424
	30	1.02	0.676	0.527	0.351	1.13	0.753	0.596	0.397	1.23	0.822	0.660	0.439
	32	1.14	0.760	0.543	0.361	1.27	0.848	0.616	0.410	1.39	0.927	0.683	0.455
	34	1.29	0.858	0.559	0.372	1.44	0.957	0.637	0.424	1.57	1.05	0.709	0.471
	36	1.45	0.962	0.577	0.384	1.61	1.07	0.660	0.439	1.76	1.17	0.736	0.490
	38	1.61	1.07	0.596	0.396	1.80	1.20	0.684	0.455	1.96	1.31	0.766	0.509
40	1.78	1.19	0.616	0.410	1.99	1.33	0.710	0.472	2.18	1.45	0.798	0.531	
42	1.97	1.31	0.637	0.424	2.20	1.46	0.738	0.491	2.40	1.60	0.842	0.560	
44	2.16	1.44	0.660	0.439	2.41	1.60	0.776	0.516	2.63	1.75	0.892	0.593	
46	2.36	1.57	0.685	0.456	2.63	1.75	0.818	0.544	2.88	1.91	0.942	0.627	
48	2.57	1.71	0.721	0.479	2.87	1.91	0.861	0.573	3.13	2.09	0.992	0.660	
50	2.79	1.85	0.756	0.503	3.11	2.07	0.904	0.601	3.40	2.26	1.04	0.693	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		1.91		1.27		2.12		1.41		2.31		1.540	
$t_y \times 10^3$, (kips) ⁻¹		0.439		0.292		0.481		0.320		0.523		0.348	
$t_r \times 10^3$, (kips) ⁻¹		0.539		0.359		0.591		0.394		0.642		0.428	
r_x/r_y		3.54				3.54				3.55			
r_y , in.		3.36				3.33				3.32			


 W27		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes											$F_y = 50$ ksi	
		Shape		W27 ^x										
Design		194				178				161 ^c				
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.585	0.389	0.565	0.376	0.636	0.423	0.625	0.416	0.703	0.467	0.692	0.460	
	11	0.658	0.438	0.565	0.376	0.718	0.478	0.625	0.416	0.793	0.527	0.692	0.460	
	12	0.673	0.448	0.568	0.378	0.734	0.489	0.630	0.419	0.811	0.540	0.698	0.465	
	13	0.689	0.459	0.576	0.383	0.753	0.501	0.640	0.426	0.832	0.554	0.710	0.472	
	14	0.708	0.471	0.584	0.389	0.773	0.515	0.650	0.432	0.855	0.569	0.722	0.480	
	15	0.728	0.484	0.593	0.395	0.796	0.530	0.661	0.439	0.881	0.586	0.735	0.489	
	16	0.750	0.499	0.602	0.401	0.821	0.546	0.671	0.447	0.909	0.604	0.747	0.497	
	17	0.775	0.516	0.612	0.407	0.849	0.565	0.683	0.454	0.939	0.625	0.761	0.506	
	18	0.802	0.533	0.621	0.413	0.879	0.585	0.694	0.462	0.973	0.647	0.775	0.515	
	19	0.831	0.553	0.631	0.420	0.912	0.607	0.706	0.470	1.01	0.672	0.789	0.525	
	20	0.863	0.574	0.641	0.427	0.948	0.631	0.718	0.478	1.05	0.699	0.804	0.535	
	22	0.937	0.623	0.663	0.441	1.03	0.686	0.745	0.495	1.14	0.761	0.835	0.556	
	24	1.02	0.682	0.686	0.456	1.13	0.752	0.773	0.514	1.25	0.835	0.869	0.578	
	26	1.13	0.751	0.711	0.473	1.25	0.830	0.803	0.534	1.39	0.924	0.906	0.603	
	28	1.25	0.834	0.737	0.490	1.39	0.925	0.836	0.556	1.55	1.03	0.946	0.630	
	30	1.40	0.934	0.766	0.509	1.56	1.04	0.871	0.580	1.74	1.16	0.990	0.659	
	32	1.59	1.06	0.797	0.530	1.77	1.18	0.910	0.606	1.98	1.31	1.04	0.691	
	34	1.79	1.19	0.830	0.552	2.00	1.33	0.952	0.634	2.23	1.48	1.09	0.726	
	36	2.01	1.34	0.867	0.577	2.24	1.49	0.999	0.665	2.50	1.66	1.17	0.781	
	38	2.24	1.49	0.906	0.603	2.49	1.66	1.07	0.713	2.79	1.85	1.27	0.844	
40	2.48	1.65	0.968	0.644	2.76	1.84	1.15	0.765	3.09	2.05	1.36	0.907		
42	2.73	1.82	1.03	0.687	3.05	2.03	1.23	0.817	3.40	2.26	1.46	0.970		
44	3.00	2.00	1.10	0.729	3.34	2.23	1.31	0.869	3.73	2.48	1.55	1.03		
46	3.28	2.18	1.16	0.771	3.66	2.43	1.38	0.920	4.08	2.72	1.65	1.10		
48	3.57	2.38	1.22	0.813	3.98	2.65	1.46	0.972	4.44	2.96	1.74	1.16		
50	3.88	2.58	1.29	0.855	4.32	2.87	1.54	1.02	4.82	3.21	1.84	1.22		
Other Constants and Properties														
$b_y \times 10^3$, (kip-ft) ⁻¹	2.62		1.74		2.92		1.94		3.27		2.17			
$t_y \times 10^3$, (kips) ⁻¹	0.585		0.389		0.636		0.423		0.702		0.467			
$t_r \times 10^3$, (kips) ⁻¹	0.718		0.479		0.781		0.521		0.862		0.575			
r_x/r_y	3.56				3.57				3.56					
r_y , in.	3.29				3.25				3.23					
^c Shape is slender for compression for $F_y = 50$ ksi.														


 W27		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		146 ^c				129 ^c				114 ^c			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.790	0.526	0.768	0.511	0.908	0.604	0.902	0.600	1.04	0.694	1.04	0.691
	11	0.882	0.587	0.768	0.511	1.15	0.763	0.976	0.649	1.31	0.873	1.13	0.754
	12	0.901	0.599	0.777	0.517	1.21	0.802	1.00	0.666	1.37	0.912	1.17	0.775
	13	0.921	0.613	0.791	0.526	1.27	0.846	1.03	0.684	1.45	0.962	1.20	0.798
	14	0.946	0.629	0.805	0.535	1.35	0.897	1.06	0.703	1.53	1.02	1.24	0.822
	15	0.974	0.648	0.819	0.545	1.44	0.955	1.09	0.723	1.64	1.09	1.27	0.847
	16	1.01	0.669	0.835	0.555	1.53	1.02	1.12	0.744	1.75	1.17	1.31	0.874
	17	1.04	0.692	0.850	0.566	1.65	1.10	1.15	0.767	1.89	1.25	1.36	0.903
	18	1.08	0.718	0.867	0.577	1.78	1.18	1.19	0.791	2.04	1.36	1.40	0.934
	19	1.12	0.746	0.884	0.588	1.92	1.28	1.23	0.816	2.21	1.47	1.45	0.967
	20	1.17	0.776	0.901	0.600	2.09	1.39	1.27	0.843	2.41	1.60	1.51	1.00
	22	1.27	0.846	0.939	0.625	2.51	1.67	1.36	0.903	2.90	1.93	1.63	1.08
	24	1.40	0.930	0.980	0.652	2.99	1.99	1.46	0.973	3.46	2.30	1.80	1.20
	26	1.55	1.03	1.02	0.681	3.51	2.33	1.64	1.09	4.06	2.70	2.04	1.36
	28	1.73	1.15	1.07	0.714	4.07	2.71	1.82	1.21	4.70	3.13	2.27	1.51
	30	1.95	1.30	1.13	0.750	4.67	3.11	2.00	1.33	5.40	3.59	2.51	1.67
	32	2.22	1.48	1.19	0.789	5.31	3.54	2.18	1.45	6.14	4.09	2.75	1.83
	34	2.50	1.67	1.27	0.843	6.00	3.99	2.36	1.57	6.94	4.61	2.99	1.99
	36	2.81	1.87	1.38	0.919	6.73	4.47	2.54	1.69	7.78	5.17	3.23	2.15
	38	3.13	2.08	1.50	0.995								
40	3.47	2.31	1.61	1.07									
42	3.82	2.54	1.73	1.15									
44	4.19	2.79	1.84	1.23									
46	4.58	3.05	1.96	1.30									
48	4.99	3.32	2.07	1.38									
50	5.41	3.60	2.19	1.46									
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		3.65		2.43		6.19		4.12		7.23		4.81	
$t_y \times 10^3$, (kips) ⁻¹		0.773		0.514		0.884		0.588		0.994		0.661	
$t_r \times 10^3$, (kips) ⁻¹		0.950		0.633		1.09		0.724		1.22		0.814	
r_x/r_y		3.59				5.07				5.05			
r_y , in.		3.20				2.21				2.18			
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W27		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi		
		102 ^c				94 ^c				84 ^c				
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.20	0.802	1.17	0.777	1.33	0.887	1.28	0.853	1.53	1.02	1.46	0.971	
	11	1.52	1.01	1.28	0.854	1.70	1.13	1.42	0.944	1.96	1.30	1.63	1.09	
	12	1.59	1.06	1.32	0.880	1.78	1.18	1.46	0.974	2.06	1.37	1.69	1.12	
	13	1.67	1.11	1.36	0.907	1.87	1.24	1.51	1.01	2.17	1.44	1.75	1.16	
	14	1.76	1.17	1.41	0.935	1.97	1.31	1.56	1.04	2.29	1.52	1.81	1.20	
	15	1.87	1.24	1.45	0.966	2.09	1.39	1.62	1.07	2.43	1.62	1.88	1.25	
	16	1.99	1.33	1.50	0.999	2.22	1.48	1.67	1.11	2.59	1.73	1.95	1.30	
	17	2.15	1.43	1.55	1.03	2.38	1.58	1.74	1.15	2.78	1.85	2.03	1.35	
	18	2.33	1.55	1.61	1.07	2.59	1.72	1.80	1.20	3.00	1.99	2.11	1.41	
	19	2.53	1.69	1.67	1.11	2.82	1.88	1.88	1.25	3.28	2.18	2.21	1.47	
	20	2.77	1.84	1.74	1.16	3.09	2.06	1.95	1.30	3.62	2.41	2.31	1.53	
	22	3.34	2.22	1.89	1.25	3.74	2.49	2.16	1.44	4.38	2.91	2.64	1.76	
	24	3.98	2.65	2.15	1.43	4.45	2.96	2.50	1.66	5.21	3.47	3.06	2.04	
	26	4.67	3.11	2.44	1.63	5.22	3.47	2.84	1.89	6.12	4.07	3.49	2.32	
	28	5.42	3.60	2.74	1.82	6.06	4.03	3.19	2.12	7.10	4.72	3.93	2.62	
	30	6.22	4.14	3.03	2.02	6.95	4.62	3.54	2.36	8.15	5.42	4.38	2.92	
	32	7.07	4.71	3.33	2.22	7.91	5.26	3.90	2.59	9.27	6.17	4.84	3.22	
	34	7.99	5.31	3.63	2.42	8.93	5.94	4.26	2.83	10.5	6.96	5.31	3.53	
	36													
	38													
40														
42														
44														
46														
48														
50														
Other Constants and Properties														
$b_y \times 10^3$, (kip-ft) ⁻¹		8.21		5.46		9.18		6.11		10.7		7.14		
$t_y \times 10^3$, (kips) ⁻¹		1.11		0.741		1.21		0.805		1.35		0.900		
$t_r \times 10^3$, (kips) ⁻¹		1.37		0.912		1.49		0.991		1.66		1.11		
r_x/r_y		5.12				5.14				5.17				
r_y , in.		2.15				2.12				2.07				
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.														


 W24		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		370 ^h				335 ^h				306 ^h			
Shape		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.306	0.204	0.315	0.210	0.340	0.226	0.349	0.232	0.372	0.248	0.386	0.257
	11	0.345	0.230	0.315	0.210	0.384	0.255	0.349	0.232	0.422	0.281	0.386	0.257
	12	0.353	0.235	0.316	0.210	0.393	0.261	0.351	0.233	0.432	0.287	0.389	0.259
	13	0.362	0.241	0.319	0.212	0.403	0.268	0.354	0.235	0.443	0.295	0.392	0.261
	14	0.372	0.247	0.321	0.213	0.414	0.276	0.357	0.237	0.455	0.303	0.396	0.263
	15	0.382	0.254	0.323	0.215	0.426	0.284	0.359	0.239	0.469	0.312	0.399	0.266
	16	0.394	0.262	0.326	0.217	0.440	0.293	0.362	0.241	0.484	0.322	0.403	0.268
	17	0.407	0.271	0.328	0.218	0.455	0.303	0.365	0.243	0.501	0.333	0.406	0.270
	18	0.422	0.280	0.330	0.220	0.471	0.314	0.368	0.245	0.520	0.346	0.410	0.273
	19	0.437	0.291	0.333	0.221	0.489	0.325	0.371	0.247	0.540	0.359	0.414	0.275
	20	0.454	0.302	0.335	0.223	0.509	0.338	0.375	0.249	0.562	0.374	0.418	0.278
	22	0.494	0.328	0.340	0.226	0.554	0.368	0.381	0.254	0.612	0.407	0.426	0.283
	24	0.540	0.359	0.346	0.230	0.608	0.404	0.388	0.258	0.673	0.448	0.434	0.289
	26	0.596	0.397	0.351	0.234	0.672	0.447	0.395	0.263	0.746	0.496	0.442	0.294
	28	0.663	0.441	0.357	0.237	0.750	0.499	0.402	0.267	0.834	0.555	0.451	0.300
	30	0.743	0.495	0.363	0.241	0.843	0.561	0.409	0.272	0.939	0.625	0.461	0.306
	32	0.842	0.560	0.369	0.245	0.957	0.636	0.417	0.277	1.07	0.711	0.470	0.313
	34	0.950	0.632	0.375	0.249	1.08	0.718	0.425	0.283	1.21	0.802	0.480	0.320
	36	1.07	0.709	0.381	0.254	1.21	0.806	0.433	0.288	1.35	0.899	0.491	0.327
	38	1.19	0.790	0.388	0.258	1.35	0.897	0.442	0.294	1.51	1.00	0.502	0.334
40	1.32	0.875	0.395	0.263	1.49	0.994	0.451	0.300	1.67	1.11	0.513	0.341	
42	1.45	0.965	0.402	0.267	1.65	1.10	0.460	0.306	1.84	1.22	0.525	0.349	
44	1.59	1.06	0.409	0.272	1.81	1.20	0.470	0.313	2.02	1.34	0.538	0.358	
46	1.74	1.16	0.417	0.277	1.98	1.32	0.480	0.319	2.21	1.47	0.551	0.367	
48	1.89	1.26	0.425	0.283	2.15	1.43	0.491	0.326	2.40	1.60	0.565	0.376	
50	2.05	1.37	0.433	0.288	2.34	1.55	0.502	0.334	2.61	1.73	0.579	0.386	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹	1.33		0.888		1.50		0.996		1.66		1.11		
$t_y \times 10^3$, (kips) ⁻¹	0.306		0.204		0.340		0.226		0.372		0.248		
$t_r \times 10^3$, (kips) ⁻¹	0.376		0.251		0.417		0.278		0.457		0.305		
r_x/r_y	3.39				3.41				3.41				
r_y , in.	3.27				3.23				3.20				
^h Flange thickness greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.													


 W24		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		279 ^h				250				229			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.408	0.271	0.427	0.284	0.454	0.302	0.479	0.319	0.497	0.331	0.528	0.351
	11	0.463	0.308	0.427	0.284	0.517	0.344	0.479	0.319	0.567	0.377	0.528	0.351
	12	0.474	0.316	0.430	0.286	0.530	0.353	0.483	0.322	0.581	0.387	0.534	0.355
	13	0.487	0.324	0.434	0.289	0.544	0.362	0.489	0.325	0.597	0.397	0.540	0.359
	14	0.501	0.333	0.438	0.292	0.560	0.373	0.494	0.329	0.615	0.409	0.547	0.364
	15	0.516	0.343	0.443	0.294	0.578	0.384	0.499	0.332	0.635	0.422	0.553	0.368
	16	0.533	0.355	0.447	0.297	0.597	0.397	0.505	0.336	0.657	0.437	0.560	0.372
	17	0.552	0.367	0.451	0.300	0.619	0.412	0.510	0.340	0.681	0.453	0.567	0.377
	18	0.573	0.381	0.456	0.303	0.642	0.427	0.516	0.343	0.707	0.471	0.574	0.382
	19	0.595	0.396	0.461	0.306	0.668	0.445	0.522	0.347	0.736	0.490	0.581	0.387
	20	0.620	0.413	0.465	0.310	0.697	0.463	0.528	0.351	0.768	0.511	0.588	0.391
	22	0.677	0.451	0.475	0.316	0.762	0.507	0.541	0.360	0.842	0.560	0.604	0.402
	24	0.746	0.496	0.485	0.323	0.841	0.559	0.554	0.368	0.930	0.619	0.620	0.412
	26	0.828	0.551	0.496	0.330	0.935	0.622	0.567	0.378	1.04	0.690	0.637	0.424
	28	0.927	0.617	0.507	0.337	1.05	0.698	0.582	0.387	1.17	0.776	0.655	0.436
	30	1.05	0.697	0.519	0.345	1.19	0.792	0.597	0.397	1.33	0.883	0.674	0.448
	32	1.19	0.793	0.531	0.353	1.35	0.901	0.613	0.408	1.51	1.00	0.694	0.462
	34	1.35	0.895	0.544	0.362	1.53	1.02	0.630	0.419	1.70	1.13	0.716	0.476
	36	1.51	1.00	0.557	0.371	1.71	1.14	0.648	0.431	1.91	1.27	0.739	0.491
	38	1.68	1.12	0.571	0.380	1.91	1.27	0.667	0.444	2.13	1.42	0.763	0.508
40	1.86	1.24	0.586	0.390	2.12	1.41	0.687	0.457	2.36	1.57	0.789	0.525	
42	2.05	1.37	0.601	0.400	2.33	1.55	0.708	0.471	2.60	1.73	0.817	0.544	
44	2.25	1.50	0.618	0.411	2.56	1.70	0.731	0.486	2.85	1.90	0.847	0.563	
46	2.46	1.64	0.635	0.423	2.80	1.86	0.755	0.502	3.12	2.08	0.884	0.588	
48	2.68	1.78	0.653	0.435	3.05	2.03	0.781	0.519	3.40	2.26	0.928	0.617	
50	2.91	1.94	0.673	0.448	3.31	2.20	0.814	0.541	3.68	2.45	0.971	0.646	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		1.85		1.23		2.08		1.39		2.31		1.54	
$t_y \times 10^3$, (kips) ⁻¹		0.408		0.271		0.454		0.302		0.497		0.331	
$t_r \times 10^3$, (kips) ⁻¹		0.501		0.334		0.558		0.372		0.611		0.407	
r_x/r_y		3.41				3.41				3.44			
r_y , in.		3.17				3.14				3.11			
^h Flange thickness greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.													


 W24		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		207				192				176			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.550	0.366	0.588	0.391	0.591	0.393	0.637	0.424	0.646	0.430	0.697	0.464
	11	0.629	0.419	0.589	0.392	0.677	0.450	0.639	0.425	0.742	0.493	0.700	0.466
	12	0.646	0.430	0.596	0.397	0.694	0.462	0.647	0.431	0.761	0.506	0.710	0.472
	13	0.664	0.442	0.604	0.402	0.714	0.475	0.656	0.437	0.783	0.521	0.721	0.479
	14	0.684	0.455	0.612	0.407	0.736	0.490	0.665	0.443	0.808	0.537	0.731	0.487
	15	0.706	0.470	0.620	0.412	0.760	0.506	0.675	0.449	0.835	0.555	0.743	0.494
	16	0.731	0.486	0.628	0.418	0.787	0.524	0.684	0.455	0.865	0.575	0.754	0.502
	17	0.758	0.505	0.637	0.424	0.816	0.543	0.694	0.462	0.898	0.597	0.766	0.510
	18	0.788	0.525	0.646	0.429	0.849	0.565	0.705	0.469	0.934	0.622	0.778	0.518
	19	0.821	0.547	0.655	0.435	0.885	0.589	0.715	0.476	0.975	0.649	0.791	0.526
	20	0.858	0.571	0.664	0.442	0.924	0.615	0.726	0.483	1.02	0.678	0.804	0.535
	22	0.942	0.626	0.683	0.454	1.02	0.675	0.749	0.498	1.12	0.746	0.832	0.553
	24	1.04	0.694	0.704	0.468	1.13	0.749	0.773	0.514	1.25	0.829	0.861	0.573
	26	1.17	0.775	0.725	0.483	1.26	0.837	0.799	0.532	1.40	0.928	0.893	0.594
	28	1.31	0.874	0.749	0.498	1.42	0.944	0.827	0.550	1.58	1.05	0.927	0.617
	30	1.50	0.996	0.773	0.514	1.62	1.08	0.857	0.570	1.80	1.20	0.964	0.641
	32	1.70	1.13	0.800	0.532	1.84	1.23	0.888	0.591	2.05	1.37	1.00	0.668
	34	1.92	1.28	0.828	0.551	2.08	1.38	0.923	0.614	2.32	1.54	1.05	0.697
	36	2.16	1.43	0.858	0.571	2.33	1.55	0.960	0.639	2.60	1.73	1.09	0.728
	38	2.40	1.60	0.891	0.593	2.60	1.73	1.00	0.666	2.90	1.93	1.15	0.767
40	2.66	1.77	0.926	0.616	2.88	1.92	1.05	0.697	3.21	2.13	1.23	0.818	
42	2.93	1.95	0.967	0.643	3.17	2.11	1.11	0.740	3.54	2.35	1.31	0.869	
44	3.22	2.14	1.02	0.679	3.48	2.32	1.17	0.782	3.88	2.58	1.38	0.920	
46	3.52	2.34	1.07	0.715	3.81	2.53	1.24	0.824	4.24	2.82	1.46	0.970	
48	3.83	2.55	1.13	0.751	4.15	2.76	1.30	0.866	4.62	3.07	1.53	1.02	
50	4.16	2.77	1.18	0.787	4.50	2.99	1.36	0.908	5.01	3.34	1.61	1.07	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		2.60		1.73		2.83		1.88		3.10		2.06	
$t_y \times 10^3$, (kips) ⁻¹		0.550		0.366		0.591		0.393		0.646		0.430	
$t_r \times 10^3$, (kips) ⁻¹		0.676		0.451		0.726		0.484		0.794		0.529	
r_x/r_y		3.44				3.42				3.45			
r_y , in.		3.08				3.07				3.04			


 W24		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes											$F_y = 50$ ksi	
		Shape		W24x										
Design		162				146				131				
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.699	0.465	0.761	0.506	0.777	0.517	0.852	0.567	0.865	0.576	0.963	0.641	
	11	0.801	0.533	0.764	0.508	0.894	0.595	0.857	0.571	1.00	0.665	0.972	0.646	
	12	0.822	0.547	0.776	0.516	0.918	0.611	0.872	0.580	1.03	0.684	0.989	0.658	
	13	0.846	0.563	0.788	0.524	0.945	0.629	0.887	0.590	1.06	0.704	1.01	0.670	
	14	0.872	0.580	0.801	0.533	0.975	0.649	0.902	0.600	1.09	0.727	1.03	0.683	
	15	0.901	0.600	0.814	0.541	1.01	0.671	0.918	0.611	1.13	0.753	1.05	0.696	
	16	0.934	0.621	0.827	0.550	1.05	0.696	0.935	0.622	1.17	0.781	1.07	0.710	
	17	0.969	0.645	0.841	0.560	1.09	0.723	0.952	0.633	1.22	0.813	1.09	0.724	
	18	1.01	0.671	0.855	0.569	1.13	0.753	0.970	0.645	1.27	0.848	1.11	0.739	
	19	1.05	0.700	0.870	0.579	1.18	0.786	0.988	0.657	1.33	0.886	1.13	0.754	
	20	1.10	0.731	0.886	0.589	1.24	0.823	1.01	0.670	1.39	0.928	1.16	0.770	
	22	1.21	0.804	0.918	0.611	1.36	0.907	1.05	0.697	1.54	1.03	1.21	0.804	
	24	1.34	0.892	0.953	0.634	1.52	1.01	1.09	0.727	1.72	1.14	1.26	0.841	
	26	1.50	0.999	0.991	0.660	1.70	1.13	1.14	0.759	1.94	1.29	1.33	0.882	
	28	1.70	1.13	1.03	0.687	1.93	1.29	1.19	0.794	2.21	1.47	1.39	0.928	
	30	1.94	1.29	1.08	0.716	2.21	1.47	1.25	0.832	2.53	1.68	1.47	0.977	
	32	2.21	1.47	1.13	0.749	2.52	1.68	1.31	0.874	2.88	1.92	1.56	1.04	
	34	2.49	1.66	1.18	0.784	2.84	1.89	1.39	0.926	3.25	2.16	1.70	1.13	
	36	2.79	1.86	1.24	0.826	3.19	2.12	1.50	1.00	3.65	2.43	1.84	1.23	
	38	3.11	2.07	1.33	0.886	3.55	2.36	1.62	1.08	4.06	2.70	1.99	1.32	
40	3.45	2.29	1.42	0.947	3.93	2.62	1.73	1.15	4.50	3.00	2.13	1.42		
42	3.80	2.53	1.51	1.01	4.34	2.89	1.85	1.23	4.96	3.30	2.28	1.52		
44	4.17	2.78	1.60	1.07	4.76	3.17	1.96	1.30	5.45	3.62	2.42	1.61		
46	4.56	3.03	1.69	1.13	5.20	3.46	2.07	1.38	5.95	3.96	2.57	1.71		
48	4.96	3.30	1.78	1.19	5.67	3.77	2.19	1.45	6.48	4.31	2.71	1.80		
50	5.39	3.58	1.87	1.25	6.15	4.09	2.30	1.53						
Other Constants and Properties														
$b_y \times 10^3$, (kip-ft) ⁻¹		3.39		2.26		3.82		2.54		4.37		2.91		
$t_y \times 10^3$, (kips) ⁻¹		0.699		0.465		0.777		0.517		0.865		0.576		
$t_r \times 10^3$, (kips) ⁻¹		0.858		0.572		0.954		0.636		1.06		0.709		
r_x/r_y		3.41				3.42				3.43				
r_y , in.		3.05				3.01				2.97				
Note: Heavy line indicates L_c/r_y equal to or greater than 200.														


 W24		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes											$F_y = 50$ ksi	
		Shape		W24 \times										
Design		117 ^c				104 ^c				103 ^c				
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.992	0.660	1.09	0.725	1.14	0.757	1.23	0.820	1.13	0.751	1.27	0.847	
	11	1.13	0.751	1.10	0.733	1.30	0.864	1.25	0.832	1.52	1.01	1.42	0.944	
	12	1.16	0.770	1.12	0.748	1.33	0.886	1.28	0.849	1.62	1.08	1.46	0.972	
	13	1.19	0.794	1.15	0.762	1.37	0.910	1.30	0.867	1.73	1.15	1.51	1.00	
	14	1.23	0.820	1.17	0.778	1.41	0.938	1.33	0.886	1.86	1.23	1.55	1.03	
	15	1.28	0.850	1.19	0.794	1.45	0.968	1.36	0.905	2.00	1.33	1.61	1.07	
	16	1.33	0.882	1.22	0.810	1.50	1.00	1.39	0.925	2.18	1.45	1.66	1.10	
	17	1.38	0.919	1.24	0.828	1.56	1.04	1.42	0.946	2.38	1.58	1.72	1.14	
	18	1.44	0.959	1.27	0.846	1.63	1.08	1.46	0.969	2.61	1.74	1.78	1.19	
	19	1.51	1.00	1.30	0.865	1.70	1.13	1.49	0.992	2.88	1.92	1.85	1.23	
	20	1.58	1.05	1.33	0.885	1.79	1.19	1.53	1.02	3.19	2.12	1.92	1.28	
	22	1.75	1.16	1.39	0.927	1.99	1.32	1.61	1.07	3.86	2.57	2.09	1.39	
	24	1.96	1.30	1.46	0.974	2.23	1.48	1.69	1.13	4.60	3.06	2.37	1.58	
	26	2.21	1.47	1.54	1.03	2.52	1.68	1.79	1.19	5.40	3.59	2.65	1.77	
	28	2.53	1.68	1.63	1.08	2.89	1.92	1.90	1.27	6.26	4.16	2.94	1.95	
	30	2.90	1.93	1.73	1.15	3.32	2.21	2.06	1.37	7.19	4.78	3.22	2.14	
	32	3.30	2.20	1.89	1.26	3.77	2.51	2.29	1.52	8.18	5.44	3.50	2.33	
	34	3.72	2.48	2.07	1.38	4.26	2.83	2.51	1.67					
	36	4.18	2.78	2.25	1.50	4.78	3.18	2.74	1.82					
	38	4.65	3.10	2.43	1.62	5.32	3.54	2.97	1.98					
40	5.16	3.43	2.62	1.74	5.90	3.92	3.20	2.13						
42	5.68	3.78	2.80	1.86	6.50	4.33	3.44	2.29						
44	6.24	4.15	2.98	1.99	7.13	4.75	3.67	2.44						
46	6.82	4.54	3.17	2.11	7.80	5.19	3.91	2.60						
48	7.42	4.94	3.35	2.23	8.49	5.65	4.14	2.76						
Other Constants and Properties														
$b_y \times 10^3$, (kip-ft) ⁻¹		4.99		3.32		5.71		3.80		8.58		5.71		
$t_y \times 10^3$, (kips) ⁻¹		0.971		0.646		1.09		0.724		1.10		0.733		
$t_r \times 10^3$, (kips) ⁻¹		1.19		0.795		1.34		0.891		1.35		0.903		
r_x/r_y		3.44				3.47				5.03				
r_y , in.		2.94				2.91				1.99				
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.														


 W24		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		94 ^c				84 ^c				76 ^c			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.26	0.838	1.40	0.933	1.45	0.965	1.59	1.06	1.63	1.09	1.78	1.19
	6	1.37	0.910	1.40	0.933	1.58	1.05	1.59	1.06	1.78	1.19	1.78	1.19
	7	1.41	0.938	1.40	0.933	1.63	1.08	1.60	1.06	1.84	1.23	1.79	1.19
	8	1.46	0.971	1.44	0.960	1.69	1.12	1.64	1.09	1.91	1.27	1.85	1.23
	9	1.52	1.01	1.48	0.987	1.76	1.17	1.69	1.13	1.99	1.32	1.91	1.27
	10	1.59	1.06	1.53	1.02	1.84	1.22	1.75	1.16	2.09	1.39	1.97	1.31
	11	1.67	1.11	1.57	1.05	1.93	1.29	1.80	1.20	2.19	1.46	2.04	1.36
	12	1.78	1.18	1.62	1.08	2.04	1.36	1.87	1.24	2.32	1.54	2.11	1.41
	13	1.90	1.26	1.68	1.12	2.17	1.44	1.93	1.28	2.47	1.64	2.19	1.46
	14	2.04	1.36	1.73	1.15	2.33	1.55	2.00	1.33	2.63	1.75	2.28	1.52
	15	2.21	1.47	1.79	1.19	2.52	1.68	2.08	1.38	2.84	1.89	2.37	1.58
	16	2.40	1.60	1.86	1.24	2.75	1.83	2.16	1.44	3.10	2.06	2.47	1.64
	17	2.62	1.74	1.93	1.28	3.01	2.00	2.25	1.49	3.40	2.26	2.58	1.71
	18	2.88	1.92	2.01	1.33	3.32	2.21	2.34	1.56	3.76	2.50	2.69	1.79
	19	3.18	2.12	2.09	1.39	3.68	2.45	2.45	1.63	4.19	2.79	2.82	1.88
	20	3.53	2.35	2.17	1.45	4.08	2.71	2.56	1.70	4.64	3.09	3.02	2.01
	22	4.27	2.84	2.43	1.61	4.94	3.28	2.95	1.96	5.62	3.74	3.53	2.35
	24	5.08	3.38	2.76	1.84	5.88	3.91	3.37	2.24	6.68	4.45	4.05	2.69
	26	5.96	3.97	3.10	2.06	6.90	4.59	3.80	2.53	7.84	5.22	4.58	3.05
	28	6.92	4.60	3.44	2.29	8.00	5.32	4.24	2.82	9.10	6.05	5.12	3.41
30	7.94	5.28	3.79	2.52	9.18	6.11	4.67	3.11	10.4	6.95	5.66	3.77	
32	9.03	6.01	4.13	2.75	10.4	6.95	5.11	3.40	11.9	7.90	6.21	4.13	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		9.50		6.32		10.9		7.27		12.5		8.29	
$t_y \times 10^3$, (kips) ⁻¹		1.21		0.802		1.35		0.900		1.49		0.992	
$t_r \times 10^3$, (kips) ⁻¹		1.48		0.987		1.66		1.11		1.83		1.22	
r_x/r_y		4.98				5.02				5.05			
r_y , in.		1.98				1.95				1.92			
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W24		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		68 ^c				62 ^c				55 ^{c, v}			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.86	1.24	2.01	1.34	2.07	1.38	2.33	1.55	2.41	1.60	2.66	1.77
	6	2.04	1.36	2.01	1.34	2.44	1.62	2.44	1.63	2.86	1.90	2.82	1.87
	7	2.11	1.41	2.04	1.36	2.58	1.72	2.56	1.70	3.04	2.03	2.95	1.96
	8	2.19	1.46	2.11	1.40	2.76	1.84	2.68	1.78	3.27	2.18	3.10	2.07
	9	2.29	1.52	2.18	1.45	2.99	1.99	2.82	1.87	3.55	2.36	3.27	2.18
	10	2.41	1.60	2.26	1.50	3.26	2.17	2.97	1.97	3.88	2.58	3.46	2.30
	11	2.54	1.69	2.34	1.56	3.58	2.38	3.13	2.08	4.29	2.86	3.67	2.44
	12	2.69	1.79	2.43	1.62	4.07	2.71	3.32	2.21	4.80	3.19	3.91	2.60
	13	2.87	1.91	2.53	1.68	4.67	3.11	3.53	2.35	5.57	3.70	4.18	2.78
	14	3.07	2.04	2.63	1.75	5.42	3.60	3.77	2.51	6.46	4.29	4.51	3.00
	15	3.30	2.20	2.75	1.83	6.22	4.14	4.15	2.76	7.41	4.93	5.08	3.38
	16	3.59	2.39	2.87	1.91	7.08	4.71	4.62	3.08	8.43	5.61	5.68	3.78
	17	3.97	2.64	3.01	2.00	7.99	5.31	5.11	3.40	9.52	6.33	6.29	4.18
	18	4.42	2.94	3.16	2.10	8.96	5.96	5.60	3.72	10.7	7.10	6.91	4.60
	19	4.92	3.27	3.35	2.23	9.98	6.64	6.10	4.06	11.9	7.91	7.55	5.02
	20	5.45	3.63	3.66	2.43	11.1	7.36	6.61	4.40	13.2	8.77	8.20	5.46
22	6.60	4.39	4.29	2.85	13.4	8.90	7.64	5.08	15.9	10.6	9.52	6.34	
24	7.85	5.22	4.94	3.29									
26	9.21	6.13	5.61	3.74									
28	10.7	7.11	6.30	4.19									
30	12.3	8.16	6.99	4.65									
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		14.5		9.67		22.7		15.1		26.8		17.8	
$t_y \times 10^3$, (kips) ⁻¹		1.66		1.11		1.84		1.22		2.06		1.37	
$t_r \times 10^3$, (kips) ⁻¹		2.04		1.36		2.25		1.50		2.53		1.69	
r_x/r_y		5.11				6.69				6.80			
r_y , in.		1.87				1.38				1.34			
^c Shape is slender for compression for $F_y = 50$ ksi. ^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(1) with $F_y = 50$ ksi; therefore, $\phi_v = 0.90$ and $\Omega_v = 1.67$. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W21		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		275 ^h				248				223			
Shape		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.408	0.272	0.476	0.316	0.453	0.301	0.531	0.353	0.502	0.334	0.593	0.394
	6	0.425	0.283	0.476	0.316	0.471	0.313	0.531	0.353	0.523	0.348	0.593	0.394
	7	0.431	0.287	0.476	0.316	0.478	0.318	0.531	0.353	0.531	0.353	0.593	0.394
	8	0.438	0.291	0.476	0.316	0.486	0.323	0.531	0.353	0.540	0.359	0.593	0.394
	9	0.446	0.297	0.476	0.316	0.495	0.329	0.531	0.353	0.551	0.366	0.593	0.394
	10	0.456	0.303	0.476	0.316	0.506	0.336	0.531	0.353	0.563	0.374	0.593	0.394
	11	0.466	0.310	0.476	0.317	0.518	0.344	0.532	0.354	0.576	0.384	0.594	0.395
	12	0.478	0.318	0.480	0.319	0.531	0.353	0.536	0.357	0.592	0.394	0.600	0.399
	13	0.491	0.327	0.483	0.322	0.546	0.363	0.541	0.360	0.609	0.405	0.606	0.403
	14	0.506	0.337	0.487	0.324	0.563	0.374	0.546	0.363	0.628	0.418	0.612	0.407
	15	0.522	0.348	0.491	0.327	0.581	0.387	0.551	0.366	0.649	0.432	0.618	0.411
	16	0.541	0.360	0.495	0.329	0.601	0.400	0.556	0.370	0.672	0.447	0.625	0.416
	17	0.560	0.373	0.499	0.332	0.624	0.415	0.561	0.373	0.698	0.464	0.631	0.420
	18	0.582	0.387	0.503	0.335	0.648	0.431	0.566	0.376	0.727	0.483	0.638	0.424
	19	0.606	0.403	0.508	0.338	0.676	0.450	0.571	0.380	0.758	0.504	0.644	0.429
	20	0.633	0.421	0.512	0.341	0.706	0.469	0.576	0.383	0.792	0.527	0.651	0.433
	22	0.694	0.462	0.521	0.346	0.774	0.515	0.587	0.391	0.872	0.580	0.665	0.443
	24	0.767	0.511	0.530	0.352	0.858	0.571	0.599	0.398	0.968	0.644	0.680	0.453
	26	0.856	0.570	0.539	0.359	0.958	0.638	0.611	0.406	1.08	0.722	0.696	0.463
	28	0.964	0.641	0.549	0.365	1.08	0.719	0.623	0.415	1.23	0.816	0.712	0.474
30	1.10	0.730	0.559	0.372	1.23	0.819	0.636	0.423	1.40	0.933	0.729	0.485	
32	1.25	0.830	0.569	0.379	1.40	0.932	0.649	0.432	1.60	1.06	0.747	0.497	
34	1.41	0.937	0.580	0.386	1.58	1.05	0.663	0.441	1.80	1.20	0.765	0.509	
36	1.58	1.05	0.592	0.394	1.77	1.18	0.678	0.451	2.02	1.34	0.785	0.522	
38	1.76	1.17	0.603	0.401	1.98	1.31	0.693	0.461	2.25	1.50	0.806	0.536	
40	1.95	1.30	0.616	0.410	2.19	1.46	0.709	0.472	2.49	1.66	0.827	0.550	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹	1.87		1.24		2.10		1.39		2.38		1.58		
$t_y \times 10^3$, (kips) ⁻¹	0.408		0.272		0.453		0.301		0.502		0.334		
$t_r \times 10^3$, (kips) ⁻¹	0.502		0.334		0.556		0.371		0.617		0.411		
r_x/r_y	3.13				3.12				3.14				
r_y , in.	3.10				3.08				3.04				
^h Flange thickness greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.													


 W21		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		201		W21x				166					
Shape	Design	$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.563	0.375	0.672	0.447	0.623	0.415	0.748	0.498	0.684	0.455	0.825	0.549
	6	0.587	0.391	0.672	0.447	0.650	0.432	0.748	0.498	0.714	0.475	0.825	0.549
	7	0.596	0.397	0.672	0.447	0.660	0.439	0.748	0.498	0.725	0.482	0.825	0.549
	8	0.606	0.403	0.672	0.447	0.672	0.447	0.748	0.498	0.738	0.491	0.825	0.549
	9	0.618	0.411	0.672	0.447	0.685	0.456	0.748	0.498	0.753	0.501	0.825	0.549
	10	0.632	0.421	0.672	0.447	0.700	0.466	0.748	0.498	0.770	0.512	0.825	0.549
	11	0.648	0.431	0.675	0.449	0.718	0.478	0.752	0.500	0.789	0.525	0.829	0.552
	12	0.665	0.443	0.682	0.454	0.737	0.491	0.761	0.507	0.811	0.540	0.841	0.559
	13	0.685	0.455	0.690	0.459	0.759	0.505	0.771	0.513	0.835	0.556	0.852	0.567
	14	0.706	0.470	0.698	0.464	0.784	0.521	0.780	0.519	0.862	0.574	0.864	0.575
	15	0.730	0.486	0.706	0.470	0.811	0.539	0.790	0.526	0.892	0.594	0.876	0.583
	16	0.757	0.504	0.714	0.475	0.841	0.559	0.801	0.533	0.925	0.616	0.888	0.591
	17	0.786	0.523	0.723	0.481	0.874	0.581	0.811	0.540	0.962	0.640	0.901	0.599
	18	0.819	0.545	0.731	0.487	0.910	0.606	0.822	0.547	1.00	0.667	0.914	0.608
	19	0.854	0.568	0.740	0.492	0.951	0.632	0.833	0.554	1.05	0.697	0.927	0.617
	20	0.894	0.595	0.749	0.498	0.995	0.662	0.844	0.562	1.10	0.729	0.941	0.626
	22	0.985	0.655	0.768	0.511	1.10	0.730	0.868	0.577	1.21	0.805	0.970	0.645
	24	1.10	0.729	0.788	0.524	1.22	0.813	0.893	0.594	1.35	0.897	1.00	0.666
	26	1.23	0.818	0.809	0.538	1.37	0.914	0.919	0.612	1.52	1.01	1.03	0.688
	28	1.39	0.926	0.831	0.553	1.56	1.04	0.947	0.630	1.72	1.15	1.07	0.711
30	1.59	1.06	0.854	0.568	1.79	1.19	0.977	0.650	1.98	1.31	1.11	0.736	
32	1.81	1.21	0.878	0.584	2.03	1.35	1.01	0.671	2.25	1.50	1.15	0.763	
34	2.05	1.36	0.904	0.602	2.30	1.53	1.04	0.694	2.54	1.69	1.19	0.792	
36	2.30	1.53	0.932	0.620	2.57	1.71	1.08	0.718	2.85	1.89	1.24	0.823	
38	2.56	1.70	0.961	0.640	2.87	1.91	1.12	0.744	3.17	2.11	1.29	0.857	
40	2.83	1.89	0.993	0.660	3.18	2.11	1.16	0.772	3.51	2.34	1.34	0.895	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		2.68		1.78		2.99		1.99		3.30		2.19	
$t_y \times 10^3$, (kips) ⁻¹		0.563		0.375		0.623		0.415		0.684		0.455	
$t_r \times 10^3$, (kips) ⁻¹		0.692		0.461		0.765		0.510		0.841		0.560	
r_x/r_y		3.14				3.13				3.13			
r_y , in.		3.02				3.00				2.99			


 W21		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		147				132				122			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.773	0.514	0.955	0.635	0.861	0.573	1.07	0.712	0.930	0.619	1.16	0.772
	6	0.808	0.537	0.955	0.635	0.900	0.599	1.07	0.712	0.973	0.647	1.16	0.772
	7	0.820	0.546	0.955	0.635	0.914	0.608	1.07	0.712	0.988	0.658	1.16	0.772
	8	0.835	0.556	0.955	0.635	0.931	0.620	1.07	0.712	1.01	0.670	1.16	0.772
	9	0.853	0.567	0.955	0.635	0.951	0.633	1.07	0.712	1.03	0.684	1.16	0.772
	10	0.873	0.581	0.955	0.635	0.973	0.647	1.07	0.712	1.05	0.700	1.16	0.772
	11	0.895	0.596	0.963	0.641	0.999	0.664	1.08	0.719	1.08	0.719	1.17	0.781
	12	0.920	0.612	0.978	0.651	1.03	0.683	1.10	0.731	1.11	0.739	1.19	0.795
	13	0.949	0.631	0.993	0.661	1.06	0.705	1.12	0.743	1.15	0.763	1.22	0.809
	14	0.980	0.652	1.01	0.671	1.09	0.728	1.14	0.756	1.19	0.789	1.24	0.823
	15	1.02	0.675	1.02	0.682	1.13	0.755	1.16	0.769	1.23	0.817	1.26	0.838
	16	1.05	0.701	1.04	0.693	1.18	0.784	1.18	0.782	1.28	0.849	1.28	0.854
	17	1.10	0.730	1.06	0.704	1.23	0.816	1.20	0.796	1.33	0.884	1.31	0.870
	18	1.14	0.761	1.08	0.716	1.28	0.852	1.22	0.811	1.39	0.924	1.33	0.887
	19	1.20	0.796	1.09	0.728	1.34	0.892	1.24	0.826	1.45	0.967	1.36	0.905
	20	1.25	0.835	1.11	0.740	1.41	0.935	1.26	0.841	1.52	1.01	1.39	0.923
	22	1.39	0.924	1.15	0.767	1.56	1.04	1.31	0.874	1.69	1.13	1.45	0.961
	24	1.55	1.03	1.19	0.795	1.74	1.16	1.37	0.910	1.89	1.26	1.51	1.00
	26	1.75	1.17	1.24	0.825	1.97	1.31	1.43	0.948	2.14	1.43	1.58	1.05
	28	2.00	1.33	1.29	0.858	2.25	1.50	1.49	0.990	2.45	1.63	1.65	1.10
30	2.29	1.53	1.34	0.894	2.59	1.72	1.56	1.04	2.82	1.87	1.74	1.16	
32	2.61	1.74	1.40	0.933	2.95	1.96	1.63	1.09	3.20	2.13	1.83	1.22	
34	2.95	1.96	1.47	0.975	3.32	2.21	1.72	1.14	3.62	2.41	1.97	1.31	
36	3.30	2.20	1.54	1.02	3.73	2.48	1.85	1.23	4.06	2.70	2.12	1.41	
38	3.68	2.45	1.64	1.09	4.15	2.76	1.98	1.32	4.52	3.01	2.28	1.52	
40	4.08	2.71	1.75	1.16	4.60	3.06	2.12	1.41	5.01	3.33	2.44	1.62	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		3.85		2.56		4.33		2.88		4.71		3.14	
$t_y \times 10^3$, (kips) ⁻¹		0.773		0.514		0.861		0.573		0.930		0.619	
$t_r \times 10^3$, (kips) ⁻¹		0.950		0.633		1.06		0.705		1.14		0.762	
r_x/r_y		3.11				3.11				3.11			
r_y , in.		2.95				2.93				2.92			


 W21		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes											$F_y = 50$ ksi	
		Shape		W21 \times										
Design		111				101 ^c				93				
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.02	0.682	1.28	0.850	1.13	0.753	1.41	0.937	1.22	0.814	1.61	1.07	
	6	1.07	0.713	1.28	0.850	1.18	0.784	1.41	0.937	1.37	0.910	1.61	1.07	
	7	1.09	0.725	1.28	0.850	1.20	0.796	1.41	0.937	1.42	0.948	1.63	1.09	
	8	1.11	0.739	1.28	0.850	1.22	0.809	1.41	0.937	1.49	0.993	1.68	1.12	
	9	1.13	0.754	1.28	0.850	1.24	0.826	1.41	0.937	1.57	1.05	1.73	1.15	
	10	1.16	0.773	1.28	0.850	1.27	0.846	1.41	0.937	1.67	1.11	1.78	1.18	
	11	1.19	0.793	1.29	0.861	1.31	0.869	1.43	0.951	1.78	1.19	1.83	1.22	
	12	1.23	0.816	1.32	0.877	1.34	0.894	1.46	0.969	1.91	1.27	1.89	1.25	
	13	1.27	0.842	1.34	0.894	1.39	0.923	1.49	0.989	2.07	1.38	1.95	1.29	
	14	1.31	0.871	1.37	0.911	1.43	0.955	1.52	1.01	2.25	1.50	2.01	1.34	
	15	1.36	0.903	1.40	0.929	1.49	0.990	1.55	1.03	2.46	1.64	2.08	1.38	
	16	1.41	0.939	1.42	0.947	1.55	1.03	1.58	1.05	2.71	1.80	2.15	1.43	
	17	1.47	0.979	1.45	0.966	1.61	1.07	1.61	1.07	3.01	2.00	2.23	1.48	
	18	1.54	1.02	1.48	0.986	1.69	1.12	1.65	1.10	3.36	2.23	2.32	1.54	
	19	1.61	1.07	1.51	1.01	1.77	1.18	1.69	1.12	3.74	2.49	2.41	1.60	
	20	1.69	1.12	1.55	1.03	1.86	1.23	1.72	1.15	4.15	2.76	2.51	1.67	
	22	1.88	1.25	1.62	1.08	2.06	1.37	1.81	1.20	5.02	3.34	2.77	1.84	
	24	2.11	1.40	1.69	1.13	2.32	1.54	1.90	1.26	5.97	3.97	3.12	2.07	
	26	2.39	1.59	1.78	1.18	2.63	1.75	2.00	1.33	7.01	4.66	3.46	2.30	
	28	2.74	1.82	1.87	1.24	3.02	2.01	2.11	1.41	8.13	5.41	3.81	2.54	
30	3.14	2.09	1.97	1.31	3.46	2.30	2.24	1.49	9.33	6.21	4.16	2.77		
32	3.58	2.38	2.12	1.41	3.94	2.62	2.46	1.64						
34	4.04	2.69	2.31	1.53	4.45	2.96	2.69	1.79						
36	4.53	3.01	2.50	1.66	4.99	3.32	2.92	1.94						
38	5.05	3.36	2.69	1.79	5.56	3.70	3.14	2.09						
40	5.59	3.72	2.88	1.91	6.16	4.10	3.37	2.24						
Other Constants and Properties														
$b_y \times 10^3$, (kip-ft) ⁻¹		5.22		3.48		5.77		3.84		10.3		6.83		
$t_y \times 10^3$, (kips) ⁻¹		1.02		0.682		1.12		0.746		1.22		0.814		
$t_r \times 10^3$, (kips) ⁻¹		1.26		0.839		1.38		0.918		1.50		1.00		
r_x/r_y		3.12				3.12				4.73				
r_y , in.		2.90				2.89				1.84				
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.														


 W21		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		83 ^c				73 ^c				68 ^c			
Shape		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.37	0.914	1.82	1.21	1.61	1.07	2.07	1.38	1.76	1.17	2.23	1.48
	6	1.53	1.02	1.82	1.21	1.78	1.19	2.07	1.38	1.95	1.30	2.23	1.48
	7	1.60	1.06	1.85	1.23	1.85	1.23	2.11	1.40	2.02	1.35	2.27	1.51
	8	1.67	1.11	1.90	1.26	1.93	1.28	2.18	1.45	2.11	1.40	2.35	1.56
	9	1.77	1.17	1.96	1.30	2.02	1.34	2.25	1.49	2.21	1.47	2.43	1.62
	10	1.87	1.25	2.02	1.34	2.14	1.43	2.32	1.55	2.33	1.55	2.51	1.67
	11	2.00	1.33	2.09	1.39	2.29	1.52	2.40	1.60	2.47	1.65	2.61	1.73
	12	2.15	1.43	2.16	1.43	2.47	1.64	2.49	1.66	2.67	1.77	2.70	1.80
	13	2.33	1.55	2.23	1.48	2.67	1.78	2.58	1.72	2.89	1.92	2.81	1.87
	14	2.53	1.69	2.31	1.54	2.92	1.94	2.68	1.79	3.16	2.10	2.93	1.95
	15	2.78	1.85	2.40	1.60	3.20	2.13	2.79	1.86	3.47	2.31	3.05	2.03
	16	3.06	2.04	2.49	1.66	3.54	2.35	2.91	1.94	3.84	2.55	3.19	2.12
	17	3.40	2.26	2.59	1.72	3.93	2.62	3.04	2.02	4.27	2.84	3.34	2.22
	18	3.80	2.53	2.70	1.80	4.41	2.93	3.18	2.11	4.79	3.19	3.50	2.33
	19	4.23	2.82	2.82	1.88	4.91	3.27	3.33	2.22	5.34	3.55	3.72	2.48
	20	4.69	3.12	2.95	1.96	5.44	3.62	3.58	2.38	5.91	3.93	4.03	2.68
	22	5.67	3.78	3.37	2.24	6.58	4.38	4.13	2.75	7.16	4.76	4.66	3.10
	24	6.75	4.49	3.81	2.53	7.83	5.21	4.68	3.12	8.52	5.67	5.31	3.53
	26	7.93	5.27	4.25	2.83	9.19	6.12	5.24	3.49	9.99	6.65	5.95	3.96
	28	9.19	6.12	4.69	3.12	10.7	7.09	5.81	3.86	11.6	7.71	6.60	4.39
30	10.6	7.02	5.13	3.41	12.2	8.14	6.37	4.24	13.3	8.85	7.26	4.83	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		11.7		7.77		13.4		8.91		14.6		9.71	
$t_y \times 10^3$, (kips) ⁻¹		1.37		0.911		1.55		1.03		1.67		1.11	
$t_r \times 10^3$, (kips) ⁻¹		1.68		1.12		1.91		1.27		2.05		1.37	
r_x/r_y		4.74				4.77				4.78			
r_y , in.		1.83				1.81				1.80			
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W21		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi		
		62 ^c				57 ^c				55 ^c				
Shape		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.97	1.31	2.47	1.65	2.17	1.44	2.76	1.84	2.28	1.52	2.83	1.88	
	6	2.19	1.45	2.47	1.65	2.58	1.72	2.91	1.94	2.54	1.69	2.83	1.88	
	7	2.27	1.51	2.54	1.69	2.75	1.83	3.04	2.03	2.64	1.76	2.92	1.94	
	8	2.37	1.58	2.62	1.74	2.96	1.97	3.19	2.12	2.76	1.84	3.02	2.01	
	9	2.49	1.66	2.71	1.81	3.21	2.14	3.35	2.23	2.90	1.93	3.14	2.09	
	10	2.63	1.75	2.81	1.87	3.56	2.37	3.53	2.35	3.07	2.04	3.27	2.17	
	11	2.79	1.86	2.92	1.94	4.02	2.68	3.73	2.48	3.27	2.18	3.40	2.26	
	12	2.98	1.98	3.04	2.02	4.60	3.06	3.95	2.63	3.50	2.33	3.55	2.36	
	13	3.22	2.14	3.16	2.10	5.32	3.54	4.20	2.79	3.78	2.51	3.71	2.47	
	14	3.53	2.35	3.30	2.19	6.17	4.10	4.48	2.98	4.11	2.73	3.89	2.58	
	15	3.89	2.59	3.44	2.29	7.08	4.71	4.94	3.29	4.55	3.03	4.08	2.71	
	16	4.31	2.87	3.61	2.40	8.06	5.36	5.47	3.64	5.07	3.38	4.29	2.86	
	17	4.83	3.21	3.78	2.52	9.10	6.05	6.01	4.00	5.71	3.80	4.53	3.01	
	18	5.41	3.60	3.98	2.65	10.2	6.79	6.55	4.36	6.40	4.26	4.92	3.27	
	19	6.03	4.01	4.33	2.88	11.4	7.56	7.10	4.72	7.13	4.75	5.38	3.58	
	20	6.68	4.45	4.70	3.13	12.6	8.38	7.65	5.09	7.90	5.26	5.86	3.90	
	21	7.37	4.90	5.08	3.38	13.9	9.24	8.20	5.46	8.71	5.80	6.34	4.22	
	22	8.09	5.38	5.46	3.63	15.2	10.1	8.76	5.83	9.56	6.36	6.84	4.55	
	23	8.84	5.88	5.85	3.89					10.5	6.95	7.34	4.88	
	24	9.63	6.40	6.24	4.15					11.4	7.57	7.84	5.22	
	25	10.4	6.95	6.63	4.41					12.3	8.22	8.35	5.56	
	26	11.3	7.52	7.02	4.67					13.4	8.89	8.86	5.90	
	27	12.2	8.10	7.42	4.94					14.4	9.58	9.38	6.24	
	28	13.1	8.72	7.81	5.20					15.5	10.3	9.90	6.59	
	29	14.1	9.35	8.21	5.46									
	Other Constants and Properties													
	$b_y \times 10^3$, (kip-ft) ⁻¹		16.4		10.9		24.1		16.0		19.4		12.9	
	$t_y \times 10^3$, (kips) ⁻¹		1.83		1.21		2.00		1.33		2.06		1.37	
	$t_r \times 10^3$, (kips) ⁻¹		2.24		1.49		2.46		1.64		2.53		1.69	
r_x/r_y		4.82				6.19				4.86				
r_y , in.		1.77				1.35				1.73				
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.														


 W21		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi		
		50 ^c				48 ^{c,f}				44 ^c				
Shape		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	2.53	1.69	3.24	2.15	2.70	1.80	3.36	2.23	2.96	1.97	3.73	2.48	
	6	3.05	2.03	3.45	2.30	3.03	2.02	3.36	2.23	3.61	2.40	4.03	2.68	
	7	3.26	2.17	3.63	2.41	3.16	2.10	3.47	2.31	3.87	2.58	4.24	2.82	
	8	3.53	2.35	3.81	2.54	3.31	2.20	3.61	2.40	4.20	2.79	4.48	2.98	
	9	3.85	2.56	4.02	2.68	3.50	2.33	3.76	2.50	4.61	3.07	4.75	3.16	
	10	4.25	2.83	4.26	2.83	3.72	2.47	3.92	2.61	5.11	3.40	5.05	3.36	
	11	4.83	3.21	4.52	3.01	3.98	2.65	4.10	2.73	5.73	3.81	5.39	3.59	
	12	5.57	3.71	4.82	3.21	4.28	2.85	4.30	2.86	6.68	4.45	5.79	3.85	
	13	6.52	4.34	5.16	3.43	4.63	3.08	4.51	3.00	7.84	5.22	6.25	4.16	
	14	7.56	5.03	5.67	3.77	5.05	3.36	4.74	3.16	9.10	6.05	7.11	4.73	
	15	8.68	5.77	6.36	4.23	5.60	3.72	5.01	3.33	10.4	6.95	7.99	5.32	
	16	9.87	6.57	7.06	4.70	6.31	4.20	5.30	3.52	11.9	7.91	8.90	5.92	
	17	11.1	7.42	7.78	5.17	7.13	4.74	5.75	3.82	13.4	8.93	9.83	6.54	
	18	12.5	8.31	8.51	5.66	7.99	5.32	6.35	4.22	15.0	10.0	10.8	7.18	
	19	13.9	9.26	9.24	6.15	8.90	5.92	6.97	4.63	16.8	11.1	11.8	7.82	
	20	15.4	10.3	9.99	6.65	9.86	6.56	7.60	5.06	18.6	12.4	12.7	8.47	
	21	17.0	11.3	10.7	7.15	10.9	7.23	8.25	5.49	20.5	13.6	13.7	9.13	
	22					11.9	7.94	8.91	5.93					
	23					13.0	8.68	9.58	6.37					
	24					14.2	9.45	10.3	6.82					
	25					15.4	10.3	10.9	7.28					
	26					16.7	11.1	11.6	7.75					
	27					18.0	12.0	12.3	8.22					
	Other Constants and Properties													
	$b_y \times 10^3$, (kip-ft) ⁻¹		29.2		19.4		24.2		16.1		35.0		23.3	
	$t_y \times 10^3$, (kips) ⁻¹		2.27		1.51		2.37		1.58		2.57		1.71	
	$t_r \times 10^3$, (kips) ⁻¹		2.79		1.86		2.91		1.94		3.16		2.10	
r_x/r_y		6.29				4.96				6.40				
r_y , in.		1.30				1.66				1.26				
^c Shape is slender for compression for $F_y = 50$ ksi. ^f Shape does not meet compact limit for flexure for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.														


 W18		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		311 ^h				283 ^h				258 ^h			
Shape		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.365	0.243	0.473	0.314	0.401	0.267	0.527	0.351	0.439	0.292	0.583	0.388
	6	0.381	0.253	0.473	0.314	0.419	0.279	0.527	0.351	0.460	0.306	0.583	0.388
	7	0.387	0.257	0.473	0.314	0.426	0.284	0.527	0.351	0.468	0.311	0.583	0.388
	8	0.394	0.262	0.473	0.314	0.434	0.289	0.527	0.351	0.477	0.317	0.583	0.388
	9	0.402	0.268	0.473	0.314	0.443	0.295	0.527	0.351	0.487	0.324	0.583	0.388
	10	0.412	0.274	0.473	0.314	0.454	0.302	0.527	0.351	0.499	0.332	0.583	0.388
	11	0.422	0.281	0.474	0.315	0.466	0.310	0.530	0.352	0.512	0.341	0.587	0.390
	12	0.434	0.289	0.477	0.317	0.480	0.319	0.533	0.355	0.528	0.351	0.591	0.393
	13	0.447	0.298	0.480	0.319	0.495	0.329	0.537	0.357	0.545	0.362	0.595	0.396
	14	0.462	0.308	0.483	0.321	0.512	0.340	0.540	0.359	0.564	0.375	0.600	0.399
	15	0.479	0.319	0.486	0.323	0.530	0.353	0.544	0.362	0.585	0.389	0.604	0.402
	16	0.497	0.331	0.489	0.325	0.551	0.367	0.548	0.364	0.608	0.405	0.609	0.405
	17	0.517	0.344	0.492	0.327	0.574	0.382	0.551	0.367	0.634	0.422	0.613	0.408
	18	0.540	0.359	0.495	0.329	0.600	0.399	0.555	0.369	0.663	0.441	0.618	0.411
	19	0.564	0.375	0.498	0.331	0.628	0.418	0.559	0.372	0.695	0.462	0.623	0.414
	20	0.592	0.394	0.501	0.333	0.659	0.439	0.563	0.374	0.730	0.486	0.627	0.417
	22	0.655	0.436	0.507	0.338	0.732	0.487	0.571	0.380	0.812	0.541	0.637	0.424
	24	0.732	0.487	0.514	0.342	0.821	0.546	0.579	0.385	0.913	0.607	0.648	0.431
	26	0.826	0.550	0.521	0.347	0.929	0.618	0.588	0.391	1.04	0.690	0.658	0.438
	28	0.942	0.627	0.528	0.351	1.06	0.708	0.596	0.397	1.19	0.793	0.669	0.445
30	1.08	0.720	0.535	0.356	1.22	0.813	0.605	0.403	1.37	0.910	0.680	0.453	
32	1.23	0.819	0.542	0.361	1.39	0.925	0.614	0.409	1.56	1.04	0.692	0.460	
34	1.39	0.924	0.550	0.366	1.57	1.04	0.624	0.415	1.76	1.17	0.704	0.468	
36	1.56	1.04	0.557	0.371	1.76	1.17	0.634	0.422	1.97	1.31	0.716	0.477	
38	1.74	1.15	0.565	0.376	1.96	1.30	0.644	0.428	2.19	1.46	0.729	0.485	
40	1.92	1.28	0.573	0.382	2.17	1.45	0.654	0.435	2.43	1.62	0.743	0.494	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		1.72		1.15		1.93		1.28		2.15		1.43	
$t_y \times 10^3$, (kips) ⁻¹		0.365		0.243		0.401		0.267		0.439		0.292	
$t_r \times 10^3$, (kips) ⁻¹		0.448		0.299		0.493		0.328		0.540		0.360	
r_x/r_y		2.96				2.96				2.96			
r_y , in.		2.95				2.91				2.88			
^h Flange thickness greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.													

 W18		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		234 ^h				211				192			
Shape	Design	$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.487	0.324	0.649	0.432	0.536	0.357	0.727	0.484	0.594	0.395	0.806	0.536
	6	0.510	0.339	0.649	0.432	0.562	0.374	0.727	0.484	0.624	0.415	0.806	0.536
	7	0.519	0.345	0.649	0.432	0.572	0.381	0.727	0.484	0.635	0.423	0.806	0.536
	8	0.529	0.352	0.649	0.432	0.584	0.388	0.727	0.484	0.648	0.431	0.806	0.536
	9	0.541	0.360	0.649	0.432	0.597	0.397	0.727	0.484	0.663	0.441	0.806	0.536
	10	0.554	0.369	0.649	0.432	0.612	0.407	0.727	0.484	0.680	0.453	0.807	0.537
	11	0.570	0.379	0.654	0.435	0.629	0.419	0.734	0.488	0.700	0.466	0.815	0.542
	12	0.587	0.390	0.659	0.438	0.649	0.432	0.740	0.493	0.722	0.480	0.823	0.548
	13	0.606	0.403	0.664	0.442	0.671	0.446	0.747	0.497	0.747	0.497	0.831	0.553
	14	0.628	0.418	0.670	0.446	0.695	0.462	0.754	0.502	0.775	0.515	0.840	0.559
	15	0.652	0.434	0.675	0.449	0.722	0.480	0.761	0.506	0.806	0.536	0.848	0.564
	16	0.678	0.451	0.681	0.453	0.752	0.501	0.768	0.511	0.840	0.559	0.857	0.570
	17	0.708	0.471	0.687	0.457	0.786	0.523	0.775	0.516	0.879	0.585	0.866	0.576
	18	0.741	0.493	0.692	0.461	0.823	0.548	0.782	0.520	0.921	0.613	0.875	0.582
	19	0.777	0.517	0.698	0.465	0.865	0.575	0.790	0.525	0.968	0.644	0.884	0.588
	20	0.818	0.544	0.704	0.469	0.910	0.606	0.797	0.531	1.02	0.679	0.894	0.595
	22	0.912	0.607	0.717	0.477	1.02	0.677	0.813	0.541	1.14	0.761	0.913	0.608
	24	1.03	0.683	0.729	0.485	1.15	0.765	0.829	0.552	1.30	0.862	0.934	0.621
	26	1.17	0.778	0.742	0.494	1.31	0.873	0.846	0.563	1.48	0.987	0.955	0.636
	28	1.35	0.897	0.756	0.503	1.52	1.01	0.864	0.575	1.72	1.14	0.978	0.651
30	1.55	1.03	0.770	0.513	1.74	1.16	0.882	0.587	1.97	1.31	1.00	0.666	
32	1.76	1.17	0.785	0.522	1.98	1.32	0.902	0.600	2.24	1.49	1.03	0.683	
34	1.99	1.32	0.800	0.533	2.24	1.49	0.922	0.613	2.53	1.68	1.05	0.700	
36	2.23	1.48	0.816	0.543	2.51	1.67	0.943	0.627	2.84	1.89	1.08	0.718	
38	2.48	1.65	0.833	0.554	2.79	1.86	0.965	0.642	3.16	2.10	1.11	0.737	
40	2.75	1.83	0.850	0.566	3.09	2.06	0.988	0.657	3.50	2.33	1.14	0.757	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹	2.39		1.59		2.70		1.80		2.99		1.99		
$t_y \times 10^3$, (kips) ⁻¹	0.487		0.324		0.536		0.357		0.594		0.395		
$t_r \times 10^3$, (kips) ⁻¹	0.598		0.399		0.659		0.439		0.730		0.487		
r_x/r_y	2.96				2.96				2.97				
r_y , in.	2.85				2.82				2.79				
^h Flange thickness greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.													


 W18		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		175				158				143			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.650	0.432	0.895	0.596	0.721	0.480	1.00	0.666	0.795	0.529	1.11	0.736
	6	0.683	0.454	0.895	0.596	0.759	0.505	1.00	0.666	0.837	0.557	1.11	0.736
	7	0.695	0.463	0.895	0.596	0.773	0.514	1.00	0.666	0.853	0.567	1.11	0.736
	8	0.710	0.472	0.895	0.596	0.789	0.525	1.00	0.666	0.871	0.580	1.11	0.736
	9	0.727	0.484	0.895	0.596	0.808	0.538	1.00	0.666	0.892	0.594	1.11	0.736
	10	0.746	0.496	0.898	0.597	0.830	0.552	1.00	0.668	0.917	0.610	1.11	0.740
	11	0.768	0.511	0.907	0.604	0.855	0.569	1.02	0.676	0.945	0.629	1.13	0.750
	12	0.793	0.528	0.917	0.610	0.883	0.587	1.03	0.685	0.976	0.649	1.14	0.760
	13	0.821	0.546	0.927	0.617	0.914	0.608	1.04	0.693	1.01	0.673	1.16	0.770
	14	0.852	0.567	0.938	0.624	0.950	0.632	1.05	0.702	1.05	0.699	1.17	0.780
	15	0.887	0.590	0.948	0.631	0.989	0.658	1.07	0.710	1.10	0.729	1.19	0.791
	16	0.926	0.616	0.959	0.638	1.03	0.687	1.08	0.719	1.14	0.762	1.21	0.802
	17	0.969	0.645	0.970	0.645	1.08	0.720	1.10	0.729	1.20	0.798	1.22	0.814
	18	1.02	0.677	0.981	0.653	1.14	0.756	1.11	0.738	1.26	0.839	1.24	0.825
	19	1.07	0.712	0.993	0.661	1.20	0.796	1.12	0.748	1.33	0.884	1.26	0.838
	20	1.13	0.752	1.00	0.669	1.26	0.841	1.14	0.758	1.41	0.935	1.28	0.850
	22	1.27	0.844	1.03	0.685	1.42	0.946	1.17	0.779	1.58	1.05	1.32	0.876
	24	1.44	0.958	1.06	0.702	1.62	1.08	1.20	0.801	1.81	1.20	1.36	0.904
	26	1.65	1.10	1.08	0.720	1.86	1.24	1.24	0.824	2.08	1.39	1.40	0.933
	28	1.92	1.28	1.11	0.739	2.16	1.44	1.28	0.849	2.42	1.61	1.45	0.965
30	2.20	1.47	1.14	0.759	2.48	1.65	1.32	0.875	2.77	1.85	1.50	0.999	
32	2.51	1.67	1.17	0.780	2.82	1.88	1.36	0.903	3.16	2.10	1.56	1.03	
34	2.83	1.88	1.21	0.803	3.19	2.12	1.40	0.933	3.56	2.37	1.61	1.07	
36	3.17	2.11	1.24	0.827	3.57	2.38	1.45	0.965	4.00	2.66	1.68	1.12	
38	3.53	2.35	1.28	0.852	3.98	2.65	1.50	0.999	4.45	2.96	1.74	1.16	
40	3.91	2.60	1.32	0.878	4.41	2.93	1.56	1.04	4.93	3.28	1.82	1.21	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		3.36		2.24		3.76		2.50		4.17		2.78	
$t_y \times 10^3$, (kips) ⁻¹		0.650		0.432		0.721		0.480		0.795		0.529	
$t_r \times 10^3$, (kips) ⁻¹		0.798		0.532		0.886		0.591		0.977		0.651	
r_x/r_y		2.97				2.96				2.97			
r_y , in.		2.76				2.74				2.72			


 W18		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes												$F_y = 50$ ksi	
		Shape		W18x											
Design		130				119				106					
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$			
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.872	0.580	1.23	0.817	0.952	0.633	1.36	0.905	1.07	0.715	1.55	1.03		
	6	0.919	0.611	1.23	0.817	1.00	0.667	1.36	0.905	1.13	0.754	1.55	1.03		
	7	0.936	0.623	1.23	0.817	1.02	0.680	1.36	0.905	1.16	0.769	1.55	1.03		
	8	0.957	0.636	1.23	0.817	1.04	0.695	1.36	0.905	1.18	0.786	1.55	1.03		
	9	0.980	0.652	1.23	0.817	1.07	0.712	1.36	0.905	1.21	0.806	1.55	1.03		
	10	1.01	0.670	1.24	0.823	1.10	0.732	1.37	0.912	1.25	0.829	1.56	1.04		
	11	1.04	0.691	1.25	0.835	1.13	0.755	1.39	0.926	1.29	0.856	1.59	1.06		
	12	1.07	0.714	1.27	0.847	1.17	0.781	1.41	0.941	1.33	0.885	1.62	1.08		
	13	1.11	0.741	1.29	0.859	1.22	0.810	1.44	0.956	1.38	0.919	1.65	1.10		
	14	1.16	0.770	1.31	0.872	1.27	0.842	1.46	0.972	1.44	0.957	1.68	1.12		
	15	1.21	0.803	1.33	0.886	1.32	0.878	1.49	0.989	1.50	0.999	1.71	1.14		
	16	1.26	0.840	1.35	0.899	1.38	0.919	1.51	1.01	1.57	1.05	1.74	1.16		
	17	1.32	0.881	1.37	0.913	1.45	0.964	1.54	1.02	1.65	1.10	1.78	1.18		
	18	1.39	0.926	1.39	0.928	1.52	1.01	1.57	1.04	1.74	1.16	1.81	1.21		
	19	1.47	0.977	1.42	0.943	1.61	1.07	1.59	1.06	1.84	1.22	1.85	1.23		
	20	1.55	1.03	1.44	0.959	1.70	1.13	1.62	1.08	1.95	1.30	1.89	1.26		
	22	1.75	1.17	1.49	0.992	1.92	1.28	1.69	1.12	2.21	1.47	1.97	1.31		
	24	2.00	1.33	1.54	1.03	2.20	1.46	1.75	1.17	2.53	1.68	2.06	1.37		
	26	2.32	1.54	1.60	1.06	2.55	1.70	1.83	1.21	2.94	1.96	2.15	1.43		
	28	2.69	1.79	1.66	1.10	2.96	1.97	1.90	1.27	3.41	2.27	2.26	1.50		
30	3.09	2.05	1.73	1.15	3.39	2.26	1.99	1.32	3.92	2.61	2.38	1.58			
32	3.51	2.34	1.80	1.20	3.86	2.57	2.08	1.39	4.46	2.97	2.51	1.67			
34	3.97	2.64	1.87	1.25	4.36	2.90	2.19	1.46	5.03	3.35	2.72	1.81			
36	4.45	2.96	1.96	1.30	4.89	3.25	2.34	1.56	5.64	3.75	2.92	1.94			
38	4.95	3.30	2.08	1.38	5.45	3.62	2.50	1.66	6.29	4.18	3.12	2.08			
40	5.49	3.65	2.20	1.47	6.04	4.02	2.65	1.77	6.97	4.63	3.32	2.21			
Other Constants and Properties															
$b_y \times 10^3$, (kip-ft) ⁻¹	4.64		3.09		5.16		3.43		5.89		3.92				
$t_y \times 10^3$, (kips) ⁻¹	0.872		0.580		0.952		0.633		1.07		0.715				
$t_r \times 10^3$, (kips) ⁻¹	1.07		0.714		1.17		0.779		1.32		0.879				
r_x/r_y	2.97				2.94				2.95						
r_y , in.	2.70				2.69				2.66						


 W18		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		97				86				76 ^c			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.17	0.780	1.69	1.12	1.32	0.878	1.92	1.27	1.51	1.01	2.19	1.45
	6	1.24	0.823	1.69	1.12	1.39	0.928	1.92	1.27	1.59	1.06	2.19	1.45
	7	1.26	0.839	1.69	1.12	1.42	0.946	1.92	1.27	1.62	1.08	2.19	1.45
	8	1.29	0.858	1.69	1.12	1.46	0.968	1.92	1.27	1.65	1.10	2.19	1.45
	9	1.32	0.880	1.69	1.12	1.49	0.994	1.92	1.27	1.70	1.13	2.19	1.45
	10	1.36	0.906	1.71	1.14	1.54	1.02	1.94	1.29	1.75	1.16	2.22	1.48
	11	1.41	0.935	1.74	1.16	1.59	1.06	1.98	1.32	1.81	1.20	2.27	1.51
	12	1.45	0.968	1.77	1.18	1.64	1.09	2.02	1.35	1.87	1.24	2.32	1.54
	13	1.51	1.00	1.81	1.20	1.71	1.14	2.06	1.37	1.94	1.29	2.37	1.58
	14	1.57	1.05	1.84	1.23	1.78	1.18	2.11	1.40	2.03	1.35	2.43	1.62
	15	1.64	1.09	1.88	1.25	1.86	1.24	2.15	1.43	2.12	1.41	2.49	1.65
	16	1.72	1.14	1.92	1.28	1.95	1.30	2.20	1.47	2.22	1.48	2.55	1.69
	17	1.81	1.20	1.96	1.30	2.05	1.36	2.25	1.50	2.34	1.56	2.61	1.74
	18	1.90	1.27	2.00	1.33	2.16	1.44	2.31	1.53	2.47	1.64	2.68	1.78
	19	2.01	1.34	2.04	1.36	2.29	1.52	2.36	1.57	2.62	1.74	2.75	1.83
	20	2.13	1.42	2.09	1.39	2.43	1.61	2.42	1.61	2.78	1.85	2.82	1.88
	22	2.42	1.61	2.18	1.45	2.76	1.83	2.54	1.69	3.16	2.11	2.98	1.98
	24	2.78	1.85	2.29	1.52	3.17	2.11	2.68	1.79	3.65	2.43	3.16	2.10
	26	3.24	2.15	2.41	1.60	3.70	2.46	2.84	1.89	4.26	2.84	3.36	2.24
	28	3.75	2.50	2.54	1.69	4.29	2.86	3.01	2.00	4.94	3.29	3.67	2.44
30	4.31	2.87	2.68	1.78	4.93	3.28	3.29	2.19	5.68	3.78	4.06	2.70	
32	4.90	3.26	2.91	1.93	5.61	3.73	3.59	2.39	6.46	4.30	4.45	2.96	
34	5.53	3.68	3.15	2.09	6.33	4.21	3.90	2.60	7.29	4.85	4.85	3.22	
36	6.20	4.13	3.38	2.25	7.10	4.72	4.21	2.80	8.17	5.44	5.24	3.49	
38	6.91	4.60	3.62	2.41	7.91	5.26	4.51	3.00	9.11	6.06	5.64	3.75	
40	7.66	5.10	3.86	2.57	8.76	5.83	4.82	3.21	10.1	6.71	6.04	4.02	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		6.44		4.29		7.36		4.90		8.44		5.62	
$t_y \times 10^3$, (kips) ⁻¹		1.17		0.780		1.32		0.878		1.50		0.997	
$t_r \times 10^3$, (kips) ⁻¹		1.44		0.960		1.62		1.08		1.84		1.23	
r_x/r_y		2.95				2.95				2.96			
r_y , in.		2.65				2.63				2.61			
^c Shape is slender for compression for $F_y = 50$ ksi.													


 W18		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		71				65				60 ^c			
Shape		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.60	1.06	2.44	1.62	1.75	1.16	2.68	1.78	1.94	1.29	2.90	1.93
	6	1.82	1.21	2.44	1.62	2.00	1.33	2.68	1.78	2.18	1.45	2.90	1.93
	7	1.91	1.27	2.51	1.67	2.09	1.39	2.76	1.84	2.28	1.52	3.00	1.99
	8	2.02	1.34	2.59	1.72	2.21	1.47	2.85	1.90	2.41	1.60	3.10	2.06
	9	2.15	1.43	2.67	1.78	2.36	1.57	2.95	1.96	2.57	1.71	3.20	2.13
	10	2.30	1.53	2.76	1.83	2.53	1.68	3.05	2.03	2.76	1.83	3.32	2.21
	11	2.48	1.65	2.85	1.90	2.73	1.82	3.15	2.10	2.98	1.98	3.44	2.29
	12	2.70	1.80	2.95	1.96	2.97	1.98	3.27	2.18	3.25	2.16	3.58	2.38
	13	2.96	1.97	3.05	2.03	3.26	2.17	3.39	2.26	3.56	2.37	3.72	2.48
	14	3.26	2.17	3.17	2.11	3.60	2.40	3.53	2.35	3.94	2.62	3.88	2.58
	15	3.63	2.41	3.29	2.19	4.01	2.67	3.67	2.44	4.39	2.92	4.05	2.69
	16	4.06	2.70	3.42	2.28	4.50	2.99	3.83	2.55	4.94	3.28	4.23	2.82
	17	4.58	3.05	3.57	2.37	5.08	3.38	4.00	2.66	5.57	3.71	4.44	2.95
	18	5.14	3.42	3.72	2.48	5.69	3.79	4.19	2.79	6.25	4.16	4.66	3.10
	19	5.73	3.81	3.89	2.59	6.34	4.22	4.43	2.95	6.96	4.63	5.02	3.34
	20	6.34	4.22	4.12	2.74	7.02	4.67	4.76	3.17	7.71	5.13	5.41	3.60
22	7.68	5.11	4.69	3.12	8.50	5.66	5.44	3.62	9.33	6.21	6.19	4.12	
24	9.14	6.08	5.25	3.50	10.1	6.73	6.11	4.07	11.1	7.39	6.98	4.64	
26	10.7	7.13	5.82	3.87	11.9	7.90	6.79	4.51	13.0	8.67	7.76	5.16	
28	12.4	8.27	6.38	4.25	13.8	9.16	7.46	4.96	15.1	10.1	8.55	5.69	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		14.4		9.60		15.8		10.5		17.3		11.5	
$t_y \times 10^3$, (kips) ⁻¹		1.60		1.06		1.75		1.16		1.90		1.26	
$t_r \times 10^3$, (kips) ⁻¹		1.96		1.31		2.15		1.43		2.33		1.55	
r_x/r_y		4.41				4.43				4.45			
r_y , in.		1.70				1.69				1.68			


^c Shape is slender for compression for $F_y = 50$ ksi.
 Note: Heavy line indicates L_c/r_y equal to or greater than 200.


 W18		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi		
		55 ^c				50 ^c				46 ^c				
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	2.14	1.42	3.18	2.12	2.42	1.61	3.53	2.35	2.64	1.76	3.93	2.61	
	6	2.41	1.60	3.19	2.12	2.73	1.81	3.55	2.36	3.20	2.13	4.19	2.79	
	7	2.51	1.67	3.30	2.20	2.85	1.90	3.68	2.45	3.44	2.29	4.39	2.92	
	8	2.64	1.75	3.42	2.27	3.00	1.99	3.81	2.54	3.73	2.48	4.61	3.07	
	9	2.80	1.86	3.54	2.36	3.17	2.11	3.96	2.64	4.13	2.75	4.85	3.23	
	10	3.01	2.00	3.68	2.45	3.38	2.25	4.12	2.74	4.66	3.10	5.12	3.41	
	11	3.26	2.17	3.83	2.55	3.63	2.41	4.29	2.86	5.32	3.54	5.43	3.61	
	12	3.55	2.36	3.99	2.65	3.97	2.64	4.48	2.98	6.15	4.09	5.77	3.84	
	13	3.90	2.60	4.16	2.77	4.37	2.91	4.69	3.12	7.21	4.80	6.16	4.10	
	14	4.32	2.87	4.35	2.89	4.85	3.23	4.91	3.27	8.36	5.56	6.69	4.45	
	15	4.82	3.21	4.55	3.03	5.42	3.61	5.16	3.43	9.60	6.38	7.45	4.95	
	16	5.43	3.61	4.78	3.18	6.13	4.08	5.44	3.62	10.9	7.26	8.21	5.46	
	17	6.13	4.08	5.03	3.35	6.92	4.60	5.76	3.83	12.3	8.20	8.98	5.97	
	18	6.87	4.57	5.39	3.59	7.76	5.16	6.31	4.20	13.8	9.19	9.75	6.49	
	19	7.65	5.09	5.85	3.89	8.64	5.75	6.86	4.57	15.4	10.2	10.5	7.01	
	20	8.48	5.64	6.32	4.20	9.58	6.37	7.43	4.94	17.1	11.3	11.3	7.53	
	21	9.35	6.22	6.78	4.51	10.6	7.02	7.99	5.32	18.8	12.5	12.1	8.05	
	22	10.3	6.83	7.26	4.83	11.6	7.71	8.56	5.70					
	23	11.2	7.46	7.73	5.14	12.7	8.43	9.14	6.08					
	24	12.2	8.13	8.20	5.46	13.8	9.17	9.72	6.47					
	25	13.3	8.82	8.68	5.78	15.0	9.95	10.3	6.85					
	26	14.3	9.54	9.16	6.09	16.2	10.8	10.9	7.24					
	27	15.5	10.3	9.63	6.41	17.5	11.6	11.5	7.63					
	Other Constants and Properties													
	$b_y \times 10^3$, (kip-ft) ⁻¹		19.3		12.8		21.5		14.3		30.5		20.3	
	$t_y \times 10^3$, (kips) ⁻¹		2.06		1.37		2.27		1.51		2.47		1.65	
	$t_r \times 10^3$, (kips) ⁻¹		2.53		1.69		2.79		1.86		3.04		2.03	
r_x/r_y		4.44				4.47				5.62				
r_y , in.		1.67				1.65				1.29				
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.														


 W18		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes								$F_y = 50$ ksi
		W18 ^c				35 ^c				
Shape	Design	$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	3.14	2.09	4.54	3.02	3.69	2.46	5.36	3.56	
	6	3.84	2.55	4.88	3.25	4.57	3.04	5.84	3.89	
	7	4.12	2.74	5.13	3.41	4.94	3.29	6.17	4.11	
	8	4.48	2.98	5.40	3.59	5.40	3.59	6.54	4.35	
	9	4.93	3.28	5.71	3.80	5.97	3.97	6.96	4.63	
	10	5.47	3.64	6.05	4.03	6.68	4.44	7.43	4.94	
	11	6.24	4.15	6.44	4.28	7.63	5.08	7.97	5.30	
	12	7.25	4.82	6.88	4.58	9.00	5.99	8.60	5.72	
	13	8.51	5.66	7.38	4.91	10.6	7.03	9.67	6.43	
	14	9.87	6.56	8.30	5.52	12.2	8.15	11.0	7.29	
	15	11.3	7.54	9.27	6.17	14.1	9.36	12.3	8.17	
	16	12.9	8.57	10.3	6.83	16.0	10.6	13.6	9.07	
	17	14.5	9.68	11.3	7.50	18.1	12.0	15.0	10.0	
	18	16.3	10.9	12.3	8.17	20.2	13.5	16.4	10.9	
	19	18.2	12.1	13.3	8.85	22.6	15.0	17.9	11.9	
	20	20.1	13.4	14.3	9.54	25.0	16.6	19.3	12.8	
	21	22.2	14.8	15.4	10.2					
	22									
	23									
	24									
	25									
	26									
	27									
	28									
	29									
	30									
	Other Constants and Properties									
	$b_y \times 10^3$, (kip-ft) ⁻¹		35.6		23.7		44.2		29.4	
	$t_y \times 10^3$, (kips) ⁻¹		2.83		1.88		3.24		2.16	
	$t_r \times 10^3$, (kips) ⁻¹		3.48		2.32		3.98		2.66	
r_x/r_y		5.68				5.77				
r_y , in.		1.27				1.22				
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.										


 W16		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes											$F_y = 50$ ksi	
		100				89				77				
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.14	0.756	1.80	1.20	1.27	0.848	2.04	1.35	1.48	0.983	2.38	1.58	
	6	1.21	0.803	1.80	1.20	1.36	0.902	2.04	1.35	1.57	1.05	2.38	1.58	
	7	1.23	0.820	1.80	1.20	1.39	0.922	2.04	1.35	1.61	1.07	2.38	1.58	
	8	1.26	0.841	1.80	1.20	1.42	0.946	2.04	1.35	1.65	1.10	2.38	1.58	
	9	1.30	0.865	1.80	1.20	1.46	0.973	2.04	1.36	1.70	1.13	2.39	1.59	
	10	1.34	0.893	1.83	1.22	1.51	1.01	2.08	1.38	1.76	1.17	2.44	1.62	
	11	1.39	0.925	1.86	1.24	1.57	1.04	2.12	1.41	1.82	1.21	2.49	1.65	
	12	1.45	0.962	1.89	1.26	1.63	1.08	2.16	1.44	1.89	1.26	2.54	1.69	
	13	1.51	1.00	1.93	1.28	1.70	1.13	2.20	1.46	1.98	1.32	2.59	1.72	
	14	1.58	1.05	1.96	1.30	1.78	1.18	2.24	1.49	2.07	1.38	2.65	1.76	
	15	1.65	1.10	1.99	1.33	1.87	1.24	2.29	1.52	2.18	1.45	2.71	1.80	
	16	1.74	1.16	2.03	1.35	1.97	1.31	2.34	1.55	2.30	1.53	2.77	1.84	
	17	1.84	1.23	2.07	1.38	2.08	1.39	2.38	1.59	2.43	1.62	2.83	1.89	
	18	1.95	1.30	2.11	1.40	2.21	1.47	2.43	1.62	2.59	1.72	2.90	1.93	
	19	2.08	1.38	2.15	1.43	2.35	1.57	2.49	1.65	2.76	1.83	2.97	1.98	
	20	2.22	1.47	2.19	1.46	2.51	1.67	2.54	1.69	2.95	1.96	3.05	2.03	
	22	2.55	1.70	2.28	1.51	2.90	1.93	2.66	1.77	3.41	2.27	3.21	2.14	
	24	2.98	1.98	2.37	1.58	3.40	2.26	2.79	1.86	4.00	2.66	3.39	2.26	
	26	3.50	2.33	2.48	1.65	3.99	2.65	2.93	1.95	4.70	3.13	3.59	2.39	
	28	4.06	2.70	2.59	1.72	4.62	3.08	3.09	2.06	5.45	3.62	3.83	2.55	
30	4.66	3.10	2.72	1.81	5.31	3.53	3.27	2.17	6.25	4.16	4.20	2.80		
32	5.30	3.52	2.85	1.90	6.04	4.02	3.54	2.36	7.12	4.73	4.57	3.04		
34	5.98	3.98	3.04	2.03	6.82	4.54	3.82	2.54	8.03	5.34	4.94	3.29		
36	6.70	4.46	3.26	2.17	7.64	5.09	4.09	2.72	9.01	5.99	5.31	3.53		
38	7.47	4.97	3.47	2.31	8.52	5.67	4.36	2.90	10.0	6.68	5.68	3.78		
40	8.28	5.51	3.68	2.45	9.44	6.28	4.63	3.08	11.1	7.40	6.04	4.02		
Other Constants and Properties														
$b_y \times 10^3$, (kip-ft) ⁻¹		6.49		4.32		7.41		4.93		8.67		5.77		
$t_y \times 10^3$, (kips) ⁻¹		1.14		0.756		1.27		0.848		1.48		0.983		
$t_r \times 10^3$, (kips) ⁻¹		1.40		0.930		1.57		1.04		1.82		1.21		
r_x/r_y		2.83				2.83				2.83				
r_y , in.		2.51				2.49				2.47				


 W16		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		67 ^c				57				50 ^c			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.70	1.13	2.74	1.82	1.99	1.32	3.39	2.26	2.30	1.53	3.87	2.58
	6	1.81	1.21	2.74	1.82	2.31	1.53	3.43	2.28	2.64	1.76	3.92	2.61
	7	1.86	1.23	2.74	1.82	2.43	1.62	3.54	2.35	2.79	1.85	4.06	2.70
	8	1.90	1.27	2.74	1.82	2.59	1.72	3.65	2.43	2.97	1.97	4.21	2.80
	9	1.96	1.31	2.76	1.84	2.77	1.85	3.78	2.51	3.18	2.12	4.36	2.90
	10	2.03	1.35	2.82	1.88	3.00	2.00	3.91	2.60	3.45	2.29	4.53	3.02
	11	2.10	1.40	2.88	1.92	3.27	2.18	4.05	2.70	3.76	2.50	4.72	3.14
	12	2.19	1.46	2.95	1.96	3.59	2.39	4.20	2.80	4.14	2.75	4.91	3.27
	13	2.29	1.52	3.02	2.01	3.98	2.65	4.37	2.91	4.59	3.06	5.13	3.41
	14	2.40	1.59	3.09	2.06	4.45	2.96	4.55	3.03	5.14	3.42	5.37	3.57
	15	2.52	1.68	3.17	2.11	5.02	3.34	4.74	3.15	5.80	3.86	5.63	3.74
	16	2.66	1.77	3.25	2.16	5.70	3.79	4.95	3.29	6.60	4.39	5.91	3.93
	17	2.82	1.87	3.33	2.22	6.44	4.28	5.18	3.45	7.45	4.96	6.23	4.14
	18	2.99	1.99	3.42	2.27	7.22	4.80	5.43	3.61	8.35	5.56	6.74	4.48
	19	3.19	2.12	3.51	2.34	8.04	5.35	5.81	3.86	9.31	6.19	7.28	4.85
	20	3.42	2.27	3.61	2.40	8.91	5.93	6.23	4.14	10.3	6.86	7.83	5.21
	22	3.96	2.63	3.83	2.55	10.8	7.17	7.07	4.70	12.5	8.30	8.93	5.94
	24	4.65	3.10	4.07	2.71	12.8	8.54	7.90	5.26	14.8	9.88	10.0	6.67
	26	5.46	3.63	4.34	2.89	15.1	10.0	8.74	5.82	17.4	11.6	11.1	7.40
	28	6.33	4.21	4.82	3.21								
30	7.27	4.84	5.31	3.53									
32	8.27	5.50	5.80	3.86									
34	9.34	6.21	6.29	4.18									
36	10.5	6.96	6.77	4.51									
38	11.7	7.76	7.26	4.83									
40	12.9	8.60	7.75	5.15									
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		10.0		6.68		18.9		12.5		21.9		14.5	
$t_y \times 10^3$, (kips) ⁻¹		1.70		1.13		1.99		1.32		2.27		1.51	
$t_r \times 10^3$, (kips) ⁻¹		2.09		1.40		2.44		1.63		2.79		1.86	
r_x/r_y		2.83				4.20				4.20			
r_y , in.		2.46				1.60				1.59			
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W16		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes											$F_y = 50$ ksi	
		45 ^c				40 ^c				36 ^c				
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	2.60	1.73	4.33	2.88	3.02	2.01	4.88	3.25	3.41	2.27	5.57	3.70	
	6	2.97	1.98	4.40	2.93	3.46	2.30	4.96	3.30	3.93	2.62	5.71	3.80	
	7	3.12	2.08	4.56	3.03	3.63	2.42	5.16	3.43	4.14	2.76	5.94	3.95	
	8	3.30	2.20	4.74	3.15	3.84	2.55	5.36	3.57	4.39	2.92	6.20	4.12	
	9	3.55	2.36	4.92	3.28	4.09	2.72	5.59	3.72	4.70	3.12	6.48	4.31	
	10	3.85	2.56	5.13	3.41	4.39	2.92	5.83	3.88	5.06	3.37	6.78	4.51	
	11	4.21	2.80	5.35	3.56	4.75	3.16	6.10	4.06	5.50	3.66	7.12	4.74	
	12	4.65	3.09	5.59	3.72	5.24	3.48	6.39	4.25	6.07	4.04	7.49	4.98	
	13	5.17	3.44	5.86	3.90	5.83	3.88	6.72	4.47	6.81	4.53	7.90	5.26	
	14	5.80	3.86	6.15	4.09	6.54	4.35	7.07	4.71	7.70	5.12	8.36	5.56	
	15	6.58	4.37	6.47	4.30	7.41	4.93	7.47	4.97	8.80	5.86	8.88	5.91	
	16	7.48	4.98	6.82	4.54	8.43	5.61	7.96	5.30	10.0	6.66	9.79	6.51	
	17	8.45	5.62	7.36	4.90	9.52	6.33	8.76	5.83	11.3	7.52	10.8	7.19	
	18	9.47	6.30	8.03	5.34	10.7	7.10	9.58	6.38	12.7	8.43	11.9	7.89	
	19	10.5	7.02	8.70	5.79	11.9	7.91	10.4	6.93	14.1	9.40	12.9	8.59	
	20	11.7	7.78	9.37	6.23	13.2	8.77	11.2	7.48	15.6	10.4	14.0	9.31	
	21	12.9	8.57	10.0	6.68	14.5	9.66	12.1	8.04	17.3	11.5	15.1	10.0	
	22	14.1	9.41	10.7	7.14	15.9	10.6	12.9	8.61	18.9	12.6	16.2	10.8	
	23	15.5	10.3	11.4	7.59	17.4	11.6	13.8	9.17	20.7	13.8	17.3	11.5	
	24	16.8	11.2	12.1	8.04	19.0	12.6	14.6	9.74	22.5	15.0	18.4	12.2	
	25	18.3	12.2	12.8	8.50	20.6	13.7	15.5	10.3	24.4	16.3	19.5	13.0	
	26	19.8	13.1	13.5	8.95	22.3	14.8	16.4	10.9					
	Other Constants and Properties													
	$b_y \times 10^3$, (kip-ft) ⁻¹		24.6		16.3		28.1		18.7		33.0		21.9	
	$t_y \times 10^3$, (kips) ⁻¹		2.51		1.67		2.83		1.88		3.15		2.10	
	$t_r \times 10^3$, (kips) ⁻¹		3.08		2.06		3.48		2.32		3.87		2.58	
r_x/r_y		4.24				4.22				4.28				
r_y , in.		1.57				1.57				1.52				
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.														


 W16-W14		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes								$F_y = 50$ ksi	
		Shape		W16 \times							
Design		31 ^c				26 ^{c,v}					
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$			
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	4.08	2.71	6.60	4.39	5.04	3.35	8.06	5.36		
	6	5.16	3.43	7.28	4.85	6.50	4.32	9.07	6.03		
	7	5.62	3.74	7.71	5.13	7.12	4.74	9.66	6.43		
	8	6.20	4.12	8.19	5.45	7.92	5.27	10.3	6.87		
	9	6.93	4.61	8.74	5.82	8.92	5.93	11.1	7.39		
	10	7.89	5.25	9.37	6.23	10.2	6.78	12.0	7.99		
	11	9.28	6.17	10.1	6.71	12.0	8.01	13.1	8.69		
	12	11.0	7.34	11.1	7.35	14.3	9.53	15.0	10.0		
	13	13.0	8.62	12.6	8.39	16.8	11.2	17.2	11.5		
	14	15.0	10.0	14.2	9.45	19.5	13.0	19.5	13.0		
	15	17.2	11.5	15.8	10.5	22.4	14.9	21.9	14.6		
	16	19.6	13.1	17.5	11.6	25.5	16.9	24.3	16.2		
	17	22.2	14.7	19.2	12.8	28.7	19.1	26.7	17.8		
	18	24.8	16.5	20.9	13.9	32.2	21.4	29.2	19.4		
	19	27.7	18.4	22.6	15.0						
	Other Constants and Properties										
	$b_y \times 10^3$, (kip-ft) ⁻¹		50.7		33.7		65.0		43.3		
	$t_y \times 10^3$, (kips) ⁻¹		3.66		2.43		4.35		2.89		
	$t_r \times 10^3$, (kips) ⁻¹		4.49		3.00		5.34		3.56		
r_x/r_y		5.48				5.59					
r_y , in.		1.17				1.12					
^c Shape is slender for compression for $F_y = 50$ ksi. ^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(1) with $F_y = 50$ ksi; therefore, $\phi_v = 0.90$ and $\Omega_v = 1.67$. Note: Heavy line indicates L_c/r_y equal to or greater than 200.											


 W14		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		873 ^h				808 ^h				730 ^h			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.130	0.0865	0.176	0.117	0.140	0.0934	0.195	0.130	0.155	0.103	0.215	0.143
	11	0.137	0.0912	0.176	0.117	0.148	0.0986	0.195	0.130	0.165	0.110	0.215	0.143
	12	0.138	0.0921	0.176	0.117	0.150	0.0996	0.195	0.130	0.166	0.111	0.215	0.143
	13	0.140	0.0931	0.176	0.117	0.151	0.101	0.195	0.130	0.168	0.112	0.215	0.143
	14	0.142	0.0942	0.176	0.117	0.153	0.102	0.195	0.130	0.171	0.114	0.215	0.143
	15	0.143	0.0954	0.176	0.117	0.155	0.103	0.195	0.130	0.173	0.115	0.215	0.143
	16	0.145	0.0967	0.176	0.117	0.158	0.105	0.195	0.130	0.176	0.117	0.215	0.143
	17	0.148	0.0982	0.176	0.117	0.160	0.106	0.195	0.130	0.178	0.119	0.215	0.143
	18	0.150	0.0997	0.176	0.117	0.162	0.108	0.195	0.130	0.181	0.121	0.215	0.143
	19	0.152	0.101	0.176	0.117	0.165	0.110	0.195	0.130	0.185	0.123	0.216	0.143
	20	0.155	0.103	0.176	0.117	0.168	0.112	0.196	0.130	0.188	0.125	0.216	0.144
	22	0.161	0.107	0.177	0.118	0.175	0.116	0.196	0.131	0.196	0.130	0.217	0.144
	24	0.167	0.111	0.177	0.118	0.182	0.121	0.197	0.131	0.205	0.136	0.217	0.145
	26	0.175	0.116	0.178	0.118	0.190	0.127	0.198	0.131	0.215	0.143	0.218	0.145
	28	0.183	0.122	0.178	0.119	0.200	0.133	0.198	0.132	0.226	0.150	0.219	0.146
	30	0.193	0.128	0.179	0.119	0.211	0.140	0.199	0.132	0.239	0.159	0.220	0.146
	32	0.204	0.135	0.179	0.119	0.223	0.148	0.199	0.133	0.254	0.169	0.221	0.147
	34	0.216	0.144	0.180	0.120	0.236	0.157	0.200	0.133	0.270	0.180	0.221	0.147
	36	0.229	0.153	0.181	0.120	0.252	0.168	0.201	0.134	0.289	0.192	0.222	0.148
	38	0.245	0.163	0.181	0.121	0.269	0.179	0.201	0.134	0.310	0.206	0.223	0.148
40	0.262	0.174	0.182	0.121	0.289	0.192	0.202	0.134	0.334	0.222	0.224	0.149	
42	0.282	0.187	0.182	0.121	0.311	0.207	0.203	0.135	0.361	0.240	0.225	0.150	
44	0.304	0.202	0.183	0.122	0.336	0.224	0.203	0.135	0.392	0.261	0.226	0.150	
46	0.329	0.219	0.183	0.122	0.365	0.243	0.204	0.136	0.429	0.285	0.226	0.151	
48	0.358	0.238	0.184	0.122	0.398	0.265	0.205	0.136	0.467	0.311	0.227	0.151	
50	0.388	0.258	0.185	0.123	0.431	0.287	0.206	0.137	0.506	0.337	0.228	0.152	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		0.349		0.232		0.383		0.255		0.437		0.290	
$t_y \times 10^3$, (kips) ⁻¹		0.130		0.0865		0.140		0.0934		0.155		0.103	
$t_r \times 10^3$, (kips) ⁻¹		0.160		0.106		0.172		0.115		0.191		0.127	
r_x/r_y		1.71				1.69				1.74			
r_y , in.		4.90				4.83				4.69			
^h Flange thickness greater than 2 in. Special requirements may apply per AISC <i>Specification</i> Section A3.1c.													


 W14		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		665 ^h				605 ^h				550 ^h			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.170	0.113	0.241	0.160	0.188	0.125	0.270	0.180	0.206	0.137	0.302	0.201
	11	0.181	0.120	0.241	0.160	0.200	0.133	0.270	0.180	0.220	0.146	0.302	0.201
	12	0.183	0.122	0.241	0.160	0.202	0.134	0.270	0.180	0.222	0.148	0.302	0.201
	13	0.185	0.123	0.241	0.160	0.204	0.136	0.270	0.180	0.225	0.150	0.302	0.201
	14	0.188	0.125	0.241	0.160	0.207	0.138	0.270	0.180	0.228	0.152	0.302	0.201
	15	0.190	0.127	0.241	0.160	0.210	0.140	0.270	0.180	0.232	0.154	0.302	0.201
	16	0.193	0.129	0.241	0.160	0.214	0.142	0.270	0.180	0.236	0.157	0.302	0.201
	17	0.197	0.131	0.241	0.160	0.217	0.145	0.270	0.180	0.240	0.160	0.303	0.201
	18	0.200	0.133	0.242	0.161	0.221	0.147	0.271	0.180	0.244	0.162	0.303	0.202
	19	0.204	0.135	0.242	0.161	0.225	0.150	0.272	0.181	0.249	0.166	0.304	0.202
	20	0.208	0.138	0.242	0.161	0.230	0.153	0.272	0.181	0.254	0.169	0.305	0.203
	22	0.216	0.144	0.243	0.162	0.240	0.160	0.273	0.182	0.265	0.177	0.306	0.204
	24	0.226	0.151	0.244	0.163	0.252	0.167	0.274	0.183	0.279	0.185	0.308	0.205
	26	0.238	0.158	0.245	0.163	0.265	0.176	0.276	0.183	0.293	0.195	0.309	0.206
	28	0.251	0.167	0.246	0.164	0.280	0.186	0.277	0.184	0.310	0.207	0.310	0.207
	30	0.266	0.177	0.247	0.164	0.297	0.197	0.278	0.185	0.330	0.219	0.312	0.208
	32	0.282	0.188	0.248	0.165	0.316	0.210	0.279	0.186	0.352	0.234	0.313	0.209
	34	0.301	0.201	0.249	0.166	0.338	0.225	0.280	0.187	0.377	0.251	0.315	0.209
	36	0.323	0.215	0.250	0.166	0.363	0.241	0.282	0.187	0.406	0.270	0.316	0.210
	38	0.347	0.231	0.251	0.167	0.391	0.260	0.283	0.188	0.438	0.292	0.318	0.211
40	0.375	0.250	0.252	0.168	0.423	0.282	0.284	0.189	0.475	0.316	0.319	0.213	
42	0.407	0.271	0.253	0.168	0.460	0.306	0.285	0.190	0.518	0.345	0.321	0.214	
44	0.443	0.295	0.254	0.169	0.503	0.335	0.287	0.191	0.568	0.378	0.322	0.215	
46	0.485	0.322	0.255	0.170	0.550	0.366	0.288	0.191	0.621	0.413	0.324	0.216	
48	0.528	0.351	0.256	0.171	0.599	0.399	0.289	0.192	0.676	0.450	0.326	0.217	
50	0.573	0.381	0.257	0.171	0.650	0.432	0.290	0.193	0.733	0.488	0.327	0.218	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		0.488		0.325		0.546		0.364		0.611		0.407	
$t_y \times 10^3$, (kips) ⁻¹		0.170		0.113		0.188		0.125		0.206		0.137	
$t_r \times 10^3$, (kips) ⁻¹		0.209		0.140		0.230		0.154		0.253		0.169	
r_x/r_y		1.73				1.71				1.70			
r_y , in.		4.62				4.55				4.49			
^h Flange thickness greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.													


 W14		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		500 ^h		W14 _x				426 ^h					
Design		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.227	0.151	0.339	0.226	0.249	0.166	0.381	0.253	0.267	0.178	0.410	0.273
	11	0.242	0.161	0.339	0.226	0.266	0.177	0.381	0.253	0.286	0.190	0.410	0.273
	12	0.245	0.163	0.339	0.226	0.270	0.179	0.381	0.253	0.290	0.193	0.410	0.273
	13	0.249	0.166	0.339	0.226	0.273	0.182	0.381	0.253	0.294	0.195	0.410	0.273
	14	0.252	0.168	0.339	0.226	0.278	0.185	0.381	0.253	0.298	0.198	0.410	0.273
	15	0.256	0.171	0.339	0.226	0.282	0.188	0.381	0.253	0.303	0.202	0.410	0.273
	16	0.261	0.173	0.340	0.226	0.287	0.191	0.381	0.254	0.308	0.205	0.411	0.273
	17	0.265	0.177	0.340	0.227	0.292	0.194	0.382	0.254	0.314	0.209	0.412	0.274
	18	0.270	0.180	0.341	0.227	0.298	0.198	0.383	0.255	0.320	0.213	0.413	0.275
	19	0.276	0.183	0.342	0.228	0.304	0.202	0.384	0.256	0.327	0.218	0.414	0.276
	20	0.282	0.187	0.343	0.228	0.310	0.207	0.385	0.256	0.334	0.222	0.415	0.276
	22	0.295	0.196	0.345	0.229	0.325	0.216	0.387	0.258	0.350	0.233	0.418	0.278
	24	0.309	0.206	0.346	0.230	0.342	0.227	0.389	0.259	0.369	0.245	0.420	0.280
	26	0.327	0.217	0.348	0.232	0.361	0.240	0.392	0.261	0.390	0.259	0.423	0.281
	28	0.346	0.230	0.350	0.233	0.383	0.255	0.394	0.262	0.414	0.276	0.425	0.283
	30	0.368	0.245	0.352	0.234	0.408	0.272	0.396	0.263	0.442	0.294	0.428	0.285
	32	0.394	0.262	0.353	0.235	0.437	0.291	0.398	0.265	0.474	0.315	0.430	0.286
	34	0.422	0.281	0.355	0.236	0.470	0.313	0.400	0.266	0.510	0.339	0.433	0.288
	36	0.455	0.303	0.357	0.238	0.508	0.338	0.403	0.268	0.551	0.367	0.435	0.290
	38	0.493	0.328	0.359	0.239	0.551	0.366	0.405	0.269	0.599	0.399	0.438	0.291
40	0.536	0.357	0.361	0.240	0.600	0.399	0.407	0.271	0.654	0.435	0.441	0.293	
42	0.586	0.390	0.363	0.241	0.657	0.437	0.409	0.272	0.718	0.478	0.443	0.295	
44	0.643	0.428	0.365	0.243	0.721	0.480	0.412	0.274	0.788	0.524	0.446	0.297	
46	0.703	0.468	0.367	0.244	0.789	0.525	0.414	0.276	0.861	0.573	0.449	0.299	
48	0.765	0.509	0.369	0.245	0.859	0.571	0.417	0.277	0.938	0.624	0.452	0.300	
50	0.830	0.552	0.371	0.247	0.932	0.620	0.419	0.279	1.02	0.677	0.454	0.302	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		0.683		0.454		0.761		0.506		0.821		0.546	
$t_y \times 10^3$, (kips) ⁻¹		0.227		0.151		0.249		0.166		0.267		0.178	
$t_r \times 10^3$, (kips) ⁻¹		0.279		0.186		0.306		0.204		0.328		0.219	
r_x/r_y		1.69				1.67				1.67			
r_y , in.		4.43				4.38				4.34			
^h Flange thickness greater than 2 in. Special requirements may apply per AISC <i>Specification</i> Section A3.1c.													


 W14		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		398 ^h				370 ^h				342 ^h			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.285	0.190	0.445	0.296	0.306	0.204	0.484	0.322	0.331	0.220	0.530	0.353
	11	0.306	0.203	0.445	0.296	0.329	0.219	0.484	0.322	0.355	0.236	0.530	0.353
	12	0.310	0.206	0.445	0.296	0.333	0.222	0.484	0.322	0.360	0.239	0.530	0.353
	13	0.314	0.209	0.445	0.296	0.338	0.225	0.484	0.322	0.365	0.243	0.530	0.353
	14	0.319	0.212	0.445	0.296	0.343	0.228	0.484	0.322	0.371	0.247	0.530	0.353
	15	0.324	0.216	0.445	0.296	0.349	0.232	0.484	0.322	0.377	0.251	0.530	0.353
	16	0.330	0.220	0.446	0.297	0.355	0.236	0.485	0.323	0.384	0.256	0.532	0.354
	17	0.336	0.224	0.447	0.298	0.362	0.241	0.487	0.324	0.392	0.261	0.534	0.355
	18	0.343	0.228	0.449	0.298	0.369	0.246	0.489	0.325	0.400	0.266	0.536	0.356
	19	0.350	0.233	0.450	0.299	0.377	0.251	0.490	0.326	0.409	0.272	0.538	0.358
	20	0.358	0.238	0.451	0.300	0.386	0.257	0.492	0.327	0.418	0.278	0.539	0.359
	22	0.376	0.250	0.454	0.302	0.405	0.270	0.495	0.329	0.439	0.292	0.543	0.361
	24	0.396	0.263	0.457	0.304	0.427	0.284	0.498	0.331	0.463	0.308	0.547	0.364
	26	0.419	0.279	0.460	0.306	0.453	0.301	0.501	0.334	0.491	0.327	0.551	0.367
	28	0.445	0.296	0.462	0.308	0.482	0.321	0.505	0.336	0.523	0.348	0.555	0.369
	30	0.475	0.316	0.465	0.310	0.515	0.343	0.508	0.338	0.560	0.373	0.559	0.372
	32	0.510	0.339	0.468	0.312	0.554	0.368	0.512	0.340	0.602	0.401	0.563	0.374
	34	0.550	0.366	0.471	0.314	0.597	0.397	0.515	0.343	0.651	0.433	0.567	0.377
	36	0.595	0.396	0.474	0.316	0.648	0.431	0.519	0.345	0.706	0.470	0.571	0.380
	38	0.647	0.431	0.477	0.318	0.705	0.469	0.522	0.347	0.770	0.513	0.575	0.383
40	0.707	0.470	0.480	0.320	0.772	0.514	0.526	0.350	0.844	0.562	0.580	0.386	
42	0.778	0.517	0.484	0.322	0.850	0.566	0.529	0.352	0.931	0.619	0.584	0.389	
44	0.853	0.568	0.487	0.324	0.933	0.621	0.533	0.355	1.02	0.680	0.588	0.391	
46	0.933	0.621	0.490	0.326	1.02	0.679	0.537	0.357	1.12	0.743	0.593	0.394	
48	1.02	0.676	0.493	0.328	1.11	0.739	0.541	0.360	1.22	0.809	0.597	0.397	
50	1.10	0.733	0.496	0.330	1.21	0.802	0.545	0.362	1.32	0.878	0.602	0.401	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		0.886		0.590		0.963		0.641		1.05		0.701	
$t_y \times 10^3$, (kips) ⁻¹		0.285		0.190		0.306		0.204		0.331		0.220	
$t_r \times 10^3$, (kips) ⁻¹		0.351		0.234		0.376		0.251		0.406		0.271	
r_x/r_y		1.66				1.66				1.65			
r_y , in.		4.31				4.27				4.24			
^h Flange thickness greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.													


 W14		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		311 ^h				283 ^h				257			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.365	0.243	0.591	0.393	0.401	0.267	0.657	0.437	0.442	0.294	0.732	0.487
	11	0.393	0.261	0.591	0.393	0.431	0.287	0.657	0.437	0.476	0.317	0.732	0.487
	12	0.398	0.265	0.591	0.393	0.437	0.291	0.657	0.437	0.483	0.321	0.732	0.487
	13	0.404	0.269	0.591	0.393	0.444	0.296	0.657	0.437	0.490	0.326	0.732	0.487
	14	0.411	0.273	0.591	0.393	0.451	0.300	0.657	0.437	0.499	0.332	0.732	0.487
	15	0.418	0.278	0.591	0.393	0.459	0.306	0.658	0.438	0.508	0.338	0.733	0.488
	16	0.426	0.283	0.593	0.395	0.468	0.312	0.661	0.440	0.517	0.344	0.736	0.490
	17	0.434	0.289	0.596	0.396	0.478	0.318	0.663	0.441	0.528	0.351	0.740	0.492
	18	0.443	0.295	0.598	0.398	0.488	0.325	0.666	0.443	0.540	0.359	0.743	0.494
	19	0.453	0.302	0.600	0.399	0.499	0.332	0.669	0.445	0.552	0.367	0.746	0.497
	20	0.464	0.309	0.602	0.401	0.511	0.340	0.672	0.447	0.566	0.376	0.750	0.499
	22	0.488	0.325	0.607	0.404	0.537	0.358	0.677	0.451	0.596	0.396	0.757	0.503
	24	0.515	0.343	0.612	0.407	0.568	0.378	0.683	0.455	0.630	0.419	0.764	0.508
	26	0.547	0.364	0.617	0.410	0.604	0.402	0.689	0.458	0.671	0.446	0.771	0.513
	28	0.583	0.388	0.621	0.413	0.645	0.429	0.695	0.462	0.717	0.477	0.778	0.518
	30	0.625	0.416	0.626	0.417	0.691	0.460	0.701	0.466	0.770	0.512	0.786	0.523
	32	0.673	0.448	0.631	0.420	0.745	0.496	0.707	0.471	0.831	0.553	0.794	0.528
	34	0.729	0.485	0.636	0.423	0.807	0.537	0.713	0.475	0.902	0.600	0.801	0.533
	36	0.792	0.527	0.641	0.427	0.879	0.585	0.720	0.479	0.983	0.654	0.809	0.539
	38	0.865	0.576	0.647	0.430	0.961	0.640	0.726	0.483	1.08	0.717	0.818	0.544
40	0.951	0.633	0.652	0.434	1.06	0.704	0.733	0.488	1.19	0.791	0.826	0.549	
42	1.05	0.697	0.657	0.437	1.17	0.776	0.740	0.492	1.31	0.872	0.834	0.555	
44	1.15	0.765	0.663	0.441	1.28	0.852	0.747	0.497	1.44	0.957	0.843	0.561	
46	1.26	0.837	0.669	0.445	1.40	0.931	0.754	0.501	1.57	1.05	0.852	0.567	
48	1.37	0.911	0.674	0.449	1.52	1.01	0.761	0.506	1.71	1.14	0.861	0.573	
50	1.49	0.988	0.680	0.452	1.65	1.10	0.768	0.511	1.86	1.24	0.870	0.579	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		1.17		0.780		1.30		0.865		1.45		0.964	
$t_y \times 10^3$, (kips) ⁻¹		0.365		0.243		0.401		0.267		0.442		0.294	
$t_r \times 10^3$, (kips) ⁻¹		0.449		0.299		0.493		0.328		0.543		0.362	
r_x/r_y		1.64				1.63				1.62			
r_y , in.		4.20				4.17				4.13			
^h Flange thickness greater than 2 in. Special requirements may apply per AISC <i>Specification</i> Section A3.1c.													


 W14		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		233				211				193			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.488	0.324	0.817	0.544	0.539	0.358	0.914	0.608	0.588	0.391	1.00	0.668
	11	0.526	0.350	0.817	0.544	0.582	0.387	0.914	0.608	0.636	0.423	1.00	0.668
	12	0.534	0.355	0.817	0.544	0.590	0.393	0.914	0.608	0.645	0.429	1.00	0.668
	13	0.542	0.361	0.817	0.544	0.600	0.399	0.914	0.608	0.655	0.436	1.00	0.668
	14	0.551	0.367	0.817	0.544	0.610	0.406	0.914	0.608	0.667	0.444	1.00	0.668
	15	0.561	0.374	0.819	0.545	0.622	0.414	0.917	0.610	0.679	0.452	1.01	0.670
	16	0.572	0.381	0.823	0.548	0.634	0.422	0.922	0.613	0.693	0.461	1.01	0.675
	17	0.584	0.389	0.827	0.551	0.647	0.431	0.927	0.617	0.708	0.471	1.02	0.679
	18	0.597	0.397	0.832	0.553	0.662	0.440	0.932	0.620	0.724	0.482	1.03	0.683
	19	0.611	0.407	0.836	0.556	0.678	0.451	0.937	0.623	0.741	0.493	1.03	0.687
	20	0.626	0.417	0.840	0.559	0.695	0.462	0.942	0.627	0.760	0.506	1.04	0.691
	22	0.660	0.439	0.849	0.565	0.733	0.488	0.953	0.634	0.802	0.534	1.05	0.700
	24	0.699	0.465	0.857	0.571	0.777	0.517	0.964	0.641	0.851	0.566	1.07	0.709
	26	0.745	0.495	0.866	0.576	0.828	0.551	0.975	0.649	0.908	0.604	1.08	0.718
	28	0.797	0.530	0.876	0.583	0.887	0.590	0.987	0.656	0.973	0.647	1.09	0.727
	30	0.857	0.570	0.885	0.589	0.955	0.635	1.00	0.664	1.05	0.697	1.11	0.737
	32	0.926	0.616	0.895	0.595	1.03	0.687	1.01	0.672	1.13	0.755	1.12	0.747
	34	1.01	0.669	0.904	0.602	1.12	0.747	1.02	0.680	1.23	0.822	1.14	0.757
	36	1.10	0.731	0.914	0.608	1.23	0.817	1.04	0.689	1.35	0.899	1.15	0.767
	38	1.20	0.801	0.925	0.615	1.35	0.897	1.05	0.697	1.49	0.989	1.17	0.778
40	1.33	0.886	0.935	0.622	1.49	0.993	1.06	0.706	1.65	1.09	1.19	0.789	
42	1.47	0.976	0.946	0.629	1.65	1.09	1.08	0.715	1.81	1.21	1.20	0.800	
44	1.61	1.07	0.957	0.637	1.81	1.20	1.09	0.725	1.99	1.32	1.22	0.812	
46	1.76	1.17	0.968	0.644	1.97	1.31	1.10	0.734	2.18	1.45	1.24	0.824	
48	1.92	1.28	0.979	0.652	2.15	1.43	1.12	0.744	2.37	1.58	1.26	0.836	
50	2.08	1.38	0.991	0.659	2.33	1.55	1.13	0.754	2.57	1.71	1.28	0.848	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		1.61		1.07		1.80		1.20		1.98		1.32	
$t_y \times 10^3$, (kips) ⁻¹		0.488		0.324		0.539		0.358		0.588		0.391	
$t_r \times 10^3$, (kips) ⁻¹		0.599		0.399		0.662		0.441		0.722		0.482	
r_x/r_y		1.62				1.61				1.60			
r_y , in.		4.10				4.07				4.05			


 W14		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		176				159				145			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.645	0.429	1.11	0.741	0.715	0.476	1.24	0.826	0.782	0.520	1.37	0.912
	11	0.698	0.464	1.11	0.741	0.774	0.515	1.24	0.826	0.848	0.564	1.37	0.912
	12	0.708	0.471	1.11	0.741	0.786	0.523	1.24	0.826	0.861	0.573	1.37	0.912
	13	0.720	0.479	1.11	0.741	0.799	0.532	1.24	0.826	0.875	0.582	1.37	0.912
	14	0.733	0.487	1.11	0.741	0.814	0.541	1.24	0.826	0.891	0.593	1.37	0.912
	15	0.747	0.497	1.12	0.745	0.829	0.552	1.25	0.831	0.908	0.604	1.38	0.919
	16	0.762	0.507	1.13	0.750	0.846	0.563	1.26	0.837	0.927	0.617	1.39	0.926
	17	0.778	0.518	1.13	0.755	0.865	0.576	1.27	0.843	0.948	0.631	1.40	0.933
	18	0.796	0.530	1.14	0.760	0.885	0.589	1.28	0.850	0.970	0.645	1.41	0.941
	19	0.816	0.543	1.15	0.765	0.907	0.603	1.29	0.856	0.994	0.662	1.43	0.949
	20	0.837	0.557	1.16	0.770	0.931	0.619	1.30	0.863	1.02	0.679	1.44	0.956
	22	0.884	0.588	1.17	0.781	0.983	0.654	1.32	0.876	1.08	0.718	1.46	0.973
	24	0.938	0.624	1.19	0.791	1.04	0.695	1.34	0.889	1.15	0.763	1.49	0.989
	26	1.00	0.666	1.21	0.803	1.12	0.742	1.36	0.904	1.23	0.816	1.51	1.01
	28	1.07	0.715	1.22	0.814	1.20	0.797	1.38	0.918	1.32	0.876	1.54	1.02
	30	1.16	0.771	1.24	0.826	1.29	0.860	1.40	0.933	1.42	0.947	1.57	1.04
	32	1.26	0.836	1.26	0.838	1.40	0.934	1.43	0.949	1.54	1.03	1.60	1.06
	34	1.37	0.911	1.28	0.851	1.53	1.02	1.45	0.965	1.69	1.12	1.63	1.08
	36	1.50	0.998	1.30	0.864	1.68	1.12	1.47	0.981	1.85	1.23	1.66	1.10
	38	1.65	1.10	1.32	0.877	1.85	1.23	1.50	0.998	2.05	1.36	1.69	1.12
40	1.83	1.22	1.34	0.891	2.05	1.36	1.53	1.02	2.27	1.51	1.72	1.15	
42	2.02	1.34	1.36	0.905	2.26	1.50	1.56	1.03	2.50	1.66	1.76	1.17	
44	2.22	1.47	1.38	0.920	2.48	1.65	1.58	1.05	2.74	1.82	1.79	1.19	
46	2.42	1.61	1.41	0.935	2.71	1.81	1.61	1.07	3.00	1.99	1.83	1.22	
48	2.64	1.75	1.43	0.951	2.95	1.97	1.64	1.09	3.26	2.17	1.87	1.24	
50	2.86	1.90	1.45	0.967	3.21	2.13	1.68	1.12	3.54	2.36	1.91	1.27	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		2.19		1.45		2.44		1.62		2.68		1.78	
$t_y \times 10^3$, (kips) ⁻¹		0.645		0.429		0.715		0.476		0.782		0.520	
$t_r \times 10^3$, (kips) ⁻¹		0.792		0.528		0.878		0.586		0.961		0.641	
r_x/r_y		1.60				1.60				1.59			
r_y , in.		4.02				4.00				3.98			


 W14		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes											$F_y = 50$ ksi	
		Shape		W14x										
Design		132				120				109				
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.861	0.573	1.52	1.01	0.946	0.630	1.68	1.12	1.04	0.694	1.86	1.23	
	11	0.942	0.627	1.52	1.01	1.04	0.690	1.68	1.12	1.14	0.761	1.86	1.23	
	12	0.958	0.638	1.52	1.01	1.05	0.702	1.68	1.12	1.16	0.774	1.86	1.23	
	13	0.976	0.650	1.52	1.01	1.07	0.715	1.68	1.12	1.19	0.789	1.86	1.23	
	14	0.996	0.663	1.53	1.02	1.10	0.730	1.69	1.13	1.21	0.805	1.87	1.25	
	15	1.02	0.677	1.55	1.03	1.12	0.746	1.71	1.14	1.24	0.823	1.89	1.26	
	16	1.04	0.693	1.56	1.04	1.15	0.763	1.73	1.15	1.27	0.843	1.91	1.27	
	17	1.07	0.710	1.57	1.05	1.18	0.783	1.74	1.16	1.30	0.864	1.93	1.29	
	18	1.10	0.729	1.59	1.06	1.21	0.803	1.76	1.17	1.33	0.887	1.95	1.30	
	19	1.13	0.749	1.60	1.07	1.24	0.826	1.78	1.18	1.37	0.913	1.98	1.31	
	20	1.16	0.771	1.62	1.08	1.28	0.851	1.80	1.20	1.41	0.940	2.00	1.33	
	22	1.23	0.821	1.65	1.10	1.36	0.906	1.84	1.22	1.51	1.00	2.04	1.36	
	24	1.32	0.880	1.68	1.12	1.46	0.971	1.88	1.25	1.61	1.07	2.09	1.39	
	26	1.42	0.948	1.71	1.14	1.57	1.05	1.92	1.28	1.74	1.16	2.14	1.43	
	28	1.54	1.03	1.75	1.16	1.71	1.14	1.96	1.30	1.89	1.26	2.20	1.46	
	30	1.68	1.12	1.79	1.19	1.86	1.24	2.00	1.33	2.06	1.37	2.25	1.50	
	32	1.85	1.23	1.82	1.21	2.05	1.36	2.05	1.37	2.27	1.51	2.31	1.54	
	34	2.04	1.35	1.86	1.24	2.26	1.50	2.10	1.40	2.50	1.67	2.37	1.58	
	36	2.26	1.51	1.90	1.27	2.51	1.67	2.15	1.43	2.79	1.86	2.44	1.62	
	38	2.52	1.68	1.95	1.29	2.80	1.86	2.21	1.47	3.11	2.07	2.51	1.67	
40	2.79	1.86	1.99	1.32	3.10	2.07	2.27	1.51	3.44	2.29	2.58	1.72		
42	3.08	2.05	2.04	1.36	3.42	2.28	2.33	1.55	3.80	2.53	2.66	1.77		
44	3.38	2.25	2.09	1.39	3.76	2.50	2.39	1.59	4.17	2.77	2.74	1.82		
46	3.70	2.46	2.14	1.42	4.11	2.73	2.46	1.63	4.55	3.03	2.82	1.88		
48	4.02	2.68	2.19	1.46	4.47	2.97	2.53	1.68	4.96	3.30	2.92	1.94		
50	4.37	2.91	2.25	1.50	4.85	3.23	2.60	1.73	5.38	3.58	3.05	2.03		
Other Constants and Properties														
$b_y \times 10^3$, (kip-ft) ⁻¹		3.15		2.10		3.49		2.32		3.84		2.56		
$t_y \times 10^3$, (kips) ⁻¹		0.861		0.573		0.946		0.630		1.04		0.694		
$t_r \times 10^3$, (kips) ⁻¹		1.06		0.705		1.16		0.775		1.28		0.855		
r_x/r_y		1.67				1.67				1.67				
r_y , in.		3.76				3.74				3.73				

 W14		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes				$F_y = 50$ ksi
		W14 \times				
Shape		99 ^f				
		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		
Design		ASD	LRFD	ASD	LRFD	
		Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.15	0.764	2.07
11	1.26		0.838	2.07	1.38	
12	1.28		0.853	2.07	1.38	
13	1.31		0.869	2.07	1.38	
14	1.33		0.887	2.08	1.38	
15	1.36		0.907	2.10	1.40	
16	1.40		0.929	2.13	1.42	
17	1.43		0.953	2.15	1.43	
18	1.47		0.978	2.18	1.45	
19	1.51		1.01	2.21	1.47	
20	1.56		1.04	2.23	1.49	
22	1.66		1.11	2.29	1.52	
24	1.78		1.19	2.35	1.56	
26	1.92		1.28	2.41	1.60	
28	2.09		1.39	2.48	1.65	
30	2.28		1.52	2.55	1.69	
32	2.51		1.67	2.62	1.74	
34	2.78		1.85	2.70	1.80	
36	3.10		2.06	2.78	1.85	
38	3.45		2.30	2.87	1.91	
40	3.83	2.55	2.96	1.97		
42	4.22	2.81	3.06	2.04		
44	4.63	3.08	3.17	2.11		
46	5.06	3.37	3.31	2.20		
48	5.51	3.67	3.48	2.32		
50	5.98	3.98	3.66	2.43		
Other Constants and Properties						
$b_y \times 10^3$, (kip-ft) ⁻¹		4.29		2.85		
$t_y \times 10^3$, (kips) ⁻¹		1.15		0.764		
$t_r \times 10^3$, (kips) ⁻¹		1.41		0.940		
r_x/r_y		1.66				
r_y , in.		3.71				
^f Shape does not meet compact limit for flexure for $F_y = 50$ ksi.						


 W14		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		Shape		W14x									
Design		90 ^f				82				74			
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.26	0.839	2.33	1.55	1.39	0.926	2.56	1.71	1.53	1.02	2.83	1.88
	6	1.30	0.862	2.33	1.55	1.48	0.985	2.56	1.71	1.63	1.08	2.83	1.88
	7	1.31	0.871	2.33	1.55	1.51	1.01	2.56	1.71	1.67	1.11	2.83	1.88
	8	1.32	0.881	2.33	1.55	1.55	1.03	2.56	1.71	1.71	1.14	2.83	1.88
	9	1.34	0.892	2.33	1.55	1.60	1.06	2.57	1.71	1.76	1.17	2.84	1.89
	10	1.36	0.906	2.33	1.55	1.65	1.10	2.61	1.74	1.82	1.21	2.89	1.92
	11	1.38	0.920	2.33	1.55	1.71	1.14	2.66	1.77	1.88	1.25	2.94	1.96
	12	1.41	0.937	2.33	1.55	1.78	1.18	2.70	1.80	1.96	1.30	2.99	1.99
	13	1.44	0.955	2.33	1.55	1.86	1.24	2.74	1.83	2.05	1.36	3.05	2.03
	14	1.47	0.975	2.33	1.55	1.95	1.30	2.79	1.86	2.14	1.43	3.10	2.06
	15	1.50	0.997	2.33	1.55	2.05	1.36	2.84	1.89	2.25	1.50	3.16	2.10
	16	1.53	1.02	2.35	1.57	2.16	1.44	2.89	1.92	2.37	1.58	3.22	2.14
	17	1.57	1.05	2.38	1.59	2.28	1.52	2.94	1.96	2.51	1.67	3.29	2.19
	18	1.62	1.08	2.42	1.61	2.42	1.61	2.99	1.99	2.67	1.78	3.35	2.23
	19	1.66	1.11	2.45	1.63	2.58	1.72	3.05	2.03	2.84	1.89	3.42	2.28
	20	1.71	1.14	2.48	1.65	2.76	1.84	3.11	2.07	3.04	2.02	3.49	2.32
	22	1.83	1.22	2.55	1.70	3.19	2.12	3.23	2.15	3.51	2.33	3.65	2.43
	24	1.96	1.31	2.62	1.74	3.74	2.49	3.36	2.24	4.12	2.74	3.81	2.54
	26	2.12	1.41	2.70	1.80	4.39	2.92	3.51	2.33	4.83	3.21	3.99	2.66
	28	2.30	1.53	2.78	1.85	5.09	3.39	3.66	2.44	5.60	3.73	4.20	2.79
30	2.52	1.68	2.87	1.91	5.84	3.89	3.83	2.55	6.43	4.28	4.42	2.94	
32	2.77	1.84	2.96	1.97	6.65	4.42	4.02	2.67	7.32	4.87	4.72	3.14	
34	3.07	2.04	3.06	2.03	7.50	4.99	4.26	2.84	8.26	5.50	5.07	3.38	
36	3.42	2.28	3.16	2.10	8.41	5.60	4.56	3.03	9.26	6.16	5.43	3.61	
38	3.81	2.54	3.27	2.18	9.37	6.24	4.85	3.22	10.3	6.86	5.78	3.85	
40	4.23	2.81	3.39	2.26	10.4	6.91	5.14	3.42	11.4	7.61	6.14	4.08	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		4.90		3.26		7.95		5.29		8.80		5.85	
$t_y \times 10^3$, (kips) ⁻¹		1.26		0.839		1.39		0.926		1.53		1.02	
$t_r \times 10^3$, (kips) ⁻¹		1.55		1.03		1.71		1.14		1.88		1.25	
r_x/r_y		1.66				2.44				2.44			
r_y , in.		3.70				2.48				2.48			
^f Shape does not meet compact limit for flexure for $F_y = 50$ ksi.													


 W14		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		68				61				53			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.67	1.11	3.10	2.06	1.87	1.24	3.49	2.32	2.14	1.42	4.09	2.72
	6	1.78	1.18	3.10	2.06	1.99	1.32	3.49	2.32	2.37	1.58	4.09	2.72
	7	1.82	1.21	3.10	2.06	2.03	1.35	3.49	2.32	2.46	1.64	4.11	2.74
	8	1.87	1.24	3.10	2.06	2.09	1.39	3.49	2.32	2.57	1.71	4.21	2.80
	9	1.92	1.28	3.12	2.07	2.15	1.43	3.52	2.34	2.70	1.80	4.32	2.88
	10	1.99	1.32	3.17	2.11	2.22	1.48	3.59	2.39	2.85	1.90	4.44	2.95
	11	2.06	1.37	3.23	2.15	2.31	1.54	3.66	2.44	3.02	2.01	4.56	3.03
	12	2.15	1.43	3.30	2.19	2.40	1.60	3.74	2.49	3.23	2.15	4.68	3.11
	13	2.24	1.49	3.36	2.24	2.51	1.67	3.82	2.54	3.47	2.31	4.81	3.20
	14	2.35	1.56	3.43	2.28	2.63	1.75	3.90	2.59	3.75	2.49	4.96	3.30
	15	2.47	1.64	3.50	2.33	2.77	1.84	3.99	2.65	4.07	2.71	5.11	3.40
	16	2.61	1.73	3.57	2.38	2.92	1.95	4.08	2.71	4.45	2.96	5.26	3.50
	17	2.76	1.84	3.65	2.43	3.10	2.06	4.17	2.78	4.89	3.25	5.43	3.62
	18	2.93	1.95	3.73	2.48	3.29	2.19	4.27	2.84	5.40	3.59	5.61	3.74
	19	3.13	2.08	3.81	2.53	3.51	2.34	4.38	2.91	6.01	4.00	5.81	3.86
	20	3.35	2.23	3.90	2.59	3.76	2.50	4.49	2.98	6.66	4.43	6.01	4.00
	22	3.88	2.58	4.08	2.72	4.36	2.90	4.72	3.14	8.06	5.36	6.47	4.31
	24	4.56	3.03	4.29	2.85	5.14	3.42	4.99	3.32	9.60	6.38	7.22	4.80
	26	5.35	3.56	4.51	3.00	6.03	4.01	5.28	3.51	11.3	7.49	7.99	5.32
	28	6.21	4.13	4.77	3.17	6.99	4.65	5.66	3.77	13.1	8.69	8.76	5.83
30	7.12	4.74	5.10	3.39	8.02	5.34	6.20	4.13	15.0	9.98	9.53	6.34	
32	8.11	5.39	5.53	3.68	9.13	6.07	6.74	4.48	17.1	11.3	10.3	6.85	
34	9.15	6.09	5.96	3.96	10.3	6.86	7.27	4.84					
36	10.3	6.83	6.38	4.25	11.6	7.69	7.81	5.20					
38	11.4	7.60	6.81	4.53	12.9	8.57	8.34	5.55					
40	12.7	8.43	7.23	4.81	14.3	9.49	8.87	5.90					
Other Constants and Properties													
$b_y \times 10^3, (\text{kip-ft})^{-1}$		9.65		6.42		10.9		7.23		16.2		10.8	
$t_y \times 10^3, (\text{kips})^{-1}$		1.67		1.11		1.87		1.24		2.14		1.42	
$t_r \times 10^3, (\text{kips})^{-1}$		2.05		1.37		2.29		1.53		2.63		1.75	
r_x/r_y		2.44				2.44				3.07			
$r_y, \text{in.}$		2.46				2.45				1.92			
Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W14		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes											$F_y = 50$ ksi	
		48				43 ^c				38 ^c				
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	2.37	1.58	4.54	3.02	2.67	1.78	5.12	3.41	3.05	2.03	5.79	3.85	
	6	2.63	1.75	4.54	3.02	2.95	1.96	5.12	3.41	3.51	2.33	5.90	3.93	
	7	2.73	1.82	4.57	3.04	3.06	2.04	5.17	3.44	3.70	2.46	6.12	4.07	
	8	2.85	1.90	4.70	3.13	3.20	2.13	5.31	3.54	3.95	2.63	6.36	4.23	
	9	2.99	1.99	4.83	3.21	3.37	2.24	5.47	3.64	4.25	2.83	6.61	4.40	
	10	3.16	2.10	4.96	3.30	3.56	2.37	5.64	3.75	4.62	3.08	6.89	4.58	
	11	3.36	2.23	5.11	3.40	3.79	2.52	5.82	3.87	5.07	3.37	7.19	4.78	
	12	3.59	2.39	5.26	3.50	4.05	2.70	6.01	4.00	5.61	3.73	7.52	5.00	
	13	3.86	2.57	5.43	3.61	4.36	2.90	6.21	4.13	6.25	4.16	7.88	5.24	
	14	4.17	2.77	5.60	3.73	4.72	3.14	6.42	4.27	7.04	4.68	8.27	5.50	
	15	4.53	3.02	5.79	3.85	5.15	3.42	6.66	4.43	8.01	5.33	8.71	5.80	
	16	4.96	3.30	5.98	3.98	5.64	3.75	6.90	4.59	9.11	6.06	9.20	6.12	
	17	5.45	3.63	6.20	4.12	6.21	4.13	7.17	4.77	10.3	6.85	9.99	6.65	
	18	6.03	4.01	6.42	4.27	6.90	4.59	7.46	4.97	11.5	7.68	10.9	7.23	
	19	6.72	4.47	6.67	4.44	7.68	5.11	7.78	5.17	12.9	8.55	11.8	7.82	
	20	7.45	4.96	6.94	4.61	8.51	5.66	8.12	5.40	14.2	9.48	12.6	8.41	
	21	8.21	5.46	7.22	4.80	9.39	6.25	8.71	5.80	15.7	10.4	13.5	9.00	
	22	9.01	6.00	7.69	5.12	10.3	6.85	9.31	6.19	17.2	11.5	14.4	9.60	
	23	9.85	6.56	8.16	5.43	11.3	7.49	9.90	6.59	18.8	12.5	15.3	10.2	
	24	10.7	7.14	8.64	5.75	12.3	8.16	10.5	6.99	20.5	13.6	16.2	10.8	
	25	11.6	7.74	9.12	6.07	13.3	8.85	11.1	7.39	22.3	14.8	17.1	11.4	
	26	12.6	8.38	9.59	6.38	14.4	9.57	11.7	7.78					
	27	13.6	9.03	10.1	6.70	15.5	10.3	12.3	8.18					
	28	14.6	9.72	10.5	7.01	16.7	11.1	12.9	8.58					
	29	15.7	10.4	11.0	7.33	17.9	11.9	13.5	8.98					
	30	16.8	11.2	11.5	7.65	19.2	12.7	14.1	9.37					
	Other Constants and Properties													
	$b_y \times 10^3$, (kip-ft) ⁻¹		18.2		12.1		20.6		13.7		29.4		19.6	
	$t_y \times 10^3$, (kips) ⁻¹		2.37		1.58		2.65		1.76		2.98		1.98	
	$t_r \times 10^3$, (kips) ⁻¹		2.91		1.94		3.26		2.17		3.66		2.44	
r_x/r_y		3.06				3.08				3.79				
r_y , in.		1.91				1.89				1.55				
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.														


 W14		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi		
		34 ^c				30 ^c				26 ^c				
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	3.49	2.32	6.53	4.34	4.01	2.67	7.53	5.01	4.72	3.14	8.86	5.90	
	6	4.03	2.68	6.67	4.44	4.65	3.10	7.76	5.16	6.24	4.15	10.0	6.67	
	7	4.24	2.82	6.94	4.61	4.91	3.27	8.09	5.38	6.90	4.59	10.7	7.10	
	8	4.50	2.99	7.22	4.80	5.22	3.48	8.44	5.62	7.75	5.16	11.4	7.59	
	9	4.81	3.20	7.53	5.01	5.60	3.73	8.83	5.88	9.02	6.00	12.3	8.15	
	10	5.24	3.48	7.87	5.23	6.06	4.03	9.26	6.16	10.7	7.13	13.2	8.80	
	11	5.76	3.83	8.24	5.48	6.70	4.46	9.74	6.48	12.9	8.60	14.4	9.56	
	12	6.38	4.25	8.64	5.75	7.47	4.97	10.3	6.83	15.4	10.2	16.5	11.0	
	13	7.14	4.75	9.09	6.05	8.41	5.60	10.8	7.21	18.1	12.0	18.7	12.4	
	14	8.07	5.37	9.58	6.37	9.56	6.36	11.5	7.65	20.9	13.9	20.9	13.9	
	15	9.21	6.13	10.1	6.74	11.0	7.30	12.3	8.20	24.0	16.0	23.2	15.4	
	16	10.5	6.97	11.0	7.29	12.5	8.31	13.7	9.12	27.3	18.2	25.5	17.0	
	17	11.8	7.87	12.0	8.01	14.1	9.38	15.1	10.0	30.9	20.5	27.8	18.5	
	18	13.3	8.82	13.1	8.73	15.8	10.5	16.5	11.0	34.6	23.0	30.1	20.0	
	19	14.8	9.83	14.2	9.47	17.6	11.7	18.0	12.0					
	20	16.4	10.9	15.3	10.2	19.5	13.0	19.4	12.9					
	21	18.0	12.0	16.5	11.0	21.5	14.3	20.9	13.9					
	22	19.8	13.2	17.6	11.7	23.6	15.7	22.4	14.9					
	23	21.6	14.4	18.7	12.4	25.8	17.2	23.9	15.9					
	24	23.6	15.7	19.8	13.2	28.1	18.7	25.4	16.9					
	25	25.6	17.0	21.0	13.9									
	Other Constants and Properties													
	$b_y \times 10^3$, (kip-ft) ⁻¹		33.6		22.4		39.6		26.4		64.3		42.8	
	$t_y \times 10^3$, (kips) ⁻¹		3.34		2.22		3.77		2.51		4.34		2.89	
	$t_r \times 10^3$, (kips) ⁻¹		4.10		2.74		4.64		3.09		5.33		3.56	
r_x/r_y		3.81				3.85				5.23				
r_y , in.		1.53				1.49				1.08				
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.														


Shape		W14 _x				
		22 ^c				
Design		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	5.80	3.86	10.7	7.14	
	6	7.81	5.20	12.4	8.24	
	7	8.70	5.79	13.3	8.83	
	8	9.84	6.55	14.3	9.51	
	9	11.3	7.54	15.5	10.3	
	10	13.6	9.08	16.9	11.2	
	11	16.5	11.0	19.2	12.8	
	12	19.7	13.1	22.3	14.8	
	13	23.1	15.3	25.4	16.9	
	14	26.8	17.8	28.5	19.0	
	15	30.7	20.4	31.8	21.2	
	16	34.9	23.2	35.1	23.3	
	17	39.4	26.2	38.4	25.6	
	Other Constants and Properties					
	$b_y \times 10^3$, (kip-ft) ⁻¹	81.2	54.0			
	$t_y \times 10^3$, (kips) ⁻¹	5.15	3.42			
	$t_r \times 10^3$, (kips) ⁻¹	6.32	4.21			
r_x/r_y	5.33					
r_y , in.	1.04					
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.						


 W12		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		Shape		W12x									
Design		336 ^h				305 ^h				279 ^h			
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.338	0.225	0.591	0.393	0.373	0.248	0.663	0.441	0.408	0.271	0.741	0.493
	6	0.349	0.232	0.591	0.393	0.385	0.256	0.663	0.441	0.422	0.280	0.741	0.493
	7	0.352	0.235	0.591	0.393	0.390	0.259	0.663	0.441	0.427	0.284	0.741	0.493
	8	0.357	0.238	0.591	0.393	0.395	0.263	0.663	0.441	0.433	0.288	0.741	0.493
	9	0.363	0.241	0.591	0.393	0.401	0.267	0.663	0.441	0.439	0.292	0.741	0.493
	10	0.369	0.245	0.591	0.393	0.408	0.272	0.663	0.441	0.447	0.298	0.741	0.493
	11	0.375	0.250	0.591	0.393	0.416	0.277	0.663	0.441	0.456	0.303	0.741	0.493
	12	0.383	0.255	0.591	0.393	0.425	0.283	0.663	0.441	0.466	0.310	0.741	0.493
	13	0.391	0.260	0.592	0.394	0.435	0.289	0.666	0.443	0.477	0.317	0.744	0.495
	14	0.401	0.267	0.594	0.395	0.445	0.296	0.668	0.444	0.489	0.325	0.746	0.497
	15	0.411	0.274	0.596	0.397	0.457	0.304	0.670	0.446	0.502	0.334	0.749	0.499
	16	0.422	0.281	0.598	0.398	0.470	0.313	0.673	0.448	0.516	0.344	0.752	0.500
	17	0.435	0.289	0.600	0.399	0.484	0.322	0.675	0.449	0.532	0.354	0.755	0.502
	18	0.448	0.298	0.602	0.400	0.500	0.332	0.677	0.451	0.550	0.366	0.758	0.504
	19	0.463	0.308	0.604	0.402	0.516	0.344	0.680	0.452	0.569	0.378	0.761	0.506
	20	0.479	0.319	0.606	0.403	0.535	0.356	0.682	0.454	0.590	0.392	0.764	0.508
	22	0.516	0.343	0.610	0.406	0.577	0.384	0.687	0.457	0.637	0.424	0.770	0.512
	24	0.559	0.372	0.614	0.408	0.627	0.417	0.692	0.461	0.693	0.461	0.776	0.516
	26	0.610	0.406	0.618	0.411	0.686	0.456	0.697	0.464	0.760	0.506	0.782	0.520
	28	0.670	0.446	0.622	0.414	0.756	0.503	0.702	0.467	0.840	0.559	0.788	0.524
30	0.742	0.494	0.626	0.417	0.839	0.558	0.708	0.471	0.935	0.622	0.795	0.529	
32	0.827	0.550	0.630	0.419	0.938	0.624	0.713	0.474	1.05	0.698	0.801	0.533	
34	0.930	0.619	0.635	0.422	1.06	0.704	0.718	0.478	1.18	0.788	0.808	0.537	
36	1.04	0.694	0.639	0.425	1.19	0.789	0.724	0.481	1.33	0.883	0.814	0.542	
38	1.16	0.773	0.644	0.428	1.32	0.879	0.729	0.485	1.48	0.984	0.821	0.546	
40	1.29	0.856	0.648	0.431	1.46	0.974	0.735	0.489	1.64	1.09	0.828	0.551	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		1.30		0.865		1.46		0.971		1.62		1.08	
$t_y \times 10^3$, (kips) ⁻¹		0.338		0.225		0.373		0.248		0.408		0.271	
$t_r \times 10^3$, (kips) ⁻¹		0.415		0.277		0.458		0.306		0.501		0.334	
r_x/r_y		1.85				1.84				1.82			
r_y , in.		3.47				3.42				3.38			
^h Flange thickness greater than 2 in. Special requirements may apply per AISC <i>Specification</i> Section A3.1c.													


 W12		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		Shape		W12 \times									
Design		252 ^h				230 ^h				210			
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.451	0.300	0.832	0.554	0.493	0.328	0.923	0.614	0.540	0.360	1.02	0.681
	6	0.466	0.310	0.832	0.554	0.511	0.340	0.923	0.614	0.560	0.372	1.02	0.681
	7	0.472	0.314	0.832	0.554	0.517	0.344	0.923	0.614	0.567	0.377	1.02	0.681
	8	0.479	0.319	0.832	0.554	0.525	0.349	0.923	0.614	0.575	0.383	1.02	0.681
	9	0.487	0.324	0.832	0.554	0.533	0.355	0.923	0.614	0.585	0.389	1.02	0.681
	10	0.495	0.330	0.832	0.554	0.543	0.361	0.923	0.614	0.596	0.397	1.02	0.681
	11	0.505	0.336	0.832	0.554	0.554	0.369	0.923	0.614	0.608	0.405	1.02	0.681
	12	0.516	0.344	0.833	0.554	0.567	0.377	0.924	0.615	0.622	0.414	1.03	0.683
	13	0.529	0.352	0.837	0.557	0.580	0.386	0.928	0.618	0.638	0.424	1.03	0.686
	14	0.542	0.361	0.840	0.559	0.596	0.396	0.933	0.621	0.655	0.436	1.04	0.689
	15	0.557	0.371	0.844	0.561	0.612	0.407	0.937	0.623	0.674	0.448	1.04	0.693
	16	0.574	0.382	0.847	0.564	0.631	0.420	0.941	0.626	0.694	0.462	1.05	0.696
	17	0.592	0.394	0.851	0.566	0.651	0.433	0.946	0.629	0.717	0.477	1.05	0.700
	18	0.612	0.407	0.854	0.568	0.674	0.448	0.950	0.632	0.742	0.494	1.06	0.703
	19	0.634	0.422	0.858	0.571	0.698	0.464	0.954	0.635	0.769	0.512	1.06	0.707
	20	0.657	0.437	0.862	0.573	0.725	0.482	0.959	0.638	0.799	0.532	1.07	0.710
	22	0.712	0.474	0.869	0.578	0.786	0.523	0.968	0.644	0.868	0.577	1.08	0.718
	24	0.776	0.516	0.877	0.583	0.858	0.571	0.977	0.650	0.950	0.632	1.09	0.725
	26	0.853	0.568	0.884	0.588	0.945	0.629	0.986	0.656	1.05	0.697	1.10	0.733
	28	0.945	0.629	0.892	0.594	1.05	0.697	0.996	0.663	1.16	0.775	1.11	0.741
30	1.05	0.701	0.900	0.599	1.17	0.780	1.01	0.669	1.30	0.868	1.13	0.749	
32	1.19	0.790	0.908	0.604	1.32	0.880	1.02	0.676	1.48	0.982	1.14	0.757	
34	1.34	0.891	0.916	0.610	1.49	0.993	1.03	0.682	1.67	1.11	1.15	0.765	
36	1.50	0.999	0.925	0.615	1.67	1.11	1.04	0.689	1.87	1.24	1.16	0.774	
38	1.67	1.11	0.933	0.621	1.87	1.24	1.05	0.696	2.08	1.38	1.18	0.782	
40	1.85	1.23	0.942	0.627	2.07	1.37	1.06	0.704	2.31	1.53	1.19	0.791	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		1.82		1.21		2.01		1.34		2.24		1.49	
$t_y \times 10^3$, (kips) ⁻¹		0.451		0.300		0.493		0.328		0.540		0.360	
$t_r \times 10^3$, (kips) ⁻¹		0.554		0.369		0.606		0.404		0.664		0.443	
r_x/r_y		1.81				1.80				1.80			
r_y , in.		3.34				3.31				3.28			
^h Flange thickness greater than 2 in. Special requirements may apply per AISC <i>Specification</i> Section A3.1c.													


 W12		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		190				170				152			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
		Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.596	0.397	1.15	0.762	0.668	0.444	1.30	0.862	0.747	0.497
6	0.618		0.411	1.15	0.762	0.693	0.461	1.30	0.862	0.776	0.516	1.47	0.975
7	0.626		0.417	1.15	0.762	0.702	0.467	1.30	0.862	0.786	0.523	1.47	0.975
8	0.636		0.423	1.15	0.762	0.713	0.474	1.30	0.862	0.798	0.531	1.47	0.975
9	0.647		0.430	1.15	0.762	0.725	0.483	1.30	0.862	0.813	0.541	1.47	0.975
10	0.659		0.438	1.15	0.762	0.739	0.492	1.30	0.862	0.829	0.551	1.47	0.975
11	0.673		0.448	1.15	0.762	0.755	0.503	1.30	0.862	0.847	0.563	1.47	0.975
12	0.688		0.458	1.15	0.764	0.773	0.514	1.30	0.865	0.867	0.577	1.47	0.980
13	0.706		0.470	1.16	0.768	0.793	0.528	1.31	0.870	0.890	0.592	1.48	0.987
14	0.725		0.482	1.16	0.773	0.815	0.542	1.32	0.876	0.915	0.609	1.49	0.994
15	0.746		0.497	1.17	0.777	0.839	0.559	1.32	0.881	0.943	0.627	1.50	1.00
16	0.770		0.512	1.17	0.781	0.866	0.576	1.33	0.887	0.974	0.648	1.51	1.01
17	0.796		0.529	1.18	0.786	0.896	0.596	1.34	0.892	1.01	0.670	1.52	1.01
18	0.824		0.548	1.19	0.790	0.928	0.618	1.35	0.898	1.04	0.695	1.54	1.02
19	0.855		0.569	1.19	0.794	0.964	0.641	1.36	0.903	1.09	0.722	1.55	1.03
20	0.889		0.591	1.20	0.799	1.00	0.667	1.37	0.909	1.13	0.752	1.56	1.04
22	0.966		0.643	1.21	0.808	1.09	0.727	1.38	0.921	1.23	0.820	1.58	1.05
24	1.06		0.705	1.23	0.817	1.20	0.798	1.40	0.932	1.36	0.902	1.60	1.07
26	1.17		0.778	1.24	0.827	1.33	0.883	1.42	0.945	1.50	1.00	1.63	1.08
28	1.30		0.867	1.26	0.837	1.48	0.985	1.44	0.957	1.68	1.12	1.65	1.10
30	1.46	0.973	1.27	0.847	1.67	1.11	1.46	0.970	1.90	1.26	1.68	1.12	
32	1.66	1.10	1.29	0.857	1.89	1.26	1.48	0.983	2.16	1.43	1.70	1.13	
34	1.87	1.25	1.30	0.867	2.14	1.42	1.50	0.997	2.43	1.62	1.73	1.15	
36	2.10	1.40	1.32	0.878	2.39	1.59	1.52	1.01	2.73	1.82	1.76	1.17	
38	2.34	1.56	1.34	0.889	2.67	1.78	1.54	1.03	3.04	2.02	1.79	1.19	
40	2.59	1.72	1.35	0.900	2.96	1.97	1.56	1.04	3.37	2.24	1.82	1.21	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		2.49		1.66		2.83		1.88		3.21		2.14	
$t_y \times 10^3$, (kips) ⁻¹		0.596		0.397		0.668		0.444		0.747		0.497	
$t_r \times 10^3$, (kips) ⁻¹		0.733		0.488		0.821		0.547		0.918		0.612	
r_x/r_y		1.79				1.78				1.77			
r_y , in.		3.25				3.22				3.19			


 W12		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes												$F_y = 50$ ksi	
		Shape		W12 \times											
Design		136				120				106					
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$			
		(kips) $^{-1}$		(kip-ft) $^{-1}$		(kips) $^{-1}$		(kip-ft) $^{-1}$		(kips) $^{-1}$		(kip-ft) $^{-1}$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	0.837	0.557	1.66	1.11	0.949	0.631	1.92	1.27	1.07	0.712	2.17	1.45		
	6	0.869	0.578	1.66	1.11	0.986	0.656	1.92	1.27	1.11	0.741	2.17	1.45		
	7	0.881	0.586	1.66	1.11	1.00	0.665	1.92	1.27	1.13	0.751	2.17	1.45		
	8	0.896	0.596	1.66	1.11	1.02	0.676	1.92	1.27	1.15	0.764	2.17	1.45		
	9	0.912	0.607	1.66	1.11	1.04	0.689	1.92	1.27	1.17	0.778	2.17	1.45		
	10	0.930	0.619	1.66	1.11	1.06	0.703	1.92	1.27	1.19	0.794	2.17	1.45		
	11	0.951	0.633	1.66	1.11	1.08	0.719	1.92	1.27	1.22	0.813	2.17	1.45		
	12	0.974	0.648	1.68	1.11	1.11	0.737	1.93	1.28	1.25	0.833	2.19	1.46		
	13	1.00	0.666	1.69	1.12	1.14	0.757	1.95	1.30	1.29	0.856	2.22	1.47		
	14	1.03	0.685	1.70	1.13	1.17	0.779	1.96	1.31	1.33	0.882	2.24	1.49		
	15	1.06	0.706	1.71	1.14	1.21	0.804	1.98	1.32	1.37	0.910	2.26	1.50		
	16	1.10	0.730	1.73	1.15	1.25	0.831	2.00	1.33	1.41	0.941	2.28	1.52		
	17	1.14	0.755	1.74	1.16	1.29	0.861	2.02	1.34	1.47	0.976	2.31	1.53		
	18	1.18	0.784	1.76	1.17	1.34	0.894	2.04	1.35	1.52	1.01	2.33	1.55		
	19	1.22	0.815	1.77	1.18	1.40	0.931	2.05	1.37	1.59	1.06	2.35	1.57		
	20	1.28	0.849	1.78	1.19	1.46	0.970	2.07	1.38	1.65	1.10	2.38	1.58		
	22	1.39	0.928	1.81	1.21	1.60	1.06	2.11	1.41	1.81	1.21	2.43	1.62		
	24	1.54	1.02	1.84	1.23	1.76	1.17	2.15	1.43	2.00	1.33	2.48	1.65		
	26	1.71	1.14	1.87	1.25	1.96	1.31	2.19	1.46	2.23	1.49	2.54	1.69		
	28	1.91	1.27	1.91	1.27	2.20	1.47	2.24	1.49	2.51	1.67	2.60	1.73		
30	2.16	1.44	1.94	1.29	2.50	1.66	2.28	1.52	2.86	1.90	2.66	1.77			
32	2.46	1.64	1.97	1.31	2.84	1.89	2.33	1.55	3.25	2.16	2.72	1.81			
34	2.78	1.85	2.01	1.34	3.21	2.14	2.38	1.58	3.67	2.44	2.79	1.86			
36	3.12	2.07	2.05	1.36	3.60	2.40	2.43	1.62	4.11	2.74	2.86	1.90			
38	3.47	2.31	2.09	1.39	4.01	2.67	2.48	1.65	4.58	3.05	2.93	1.95			
40	3.85	2.56	2.13	1.41	4.44	2.96	2.54	1.69	5.08	3.38	3.01	2.00			
Other Constants and Properties															
$b_y \times 10^3$, (kip-ft) $^{-1}$		3.64		2.42		4.17		2.78		4.74		3.16			
$t_y \times 10^3$, (kips) $^{-1}$		0.837		0.557		0.949		0.631		1.07		0.712			
$t_r \times 10^3$, (kips) $^{-1}$		1.03		0.685		1.17		0.777		1.31		0.877			
r_x/r_y		1.77				1.76				1.76					
r_y , in.		3.16				3.13				3.11					


 W12		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		96				87				79			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.18	0.788	2.42	1.61	1.30	0.868	2.70	1.80	1.44	0.958	2.99	1.99
	6	1.23	0.820	2.42	1.61	1.36	0.904	2.70	1.80	1.50	0.998	2.99	1.99
	7	1.25	0.832	2.42	1.61	1.38	0.917	2.70	1.80	1.52	1.01	2.99	1.99
	8	1.27	0.846	2.42	1.61	1.40	0.932	2.70	1.80	1.55	1.03	2.99	1.99
	9	1.30	0.862	2.42	1.61	1.43	0.950	2.70	1.80	1.58	1.05	2.99	1.99
	10	1.32	0.880	2.42	1.61	1.46	0.971	2.70	1.80	1.61	1.07	2.99	1.99
	11	1.35	0.901	2.43	1.61	1.49	0.994	2.70	1.80	1.65	1.10	3.00	2.00
	12	1.39	0.924	2.45	1.63	1.53	1.02	2.74	1.82	1.69	1.13	3.04	2.02
	13	1.43	0.949	2.48	1.65	1.58	1.05	2.77	1.84	1.74	1.16	3.08	2.05
	14	1.47	0.978	2.50	1.67	1.62	1.08	2.80	1.86	1.80	1.20	3.12	2.08
	15	1.52	1.01	2.53	1.68	1.68	1.12	2.84	1.89	1.86	1.24	3.16	2.11
	16	1.57	1.05	2.56	1.70	1.74	1.16	2.87	1.91	1.92	1.28	3.21	2.13
	17	1.63	1.08	2.59	1.72	1.80	1.20	2.91	1.93	2.00	1.33	3.25	2.16
	18	1.69	1.13	2.62	1.74	1.87	1.25	2.94	1.96	2.08	1.38	3.30	2.19
	19	1.76	1.17	2.65	1.76	1.95	1.30	2.98	1.98	2.17	1.44	3.34	2.22
	20	1.84	1.22	2.68	1.78	2.04	1.36	3.02	2.01	2.26	1.51	3.39	2.26
	22	2.02	1.34	2.74	1.83	2.24	1.49	3.10	2.06	2.49	1.66	3.49	2.32
	24	2.24	1.49	2.81	1.87	2.48	1.65	3.19	2.12	2.76	1.84	3.60	2.40
	26	2.50	1.66	2.88	1.92	2.78	1.85	3.28	2.18	3.09	2.06	3.71	2.47
	28	2.81	1.87	2.95	1.97	3.13	2.08	3.37	2.24	3.50	2.33	3.84	2.55
30	3.20	2.13	3.03	2.02	3.57	2.38	3.47	2.31	4.00	2.66	3.96	2.64	
32	3.64	2.42	3.11	2.07	4.07	2.71	3.58	2.38	4.55	3.02	4.10	2.73	
34	4.11	2.74	3.20	2.13	4.59	3.05	3.69	2.46	5.13	3.41	4.25	2.83	
36	4.61	3.07	3.29	2.19	5.15	3.42	3.81	2.54	5.75	3.83	4.41	2.93	
38	5.14	3.42	3.39	2.26	5.73	3.81	3.94	2.62	6.41	4.26	4.58	3.05	
40	5.69	3.79	3.49	2.32	6.35	4.23	4.08	2.72	7.10	4.73	4.78	3.18	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		5.28		3.51		5.90		3.92		6.56		4.37	
$t_y \times 10^3$, (kips) ⁻¹		1.18		0.788		1.30		0.868		1.44		0.958	
$t_r \times 10^3$, (kips) ⁻¹		1.45		0.970		1.60		1.07		1.77		1.18	
r_x/r_y		1.76				1.75				1.75			
r_y , in.		3.09				3.07				3.05			


 W12		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		72				65 ^f				58			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.58	1.05	3.30	2.19	1.75	1.16	3.75	2.50	1.96	1.31	4.12	2.74
	6	1.65	1.10	3.30	2.19	1.82	1.21	3.75	2.50	2.09	1.39	4.12	2.74
	7	1.67	1.11	3.30	2.19	1.85	1.23	3.75	2.50	2.13	1.42	4.12	2.74
	8	1.70	1.13	3.30	2.19	1.88	1.25	3.75	2.50	2.19	1.45	4.12	2.74
	9	1.74	1.16	3.30	2.19	1.92	1.28	3.75	2.50	2.25	1.50	4.13	2.75
	10	1.77	1.18	3.30	2.19	1.96	1.31	3.75	2.50	2.32	1.54	4.21	2.80
	11	1.82	1.21	3.31	2.20	2.01	1.34	3.75	2.50	2.41	1.60	4.28	2.85
	12	1.87	1.24	3.36	2.23	2.06	1.37	3.75	2.50	2.50	1.66	4.36	2.90
	13	1.92	1.28	3.40	2.27	2.13	1.41	3.81	2.54	2.61	1.73	4.45	2.96
	14	1.98	1.32	3.45	2.30	2.19	1.46	3.87	2.58	2.73	1.81	4.53	3.02
	15	2.05	1.36	3.50	2.33	2.27	1.51	3.93	2.62	2.86	1.90	4.62	3.07
	16	2.12	1.41	3.56	2.37	2.35	1.56	4.00	2.66	3.01	2.01	4.71	3.14
	17	2.20	1.46	3.61	2.40	2.44	1.62	4.06	2.70	3.18	2.12	4.81	3.20
	18	2.29	1.52	3.67	2.44	2.54	1.69	4.13	2.75	3.38	2.25	4.91	3.27
	19	2.39	1.59	3.72	2.48	2.65	1.77	4.20	2.80	3.59	2.39	5.01	3.34
	20	2.50	1.66	3.78	2.52	2.77	1.85	4.27	2.84	3.83	2.55	5.12	3.41
	22	2.75	1.83	3.91	2.60	3.06	2.03	4.43	2.95	4.41	2.94	5.36	3.56
	24	3.05	2.03	4.04	2.69	3.40	2.26	4.59	3.06	5.15	3.43	5.61	3.74
	26	3.42	2.28	4.18	2.78	3.82	2.54	4.77	3.17	6.05	4.02	5.90	3.92
	28	3.87	2.57	4.33	2.88	4.32	2.88	4.96	3.30	7.01	4.67	6.21	4.13
30	4.42	2.94	4.49	2.99	4.95	3.29	5.17	3.44	8.05	5.36	6.57	4.37	
32	5.03	3.35	4.67	3.10	5.63	3.75	5.39	3.59	9.16	6.09	7.12	4.74	
34	5.68	3.78	4.86	3.23	6.36	4.23	5.64	3.75	10.3	6.88	7.66	5.10	
36	6.37	4.24	5.06	3.37	7.13	4.74	5.97	3.98	11.6	7.71	8.21	5.46	
38	7.09	4.72	5.32	3.54	7.94	5.28	6.39	4.25	12.9	8.59	8.75	5.82	
40	7.86	5.23	5.66	3.76	8.80	5.85	6.81	4.53	14.3	9.52	9.29	6.18	
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		7.24		4.82		8.31		5.53		11.0		7.29	
$t_y \times 10^3$, (kips) ⁻¹		1.58		1.05		1.75		1.16		1.96		1.31	
$t_r \times 10^3$, (kips) ⁻¹		1.94		1.30		2.15		1.43		2.41		1.61	
r_x/r_y		1.75				1.75				2.10			
r_y , in.		3.04				3.02				2.51			
^f Shape does not meet compact limit for flexure for $F_y = 50$ ksi.													


 W12		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes												$F_y = 50$ ksi	
		Shape		W12x											
Design		53				50				45					
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$			
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	2.14	1.42	4.57	3.04	2.29	1.52	4.96	3.30	2.55	1.70	5.55	3.69		
	6	2.28	1.52	4.57	3.04	2.52	1.68	4.96	3.30	2.82	1.87	5.55	3.69		
	7	2.33	1.55	4.57	3.04	2.62	1.74	4.96	3.30	2.92	1.94	5.56	3.70		
	8	2.39	1.59	4.57	3.04	2.73	1.81	5.08	3.38	3.04	2.03	5.70	3.79		
	9	2.46	1.64	4.59	3.06	2.86	1.90	5.19	3.46	3.19	2.12	5.84	3.89		
	10	2.54	1.69	4.68	3.12	3.01	2.00	5.32	3.54	3.36	2.24	6.00	3.99		
	11	2.63	1.75	4.77	3.18	3.19	2.12	5.45	3.62	3.56	2.37	6.15	4.09		
	12	2.74	1.82	4.87	3.24	3.39	2.26	5.58	3.72	3.80	2.53	6.32	4.21		
	13	2.86	1.90	4.97	3.31	3.64	2.42	5.73	3.81	4.07	2.71	6.50	4.32		
	14	2.99	1.99	5.07	3.38	3.91	2.60	5.88	3.91	4.39	2.92	6.69	4.45		
	15	3.15	2.09	5.18	3.45	4.24	2.82	6.04	4.02	4.75	3.16	6.88	4.58		
	16	3.32	2.21	5.29	3.52	4.61	3.07	6.20	4.13	5.18	3.45	7.09	4.72		
	17	3.51	2.34	5.41	3.60	5.05	3.36	6.38	4.25	5.68	3.78	7.32	4.87		
	18	3.73	2.48	5.53	3.68	5.56	3.70	6.57	4.37	6.25	4.16	7.56	5.03		
	19	3.97	2.64	5.66	3.77	6.17	4.10	6.77	4.50	6.94	4.62	7.81	5.20		
	20	4.25	2.83	5.80	3.86	6.83	4.55	6.98	4.64	7.69	5.12	8.08	5.38		
	22	4.90	3.26	6.09	4.05	8.27	5.50	7.45	4.95	9.31	6.19	8.69	5.78		
	24	5.75	3.83	6.41	4.26	9.84	6.55	8.01	5.33	11.1	7.37	9.66	6.43		
	26	6.75	4.49	6.77	4.50	11.5	7.68	8.84	5.88	13.0	8.65	10.7	7.11		
	28	7.83	5.21	7.16	4.77	13.4	8.91	9.67	6.44	15.1	10.0	11.7	7.80		
30	8.99	5.98	7.81	5.20	15.4	10.2	10.5	6.99	17.3	11.5	12.8	8.48			
32	10.2	6.80	8.48	5.64	17.5	11.6	11.3	7.53	19.7	13.1	13.8	9.16			
34	11.5	7.68	9.15	6.09											
36	12.9	8.61	9.81	6.53											
38	14.4	9.59	10.5	6.97											
40	16.0	10.6	11.1	7.41											
Other Constants and Properties															
$b_y \times 10^3$, (kip-ft) ⁻¹		12.2		8.15		16.7		11.1		18.8		12.5			
$t_y \times 10^3$, (kips) ⁻¹		2.14		1.42		2.29		1.52		2.55		1.70			
$t_r \times 10^3$, (kips) ⁻¹		2.63		1.75		2.81		1.87		3.13		2.09			
r_x/r_y		2.11				2.64				2.64					
r_y , in.		2.48				1.96				1.95					
Note: Heavy line indicates L_c/r_y equal to or greater than 200.															


 W12		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		40				35 ^c				30 ^c			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
		Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	2.85	1.90	6.25	4.16	3.25	2.16	6.96	4.63	3.93	2.62
6	3.16		2.10	6.25	4.16	3.80	2.53	7.09	4.72	4.55	3.03	8.46	5.63
7	3.27		2.18	6.27	4.17	4.03	2.68	7.34	4.89	4.79	3.19	8.79	5.85
8	3.41		2.27	6.44	4.29	4.31	2.87	7.61	5.07	5.09	3.39	9.14	6.08
9	3.58		2.38	6.62	4.40	4.65	3.09	7.90	5.26	5.50	3.66	9.53	6.34
10	3.78		2.51	6.80	4.53	5.05	3.36	8.22	5.47	5.99	3.99	9.94	6.62
11	4.00		2.66	7.00	4.66	5.55	3.69	8.56	5.69	6.60	4.39	10.4	6.92
12	4.27		2.84	7.21	4.79	6.15	4.09	8.93	5.94	7.32	4.87	10.9	7.25
13	4.58		3.05	7.43	4.94	6.87	4.57	9.33	6.21	8.21	5.46	11.5	7.62
14	4.94		3.29	7.66	5.10	7.74	5.15	9.77	6.50	9.28	6.18	12.1	8.02
15	5.36		3.56	7.91	5.26	8.82	5.87	10.3	6.82	10.6	7.06	12.7	8.48
16	5.84		3.89	8.18	5.44	10.0	6.68	10.8	7.18	12.1	8.04	13.7	9.13
17	6.41		4.26	8.46	5.63	11.3	7.54	11.5	7.66	13.6	9.07	15.0	10.0
18	7.07		4.70	8.77	5.83	12.7	8.45	12.5	8.30	15.3	10.2	16.4	10.9
19	7.85		5.23	9.10	6.05	14.2	9.42	13.4	8.94	17.0	11.3	17.7	11.8
20	8.70		5.79	9.45	6.29	15.7	10.4	14.4	9.59	18.9	12.6	19.0	12.7
22	10.5		7.01	10.5	6.96	19.0	12.6	16.3	10.9	22.8	15.2	21.7	14.5
24	12.5		8.34	11.8	7.83	22.6	15.0	18.3	12.2	27.2	18.1	24.4	16.3
26	14.7		9.79	13.1	8.69								
28	17.1		11.3	14.4	9.56								
30	19.6	13.0	15.7	10.4									
32	22.3	14.8	16.9	11.3									
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		21.2		14.1		31.0		20.6		37.3		24.8	
$t_y \times 10^3$, (kips) ⁻¹		2.85		1.90		3.24		2.16		3.80		2.53	
$t_r \times 10^3$, (kips) ⁻¹		3.51		2.34		3.98		2.66		4.67		3.11	
r_x/r_y		2.64				3.41				3.43			
r_y , in.		1.94				1.54				1.52			
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W12		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		26 ^c				22 ^c				19 ^c			
Shape		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	4.64	3.09	9.58	6.37	5.40	3.59	12.2	8.09	6.50	4.33	14.4	9.60
	1	4.66	3.10	9.58	6.37	5.47	3.64	12.2	8.09	6.59	4.38	14.4	9.60
	2	4.72	3.14	9.58	6.37	5.67	3.78	12.2	8.09	6.85	4.56	14.4	9.60
	3	4.82	3.21	9.58	6.37	6.04	4.02	12.2	8.09	7.31	4.87	14.5	9.66
	4	4.96	3.30	9.58	6.37	6.59	4.38	13.0	8.65	8.02	5.33	15.6	10.4
	5	5.15	3.42	9.58	6.37	7.43	4.95	14.0	9.28	9.02	6.00	16.9	11.2
	6	5.38	3.58	9.83	6.54	8.73	5.81	15.1	10.0	10.5	6.99	18.4	12.2
	7	5.68	3.78	10.2	6.81	10.6	7.03	16.4	10.9	12.9	8.56	20.2	13.4
	8	6.04	4.02	10.7	7.11	13.2	8.75	17.9	11.9	16.3	10.8	22.3	14.9
	9	6.47	4.31	11.2	7.43	16.7	11.1	19.8	13.1	20.6	13.7	25.7	17.1
	10	7.00	4.66	11.7	7.79	20.6	13.7	23.0	15.3	25.5	16.9	30.4	20.2
	11	7.63	5.08	12.3	8.17	24.9	16.6	26.5	17.6	30.8	20.5	35.2	23.4
	12	8.49	5.65	12.9	8.60	29.6	19.7	30.0	20.0	36.7	24.4	40.1	26.7
	13	9.53	6.34	13.6	9.08	34.7	23.1	33.5	22.3	43.0	28.6	45.1	30.0
	14	10.8	7.18	14.4	9.61	40.3	26.8	37.1	24.7				
	15	12.4	8.22	15.4	10.3								
	16	14.1	9.36	17.1	11.4								
	17	15.9	10.6	18.8	12.5								
	18	17.8	11.8	20.6	13.7								
	19	19.8	13.2	22.3	14.9								
	20	22.0	14.6	24.1	16.0								
	21	24.2	16.1	25.9	17.2								
	22	26.6	17.7	27.7	18.4								
	23	29.1	19.3	29.5	19.6								
	24	31.6	21.0	31.3	20.8								
25	34.3	22.8	33.1	22.0									
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		43.6		29.0		97.3		64.8		120		79.5	
$t_y \times 10^3$, (kips) ⁻¹		4.37		2.90		5.15		3.43		6.00		3.99	
$t_r \times 10^3$, (kips) ⁻¹		5.36		3.58		6.33		4.22		7.37		4.91	
r_x/r_y		3.42				5.79				5.86			
r_y , in.		1.51				0.848				0.822			
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W12		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes								$F_y = 50$ ksi	
		W12 ^c				W12 ^{c,v}					
Shape	Design	$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	7.95	5.29	17.7	11.8	9.35	6.22	20.5	13.6		
	1	8.06	5.37	17.7	11.8	9.49	6.31	20.5	13.6		
	2	8.42	5.60	17.7	11.8	9.93	6.61	20.5	13.6		
	3	9.05	6.02	18.1	12.0	10.7	7.13	21.0	14.0		
	4	10.0	6.67	19.6	13.1	11.9	7.93	22.9	15.2		
	5	11.4	7.59	21.4	14.3	13.7	9.08	25.1	16.7		
	6	13.4	8.91	23.6	15.7	16.1	10.7	27.8	18.5		
	7	16.8	11.2	26.3	17.5	19.9	13.3	31.2	20.7		
	8	21.8	14.5	29.6	19.7	26.0	17.3	36.4	24.2		
	9	27.6	18.3	36.1	24.0	32.9	21.9	44.6	29.7		
	10	34.0	22.6	42.9	28.5	40.6	27.0	53.3	35.5		
	11	41.2	27.4	50.0	33.3	49.1	32.7	62.4	41.5		
12	49.0	32.6	57.2	38.1	58.5	38.9	71.8	47.8			
Other Constants and Properties											
$b_y \times 10^3$, (kip-ft) ⁻¹		158		105		188		125			
$t_y \times 10^3$, (kips) ⁻¹		7.09		4.72		8.03		5.34			
$t_r \times 10^3$, (kips) ⁻¹		8.71		5.81		9.86		6.57			
r_x/r_y		6.04				6.14					
r_y , in.		0.773				0.753					
^c Shape is slender for compression for $F_y = 50$ ksi. ^v Shape does not meet the h/t_w limit for shear in AISC Specification Section G2.1(1) with $F_y = 50$ ksi; therefore, $\phi_v = 0.90$ and $\Omega_v = 1.67$. Note: Heavy line indicates L_c/r_y equal to or greater than 200.											


 W10		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes												$F_y = 50 \text{ ksi}$	
		Shape		W10 \times											
Design		112				100				88					
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$			
		(kips) $^{-1}$		(kip-ft) $^{-1}$		(kips) $^{-1}$		(kip-ft) $^{-1}$		(kips) $^{-1}$		(kip-ft) $^{-1}$			
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD		
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.02	0.675	2.42	1.61	1.14	0.758	2.74	1.82	1.28	0.855	3.15	2.10		
	6	1.07	0.712	2.42	1.61	1.20	0.800	2.74	1.82	1.36	0.903	3.15	2.10		
	7	1.09	0.726	2.42	1.61	1.23	0.816	2.74	1.82	1.38	0.921	3.15	2.10		
	8	1.12	0.742	2.42	1.61	1.25	0.835	2.74	1.82	1.42	0.942	3.15	2.10		
	9	1.14	0.761	2.42	1.61	1.29	0.856	2.74	1.82	1.45	0.967	3.15	2.10		
	10	1.18	0.782	2.43	1.62	1.32	0.881	2.75	1.83	1.50	0.995	3.17	2.11		
	11	1.21	0.807	2.45	1.63	1.37	0.909	2.78	1.85	1.54	1.03	3.20	2.13		
	12	1.25	0.834	2.47	1.64	1.41	0.941	2.80	1.86	1.60	1.06	3.23	2.15		
	13	1.30	0.865	2.49	1.66	1.47	0.977	2.82	1.88	1.66	1.11	3.27	2.17		
	14	1.35	0.900	2.51	1.67	1.53	1.02	2.85	1.90	1.73	1.15	3.30	2.19		
	15	1.41	0.939	2.53	1.68	1.60	1.06	2.87	1.91	1.81	1.20	3.33	2.22		
	16	1.48	0.983	2.55	1.69	1.67	1.11	2.90	1.93	1.90	1.26	3.36	2.24		
	17	1.55	1.03	2.56	1.71	1.76	1.17	2.92	1.94	1.99	1.33	3.40	2.26		
	18	1.63	1.09	2.59	1.72	1.85	1.23	2.95	1.96	2.10	1.40	3.43	2.28		
	19	1.72	1.15	2.61	1.73	1.96	1.30	2.98	1.98	2.23	1.48	3.47	2.31		
	20	1.82	1.21	2.63	1.75	2.08	1.38	3.00	2.00	2.36	1.57	3.50	2.33		
	22	2.06	1.37	2.67	1.78	2.36	1.57	3.06	2.03	2.68	1.79	3.58	2.38		
	24	2.36	1.57	2.71	1.80	2.70	1.80	3.11	2.07	3.09	2.05	3.65	2.43		
	26	2.74	1.82	2.76	1.83	3.15	2.09	3.17	2.11	3.60	2.40	3.73	2.48		
	28	3.18	2.11	2.80	1.87	3.65	2.43	3.23	2.15	4.18	2.78	3.82	2.54		
30	3.65	2.43	2.85	1.90	4.19	2.79	3.30	2.19	4.79	3.19	3.90	2.60			
32	4.15	2.76	2.90	1.93	4.77	3.17	3.36	2.24	5.46	3.63	4.00	2.66			
34	4.69	3.12	2.95	1.97	5.38	3.58	3.43	2.28	6.16	4.10	4.09	2.72			
36	5.25	3.50	3.01	2.00	6.03	4.01	3.50	2.33	6.90	4.59	4.19	2.79			
38	5.85	3.90	3.06	2.04	6.72	4.47	3.58	2.38	7.69	5.12	4.30	2.86			
40	6.49	4.32	3.12	2.08	7.45	4.96	3.66	2.43	8.52	5.67	4.41	2.94			
Other Constants and Properties															
$b_y \times 10^3$, (kip-ft) $^{-1}$		5.15		3.43		5.84		3.89		6.71		4.46			
$t_y \times 10^3$, (kips) $^{-1}$		1.02		0.675		1.14		0.758		1.28		0.855			
$t_r \times 10^3$, (kips) $^{-1}$		1.25		0.831		1.40		0.933		1.58		1.05			
r_x/r_y		1.74				1.74				1.73					
r_y , in.		2.68				2.65				2.63					


 W10		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes											$F_y = 50$ ksi	
		77				68				60				
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.47	0.979	3.65	2.43	1.68	1.12	4.18	2.78	1.89	1.26	4.78	3.18	
	6	1.56	1.04	3.65	2.43	1.78	1.18	4.18	2.78	2.00	1.33	4.78	3.18	
	7	1.59	1.06	3.65	2.43	1.81	1.21	4.18	2.78	2.04	1.36	4.78	3.18	
	8	1.63	1.08	3.65	2.43	1.86	1.23	4.18	2.78	2.09	1.39	4.78	3.18	
	9	1.67	1.11	3.65	2.43	1.91	1.27	4.18	2.78	2.15	1.43	4.78	3.18	
	10	1.72	1.14	3.68	2.45	1.96	1.31	4.22	2.81	2.21	1.47	4.84	3.22	
	11	1.78	1.18	3.72	2.48	2.03	1.35	4.27	2.84	2.29	1.52	4.90	3.26	
	12	1.84	1.23	3.76	2.50	2.10	1.40	4.32	2.88	2.37	1.58	4.97	3.31	
	13	1.91	1.27	3.80	2.53	2.19	1.46	4.38	2.91	2.47	1.64	5.04	3.36	
	14	2.00	1.33	3.85	2.56	2.28	1.52	4.44	2.95	2.58	1.72	5.12	3.41	
	15	2.09	1.39	3.89	2.59	2.39	1.59	4.49	2.99	2.70	1.80	5.19	3.46	
	16	2.19	1.46	3.94	2.62	2.51	1.67	4.55	3.03	2.84	1.89	5.27	3.51	
	17	2.31	1.54	3.98	2.65	2.64	1.76	4.61	3.07	2.99	1.99	5.35	3.56	
	18	2.44	1.62	4.03	2.68	2.79	1.86	4.67	3.11	3.16	2.10	5.43	3.62	
	19	2.58	1.72	4.08	2.71	2.96	1.97	4.74	3.15	3.36	2.23	5.52	3.67	
	20	2.74	1.83	4.13	2.74	3.14	2.09	4.80	3.20	3.57	2.38	5.61	3.73	
	22	3.13	2.08	4.23	2.81	3.59	2.39	4.94	3.29	4.08	2.72	5.79	3.85	
	24	3.61	2.40	4.33	2.88	4.15	2.76	5.08	3.38	4.73	3.14	5.99	3.99	
	26	4.22	2.81	4.45	2.96	4.85	3.23	5.24	3.49	5.54	3.69	6.20	4.13	
	28	4.89	3.26	4.56	3.04	5.63	3.74	5.40	3.59	6.42	4.27	6.43	4.28	
30	5.62	3.74	4.69	3.12	6.46	4.30	5.57	3.71	7.38	4.91	6.67	4.44		
32	6.39	4.25	4.82	3.21	7.35	4.89	5.76	3.83	8.39	5.58	6.94	4.61		
34	7.22	4.80	4.96	3.30	8.30	5.52	5.96	3.96	9.47	6.30	7.22	4.80		
36	8.09	5.38	5.11	3.40	9.30	6.19	6.17	4.10	10.6	7.07	7.53	5.01		
38	9.02	6.00	5.26	3.50	10.4	6.90	6.40	4.26	11.8	7.87	7.96	5.30		
40	9.99	6.65	5.43	3.61	11.5	7.64	6.64	4.42	13.1	8.72	8.43	5.61		
Other Constants and Properties														
$b_y \times 10^3$, (kip-ft) ⁻¹		7.76		5.16		8.88		5.91		10.2		6.77		
$t_y \times 10^3$, (kips) ⁻¹		1.47		0.979		1.68		1.12		1.89		1.26		
$t_r \times 10^3$, (kips) ⁻¹		1.81		1.20		2.06		1.37		2.32		1.55		
r_x/r_y		1.73				1.71				1.71				
r_y , in.		2.60				2.59				2.57				


 W10		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes											$F_y = 50$ ksi	
		Shape		W10 \times										
Design		54				49				45				
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
		(kips) $^{-1}$		(kip-ft) $^{-1}$		(kips) $^{-1}$		(kip-ft) $^{-1}$		(kips) $^{-1}$		(kip-ft) $^{-1}$		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	2.11	1.41	5.35	3.56	2.32	1.54	5.90	3.92	2.51	1.67	6.49	4.32	
	6	2.24	1.49	5.35	3.56	2.46	1.64	5.90	3.92	2.76	1.84	6.49	4.32	
	7	2.29	1.52	5.35	3.56	2.51	1.67	5.90	3.92	2.85	1.90	6.49	4.32	
	8	2.34	1.56	5.35	3.56	2.57	1.71	5.90	3.92	2.97	1.97	6.60	4.39	
	9	2.41	1.60	5.35	3.56	2.65	1.76	5.90	3.93	3.10	2.06	6.73	4.48	
	10	2.48	1.65	5.43	3.61	2.73	1.82	6.00	3.99	3.26	2.17	6.87	4.57	
	11	2.57	1.71	5.51	3.67	2.83	1.88	6.10	4.06	3.44	2.29	7.00	4.66	
	12	2.66	1.77	5.60	3.72	2.93	1.95	6.20	4.13	3.65	2.43	7.15	4.76	
	13	2.77	1.85	5.69	3.78	3.06	2.03	6.31	4.20	3.90	2.60	7.30	4.86	
	14	2.90	1.93	5.78	3.85	3.19	2.12	6.42	4.27	4.19	2.78	7.46	4.96	
	15	3.03	2.02	5.88	3.91	3.35	2.23	6.54	4.35	4.51	3.00	7.63	5.07	
	16	3.19	2.12	5.97	3.97	3.52	2.34	6.66	4.43	4.89	3.26	7.80	5.19	
	17	3.36	2.24	6.08	4.04	3.72	2.47	6.78	4.51	5.33	3.55	7.98	5.31	
	18	3.56	2.37	6.18	4.11	3.94	2.62	6.91	4.60	5.84	3.89	8.17	5.44	
	19	3.78	2.51	6.29	4.19	4.18	2.78	7.04	4.69	6.44	4.28	8.37	5.57	
	20	4.02	2.67	6.40	4.26	4.46	2.96	7.18	4.78	7.13	4.75	8.58	5.71	
	22	4.60	3.06	6.64	4.42	5.11	3.40	7.48	4.98	8.63	5.74	9.03	6.01	
	24	5.33	3.55	6.90	4.59	5.94	3.95	7.80	5.19	10.3	6.83	9.53	6.34	
	26	6.25	4.16	7.18	4.78	6.97	4.64	8.15	5.42	12.1	8.02	10.1	6.71	
	28	7.25	4.83	7.48	4.98	8.08	5.38	8.53	5.68	14.0	9.30	10.9	7.22	
30	8.33	5.54	7.81	5.20	9.28	6.17	8.95	5.96	16.0	10.7	11.7	7.82		
32	9.47	6.30	8.17	5.43	10.6	7.03	9.47	6.30	18.3	12.1	12.6	8.41		
34	10.7	7.12	8.60	5.72	11.9	7.93	10.2	6.77						
36	12.0	7.98	9.19	6.11	13.4	8.89	10.9	7.24						
38	13.4	8.89	9.77	6.50	14.9	9.91	11.6	7.71						
40	14.8	9.85	10.4	6.89	16.5	11.0	12.3	8.18						
Other Constants and Properties														
$b_y \times 10^3$, (kip-ft) $^{-1}$		11.4		7.57		12.6		8.38		17.6		11.7		
$t_y \times 10^3$, (kips) $^{-1}$		2.11		1.41		2.32		1.54		2.51		1.67		
$t_r \times 10^3$, (kips) $^{-1}$		2.60		1.73		2.85		1.90		3.08		2.06		
r_x/r_y		1.71				1.71				2.15				
r_y , in.		2.56				2.54				2.01				
Note: Heavy line indicates L_c/r_y equal to or greater than 200.														


 W10		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		39				33				30			
Shape	Design	$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹		$p \times 10^3$ (kips) ⁻¹		$b_x \times 10^3$ (kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	2.90	1.93	7.61	5.06	3.44	2.29	9.18	6.11	3.78	2.51	9.73	6.48
	6	3.20	2.13	7.61	5.06	3.80	2.53	9.18	6.11	4.62	3.08	10.1	6.74
	7	3.31	2.20	7.61	5.07	3.95	2.62	9.22	6.13	4.97	3.31	10.5	6.99
	8	3.45	2.29	7.78	5.18	4.11	2.74	9.45	6.29	5.41	3.60	10.9	7.25
	9	3.61	2.40	7.96	5.29	4.31	2.87	9.70	6.45	5.95	3.96	11.3	7.53
	10	3.80	2.53	8.14	5.41	4.55	3.03	9.96	6.62	6.62	4.41	11.8	7.84
	11	4.02	2.67	8.33	5.54	4.83	3.21	10.2	6.81	7.45	4.96	12.3	8.17
	12	4.28	2.84	8.53	5.67	5.15	3.42	10.5	7.00	8.47	5.64	12.8	8.54
	13	4.57	3.04	8.74	5.81	5.52	3.67	10.8	7.20	9.76	6.49	13.4	8.93
	14	4.92	3.27	8.96	5.96	5.95	3.96	11.2	7.42	11.3	7.53	14.1	9.37
	15	5.31	3.54	9.19	6.12	6.45	4.29	11.5	7.65	13.0	8.64	14.8	9.85
	16	5.78	3.84	9.44	6.28	7.04	4.68	11.9	7.89	14.8	9.83	15.6	10.4
	17	6.31	4.20	9.70	6.45	7.72	5.14	12.3	8.15	16.7	11.1	16.8	11.2
	18	6.93	4.61	9.97	6.63	8.51	5.67	12.7	8.43	18.7	12.4	18.1	12.1
	19	7.67	5.10	10.3	6.82	9.46	6.30	13.1	8.73	20.8	13.9	19.4	12.9
	20	8.50	5.66	10.6	7.03	10.5	6.98	13.6	9.05	23.1	15.4	20.7	13.8
	22	10.3	6.84	11.2	7.47	12.7	8.44	14.8	9.82	27.9	18.6	23.2	15.4
	24	12.2	8.14	12.0	7.98	15.1	10.0	16.5	11.0				
	26	14.4	9.56	13.2	8.77	17.7	11.8	18.3	12.2				
	28	16.7	11.1	14.4	9.58	20.6	13.7	20.1	13.4				
30	19.1	12.7	15.6	10.4	23.6	15.7	21.9	14.5					
32	21.8	14.5	16.8	11.2	26.8	17.9	23.6	15.7					
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		20.7		13.8		25.4		16.9		40.3		26.8	
$t_y \times 10^3$, (kips) ⁻¹		2.90		1.93		3.44		2.29		3.78		2.51	
$t_r \times 10^3$, (kips) ⁻¹		3.57		2.38		4.23		2.82		4.64		3.09	
r_x/r_y		2.16				2.16				3.20			
r_y , in.		1.98				1.94				1.37			
Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


 W10		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		26				22 ^c				19			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	4.39	2.92	11.4	7.57	5.18	3.45	13.7	9.12	5.94	3.95	16.5	11.0
	1	4.41	2.94	11.4	7.57	5.21	3.46	13.7	9.12	6.03	4.01	16.5	11.0
	2	4.49	2.99	11.4	7.57	5.29	3.52	13.7	9.12	6.28	4.18	16.5	11.0
	3	4.62	3.07	11.4	7.57	5.43	3.61	13.7	9.12	6.73	4.48	16.5	11.0
	4	4.81	3.20	11.4	7.57	5.66	3.77	13.7	9.12	7.41	4.93	17.4	11.6
	5	5.06	3.37	11.5	7.63	5.97	3.97	13.9	9.23	8.39	5.58	18.6	12.4
	6	5.39	3.58	11.9	7.93	6.38	4.24	14.5	9.64	9.76	6.49	19.9	13.2
	7	5.80	3.86	12.4	8.25	6.89	4.58	15.1	10.1	11.7	7.77	21.4	14.3
	8	6.32	4.20	12.9	8.59	7.53	5.01	15.9	10.6	14.4	9.55	23.2	15.4
	9	6.96	4.63	13.5	8.97	8.33	5.55	16.7	11.1	18.1	12.0	25.3	16.8
	10	7.76	5.16	14.1	9.38	9.33	6.21	17.6	11.7	22.3	14.8	28.2	18.8
	11	8.74	5.81	14.8	9.84	10.6	7.04	18.5	12.3	27.0	18.0	32.3	21.5
	12	9.96	6.63	15.5	10.3	12.1	8.07	19.6	13.1	32.1	21.4	36.4	24.2
	13	11.5	7.65	16.4	10.9	14.1	9.38	20.9	13.9	37.7	25.1	40.5	26.9
	14	13.3	8.88	17.3	11.5	16.4	10.9	22.5	15.0	43.7	29.1	44.6	29.7
	15	15.3	10.2	18.4	12.2	18.8	12.5	25.0	16.6				
	16	17.4	11.6	20.1	13.4	21.4	14.2	27.4	18.2				
	17	19.7	13.1	21.8	14.5	24.1	16.0	29.9	19.9				
	18	22.1	14.7	23.6	15.7	27.0	18.0	32.4	21.6				
	19	24.6	16.3	25.3	16.8	30.1	20.0	34.9	23.2				
	20	27.2	18.1	27.0	18.0	33.4	22.2	37.4	24.9				
	21	30.0	20.0	28.7	19.1	36.8	24.5	39.9	26.5				
22	32.9	21.9	30.5	20.3	40.4	26.9	42.4	28.2					
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		47.5		31.6		58.4		38.9		106		70.8	
$t_y \times 10^3$, (kips) ⁻¹		4.39		2.92		5.15		3.42		5.94		3.95	
$t_r \times 10^3$, (kips) ⁻¹		5.39		3.59		6.32		4.21		7.30		4.87	
r_x/r_y		3.20				3.21				4.74			
r_y , in.		1.36				1.33				0.874			
^c Shape is slender for compression for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													

		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		17 ^c				15 ^c				12 ^{c, f}			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	6.75	4.49	19.1	12.7	7.75	5.15	22.3	14.8	10.3	6.85	28.5	19.0
	1	6.83	4.55	19.1	12.7	7.85	5.22	22.3	14.8	10.4	6.95	28.5	19.0
	2	7.10	4.72	19.1	12.7	8.18	5.44	22.3	14.8	10.9	7.25	28.5	19.0
	3	7.64	5.09	19.1	12.7	8.75	5.82	22.5	15.0	11.7	7.78	28.8	19.1
	4	8.47	5.64	20.4	13.6	9.79	6.51	24.2	16.1	12.9	8.60	31.1	20.7
	5	9.68	6.44	21.9	14.5	11.3	7.53	26.1	17.4	14.7	9.78	33.9	22.6
	6	11.4	7.57	23.6	15.7	13.5	8.98	28.4	18.9	17.5	11.6	37.3	24.8
	7	13.8	9.17	25.6	17.0	16.6	11.1	31.2	20.7	21.8	14.5	41.3	27.5
	8	17.2	11.4	28.0	18.6	21.2	14.1	34.5	22.9	28.1	18.7	46.4	30.9
	9	21.8	14.5	30.9	20.6	26.8	17.8	39.6	26.4	35.6	23.7	56.5	37.6
	10	26.9	17.9	36.0	23.9	33.1	22.0	46.8	31.1	43.9	29.2	67.2	44.7
	11	32.5	21.6	41.4	27.5	40.1	26.7	54.0	35.9	53.1	35.4	78.3	52.1
	12	38.7	25.8	46.8	31.2	47.7	31.7	61.4	40.9	63.2	42.1	89.6	59.6
	13	45.4	30.2	52.3	34.8	56.0	37.2	68.8	45.8	74.2	49.4	101	67.3
	14	52.7	35.1	57.8	38.5								
Other Constants and Properties													
$b_y \times 10^3, (\text{kip-ft})^{-1}$		127		84.7		155		103		207		138	
$t_y \times 10^3, (\text{kips})^{-1}$		6.69		4.45		7.57		5.04		9.44		6.28	
$t_r \times 10^3, (\text{kips})^{-1}$		8.22		5.48		9.30		6.20		11.6		7.73	
r_x/r_y		4.79				4.88				4.97			
$r_y, \text{in.}$		0.845				0.810				0.785			
^c Shape is slender for compression for $F_y = 50$ ksi. ^f Shape does not meet compact limit for flexure for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													

 W8		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes											$F_y = 50$ ksi	
		67				58				48				
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		
Design		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	1.70	1.13	5.08	3.38	1.95	1.30	5.96	3.96	2.37	1.58	7.27	4.84	
	6	1.84	1.23	5.08	3.38	2.13	1.42	5.96	3.96	2.59	1.72	7.27	4.84	
	7	1.90	1.27	5.08	3.38	2.20	1.46	5.96	3.96	2.67	1.78	7.27	4.84	
	8	1.97	1.31	5.11	3.40	2.28	1.51	6.00	3.99	2.77	1.84	7.34	4.88	
	9	2.05	1.36	5.16	3.43	2.37	1.58	6.07	4.04	2.88	1.92	7.44	4.95	
	10	2.14	1.43	5.21	3.47	2.48	1.65	6.14	4.08	3.02	2.01	7.55	5.02	
	11	2.25	1.50	5.27	3.50	2.61	1.73	6.21	4.13	3.18	2.12	7.65	5.09	
	12	2.38	1.58	5.32	3.54	2.75	1.83	6.29	4.18	3.36	2.24	7.77	5.17	
	13	2.52	1.68	5.38	3.58	2.92	1.95	6.36	4.23	3.57	2.38	7.88	5.24	
	14	2.68	1.79	5.43	3.61	3.12	2.08	6.44	4.29	3.82	2.54	8.00	5.32	
	15	2.87	1.91	5.49	3.65	3.34	2.22	6.52	4.34	4.10	2.73	8.12	5.41	
	16	3.09	2.05	5.55	3.69	3.60	2.39	6.61	4.40	4.42	2.94	8.25	5.49	
	17	3.34	2.22	5.61	3.73	3.89	2.59	6.69	4.45	4.79	3.18	8.38	5.58	
	18	3.62	2.41	5.67	3.77	4.23	2.82	6.78	4.51	5.21	3.47	8.52	5.67	
	19	3.95	2.63	5.74	3.82	4.62	3.08	6.87	4.57	5.70	3.79	8.66	5.76	
	20	4.33	2.88	5.80	3.86	5.08	3.38	6.96	4.63	6.28	4.18	8.80	5.85	
	22	5.24	3.48	5.93	3.95	6.15	4.09	7.15	4.76	7.60	5.06	9.10	6.06	
	24	6.23	4.15	6.07	4.04	7.32	4.87	7.35	4.89	9.05	6.02	9.43	6.27	
26	7.31	4.87	6.22	4.14	8.59	5.71	7.57	5.03	10.6	7.06	9.77	6.50		
28	8.48	5.64	6.38	4.24	9.96	6.63	7.79	5.19	12.3	8.19	10.1	6.75		
30	9.74	6.48	6.54	4.35	11.4	7.61	8.03	5.35	14.1	9.40	10.6	7.02		
32	11.1	7.37	6.71	4.46	13.0	8.66	8.29	5.52	16.1	10.7	11.0	7.31		
34	12.5	8.32	6.89	4.58	14.7	9.77	8.56	5.70	18.2	12.1	11.5	7.63		
Other Constants and Properties														
$b_y \times 10^3$, (kip-ft) ⁻¹		10.9		7.25		12.8		8.50		15.6		10.4		
$t_y \times 10^3$, (kips) ⁻¹		1.70		1.13		1.95		1.30		2.37		1.58		
$t_r \times 10^3$, (kips) ⁻¹		2.08		1.39		2.40		1.60		2.91		1.94		
r_x/r_y		1.75				1.74				1.74				
r_y , in.		2.12				2.10				2.08				
Note: Heavy line indicates L_c/r_y equal to or greater than 200.														

 W8		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes										$F_y = 50$ ksi	
		40				35				31 ^f			
Shape		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
Design		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
		Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	2.85	1.90	8.95	5.96	3.24	2.16	10.3	6.83	3.66	2.43
6	3.13		2.08	8.95	5.96	3.56	2.37	10.3	6.83	4.01	2.67	11.7	7.80
7	3.23		2.15	8.95	5.96	3.68	2.45	10.3	6.83	4.15	2.76	11.7	7.80
8	3.36		2.23	9.07	6.03	3.82	2.54	10.4	6.94	4.32	2.87	11.9	7.94
9	3.50		2.33	9.22	6.14	3.99	2.65	10.6	7.07	4.51	3.00	12.2	8.11
10	3.68		2.45	9.38	6.24	4.19	2.79	10.8	7.21	4.74	3.15	12.5	8.29
11	3.88		2.58	9.55	6.35	4.42	2.94	11.1	7.36	5.00	3.33	12.7	8.48
12	4.11		2.73	9.72	6.47	4.68	3.12	11.3	7.51	5.30	3.53	13.0	8.67
13	4.38		2.91	9.90	6.59	4.99	3.32	11.5	7.67	5.66	3.76	13.3	8.88
14	4.69		3.12	10.1	6.71	5.35	3.56	11.8	7.83	6.07	4.04	13.7	9.09
15	5.04		3.36	10.3	6.84	5.76	3.83	12.0	8.00	6.54	4.35	14.0	9.32
16	5.46		3.63	10.5	6.97	6.24	4.15	12.3	8.18	7.08	4.71	14.4	9.56
17	5.93		3.95	10.7	7.11	6.79	4.51	12.6	8.37	7.71	5.13	14.7	9.81
18	6.48		4.31	10.9	7.25	7.42	4.94	12.9	8.56	8.44	5.62	15.1	10.1
19	7.12		4.73	11.1	7.40	8.16	5.43	13.2	8.77	9.29	6.18	15.6	10.3
20	7.87		5.24	11.4	7.55	9.03	6.01	13.5	8.99	10.3	6.84	16.0	10.6
22	9.52		6.34	11.8	7.88	10.9	7.27	14.2	9.45	12.4	8.28	17.0	11.3
24	11.3		7.54	12.4	8.24	13.0	8.65	15.0	9.97	14.8	9.86	18.0	12.0
26	13.3		8.85	13.0	8.64	15.3	10.2	15.8	10.5	17.4	11.6	19.6	13.1
28	15.4		10.3	13.6	9.07	17.7	11.8	17.0	11.3	20.2	13.4	21.4	14.3
30	17.7	11.8	14.4	9.57	20.3	13.5	18.4	12.3	23.1	15.4	23.3	15.5	
32	20.1	13.4	15.4	10.3	23.1	15.4	19.8	13.2	26.3	17.5	25.1	16.7	
34	22.7	15.1	16.5	11.0									
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		19.3		12.8		22.1		14.7		25.3		16.8	
$t_y \times 10^3$, (kips) ⁻¹		2.85		1.90		3.24		2.16		3.66		2.43	
$t_r \times 10^3$, (kips) ⁻¹		3.51		2.34		3.98		2.66		4.49		3.00	
r_x/r_y		1.73				1.73				1.72			
r_y , in.		2.04				2.03				2.02			
^f Shape does not meet compact limit for flexure for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													

 W8		Table 6-J (continued) Combined Flexure and Axial Force W-Shapes				$F_y = 50$ ksi
		W8x				
Shape		28				
Design		$p \times 10^3$		$b_x \times 10^3$		
		(kips) ⁻¹		(kip-ft) ⁻¹		
		ASD	LRFD	ASD	LRFD	
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	4.05	2.69	13.1	8.71	
	6	4.68	3.11	13.2	8.77	
	7	4.93	3.28	13.5	9.00	
	8	5.23	3.48	13.9	9.23	
	9	5.60	3.73	14.2	9.48	
	10	6.05	4.02	14.6	9.74	
	11	6.58	4.38	15.0	10.0	
	12	7.21	4.80	15.5	10.3	
	13	7.98	5.31	15.9	10.6	
	14	8.89	5.91	16.4	10.9	
	15	9.98	6.64	17.0	11.3	
	16	11.3	7.54	17.5	11.7	
	17	12.8	8.51	18.1	12.0	
	18	14.3	9.54	18.7	12.5	
	19	16.0	10.6	19.4	12.9	
	20	17.7	11.8	20.2	13.4	
	22	21.4	14.2	22.1	14.7	
	24	25.5	17.0	24.5	16.3	
	26	29.9	19.9	26.9	17.9	
	28					
30						
32						
34						
36						
38						
40						
Other Constants and Properties						
$b_y \times 10^3$, (kip-ft) ⁻¹		35.3		23.5		
$t_y \times 10^3$, (kips) ⁻¹		4.05		2.69		
$t_r \times 10^3$, (kips) ⁻¹		4.97		3.32		
r_x/r_y		2.13				
r_y , in.		1.62				
Note: Heavy line indicates L_c/r_y equal to or greater than 200.						

		Table 6-J (continued)										$F_y = 50$ ksi	
		Combined Flexure and Axial Force W-Shapes											
Shape		W8 \times											
Design		24				21				18			
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
		(kips) $^{-1}$		(kip-ft) $^{-1}$		(kips) $^{-1}$		(kip-ft) $^{-1}$		(kips) $^{-1}$		(kip-ft) $^{-1}$	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	4.72	3.14	15.4	10.3	5.42	3.61	17.5	11.6	6.35	4.22	21.0	13.9
	1	4.74	3.15	15.4	10.3	5.46	3.63	17.5	11.6	6.39	4.25	21.0	13.9
	2	4.79	3.19	15.4	10.3	5.57	3.70	17.5	11.6	6.53	4.34	21.0	13.9
	3	4.89	3.26	15.4	10.3	5.76	3.83	17.5	11.6	6.76	4.50	21.0	13.9
	4	5.03	3.35	15.4	10.3	6.03	4.01	17.5	11.6	7.10	4.72	21.0	13.9
	5	5.22	3.47	15.4	10.3	6.40	4.26	17.8	11.9	7.56	5.03	21.5	14.3
	6	5.46	3.63	15.6	10.4	6.88	4.58	18.5	12.3	8.16	5.43	22.5	15.0
	7	5.76	3.83	16.0	10.6	7.50	4.99	19.2	12.8	8.93	5.94	23.5	15.6
	8	6.12	4.07	16.5	11.0	8.29	5.51	20.0	13.3	9.91	6.60	24.6	16.4
	9	6.56	4.36	17.0	11.3	9.28	6.17	20.9	13.9	11.2	7.42	25.9	17.2
	10	7.08	4.71	17.5	11.7	10.5	7.00	21.9	14.5	12.7	8.47	27.3	18.1
	11	7.71	5.13	18.1	12.0	12.1	8.05	22.9	15.2	14.7	9.81	28.8	19.2
	12	8.47	5.63	18.7	12.4	14.1	9.39	24.1	16.0	17.3	11.5	30.5	20.3
	13	9.37	6.24	19.3	12.9	16.6	11.0	25.3	16.8	20.3	13.5	32.5	21.6
	14	10.5	6.96	20.0	13.3	19.2	12.8	26.7	17.8	23.6	15.7	35.3	23.5
	15	11.8	7.83	20.8	13.8	22.0	14.7	28.5	18.9	27.1	18.0	38.8	25.8
	16	13.4	8.89	21.6	14.4	25.1	16.7	30.9	20.6	30.8	20.5	42.4	28.2
	17	15.1	10.0	22.5	14.9	28.3	18.8	33.4	22.2	34.8	23.1	45.9	30.5
	18	16.9	11.3	23.4	15.6	31.7	21.1	35.9	23.9	39.0	26.0	49.4	32.9
	19	18.8	12.5	24.5	16.3	35.4	23.5	38.3	25.5	43.5	28.9	52.9	35.2
	20	20.9	13.9	26.1	17.4	39.2	26.1	40.7	27.1	48.2	32.0	56.4	37.5
	21	23.0	15.3	27.8	18.5	43.2	28.7	43.2	28.7				
	22	25.3	16.8	29.4	19.6								
	23	27.6	18.4	31.0	20.6								
	24	30.1	20.0	32.6	21.7								
25	32.6	21.7	34.2	22.8									
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) $^{-1}$		41.6		27.7		62.6		41.7		76.5		50.9	
$t_y \times 10^3$, (kips) $^{-1}$		4.72		3.14		5.42		3.61		6.35		4.22	
$t_r \times 10^3$, (kips) $^{-1}$		5.79		3.86		6.66		4.44		7.80		5.20	
r_x/r_y		2.12				2.77				2.79			
r_y , in.		1.61				1.26				1.23			
Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


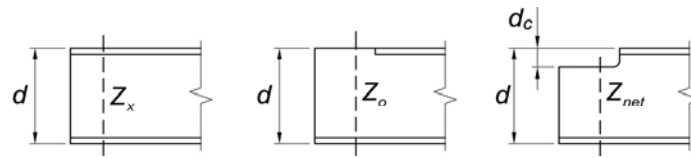
		Table 6-J (continued)										$F_y = 50$ ksi	
		Combined Flexure and Axial Force W-Shapes											
Shape		W8 \times											
Design		15				13				10 ^{c,f}			
		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$		$p \times 10^3$		$b_x \times 10^3$	
		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹		(kips) ⁻¹		(kip-ft) ⁻¹	
		ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD	ASD	LRFD
Effective length, L_c (ft), with respect to the least radius of gyration, r_y , or Unbraced Length, L_b (ft), for X-X axis bending	0	7.52	5.01	26.2	17.4	8.70	5.79	31.3	20.8	11.7	7.76	40.6	27.0
	1	7.63	5.07	26.2	17.4	8.83	5.87	31.3	20.8	11.8	7.86	40.6	27.0
	2	7.95	5.29	26.2	17.4	9.23	6.14	31.3	20.8	12.3	8.17	40.6	27.0
	3	8.51	5.66	26.2	17.4	9.94	6.61	31.3	20.8	13.1	8.71	40.6	27.0
	4	9.37	6.23	27.6	18.4	11.0	7.34	33.4	22.2	14.3	9.53	43.2	28.8
	5	10.6	7.05	29.4	19.5	12.6	8.38	35.7	23.8	16.4	10.9	46.7	31.1
	6	12.3	8.20	31.3	20.8	14.8	9.86	38.5	25.6	19.3	12.8	50.8	33.8
	7	14.7	9.80	33.6	22.4	18.0	12.0	41.7	27.7	23.4	15.6	55.7	37.0
	8	18.1	12.0	36.2	24.1	22.5	14.9	45.4	30.2	29.3	19.5	61.6	41.0
	9	22.8	15.2	39.3	26.1	28.4	18.9	50.0	33.2	37.1	24.7	71.3	47.4
	10	28.1	18.7	42.9	28.6	35.1	23.4	57.4	38.2	45.8	30.4	84.3	56.1
	11	34.0	22.6	48.9	32.5	42.5	28.3	65.8	43.8	55.4	36.8	97.6	64.9
	12	40.5	26.9	54.9	36.5	50.6	33.6	74.3	49.4	65.9	43.8	111	73.9
	13	47.5	31.6	60.9	40.5	59.3	39.5	82.7	55.0	77.3	51.5	125	83.0
	14	55.1	36.7	66.9	44.5	68.8	45.8	91.2	60.7	89.7	59.7	139	92.2
Other Constants and Properties													
$b_y \times 10^3$, (kip-ft) ⁻¹		133		88.8		166		110		218		145	
$t_y \times 10^3$, (kips) ⁻¹		7.52		5.01		8.70		5.79		11.3		7.51	
$t_r \times 10^3$, (kips) ⁻¹		9.24		6.16		10.7		7.12		13.9		9.24	
r_x/r_y		3.76				3.81				3.83			
r_y , in.		0.876				0.843				0.841			
^c Shape is slender for compression for $F_y = 50$ ksi. ^f Shape does not meet compact limit for flexure for $F_y = 50$ ksi. Note: Heavy line indicates L_c/r_y equal to or greater than 200.													


Table 9-A
Plastic Section Modulus for Coped W-Shapes



Shape	d, in.	t _f , in.	Z _x , in. ³	Z _o , in. ³	Z _{net} , in. ³									
					d _c , in.									
					2	3	4	5	6	7	8	9	10	
W44×335	44.0	1.77	1620	886	816	781	747	713	680	648	616	585	554	
×290	43.6	1.58	1410	746	685	656	627	598	570	542	515	488	461	
×262	43.3	1.42	1270	670	615	588	562	536	511	486	461	437	413	
×230	42.9	1.22	1100	591	543	519	496	473	451	429	407	385	364	
W40×655	43.6	3.54	3080	1640	–	–	1370	1310	1240	1180	1120	1060	996	
×593	43.0	3.23	2760	1460	–	–	1220	1160	1100	1050	989	934	880	
×503	42.1	2.76	2320	1220	–	1060	1010	961	912	864	817	771	725	
×431	41.3	2.36	1960	1020	–	892	849	807	766	725	685	645	606	
×397	41.0	2.20	1800	928	–	807	768	729	691	653	617	580	545	
×372	40.6	2.05	1680	866	–	752	715	679	643	608	574	540	507	
×362	40.6	2.01	1640	839	–	728	693	658	623	589	555	522	490	
×324	40.2	1.81	1460	740	674	641	610	578	547	517	487	458	429	
×297	39.8	1.65	1330	674	614	584	555	526	498	470	443	416	390	
×277	39.7	1.58	1250	609	554	526	499	473	447	421	396	372	348	
×249	39.4	1.42	1120	545	494	470	446	422	399	376	353	331	309	
×215	39.0	1.22	964	465	422	401	380	359	339	319	300	281	263	
×199	38.7	1.07	869	447	407	387	367	348	329	310	292	274	257	
W40×392	41.6	2.52	1710	1020	–	893	852	812	773	734	696	659	622	
×331	40.8	2.13	1430	848	–	741	706	673	639	607	575	543	513	
×327	40.8	2.13	1410	826	–	722	688	655	623	591	559	529	499	
×294	40.4	1.93	1270	734	671	640	610	580	551	523	495	467	440	
×278	40.2	1.81	1190	702	641	612	583	555	527	500	473	447	421	
×264	40.0	1.73	1130	653	597	569	542	516	490	464	439	414	390	
×235	39.7	1.58	1010	568	519	494	471	447	424	402	380	358	337	
×211	39.4	1.42	906	507	462	441	419	399	378	358	338	319	300	
×183	39.0	1.20	774	431	393	375	356	338	321	304	287	270	254	
×167	38.6	1.03	693	407	371	354	337	320	303	287	271	256	241	
×149	38.2	0.830	598	369	336	320	305	290	275	260	246	232	218	

– Indicates that cope depth is less than flange thickness


Table 9-A (continued)
Plastic Section Modulus for Coped W-Shapes

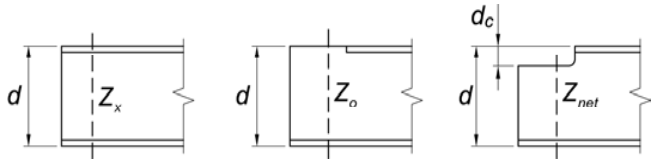

Shape	d, in.	t _f , in.	Z _x , in. ³	Z _o , in. ³	Z _{net} , in. ³									
					d _c , in.									
					2	3	4	5	6	7	8	9	10	
W36×925	43.1	4.53	4130	2350	—	—	—	1870	1780	1690	1600	1510	1420	
×853	43.1	4.53	3920	2040	—	—	—	1610	1520	1440	1360	1290	1210	
×802	42.6	4.29	3660	1890	—	—	—	1490	1410	1330	1260	1190	1120	
×723	41.8	3.90	3270	1670	—	—	1380	1310	1240	1170	1110	1040	979	
×652	41.1	3.54	2910	1480	—	—	1220	1150	1090	1030	971	913	858	
×529	39.8	2.91	2330	1150	—	994	942	891	841	792	745	699	654	
×487	39.3	2.68	2130	1050	—	906	858	811	765	719	676	633	592	
×441	38.9	2.44	1910	942	—	809	766	723	682	641	601	563	526	
×395	38.4	2.20	1710	829	—	710	672	634	597	561	526	492	459	
×361	38.0	2.01	1550	749	—	641	606	571	537	504	472	442	412	
×330	37.7	1.85	1410	675	609	577	545	514	483	453	424	396	369	
×302	37.3	1.68	1280	615	554	524	495	466	438	411	384	358	333	
×282	37.1	1.57	1190	571	514	487	459	433	406	381	356	332	309	
×262	36.9	1.44	1100	535	482	456	431	406	382	357	334	311	289	
×247	36.7	1.35	1030	504	454	430	406	382	359	336	314	293	272	
×231	36.5	1.26	963	473	426	404	381	359	337	316	295	275	255	
W36×256	37.4	1.73	1040	584	530	503	477	452	427	402	378	354	331	
×232	37.1	1.57	936	523	474	450	427	404	381	359	338	316	295	
×210	36.7	1.36	833	481	436	414	392	371	350	330	310	291	272	
×194	36.5	1.26	767	440	398	378	358	339	320	301	283	265	248	
×182	36.3	1.18	718	412	373	354	336	318	300	282	265	248	232	
×170	36.2	1.10	668	384	348	330	313	296	279	263	247	231	216	
×160	36.0	1.02	624	362	327	311	294	278	262	247	232	217	203	
×150	35.9	0.940	581	343	310	294	279	264	249	234	220	206	193	
×135	35.6	0.790	509	313	283	269	255	241	227	214	201	189	176	
W33×387	36.0	2.28	1560	752	—	636	599	562	526	492	459	427	396	
×354	35.6	2.09	1420	681	—	574	540	507	474	443	412	383	355	
×318	35.2	1.89	1270	601	537	506	475	445	416	388	361	336	311	
×291	34.8	1.73	1160	544	486	457	429	402	375	350	325	302	279	
×263	34.5	1.57	1040	487	434	409	384	359	335	312	290	268	248	
×241	34.2	1.40	940	455	406	382	359	336	314	292	271	251	231	
×221	33.9	1.28	857	417	372	351	329	308	287	267	248	229	211	
×201	33.7	1.15	773	380	339	319	300	281	262	244	226	209	192	

— Indicates that cope depth is less than flange thickness


Table 9-A (continued)
Plastic Section Modulus for Coped W-Shapes

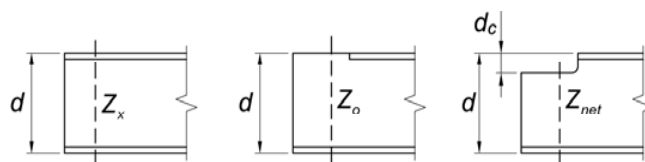

Shape	d, in.	t _f , in.	Z _x , in. ³	Z _o , in. ³	Z _{net} , in. ³									
					d _c , in.									
					2	3	4	5	6	7	8	9	10	
W33×169	33.8	1.22	629	341	306	289	272	256	240	224	209	194	179	
×152	33.5	1.06	559	313	281	266	250	235	221	206	192	178	165	
×141	33.3	0.960	514	292	262	247	233	219	205	192	179	166	154	
×130	33.1	0.855	467	272	244	230	217	204	191	179	167	155	144	
×118	32.9	0.740	415	249	224	211	199	187	176	164	153	143	132	
W30×391	33.2	2.44	1450	687	—	570	533	498	463	430	398	367	338	
×357	32.8	2.24	1320	616	—	510	476	444	413	383	354	326	300	
×326	32.4	2.05	1190	555	—	459	428	399	370	343	316	291	267	
×292	32.0	1.85	1060	488	430	402	375	349	323	299	276	254	232	
×261	31.6	1.65	943	436	384	358	334	310	287	265	244	224	205	
×235	31.3	1.50	847	384	338	315	293	272	252	232	214	196	179	
×211	30.9	1.32	751	349	307	287	267	247	229	211	193	177	161	
×191	30.7	1.19	675	316	278	260	242	224	207	190	175	160	145	
×173	30.4	1.07	607	287	252	235	219	202	187	172	158	144	131	
W30×148	30.7	1.18	500	273	242	227	212	198	184	170	157	144	131	
×132	30.3	1.00	437	246	218	205	192	179	166	154	142	130	119	
×124	30.2	0.930	408	232	206	193	181	168	157	145	134	123	112	
×116	30.0	0.850	378	219	194	182	170	159	148	137	126	116	106	
×108	29.8	0.760	346	205	181	170	159	148	138	128	118	108	99.2	
×99	29.7	0.670	312	190	169	158	148	138	129	119	110	101	92.6	
×90	29.5	0.610	283	170	151	141	132	123	115	106	98.1	90.1	82.4	
W27×539	32.5	3.54	1890	921	—	—	709	661	614	569	526	485	445	
×368	30.4	2.48	1240	582	—	474	440	407	376	346	318	290	264	
×336	30.0	2.28	1130	522	—	423	392	363	335	308	282	257	234	
×307	29.6	2.09	1030	470	—	380	352	325	299	275	251	229	208	
×281	29.3	1.93	936	424	368	342	316	292	268	246	225	204	185	
×258	29.0	1.77	852	385	334	310	287	264	243	222	203	184	167	
×235	28.7	1.61	772	351	305	282	261	240	221	202	184	167	150	
×217	28.4	1.50	711	316	273	253	233	215	197	180	164	148	133	
×194	28.1	1.34	631	281	242	224	207	190	174	159	144	130	117	
×178	27.8	1.19	570	264	229	212	195	179	164	149	135	122	110	
×161	27.6	1.08	515	238	206	191	176	161	147	134	121	109	97.9	
×146	27.4	0.975	464	216	187	173	159	146	133	121	109	98.3	88.0	

— Indicates that cope depth is less than flange thickness


Table 9-A (continued)
Plastic Section Modulus for Coped W-Shapes

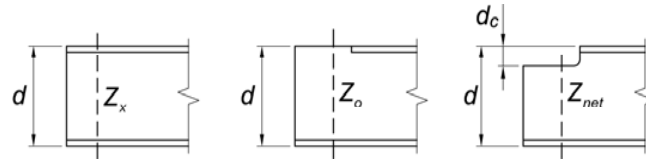

Shape	d, in.	t _f , in.	Z _x , in. ³	Z _o , in. ³	Z _{net} , in. ³									
					d _c , in.									
					2	3	4	5	6	7	8	9	10	
W27×129	27.6	1.10	395	209	183	170	157	145	133	122	110	99.5	89.1	
×114	27.3	0.930	343	189	165	153	142	131	120	110	100	90.2	80.7	
×102	27.1	0.830	305	168	147	136	126	117	107	97.8	88.8	80.1	71.6	
×94	26.9	0.745	278	156	136	126	117	108	99.3	90.8	82.5	74.4	66.6	
×84	26.7	0.640	244	141	123	115	106	98.2	90.3	82.6	75.1	67.8	60.8	
W24×370	28.0	2.72	1130	536	—	428	394	362	332	303	275	249	225	
×335	27.5	2.48	1020	473	—	376	346	317	290	264	240	216	194	
×306	27.1	2.28	922	423	—	335	308	282	257	234	211	190	171	
×279	26.7	2.09	835	380	—	300	275	252	229	208	188	169	151	
×250	26.3	1.89	744	333	285	262	240	219	199	180	162	146	130	
×229	26.0	1.73	675	302	258	237	217	198	179	162	146	130	116	
×207	25.7	1.57	606	269	229	210	192	175	159	143	128	115	102	
×192	25.5	1.46	559	248	211	193	176	160	145	131	117	105	92.6	
×176	25.2	1.34	511	225	191	175	159	145	131	118	105	93.7	82.7	
×162	25.0	1.22	468	209	177	162	148	134	121	109	97.0	86.1	75.9	
×146	24.7	1.09	418	188	159	146	133	120	108	97.1	86.6	76.6	67.3	
×131	24.5	0.960	370	172	146	134	121	110	98.9	88.6	78.8	69.6	61.1	
×117	24.3	0.850	327	154	131	120	109	98.2	88.3	79.0	70.2	61.9	54.1	
×104	24.1	0.750	289	138	117	107	97.2	87.8	78.8	70.4	62.4	55.0	48.0	
W24×103	24.5	0.980	280	149	128	117	107	97.8	88.4	79.3	70.6	62.3	54.5	
×94	24.3	0.875	254	136	117	108	98.6	89.7	81.1	72.8	64.7	57.0	49.9	
×84	24.1	0.770	224	122	105	96.2	88.0	80.1	72.5	65.1	57.9	50.9	44.4	
×76	23.9	0.680	200	111	95.2	87.6	80.2	73.1	66.1	59.4	52.8	46.6	40.5	
×68	23.7	0.585	177	101	86.6	79.7	73.0	66.5	60.2	54.2	48.3	42.7	37.2	
W24×62	23.7	0.590	153	96.6	82.9	76.4	70.1	64.1	58.2	52.6	47.1	41.9	36.9	
×55	23.6	0.505	134	86.5	74.2	68.4	62.8	57.3	52.1	47.0	42.2	37.5	33.1	

— Indicates that cope depth is less than flange thickness

Table 9-A (continued)
Plastic Section Modulus for Coped W-Shapes

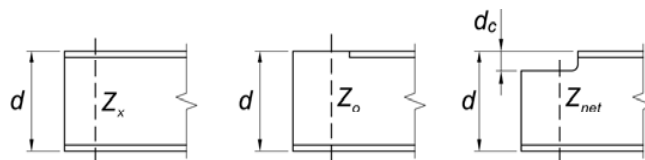


Shape	d, in.	t _f , in.	Z _x , in. ³	Z _o , in. ³	Z _{net} , in. ³									
					d _c , in.									
					2	3	4	5	6	7	8	9	10	
W21×275	24.1	2.19	749	324	—	249	226	204	184	165	146	130	114	
×248	23.7	1.99	671	285	239	217	197	178	160	143	127	112	97.7	
×223	23.4	1.79	601	254	212	193	175	158	141	126	111	97.8	85.3	
×201	23.0	1.63	530	225	187	170	154	138	123	110	96.7	84.7	73.5	
×182	22.7	1.48	476	201	167	151	136	122	109	96.7	85.1	74.3	64.2	
×166	22.5	1.36	432	179	149	135	121	109	96.8	85.7	75.2	65.5	56.5	
×147	22.1	1.15	373	166	138	124	112	99.7	88.5	77.9	68.1	59.0	50.6	
×132	21.8	1.04	333	147	121	109	97.9	87.3	77.3	67.9	59.2	51.1	43.6	
×122	21.7	0.960	307	135	111	100	89.7	79.9	70.7	62.1	54.0	46.6	39.7	
×111	21.5	0.875	279	122	100	90.1	80.7	71.8	63.4	55.5	48.2	41.5	35.3	
×101	21.4	0.800	253	110	90.4	81.4	72.8	64.7	57.1	50.0	43.4	37.2	31.6	
W21×93	21.6	0.930	221	120	101	91.7	82.8	74.2	65.9	57.8	50.2	43.1	36.6	
×83	21.4	0.835	196	105	88.4	80.3	72.4	64.8	57.4	50.3	43.6	37.3	31.6	
×73	21.2	0.740	172	92.0	77.0	69.8	62.9	56.2	49.7	43.5	37.6	32.1	27.1	
×68	21.1	0.685	160	85.9	71.9	65.2	58.7	52.5	46.5	40.6	35.1	29.9	25.2	
×62	21.0	0.615	144	78.7	65.9	59.8	53.9	48.2	42.6	37.3	32.2	27.5	23.1	
×55	20.8	0.522	126	70.9	59.4	53.9	48.6	43.5	38.6	33.9	29.3	25.0	20.9	
×48	20.6	0.430	107	62.9	52.7	47.8	43.2	38.7	34.4	30.2	26.3	22.5	18.9	
W21×57	21.1	0.650	129	76.1	64.0	58.2	52.6	47.3	42.1	37.2	32.4	27.8	23.5	
×50	20.8	0.535	110	67.3	56.5	51.4	46.4	41.7	37.2	32.8	28.6	24.6	20.8	
×44	20.7	0.450	95.4	60.0	50.4	45.8	41.4	37.2	33.2	29.3	25.6	22.1	18.7	
W18×311	22.3	2.74	754	336	—	252	227	204	182	161	142	124	107	
×283	21.9	2.50	676	300	—	224	202	180	160	142	124	108	93.3	
×258	21.5	2.30	611	267	—	198	178	159	141	124	108	93.6	80.4	
×234	21.1	2.11	549	235	—	174	155	138	122	107	93.1	80.3	68.6	
×211	20.7	1.91	490	208	170	153	136	121	106	92.8	80.4	69.0	58.6	
×192	20.4	1.75	442	184	150	135	120	106	93.0	81.0	69.9	59.7	50.5	
×175	20.0	1.59	398	165	134	120	106	93.6	81.8	71.0	60.9	51.7	43.4	
×158	19.7	1.44	356	147	119	106	93.6	82.2	71.7	61.9	52.9	44.7		
×143	19.5	1.32	322	130	105	93.6	82.7	72.6	63.1	54.4	46.4	39.1		
×130	19.3	1.20	290	118	94.7	84.2	74.3	65.1	56.5	48.5	41.2	34.6		
×119	19.0	1.06	262	112	89.5	79.3	69.8	60.9	52.7	45.0	38.0	31.7		
×106	18.7	0.940	230	98.0	78.2	69.1	60.7	52.8	45.5	38.7	32.5	26.9		
×97	18.6	0.870	211	88.3	70.4	62.2	54.5	47.4	40.7	34.7	29.1	24.0		
×86	18.4	0.770	186	77.9	61.9	54.6	47.8	41.4	35.6	30.1	25.2	20.7		
×76	18.2	0.680	163	67.8	53.7	47.3	41.3	35.7	30.6	25.9	21.5	17.6		

— Indicates that cope depth is less than flange thickness

Note: Values are omitted when cope depth exceeds d/2.


Table 9-A (continued)
Plastic Section Modulus for Coped W-Shapes

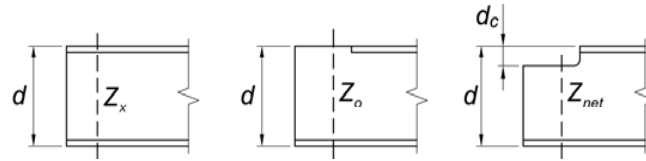

Shape	d, in.	t _f , in.	Z _x , in. ³	Z _o , in. ³	Z _{net} , in. ³									
					d _c , in.									
					2	3	4	5	6	7	8	9	10	
W18×71	18.5	0.810	146	76.6	62.2	55.3	48.7	42.4	36.3	30.8	25.7	21.1		
	×65	18.4	0.750	133	69.4	56.2	50.0	43.9	38.1	32.7	27.6	23.0	18.9	
	×60	18.2	0.695	123	63.0	50.9	45.1	39.6	34.3	29.3	24.7	20.5	16.7	
	×55	18.1	0.630	112	58.3	47.1	41.8	36.7	31.8	27.1	22.9	18.9	15.4	
	×50	18.0	0.570	101	52.6	42.5	37.7	33.1	28.6	24.4	20.5	17.0	13.8	
W18×46	18.1	0.605	90.7	51.4	41.8	37.3	32.9	28.7	24.7	20.9	17.3	14.1		
	×40	17.9	0.525	78.4	44.1	35.8	31.9	28.1	24.5	21.1	17.8	14.7		
	×35	17.7	0.425	66.5	39.5	32.1	28.6	25.3	22.1	19.0	16.1	13.4		
W16×100	17.0	0.985	198	80.0	62.4	54.4	47.0	40.2	33.9	28.2	23.1			
	×89	16.8	0.875	175	70.5	54.8	47.7	41.1	35.0	29.5	24.4	19.9		
	×77	16.5	0.760	150	59.3	45.9	39.8	34.2	29.0	24.3	20.0	16.2		
	×67	16.3	0.665	130	50.5	38.9	33.7	28.9	24.4	20.4	16.7	13.4		
W16×57	16.4	0.715	105	53.1	41.7	36.3	31.2	26.4	22.0	18.0	14.4			
	×50	16.3	0.630	92.0	46.6	36.5	31.8	27.3	23.0	19.1	15.6	12.5		
	×45	16.1	0.565	82.3	41.4	32.4	28.1	24.1	20.3	16.8	13.7	10.9		
	×40	16.0	0.505	73.0	36.3	28.4	24.6	21.0	17.7	14.6	11.9	9.40		
	×36	15.9	0.430	64.0	33.9	26.6	23.2	19.9	16.8	13.9	11.2			
W16×31	15.9	0.440	54.0	30.4	24.0	21.0	18.1	15.4	12.8	10.4				
	×26	15.7	0.345	44.2	26.0	20.5	18.0	15.6	13.3	11.1	9.02			

Note: Values are omitted when cope depth exceeds d/2.

Table 9-A (continued)
Plastic Section Modulus for Coped W-Shapes

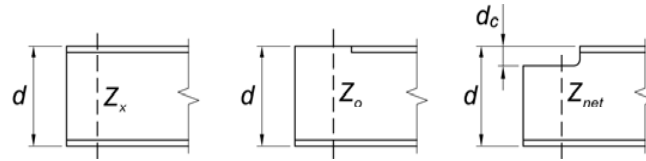


Shape	d, in.	t _f , in.	Z _x , in. ³	Z _o , in. ³	Z _{net} , in. ³									
					d _c , in.									
					2	3	4	5	6	7	8	9	10	
W14×873	23.6	5.51	2030	916	–	–	–	–	532	480	432	387	346	
×808	22.8	5.12	1830	817	–	–	–	–	463	416	372	332	295	
×730	22.4	4.91	1660	669	–	–	–	421	380	341	306	273	243	
×665	21.6	4.52	1480	579	–	–	–	358	321	287	256	227	201	
×605	20.9	4.16	1320	503	–	–	–	305	272	242	214	189	166	
×550	20.2	3.82	1180	434	–	–	289	258	229	203	179	157	137	
×500	19.6	3.50	1050	379	–	–	248	221	195	172	150	131		
×455	19.0	3.21	936	331	–	–	213	189	166	145	126	109		
×426	18.7	3.04	869	301	–	–	193	170	149	130	113	97.0		
×398	18.3	2.85	801	273	–	195	172	152	132	115	99.0	84.8		
×370	17.9	2.66	736	246	–	174	154	134	117	101	86.5			
×342	17.5	2.47	672	219	–	154	135	118	102	87.6	74.7			
×311	17.1	2.26	603	193	–	134	117	102	87.5	74.6	63.1			
×283	16.7	2.07	542	169	–	117	101	87.5	74.9	63.5	53.3			
×257	16.4	1.89	487	150	117	102	88.8	76.3	64.9	54.7	45.6			
×233	16.0	1.72	436	130	101	87.9	75.9	64.8	54.8	45.9	37.9			
×211	15.7	1.56	390	115	88.9	77.1	66.2	56.3	47.3	39.3				
×193	15.5	1.44	355	103	78.8	68.1	58.3	49.4	41.4	34.2				
×176	15.2	1.31	320	92.2	70.3	60.6	51.6	43.5	36.2	29.7				
×159	15.0	1.19	287	81.0	61.5	52.8	44.9	37.6	31.2	25.4				
×145	14.8	1.09	260	72.2	54.5	46.7	39.6	33.1	27.2	22.1				
W14×132	14.7	1.03	234	67.4	50.7	43.4	36.6	30.5	25.0	20.1				
×120	14.5	0.940	212	60.2	45.1	38.4	32.3	26.8	21.9	17.5				
×109	14.3	0.860	192	52.3	39.0	33.2	27.8	23.0	18.6	14.8				
×99	14.2	0.780	173	47.7	35.5	30.1	25.2	20.7	16.8	13.3				
×90	14.0	0.710	157	42.2	31.2	26.4	22.0	18.0	14.5	11.4				
×82	14.3	0.855	139	49.7	36.9	31.2	26.1	21.4	17.2	13.6				
×74	14.2	0.785	126	43.5	32.2	27.3	22.7	18.6	15.0	11.7				
×68	14.0	0.720	115	39.1	28.8	24.3	20.2	16.5	13.2	10.2				
×61	13.9	0.645	102	35.0	25.7	21.6	17.9	14.6	11.6					
W14×53	13.9	0.660	87.1	34.2	25.1	21.1	17.4	14.2	11.2					
×48	13.8	0.595	78.4	31.1	22.7	19.1	15.7	12.7	10.1					
×43	13.7	0.530	69.6	27.6	20.1	16.9	13.9	11.2	8.83					
W14×38	14.1	0.515	61.5	29.1	21.7	18.3	15.1	12.3	9.77	7.54				
×34	14.0	0.455	54.6	26.3	19.7	16.5	13.7	11.1	8.78	6.75				
×30	13.8	0.385	47.3	23.8	17.9	15.1	12.5	10.1	7.91					

– Indicates that cope depth is less than flange thickness

Note: Values are omitted when cope depth exceeds d/2.

Table 9-A (continued)
Plastic Section Modulus for Coped W-Shapes

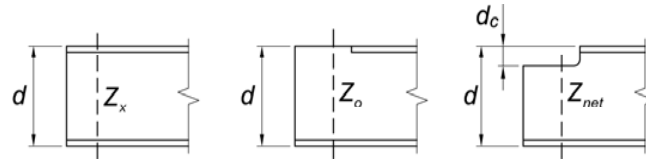


Shape	d, in.	t _f , in.	Z _x , in. ³	Z _o , in. ³	Z _{net} , in. ³															
					d _c , in.															
					2	3	4	5	6	7	8	9	10							
W14×26	13.9	0.420	40.2	21.9	16.6	14.1	11.8	9.61	7.58											
×22	13.7	0.335	33.2	18.7	14.2	12.1	10.1	8.26	6.52											
W12×336	16.8	2.96	603	225	—	156	136	118	101	86.2	73.1									
×305	16.3	2.71	537	195	—	133	116	99.6	85.1	72.0	60.5									
×279	15.9	2.47	481	175	—	118	102	87.1	73.8	61.9										
×252	15.4	2.25	428	152	—	101	86.3	73.3	61.6	51.2										
×230	15.1	2.07	386	135	—	88.9	75.8	64.1	53.5	44.1										
×210	14.7	1.90	348	118	89.3	76.6	65.0	54.5	45.2	37.0										
×190	14.4	1.74	311	103	77.2	65.9	55.7	46.5	38.3	31.1										
×170	14.0	1.56	275	88.4	65.8	55.9	46.9	38.8	31.6	25.4										
×152	13.7	1.40	243	77.1	56.9	48.1	40.1	32.9	26.6											
×136	13.4	1.25	214	67.3	49.3	41.4	34.3	27.9	22.3											
×120	13.1	1.11	186	58.1	42.1	35.2	28.9	23.4	18.5											
×106	12.9	0.990	164	48.8	35.2	29.3	24.0	19.3	15.2											
×96	12.7	0.900	147	42.8	30.7	25.5	20.8	16.6	12.9											
×87	12.5	0.810	132	38.9	27.7	22.8	18.5	14.7	11.3											
×79	12.4	0.735	119	35.0	24.8	20.4	16.5	13.0	10.0											
×72	12.3	0.670	108	31.6	22.3	18.3	14.7	11.6	8.85											
×65	12.1	0.605	96.8	27.8	19.5	15.9	12.8	9.96	7.54											
W12×58	12.2	0.640	86.4	26.0	18.3	15.0	12.0	9.39	7.13											
×53	12.1	0.575	77.9	24.5	17.2	14.0	11.2	8.69	6.55											
W12×50	12.2	0.640	71.9	26.4	18.5	15.1	12.1	9.38	7.07											
×45	12.1	0.575	64.2	23.6	16.5	13.4	10.7	8.28	6.20											
×40	11.9	0.515	57.0	20.2	14.0	11.3	8.99	6.92												
W12×35	12.5	0.520	51.2	22.4	15.8	13.0	10.4	8.13	6.15											
×30	12.3	0.440	43.1	18.9	13.3	10.8	8.64	6.70	5.03											
×26	12.2	0.380	37.2	16.5	11.6	9.41	7.48	5.79	4.31											
W12×22	12.3	0.425	29.3	16.9	12.3	10.3	8.32	6.50	4.85											
×19	12.2	0.350	24.7	14.7	10.8	8.96	7.28	5.71	4.27											
×16	12.0	0.265	20.1	12.6	9.23	7.68	6.25	4.93	3.71											
×14	11.9	0.225	17.4	11.1	8.10	6.74	5.48	4.31												

— Indicates that cope depth is less than flange thickness

Note: Values are omitted when cope depth exceeds $d/2$.

Table 9-A (continued)
Plastic Section Modulus for Coped W-Shapes

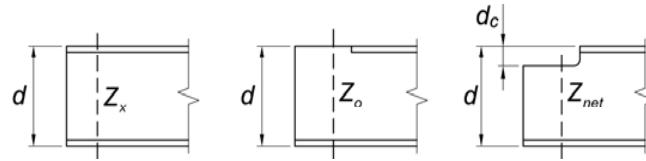

Shape	d, in.	t _f , in.	Z _x , in. ³	Z _o , in. ³	Z _{net} , in. ³															
					d _c , in.															
					2	3	4	5	6	7	8	9	10							
W10×112	11.4	1.25	147	46.3	32.1	26.0	20.7	16.1												
×100	11.1	1.12	130	39.8	27.2	21.9	17.3	13.3												
×88	10.8	0.990	113	33.7	22.8	18.2	14.2	10.8												
×77	10.6	0.870	97.6	28.6	19.1	15.2	11.7	8.80												
×68	10.4	0.770	85.3	24.5	16.2	12.8	9.79	7.26												
×60	10.2	0.680	74.6	21.2	13.9	10.8	8.22	6.01												
×54	10.1	0.615	66.6	18.4	12.0	9.32	7.03	5.11												
×49	10.0	0.560	60.4	16.6	10.7	8.33	6.25	4.50												
W10×45	10.1	0.620	54.9	17.2	11.2	8.66	6.51	4.69												
×39	9.92	0.530	46.8	15.0	9.61	7.40	5.50													
×33	9.73	0.435	38.8	13.3	8.41	6.41	4.70													
W10×30	10.5	0.510	36.6	15.7	10.3	8.05	6.08	4.40												
×26	10.3	0.440	31.3	13.2	8.58	6.65	4.98	3.56												
×22	10.2	0.360	26.0	11.9	7.75	5.98	4.45	3.15												
W10×19	10.2	0.395	21.6	11.6	7.80	6.09	4.52	3.19												
×17	10.1	0.330	18.7	10.6	7.16	5.62	4.21	2.95												
×15	9.99	0.270	16.0	9.56	6.47	5.10	3.85													
×12	9.87	0.210	12.6	7.63	5.15	4.05	3.05													
W8×67	9.00	0.935	70.1	21.9	13.5	10.2	7.44													
×58	8.75	0.810	59.8	18.6	11.3	8.40	6.00													
×48	8.50	0.685	49.0	13.9	8.34	6.13	4.31													
×40	8.25	0.560	39.8	11.8	6.90	4.98	3.40													
×35	8.12	0.495	34.7	9.91	5.73	4.10	2.77													
×31	8.00	0.435	30.4	8.86	5.06	3.58	2.38													
W8×28	8.06	0.465	27.2	8.90	5.09	3.60	2.39													
×24	7.93	0.400	23.1	7.44	4.21	2.95														
W8×21	8.28	0.400	20.4	8.18	4.72	3.36	2.24													
×18	8.14	0.330	17.0	7.30	4.16	2.93	1.92													
W8×15	8.11	0.315	13.6	7.22	4.29	3.02	1.96													
×13	7.99	0.255	11.4	6.38	3.82	2.70														
×10	7.89	0.205	8.87	4.74	2.79	1.95														

Note: Values are omitted when cope depth exceeds $d/2$.